

Figure 1. Generalized surface geology map of Sabine Peninsula (after Harrison, 1994) displaying sedimentary stratigraphic divisions.

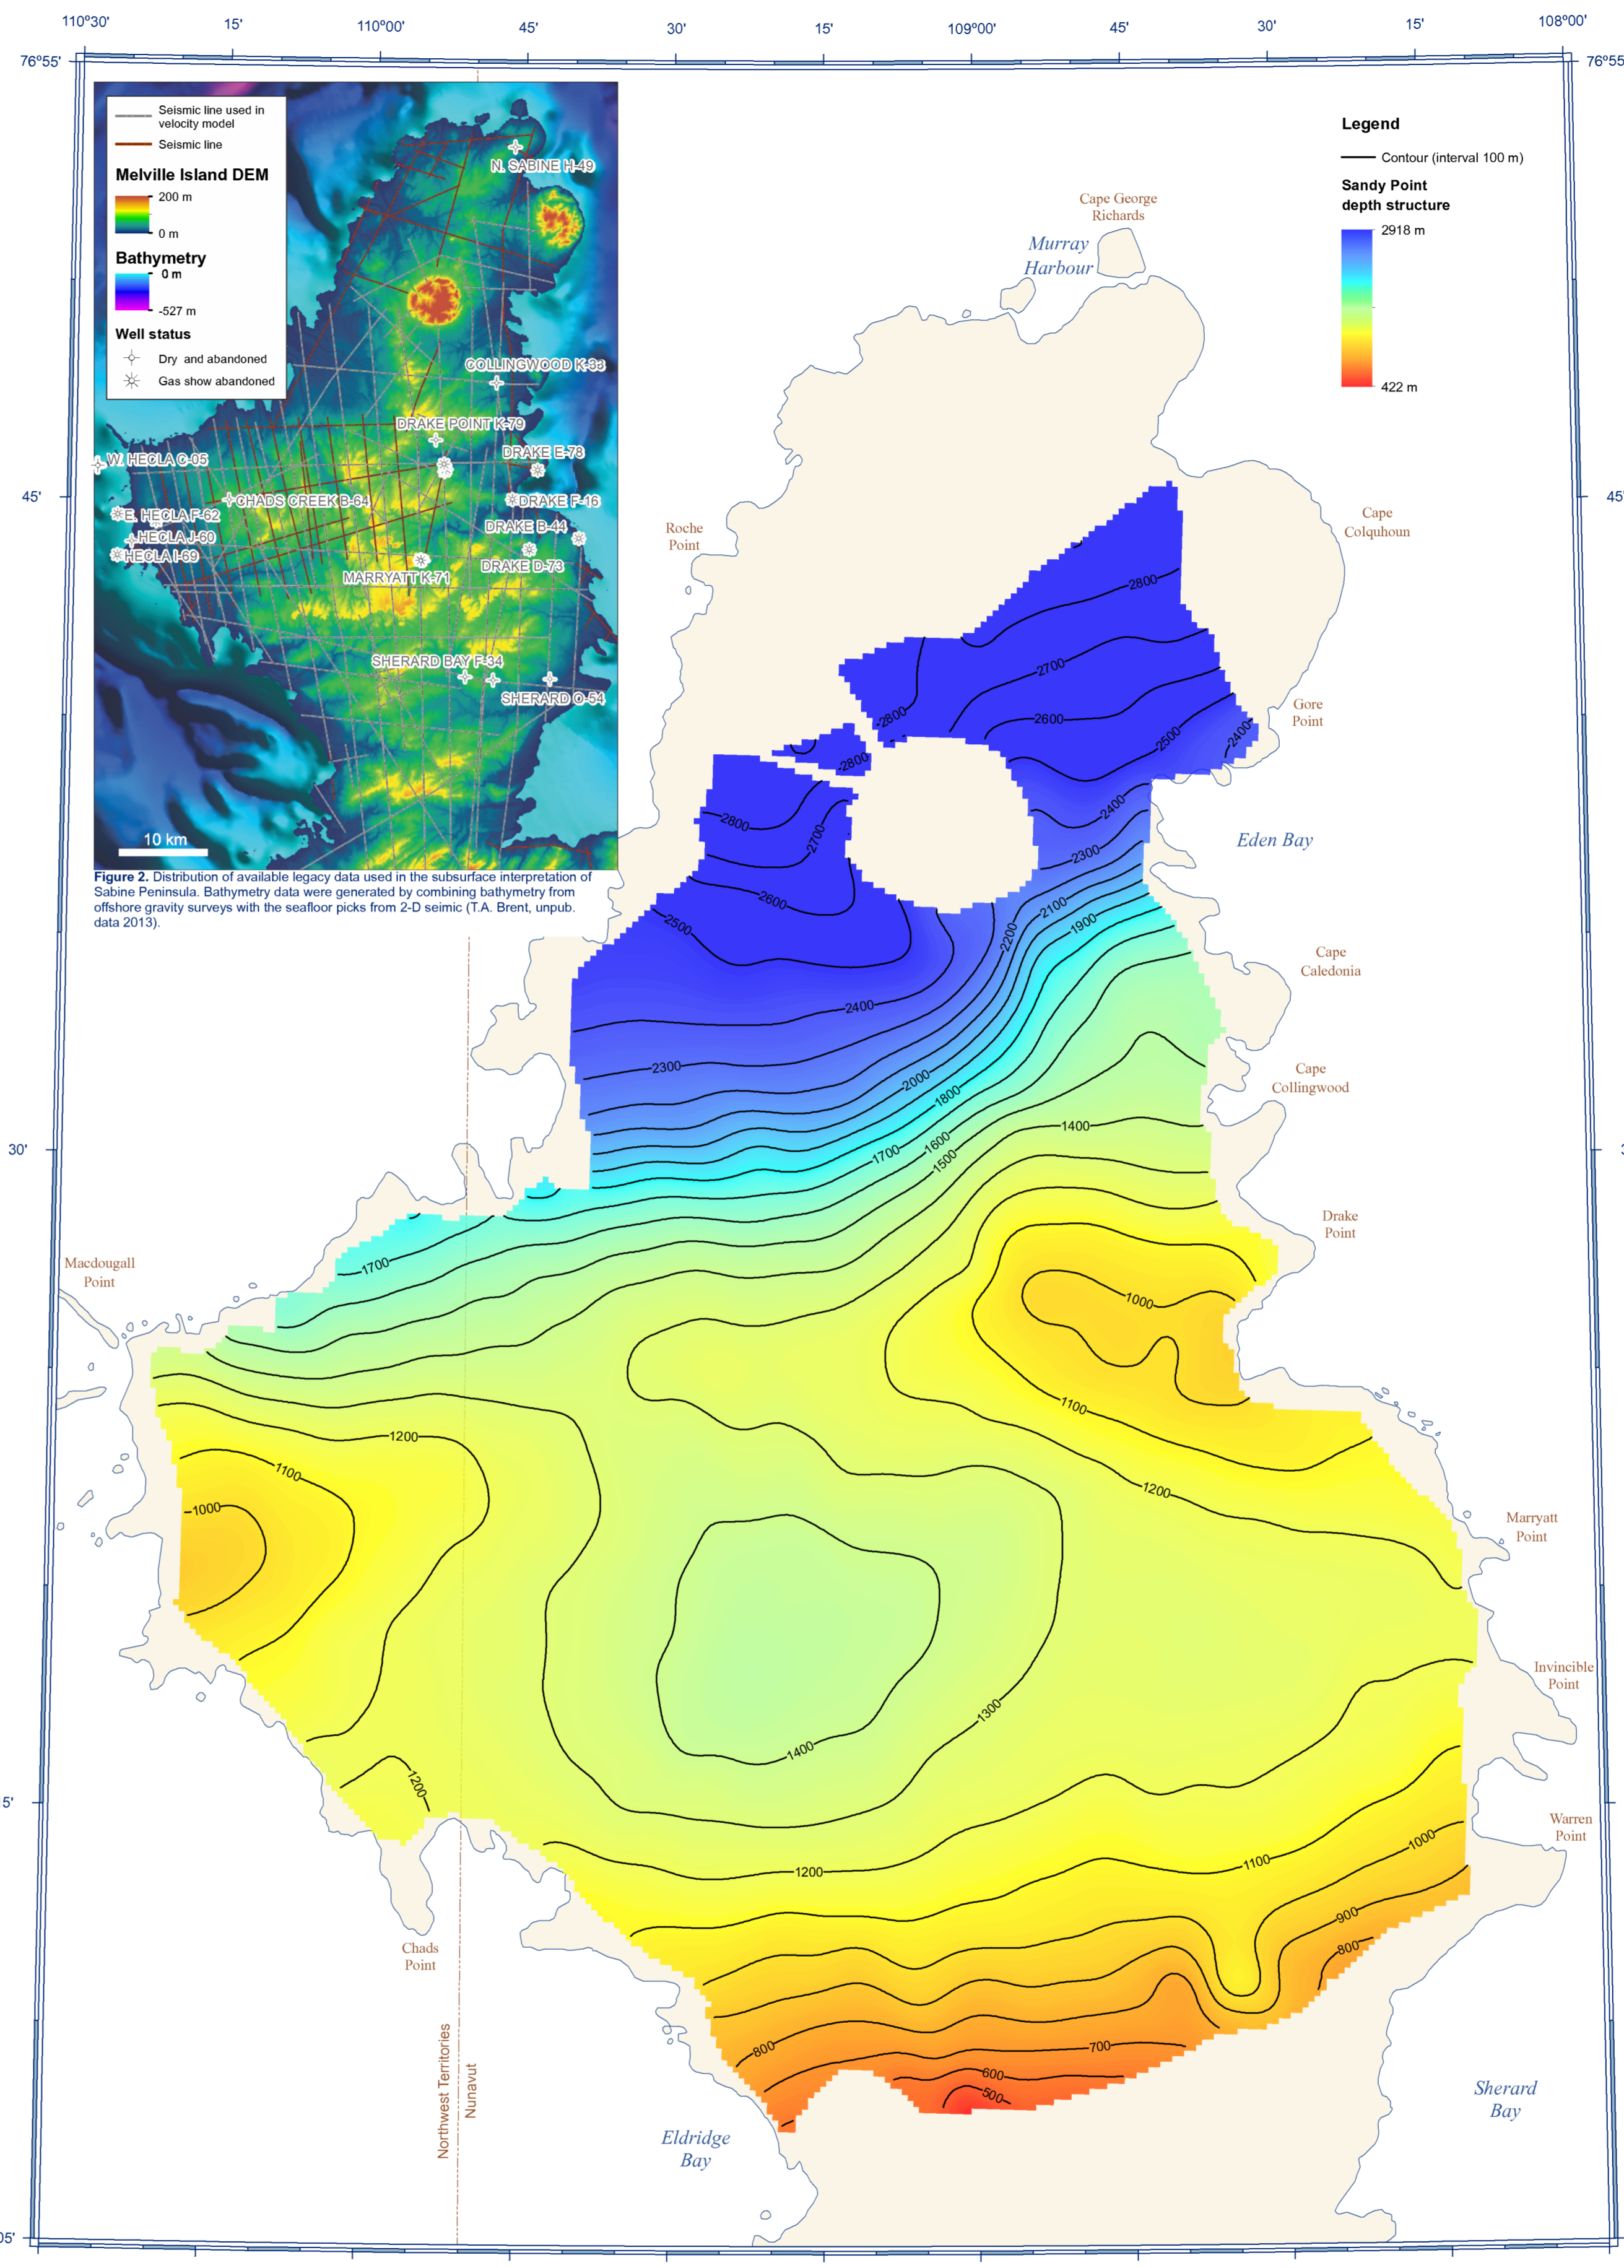


Figure 2. Distribution of available legacy data used in the subsurface interpretation of Sabine Peninsula. Bathymetry data were generated by combining bathymetry from offshore gravity surveys with the seafloor picks from 2-D seismic (T.A. Brent, unpub. data 2013).

DESCRIPTIVE NOTES

INTRODUCTION
The time- and depth-structure maps presented herein are part of an eight-map series of the subsurface of Sabine Peninsula spanning the Early Permian through Early Cretaceous interval. These maps are the product of the application of modern geoscientific methods of processing and interpretation to a suite of legacy seismic-reflection data from onshore Sabine Peninsula (Melville Island, Western Arctic Islands). The resultant processed seismic lines were interpreted using the existing regional geological framework (see Harrison, 1999) by integrating existing regional well data, geological logs, age control, and lithological information through synthetic seismograms.

REGIONAL SETTING
The Sabine Peninsula is located within the Sverdrup Basin in the Queen Elizabeth Islands of the western Arctic. The Sverdrup Basin extends for about 1300 km in a northeast-southwest direction and is up to 350 km wide. The basin contains up to 10 km of sedimentary strata (Embry and Beauchamp, 2008). The Sverdrup Basin is separated from the underlying Franklin Basin by an unconformity at the base of the Carboniferous strata. The Franklin Basin was extensively widespread following Late Devonian–earliest Carboniferous Eiseismentation Orogeny. The resulting rift-related structural depression acted as a major depocentre for the Carboniferous through the Paleogene (Embry and Beauchamp, 2008). The Sverdrup Basin succession was uplifted and deformed during the early Cenozoic Eurasian Orogeny.

The surface geology of Melville Islands is dominated by Lower Paleozoic strata of the Franklinian Basin. The Sabine Peninsula is an exception to this, as surface strata are part of the Sverdrup Basin. The geology of the Sabine Peninsula consists of deformed Late Carboniferous to Paleocene sandstone, siltstone, shale, and minor amounts of carbonate. Additionally, evaporitic rocks are exposed in two depocenters on northern Sabine Peninsula—the Barrow and Colquhoun domes, which consist of deformed anhydrite and gypsum. The strata of the Sverdrup Basin succession on Melville Island were deformed into a series of folds, including the Murray Harbour syncline in the northern part of the peninsula and the Drake Point anticline and the Maryatt Point syncline to the south (Harrison, 1994) (Fig. 1).

During a 1981 to 1988 phase of petroleum exploration, companies drilled 52 wells on Melville Island and surrounding waters (22 of which were on Sabine Peninsula) and acquired 3,400 line-kilometres of onshore seismic-reflection data (Fig. 2).

Three separate gas fields were discovered in the Sabine Peninsula area: Drake Point, Hecla, and Roche Point. Feasibility studies for the development of the gas fields were conducted in the early 1980s; however, due to low gas prices and the lack of gas markets, the gas fields on Melville Island (and elsewhere in the Canadian Arctic) were not developed (Harrison, 1995).

SEISMIC DATA SET AND PROCESSING
Data access was obtained through a Memorandum of Understanding signed in 1997 by the Geological Survey of Canada (GSC), Panarctic Oils, the Arctic Islands Exploration Group, and the Offshore Arctic Exploration Group (joint-venture parties). The data sets consist of original land seismic-reflection field tapes transferred from 21-, 7-, and 9-track media. Data were collected using a dynamic charge of 20–30 kg per shot at about 20 m below the surface. Shot-point spacing ranged from 67 m to 300 m, the shorter spacing being used for most surveys. The majority of the seismic-reflection data were recorded using 48- or 96-channel systems. Channel stations were separately deployed using nine receivers spaced at about 6 m and station intervals varying from 50 m to 70 m. The common-midpoint multiplicity of the data sets range from single to 12-fold coverage. The most common recording length was 6 s.

The processing consisted of these main steps: 1) principal component decomposition was used to remove both coherent and random noise; 2) data were migrated utilizing poststack Kirchhoff migration; and 3) seismic bandpasses were extended to increase vertical resolution (Claproot et al., 2011; Duchesne et al., 2012).

Velocity model
A 3-D velocity model was built using about 1300 km of linear seismic data (78 lines) and 13 wells spread over an area of about 2800 km² (Fig. 2). The velocity model was then used for poststack migration processing and to correct seismic horizon surfaces from time to depth. The primary assumption behind the velocity model is that the coherent high-amplitude reflectors that were picked to build the model correspond to important acoustic impedance contrasts caused by significant and abrupt velocity changes. This assumption was confirmed by using seismic picks to well sonic logs (Duchesne et al., 2012). The geostatistical approach of kriging with an external drift (KED) was applied to both the reflection time of the picked seismic horizons and time-depth pairs derived from check shot data to compute the 3-D velocity field. Kriging interpolates values between the known positions based on weighted spatial correlations. The KED technique was specifically developed for the integration of seismic data into the kriging process where the number of wells is insufficient for the computation of adequate depth statistics (Haas and Dubrule, 1994). Hence, it uses the information provided by the time horizon picks to improve estimates where depth control is sparse. For seismic migration, root mean squared (RMS) velocity values are first estimated by KED and then time-to-depth conversion of seismic horizon surfaces, mapped as important velocity boundaries (Duchesne et al., 2012). Then, once the approximate depths of the surfaces are known, the interval velocities (V_{int}) for all time intervals delimited by two consecutive horizons is computed for

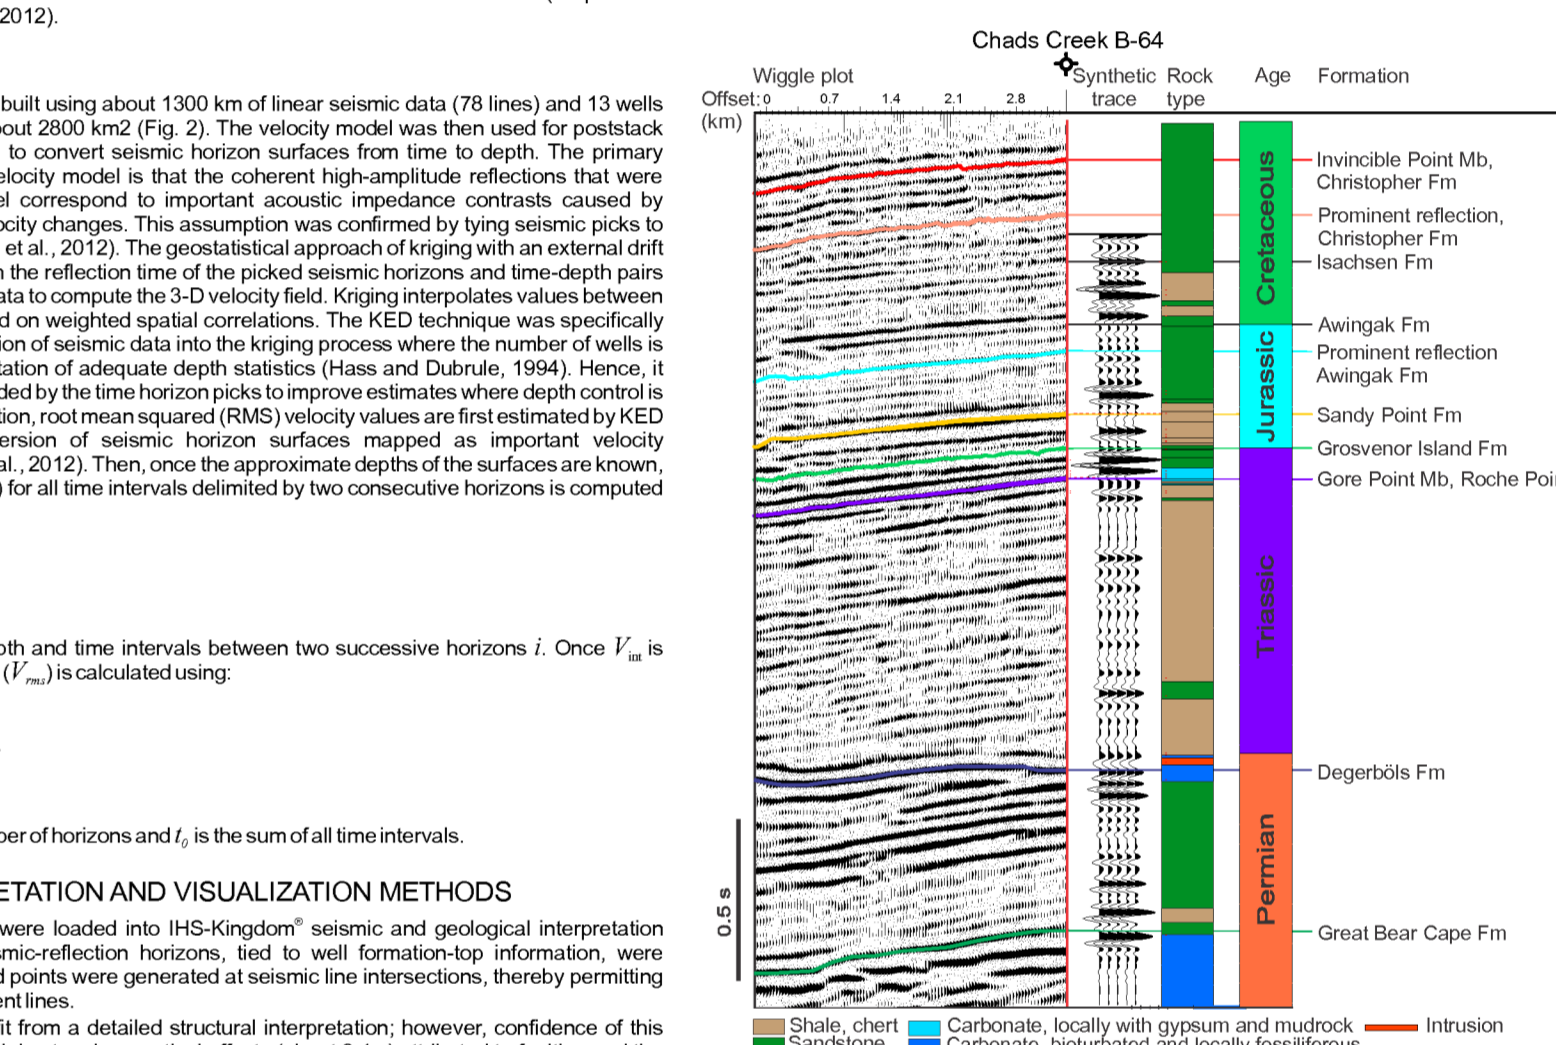


Figure 3. Comparison of the wiggle plot, synthetic trace, stratigraphy, age, and formation-top data for the Chads Creek B-64 well.

ACKNOWLEDGMENTS
The authors would like to thank J. Dietrich and B. MacLean (GSC Calgary) for their technical reviews that improved the overall quality of the maps. IHG is acknowledged for providing Kingdom 8.8 seismic interpretation software.

REFERENCES

Chiles, J.P., and Delfiner, P., 1999. Geostatistics: Modeling Spatial Uncertainty. Wiley Series in Probability and Statistics. Wiley, New York, 734 p.

Claproot, M., Duchesne, M.J., and Gagnon, E., 2011. A geostatistical approach for 2-D seismic velocity modeling. Geological Survey of Canada, Open File 7045, 21 p. doi:10.4095/289551

Dewing, K., and Embry, A.F., 2007. Geological and geochemical data from the Canadian Arctic Islands, Part I: Stratigraphic logs from Arctic Islands and gas exploration basins. Geological Survey of Canada, Open File 5442, 133 p. doi:10.4095/23386

Duchesne, M.J., Claproot, M., and Gagnon, E., 2012. Improving seismic velocity estimation for 2-D poststack time migration of regional seismic data using kriging with an external drift. The Leading Edge, v. 31, p. 1156–1166.

Embry, A.F., 1984. The Wilkes Point Group (Lower–Upper Jurassic), Sverdrup Basin, Arctic Islands, in Current Research, Geological Survey of Canada, Paper 84-15, p. 299–303. doi:10.4095/1668

Embry, A., and Beauchamp, B., 2008. Sverdrup Basin: in Sedimentary Basins of the World, ed. K.J. Holz, Volume 5, The Sedimentary Basins of the United States and Canada. Elsevier, Amsterdam, The Netherlands, p. 617–671.

Harrison, J.C., 1994. Melville Island and adjacent smaller islands, Canadian Arctic Archipelago, District of Franklin, Northwest Territories. Geological Survey of Canada, Map 1844A, scale 1:250 000. doi:10.4095/20377

Harrison, J.C., 1995. Melville Island's salt-based fold belt. Arctic Canadian Geological Survey of Canada, Bulletin 472, 344 p. doi:10.4095/20375

Haas, A., and Dubrule, O., 1994. Geostatistical inversion – a sequential method of stochastic reservoir modeling constrained by seismic data. First Break, v. 12, p. 951–959.

Sherriff, R.E., and Gokturt, L.P., 1999. Exploration Seismology. Cambridge University Press, New York, New York, 628 p.

Recommended citation
Brake, V.I., Duchesne, M.J., Drawing, K., Claproot, M., Gagnon, E., and Brent, T.A., 2013. Time- and depth-structure map, Sandy Point Formation, Sabine Peninsula, Melville Island, Nunavut–Northwest Territories. Geological Survey of Canada, Canadian Geoscience Map 164, scale 1:200 000. doi:10.4095/29308

Abstract
Sabine Peninsula of Melville Island was the subject of an oil and gas exploration boom from 1981 to 1985, during which time seismic-reflection data were collected and wells were drilled as a result of the two largest conventional natural gas fields in Canada were discovered.

Seismic-reflection methods use sound waves to image the internal structure of the Earth. Waves are emitted at the surface before being reflected back to the surface by geological interfaces and recorded. Modern analysis methods were used to re-investigate existing seismic data. In doing so, eight seismic unit boundaries identified on seismic profiles in two-way time were correlated to the regional geological framework and gridded to provide subsurface maps. Each map approximates the structures preserved at that particular time or depth allowing the enhancement of the geological knowledge of Sabine Peninsula and better delineation of elements of the petroleum systems therein.

Résumé
La péninsule de Sabine de l'île de Melville a connu un boom d'exploration gazière et pétrolière entre 1981–1985 pendant lequel des données de sismique-réflexion furent acquises et des puits forés. En ce résultat la découverte des deux plus grands champs de gaz naturel conventionnels du Canada.

La sismique-réflexion utilise des ondes sonores pour imaginer la structure interne de la Terre. Les ondes sont émises en surface avant d'être réfléchies de nouveau vers la surface par des interfaces géologiques où elles sont enregistrées. Des méthodes d'analyse modernes furent utilisées pour ré-investiger des données sismiques existantes. Ainsi, huit limites d'unités sismiques identifiées sur les profils sismiques en temps de parcours aller-retour furent corrélées au cadre géologique régional et maillées afin de produire des cartes de la sous-surface. Chaque carte est une approximation des structures préservées à un certain temps ou à une certaine profondeur nous permettant d'améliorer la connaissance géologique de la péninsule de Sabine et de mieux délimiter les éléments des systèmes pétroliers s'y trouvant.

Cover Illustration
Permian sandstone hoodoos, Sabine Peninsula, Melville Island, Nunavut. Photograph by T.A. Brent, 2013-242

Catalogue No. M163-1164-2013E-PDF
ISBN 978-1-102-29222-4
doi:10.4095/29308

© Her Majesty the Queen in Right of Canada 2013

Natural Resources Canada / **Resources naturelles du Canada**

CANADIAN GEOSCIENCE MAP 164
TIME- AND DEPTH-STRUCTURE MAP
SANDY POINT FORMATION
Sabine Peninsula, Melville Island
Nunavut–Northwest Territories
1:200 000



Canadian Geoscience Maps

Canada

TIME- AND DEPTH-STRUCTURE MAP
SANDY POINT FORMATION
Sabine Peninsula, Melville Island
Nunavut–Northwest Territories
1:200 000

Authors: V.I. Brake, M.J. Duchesne, K. Drawing, M. Claproot, E. Gagnon, and T.A. Brent

Geomatics by V.I. Brake, Geological Survey of Canada and G. Huot-Vézina, Institut national de la recherche scientifique

Cartography by R. Boivin

Scientific editing by E. Inglis

Initiative of the Geological Survey of Canada, conducted under the auspices of the Western Arctic Islands' project as part of Natural Resources Canada's Geo-mapping for Energy and Minerals (GEM) program.

Map projection: Universal Transverse Mercator, zone 12
North American Datum 1983

Base map of the scale of 1:250 000 from Natural Resource Canada, with modifications.

Proximity to the North Magnetic Pole causes the magnetic compass to be useless in this area.

The Geological Survey of Canada welcomes corrections or additional data that may include additional observations not portrayed on this map. See documentation accompanying the data.

This publication is available for free download through GEOCAN (<http://geocan.ess.nrcan.gc.ca/>).

This map is not to be used for navigational purposes.