

FACT SHEET 67


Eka Chimie Canada Inc.

640 des Érables
Salaberry-de-Valleyfield,
Quebec
J6T 6G4

A list of 106 industrial plants has been established under St. Lawrence Vision 2000 (SLV 2000), the second phase of the St. Lawrence Action Plan, launched in 1988. The overall objective is to reduce toxic effluent and virtually eliminate discharges of persistent toxic substances.

The 106 industrial plants designated under SLV 2000 are divided into four groups, each with a specific objective. The EKA CHIMIE CANADA INC. plant in Salaberry-de-Valleyfield is in Group 2, comprising plants that have already implemented treatment programs but whose effluent may contain toxic substances.

The objective for Group 2 is maximum reduction of toxic effluent of targeted plants.

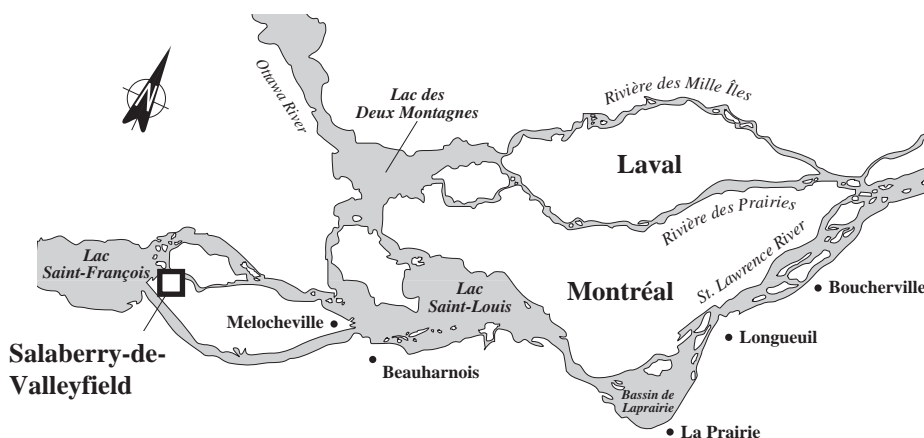

INDUSTRIAL PLANT

Sodium chloride production

The EKA CHIMIE CANADA INC. plant in Salaberry-de-Valleyfield produces sodium chlorate. Rock salt dissolved in recycled water is purified by a physico-chemical process. The brine obtained is evaporated and decanted, then centrifuged to concentrate the salt crystals. The salt is next dissolved in a chlorate liquor and mixed with other solutions before entering the reactors. The sodium chlorate generated by electrolysis of the solution is purified, crystallized, and then concentrated by decanting and centrifuging. The plant uses some of the hydrogen released through electrolysis as a source of energy; the surplus is discharged into the air. Hydrogen peroxide at 70% is stored, diluted (35% to 50%) and shipped to customers. Annual production capacity of the plant is 118 560 t of sodium chlorate. In 1997, the plant operated at 100% design capacity and employed a work force of approximately 60.

PRODUCTION

PRINCIPAL RAW MATERIALS

- Sodium chloride
- Hydrochloric acid
- Sodium hydroxide
- Sodium dichromate
- Sodium bicarbonate
- Calcium chloride
- Hydrogen peroxide (70%)

FINISHED PRODUCTS

- Sodium chlorate crystals
- Hydrogen peroxide in solution (35% to 50%)

TREATMENT MEASURES

INITIAL EFFLUENT VALUES

Mainly dissolved solids

Based on company data, in 1993 the plant discharged 20 580 m³/d of effluent, containing notably:

- 3900 kg/d of dissolved solids (DS)
- 84 kg/d of suspended solids (SS)
- 0.96 kg/d of chlorates

RESOURCES AND USES TO PRESERVE

Migration route for many fish species

Part of the wastewater from the EKA CHIMIE CANADA INC. plant in Salaberry-de-Valleyfield is treated at the municipal sewage treatment plant. The plant is located on the Beauharnois canal, which is a migration route for many fish species (yellow sturgeon, shad, smallmouth bass, perch, white sucker and longnose sucker, whitenose sucker and shorthead redhorse, cyprinids, etc.). Fishing enthusiasts (pike, perch, walleye) come regularly to the canal, particularly near Highway 132 and in the power plant park near the mouth of the canal. There is a large spawning ground for brown bullhead on the north shore, in the bay upstream from the Saint-Louis-de-Gonzague bridge. Two other spawning grounds are located at the canal entrance and near the locks. The water-plant communities on either side of the bridge are very attractive to waterfowl. A 4200-hectare area has been designated by federal authorities as a rest area for migrating birds. Water for the Beauharnois water supply system is taken on the south shore of the canal, upstream from the dam, about 15 kilometres downstream from the effluent discharge point of the EKA CHIMIE CANADA INC. plant.

ENVIRONMENTAL DISCHARGE OBJECTIVES

Environmental protection

Environmental discharge objectives are established to preserve local resources and uses. These guidelines, expressed as maximum permissible loads and concentrations for effluent released into the environment, are used in choosing treatment methods which best promote environmental protection. Environmental discharge objectives for EKA CHIMIE CANADA INC. have been calculated and are available on request.

EFFLUENT TREATMENT

Process water recirculated

Industrial wastewater from the EKA CHIMIE CANADA INC. plant is recirculated. Sewage and purge water from the cooling towers are discharged into the Salaberry-de-Valleyfield public sewer system and carried to the municipal sewage treatment plant (activated sludge). Primary indirect cooling water is discharged into the municipal storm sewer network, which releases it untreated into the Beauharnois canal. Purge water from the secondary indirect cooling system on the crystallization circuit is re-used as primary cooling water.

PREVENTION AND CLEANUP MEASURES IMPLEMENTED

Groundwater quality measurement

In November 1990, a certificate of authorization was issued to increase the production capacity of the plant; at this time the company installed four groundwater sampling wells. Groundwater quality analyses are carried out on a regular basis. In 1995, the company obtained authorization to modify the sodium chlorate solution purification process. The crystallizer purge process was improved in 1996 and the average flowrate is only 20 m³/d. The target is 0 m³/d.

REGULATORY COMPLIANCE - WATER COMPONENT

Standards met

The EKA CHIMIE CANADA INC. plant in Salaberry-de-Valleyfield is subject to and satisfies the standards of the certificate of authorization issued in 1996. A new standard for total residual chlorine is being developed.

POLLUTION ABATEMENT

CHIMIOTOX INDEX ABATEMENT OF TOXIC POLLUTION

Negative Chimiotox index

The Chimiotox index gauges the load of all toxic substances in industrial effluent using the toxicity factors assigned to each contaminant. It is used, among other things, to monitor discharge trends over the years and determine the toxic contribution of each pollutant.

Table 1 gives data from the characterization carried out in August 1995 under SLV 2000 along with Chimiotox values estimated from them, assuming an effluent flowrate of 28 099 m³/d. Eleven substances were selected in testing for more than 120.

The Chimiotox index estimated from the characterization under SLV 2000 is negative. Industrial wastewater from the plant is recirculated in the process and effluent discharged into the municipal sewer system is of better quality than the plant's water supply.

Table 1 *Chimiotox Index (1995) - Eka Chimie Canada Inc.**

Substance	Load (kg/d)	Toxic Weighting Factor	Chimiotox Units (CU)
Total oil and grease	-0.606	100	-61
Nitrites-nitrates	0.104	5	1
Total sulphides	0.049	500	24
Total aluminum	-0.720	11	-8
Total antimony	-0.107	1.6	0
Total beryllium	0.005	15 601	78
Total copper	0.028	451	12
Total iron	-0.202	3.3	-1
Total mercury	-0.002	166 667	-389
Total vanadium	0.301	71	21
Total zinc	-0.339	9.4	-3
CHIMIOTOX INDEX			-324

* Assuming an effluent flowrate of 28 099 m³/d (11 substances selected in testing for over 120).

VIRTUAL ELIMINATION OF PERSISTENT TOXIC SUBSTANCES

One long-range objective of SLV 2000 is the virtual elimination of eleven persistent and bioaccumulative toxic substances from the effluent of the 106 priority plants along the St. Lawrence and its tributaries. The targeted substances are those designated by the International Joint Commission in August 1993: PCBs, DDT, dieldrin, toxaphene, dioxins, furans, mirex, mercury, lead alkyls, benzo(a)pyrene and hexachlorobenzene. To reach this objective, Protection has fixed the environmental discharge objectives set for applicable substances as its target by the end of SLV 2000 in 1998, thereby ensuring that all uses of the receiving environment are protected.

Based on SLV 2000 data for 1995, none of the eleven persistent and bioaccumulative substances were detected in the company's effluent.

PEEP TOXICITY REDUCTION

Low toxicity

The Potential Ecotoxic Effects Probe, or PEEP, combines the results of six standardized bioassays measuring the toxic effects of effluent. The results are expressed on a logarithmic scale of increasing toxicity ranging from 1 to 10 and are used to monitor discharge trends over the years. In the case of EKA CHIMIE CANADA INC. plant, a series of bioassays was conducted in 1995; yielding a PEEP index of 2,2, and showing a low toxicity for the organisms tested.

REDUCTION IN SUBSTANCES MONITORED

Load reduction in 1997

Based on company data for the first six months of 1997, the plant discharged 25 825 m³/d of effluent, containing notably:

- 4200 kg/d of dissolved solids (DS)
- <50 kg/d of suspended solids (SS)
- <0.004 kg/d of chlorates

From 1993 to 1997, dissolved solids and chlorates decreased despite an increase in production and flowrate.

KEY POINTS

- Recirculation of industrial wastewater and connection to municipal sewer system
- Negative Chimiotox index

Information revised January 1998

ADDITIONAL INFORMATION

Chimiotox Index and PEEP:

Gilles Legault, Environment Canada
(514) 283-3452

Environmental discharge objectives:

Francine Richard, MEF (418) 521-3820 #4767

Records officer at the Ministère de l'Environnement et de la Faune du Québec (MEF):

Diane Lafortune (514) 370-3085

Environment officer at EKA CHIMIE CANADA INC.:

Jean Goyette (514) 377-1131

Production team:

Environment Canada

Isabelle Bouchard Thérèse Drapeau

Gilles Legault Lucie Olivier

Sylvie Roberge Marc Villeneuve

Ministère de l'Environnement et de la Faune du Québec

Francine Richard

François Rocheleau

Internet address:

<http://www.slv2000.qc.ec.gc.ca>

Published by authority of the Minister of the Environment

© Public Works and Government Services
Canada 1998 Catalogue No. En153-6/67-1998E
ISBN 0-662-26535-1

(Aussi disponible en français sous le titre
Établissements industriels : faits saillants)