
Development and Transportation, Government of Nunavut, 107 pp.

This map shows the relative ground surface displacement between the major terrain units during one summer in the area of Rankin Inlet. The ground displacement was derived using differential interferometric synthetic aperture radar (DInSAR) data for the summer of 2015. DInSAR data came from the Canadian RADARSAT-2 satellite which operates with a C-band SAR. Stable ground represents locations where either no vertical change was calculated or where displacement was within the expected range of error (± 1.0 cm). Downward displacement represents, in general, ground surface lowering (subsidence) on the order of 1.0 to 2.5, 2.5 to 4.0, 4.0 to 6.0, 6.0 to 8.5, and 8.5 to 14.0 cm. Other possible causes of apparent downward displacement could be associated with downward surface water table movement throughout the summer and sediment erosion. Upward displacement represents a surface rise of 1.0 to 5 cm. which is only 0.3% of the total coverage of the DInSAR map. Areas of no data result from a loss of interferometric coherence. These are typically water and other relatively smooth surfaces from which there is no radar return, or where there has been significant ground surface disturbance and the radar returns cannot be correlated.

Preliminary

les principales unités de terrain de la région de Rankin Inlet au cours d'un été. Les mouvements du sol calculés découlent de données d'interférométrie différentielle par radar à synthèse d'ouverture (DInSAR) nour l'été 2015. Les données DInSAR ont été acquises nar le satellite canadien RADARSAT-2, qui exploite ur radar à synthèse d'ouverture (RSO) dans la bande C Un sol stable représente une zone où, selon les calculs, il n'y a pas de changement vertical de la surface du sol ou que celui-ci se situe à l'intérieur de la marge d'erreur (± 1,0 cm) attendue. En général, les déplacements vers le bas représentent un abaissement de la surface du sol 4,0 à 6,0 cm, 6,0 à 8,0 cm et 8,0 à 14,0 cm. D'autres causes d'un déplacement apparent vers le bas de la surface du sol pourraient être associées à un abaissement du niveau de la nappe d'eau de surface au cours de l'été ou à l'érosion de sédiments. Un déplacement vers le haut correspond à une hausse de la surface du sol de 1,0 à 5 cm. Ces zones ne représentent que 0,3% de la couverture totale de la carte DInSAR. Les zones sans données sont le résultat d'une perte de cohérence interférométrique. Ces zones signaux radar de retour qui ne peuvent être corrélés.

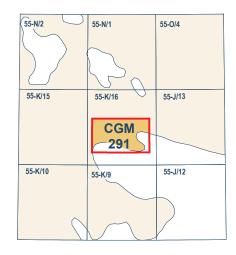

National Topographic System reference

Catalogue No. M183-1/291-2016E-PDF ISBN 978-0-660-05477-3 doi:10.4095/298815

Natural Resources Ressources naturelles du Canada

SEASONAL SURFACE DISPLACEMENT DERIVED

RANKIN INLET



(subsidence) de l'ordre de 1,0 à 2,5 cm, 2,5 à 4,0 cm, correspondent typiquement aux étendues d'eau et aux surfaces relativement lisses qui ne produisent pas de signal radar de retour ou à des zones où une perturbation importante de la surface du sol produit des



© Her Majesty the Queen in Right of

Canada, as represented by the Minister of Natural Resources, 2016

CANADIAN GEOSCIENCE MAP 291

FROM DINSAR



Preliminary

Geological Survey of Canada Canadian Geoscience Maps

Authors: N. Short, A.-M., LeBlanc, and O. Bellehumeur-Génier Geology by I. McMartin, 1997–1999 Surficial geology data conversion by D.E. Kerr, 2016

Geology has been spatially adjusted to fit the updated base.

Meliadine River mouth), is likely related to surface water movement and erosion.

Surficial geology was mapped by McMartin (2002) at a scale of 1:50 000 for the Rankin Inlet area and updated recently to

with the characteristics of the surficial geology units. The most common surficial units classified as stable are bedrock (50%

(sand and gravel; generally well sorted material, 38% of unit Mr). These units generally have low pore ice content, and will

intersects one of these units. Bedrock, esker and beach sediments commonly occur on topographic highs, thus ideal for

conform to the Surficial Data Model v. 2.1. The DInSAR results correspond well with the expected displacement associated

of unit R), glaciofluvial sediments (sands and bouldery gravel; including eskers, 43% of unit GF), and beach sediments

not subside upon thawing. The road network, including the Iqalugaarjuup Nunanga Territorial Park access road, often

road paths. The highest values of downward displacement (> -6 cm), for summer 2015, are mostly associated with intertida

sediments (17% of unit Mi), deltaic sediments (14% of unit Md), alluvial and marine undifferentiated sediments (13% of unit

boulders), these units are characterized by a significant amount of fine-grained sediments (silts and/or clays) which are often

by surface water runoff features and high water table (McMartin, 2002). Therefore, the downward displacement calculated

by DInSAR for this particular unit, may have resulted from a complex interaction between ground surface subsidence and

surface water movement. The relatively high DInSAR downward displacement observed for the deltaic sediments (at the

associated with thaw-sensitive terrain (ice-rich). In addition, the alluvial-marine undifferentiated sediments are characterized

A.M), and nearshore sediments (8% of unit Mn). With the exception of deltaic sediments (coarse sand, grayel, an

Correlation with surficial geology

Geomatics by O. Bellehumeur-Génier Cartography by O. Bellehumeur-Génier and E. Everett Map projection Universal Transverse Mercator, zone 15.

Preliminary

CANADIAN GEOSCIENCE MAP 291

North American Datum 1983 Base map at the scale of 1:50 000 from Natural Resources Canada, with modifications.

 $R \mid A \mid N \mid K \mid L \mid I \mid N$

CANADIAN GEOSCIENCE MAP 291

Acknowledgments

This work was supported through collaboration between the Canada-Nunavut Geoscience Office and Natural Resource

Canada (Canada Centre for Mapping and Earth Observation and Geological Survey of Canada). Special thanks go to L.

Ham, Chief Geologist at the Canada-Nunavut Geoscience Office. The Canadian Northern Economic Development

Agency's (CanNor) Strategic Investments in Northern Economic Development (SINED) program provided financial

support for this work. Additional resources were provided by the Canadian Space Agency through the RADARSAT

Her Majesty the Queen in Right of Canada, as represented by the Minister of Natural Resources ("Canada") does not

warrant or guarantee the accuracy or completeness of the information ("Data") on this map and does not assume any

The Data on this map are intended to convey regional trends and should be used as a guide only. The Data should

not be used for design or construction at any specific location, nor are the Data to be used as a replacement for the

esponsibility or liability with respect to any damage or loss arising from the use of interpretation of the Data.

This project is part of the Natural Resources Canada Climate Change Geoscience Program.

types of site-specific geotechnical investigations.

Constellation Mission program. The authors also want to thank I. McMartin for her helpful comments on surficial geology.

RANKIN INLET

SEASONAL SURFACE DISPLACEMENT DERIVED FROM DINSAR

500 0 500 1000 1500 2000 2500 300@n

Preliminary

92°28' 27'30" 25'00" 20'00" 15'00" 15'00" 50'00" 92°03' 527500 m E. 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 548000 m E.

Shaded relief image prepared by O. Bellehumeur-Génier and derived from the digital elevation model created from 50 cm stereo-optical satellite images acquired August, 2012 (Worldview-1) and June, 2014 (Worldview-2). Worldview: ©DigitalGlobe, all Rights Reserved. 1 m DEM created using a proprietary stereo image matching process by PhotoSat

Preliminary

Preliminary

Magnetic declination 2016, 6°58'E, decreasing 4.2' annually This map is not to be used for navigational purposes.

Information Ltd. Illumination: azimuth 315°, altitude 45°,

vertical factor 1x

Title photograph: Rankin Inlet inuksuk, Rankin Inlet, Nunavut. Photograph by A.-M. LeBlanc. 2016-055

Preliminary

|P R A I R I E| B A Y

Preliminary

The Geological Survey of Canada welcomes corrections or additional information from users.

Data may include additional observations not portrayed on this map. See documentation accompanying the data. This publication is available for free download through GEOSCAN (http://geoscan.nrcan.gc.ca/).

In town, the modification of surface conditions by adding fill material (roads, airport infrastructure, gravel pads below buildings, etc.) reduced the amount of seasonal downward displacement; these areas are usually more stable than their natural surficial foundation. The commercial areas, also located on past mining facilities, appeared slightly more stable than

Preliminary

the residential areas. This is especially apparent in the old part of town (residential), although both areas are located on till and marine undifferentiated sediments (unit T.M). This phenomenon was also observed at the airport where the runway, the runway shoulders, aprons, taxiways, and the military facility appeared mostly stable.

The natural terrain northwest of the current runway was altered several times during construction and upgrading of the airport facilities (Fig. 1; polygons 1 and 3). A well-developed network of ice-wedge polygons, located in a topographic high

made of marine beaches (unit Mr), was clearly visible at the north end of the runway in 1961, before the runway extension (Fig. 2). Despite the numerous ice-wedges, the sand and gravel of the Mr unit was probably used as a source of fill material for runway extension. A subset of this reworked sector (mostly on unit T.M), appeared drier (more recent) on the 1992 air photo, which perfectly matches the area of stable DInSAR values (Fig. 1 and 3: polygon 3). Another subset of the Mr unit, on the northeast of the runway, remained more or less untouched through time. This area includes a past beach spit (McMartin, pers. comm., 2016) and is more stable than the surrounding terrain (Fig. 1 to 3; polygon 2). Polygon 2 is more stable than the reworked Mr and T.M unit areas (polygon 1) on the northwest of the runway

(Fig. 1). Fill material was also used on the northeast side of the runway where the DInSAR shows stable ground (Fig. 1 and

In addition, in 1993, a layer of rigid styrofoam insulation was incorporated in the base structure of the runway to limit degradation of the underlying permafrost and pavement resurfacing was also done in 2008 (LPS Aviation Inc., 2010). According to the DInSAR results, the natural foundation of the runway (mostly on unit Mr), the use of fill material for embankment, mitigation method (insulation) and maintenance seemed to have played a role in maintaining the runway in operational condition. Taxiway C is the only section of the airport showing significant displacement. Further investigation in this area would be needed to identify the cause.

Some buildings and roads, including portions of the airport area were built on small lakes drained prior to construction. These are shown as historical lakes in the inset above (from 1965 air photo (A18916-104)). There is no obvious relationship between the presence of past lakes and relatively high downward displacement values. Most of the historical lakes were located in beach, nearshore, and till and marine undifferentiated sediments and the displacements within these past lakes are most likely related to the surficial units and/or the addition of fill material.

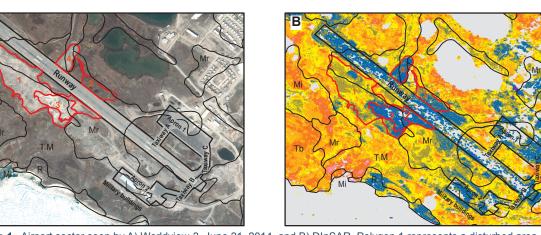


Figure 1. Airport sector seen by A) Worldview-2, June 21, 2014, and B) DInSAR. Polygon 1 represents a disturbed area, in units Mr and T.M. Polygon 2 represents a past beach spit in unit Mr. Polygon 3 represents a subsequently reworked area


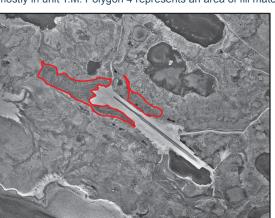


Figure 2. Air photo of 1961 (A17162-71). Polygons represent the ice wedge polygon network on raised marine beaches and the beach spit (unit Mr).

Preliminary



Figure 3. Air photo of 1992 (A27836-84). Polygon 1 represents a disturbed area, in units Mr and T.M. Polygon 2 represents a past beach spit in unit Mr. Polygon 3 represents a subsequent reworked area mostly in unit T.M. Polygon 4 represents an area of fill material.

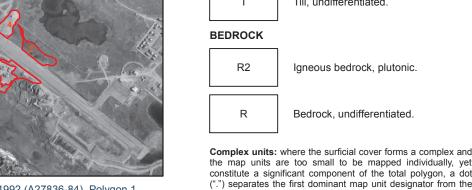

the map units are too small to be mapped individually, yet constitute a significant component of the total polygon, a dot (".") separates the first dominant map unit designator from the less abundant secondary unit (e.g. T.M designates an area of till interspersed with marine sediments).

Recommended citation

Short, N., LeBlanc, A.-M., and Bellehumeur-Génier, O., 2016. Seasonal surface displacement derived from DInSAR. Rankin Inlet. Nunavut: Geological Survey of Canada, Canadian Geoscience Map 291

Preliminary

RELATIVE SURFACE DISPLACEMENT (cm)

Loss of DinSAR coherence or no data.

Alluvial sediments, undifferentiated.

Beach sediments.

Deltaic sediments.

Intertidal sediments.

Nearshore sediments.

Hummocky sediments.

Ice-contact sediments.

Till veneer.

Till blanket.

Marine sediments, undifferentiated.

Subaqueous outwash fan sediments.

MARINE SEDIMENTS

GLACIOFLUVIAL DEPOSITS

GLACIAL SEDIMENTS (TILL)

GFh

GFc

preliminary), scale 1:35 000. doi:10.4095/298815

Preliminary publications in this series have not been scientifically edited.

CANADIAN GEOSCIENCE MAP 291 SEASONAL SURFACE DISPLACEMENT DERIVED FROM DINSAF RANKIN INLET