



Environment
Canada
Environmental
Protection
Service

Environnement
Canada
Service de la
protection de
l'environnement

ENVIRO

Technical

Information for

Problem

Spills

SODIUM SULPHATE

TP
240
S6313
1985

June 1985

Canada

ENVIRONMENTAL AND TECHNICAL INFORMATION FOR PROBLEM SPILLS MANUALS

The Environmental and Technical Information for Problem Spills (EnviroTIPS) manuals provide detailed information on chemical substances. This information is intended to assist the reader in designing countermeasures for spills and to assess their impact on the environment. The report has been reviewed by the Technical Services Branch, Environmental Protection Service, and approved for publication. Approval does not signify that the contents reflect the views and policies of the Environmental Protection Service. Mention of trade names or commercial products does not constitute endorsement for use.

EnviroTIPS manuals are available from:


Publications Section
Environmental Protection Service
Environment Canada
Ottawa, Ontario
CANADA
K1A 1C8

TP
240
SSS:
1985

SODIUM SULPHATE


12-12-96

ENVIRONMENTAL AND TECHNICAL INFORMATION FOR PROBLEM SPILLS

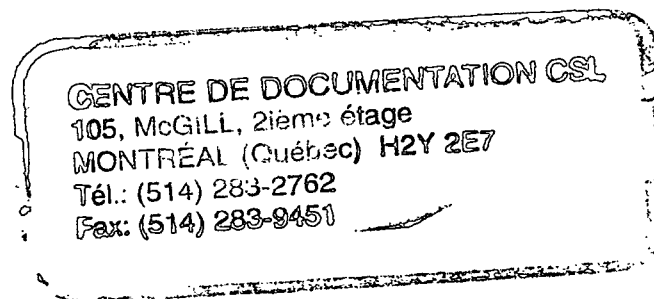

Technical Services Branch
Environmental Protection Programs Directorate
Environmental Protection Service
Ottawa, Ontario

June 1985

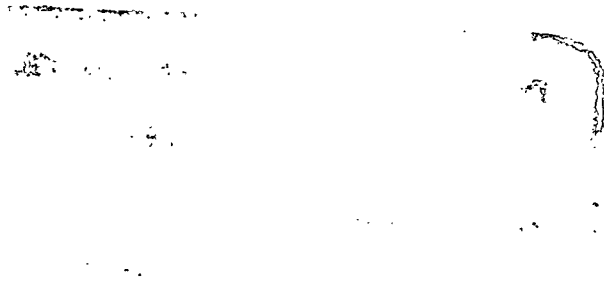

FOREWORD

The Environmental and Technical Information for Problem Spills (EnviroTIPS) manuals were initiated in 1981 to provide comprehensive information on chemicals that are spilled frequently in Canada. The manuals are intended to be used by spill specialists for designing countermeasures for spills and to assess their effects on the environment. The major focus of EnviroTIPS manuals is environmental. The manuals are not intended to be used by first-response personnel because of the length and technical content; a number of manuals intended for first-response use are available. The information presented in this manual was largely obtained from literature review. Efforts were made, both in compilation and in review, to ensure that the information is as correct as possible. Publication of these data does not signify that they are recommended by the Government of Canada, nor by any other group.

ACKNOWLEDGEMENTS

The final version of this manual was prepared by the staff of the Environmental Protection Service who wrote extensive revisions to the text, drafted illustrations and incorporated all comments and additions.

The level of detail present was made possible by the many individuals, organizations and associations who provided technical data and comments throughout the compilation and subsequent review of and input to this manual. The draft of this manual was prepared under contract to Environment Canada by M.M. Dillon Consulting Engineers and Planners, Concord Scientific Corporation and Waterloo Engineering Limited.

TABLE OF CONTENTS

	Page
FOREWORD	i
ACKNOWLEDGEMENTS	i
LIST OF FIGURES	vi
LIST OF TABLES	vii
1 SUMMARY	1
2 PHYSICAL AND CHEMICAL DATA	3
3 COMMERCE AND PRODUCTION	7
3.1 Grades, Purities	7
3.2 Domestic Manufacturers	7
3.3 Other Suppliers	8
3.4 Major Transportation Routes	8
3.5 Production Levels	8
3.6 Future Development	9
3.7 Manufacturer of Sodium Sulphate	9
3.7.1 General	9
3.7.2 Process	9
3.8 Major Uses in Canada	9
3.9 Major Buyers in Canada	9
4 MATERIAL HANDLING AND COMPATIBILITY	11
4.1 Containers and Transportation Vessels	11
4.1.1 General	11
4.1.1.1 Railway hopper cars	11
4.1.1.2 Truck transport	11
4.1.2 Packaging	11
4.2 Compatibility with Materials of Construction	11
5 CONTAMINANT TRANSPORT	17
5.1 General Summary	17
5.2 Leak Nomograms	17
5.3 Dispersion in Air	17
5.4 Behaviour in Water	17
5.4.1 Introduction	17
5.4.2 Nomograms	18
5.4.2.1 Nomograms for non-tidal rivers	20
5.4.2.2 Nomograms for lakes or still water bodies	20
5.4.3 Sample Calculations	28
5.4.3.1 Pollutant concentration in non-tidal rivers	28

5.4.3.2	Average pollutant concentration in lakes or still water bodies	30
5.5	Subsurface Behaviour: Penetration into Soil	30
5.5.1	Mechanisms	30
5.5.2	Equations Describing Dissolved Sodium Sulphate Movement into Soil	31
5.5.3	Saturated Hydraulic Conductivity of Dissolved Sodium Sulphate in Soil	31
5.5.4	Soils	33
5.5.5	Penetration Nomograms	33
5.5.6	Sample Calculation	33
6	ENVIRONMENTAL DATA	39
6.1	Suggested or Regulated Limits	39
6.1.1	Water	39
6.1.2	Air	39
6.2	Aquatic Toxicity	39
6.2.1	Measured Toxicities	39
6.3	Mammalian Toxicity	41
6.4	Other Land and Air Toxicity	41
6.5	Long-term Fate and Effects	41
7	HUMAN HEALTH	42
7.1	Recommended Exposure Limits	42
7.2	Irritation Data	42
7.2.1	Skin Contact	42
7.2.2	Eye Contact	42
7.3	Threshold Perception Properties	43
7.3.1	Odour	43
7.3.2	Taste	43
7.4	Toxicity Studies	43
7.4.1	Inhalation	43
7.4.2	Ingestion	43
7.4.3	Percutaneous	44
7.4.4	Intravenous	44
7.4.5	Mutagenicity, Teratogenicity and Carcinogenicity	44
7.5	Symptoms of Exposure	44
7.5.1	Inhalation	44
7.5.2	Ingestion	44
7.5.3	Skin	45
7.5.4	Eye Contact	45
8	CHEMICAL COMPATIBILITY	46
8.1	Compatibility of Sodium Sulphate with Other Chemicals and Chemical Groups	46

		Page
9	COUNTERMEASURES	47
9.1	Recommended Handling Procedures	47
9.1.1	Fire Concerns	47
9.1.2	Fire Extinguishing Agents	47
9.1.3	Spill Actions, Cleanup and Treatment	47
9.1.3.1	General	47
9.1.3.2	Spills on land	47
9.1.4	Disposal	47
9.1.5	Protective Measures	47
10	PREVIOUS SPILL EXPERIENCE	48
11	ANALYTICAL METHODS	49
11.1	Quantitative Method for the Detection of Sodium Sulphate in Water	49
11.1.1	Flame Photometry	49
11.2	Quantitative Method for the Detection of Sodium Sulphate in Soil	49
11.2.1	Flame Photometry	49
12	REFERENCES AND BIBLIOGRAPHY	51
12.1	References	51
12.2	Bibliography	53

LIST OF FIGURES

Figure		Page
1	SOLUBILITY IN WATER vs TEMPERATURE	6
2	COVERED HOPPER CARS - AAR CLASS LO	12
3	TYPICAL DRUM CONTAINER	15
4	FLOWCHART TO DETERMINE POLLUTANT CONCENTRATION IN NON-TIDAL RIVERS	19
5	TIME vs DISTANCE	21
6	HYDRAULIC RADIUS vs CHANNEL WIDTH	22
7	DIFFUSION COEFFICIENT vs HYDRAULIC RADIUS	23
8	ALPHA vs DIFFUSION COEFFICIENT	24
9	ALPHA vs DELTA	25
10	MAXIMUM CONCENTRATION vs DELTA	26
11	VOLUME vs RADIUS	27
12	AVERAGE CONCENTRATION vs VOLUME	29
13	SCHEMATIC SOIL TRANSPORT	32
14	FLOWCHART FOR NOMOGRAM USE	34
15	PENETRATION IN COARSE SAND	35
16	PENETRATION IN SILTY SAND	36
17	PENETRATION IN CLAY TILL	37

LIST OF TABLES

Table		Page
1	CONVERSION NOMOGRAMS	5
2	TYPICAL RAILWAY HOPPER CAR SPECIFICATIONS - AAR CLASS LO	13
3	DRUMS	14
4	COMPATIBILITY WITH MATERIALS OF CONSTRUCTION	15
5	MATERIALS OF CONSTRUCTION	16

1 SUMMARY

SODIUM SULPHATE (Na_2SO_4)

White to grey or tan powder or pellets, with no odour.

SYNONYMS

Disodium Sulphate, Salt Cake, Anhydrous Sodium Sulphate, Sulphuric Acid Disodium Salt, Thenardite, Miralolite, Glauber's Salt ($\text{Na}_2\text{SO}_4 \cdot 10\text{H}_2\text{O}$)

IDENTIFICATION NUMBERS

UN. No. Not regulated; CAS No. 7757-82-6; OHM-TADS No. 7216904; STCC No. Not required.

GRADES & PURITIES

Natural salt cake, 90 percent or greater

Detergent or rayon grade, >98 percent

Technical, calcined grade, 94 to 96 percent

IMMEDIATE CONCERNS

Fire: Not combustible.

Human Health: Low toxicity.

Environment: Harmful to aquatic life, animals and plants in high concentrations.

PHYSICAL PROPERTY DATA

State (15°C, 1 atm): solid

Melting Point: 884°C

Flammability: noncombustible

Specific gravity: 2.68 (20°/4°C)

Solubility (in water): 4.76 g/100 mL (0°C)

Behaviour (in water): sinks and mixes; no reaction

Odour Threshold: odourless

ENVIRONMENTAL

Sodium sulphate is toxic to aquatic life in high concentrations, generally over 1000 mg/L. Concentrations of 7000 mg/L and over were found to be harmful to domestic animals. Concentrations of 4000 mg/L in solid are injurious to plants, depressing root growth and water absorption. Sodium sulphate does not show bioaccumulation or food chain contamination potential.

HUMAN HEALTH

No TLV® or IDLH established.

Exposure Effects

Contact: Irritation and watering of eyes.

IMMEDIATE ACTION

Spill Control

Restrict access to spill site. Notify manufacturer. Stop the flow and contain spill, if safe to do so. Keep contaminated water from entering sewers or watercourses.

Fire Control

Use fire extinguishing agents appropriate for materials actually burning.

COUNTERMEASURES

Emergency Control Procedures in/on

Soil: Construct barriers to contain spill. Remove material by manual or mechanical means.

Water: Contain by damming, water diversion or natural barriers.

2 PHYSICAL AND CHEMICAL DATA

Physical State Properties

Appearance	Dark grey pellets (technical calcined) and light tan powder (technical anhydrous) (Koppers PD 1981)
Usual shipping state	Solid
Physical state at 15°C, 1 atm	Solid
Melting point	884°C (CRC 1980)

Densities

Density	2.69 g/cm ³ (20°C) (Ullmann 1975)
Specific gravity	2.68 (20°/4°C) (CRC 1980)

Fire Properties

Flammability	Noncombustible (CCD 1977)
--------------	---------------------------

Other Properties

Molecular weight of pure substance	142.04 (CRC 1980)
Constituent components of typical commercial grade	Calcined: 94 to 96 percent anhydrous sodium sulphate, 3 to 5 percent sodium carbonate Anhydrous: 98 percent min. Na ₂ SO ₄ , 0.5 percent max. Na ₂ SO ₃ (Koppers PD 1981)
Refractive index	1.464 (rhomboh) 1.474 (monoclinic) 1.485 (hexagonal) (Kirk-Othmer 1983)
Viscosity	2.48 (22 percent solution, 20°C) (CRC 1980)
Latent heat of fusion	24.4 kJ/mole (at melting point) (CRC 1980)
Heat of formation	-1387 kJ/mole (JANAF 1971)
Entropy	149.6 J/(mole·K) (Ullmann 1975)
Heat of solution	1.17 kJ/mole (18°C) (Perry 1973)
Heat capacity constant pressure (C _p)	127.8 J/(mole·°C) (JANAF 1971)
Coefficient of thermal expansion	0.410 x 10 ⁻³ /°C (24 percent solution, 20°C) (Lange's Handbook 1979)

Thermal conductivity	0.605 W/(m·K) (10 percent solution, 32°C) (Lange's Handbook 1979)
Dielectric constant	7.8 (Ullmann 1975)
Eutectic compositions	12.7 percent aqueous solution (f.p. -3.55°C) (Lange's Handbook 1979)

Solubility

In water	4.76 g/100 mL (0°C) (CRC 1980)
In other common materials	Soluble in hydrogen iodide and glycerin; insoluble in ethanol (CRC 1980)
	The solubility in various solvents is given below (Ullmann 1975):

Solvent	Sodium Sulphate Solubility (percent)	Temperature (°C)
Methanol	0.025	20
Ethanol	0.002	20
Ethylene glycol	0.54	25
40 percent ammonia in water	1.3	23





Properties of Glauber's Salt

The decahydrate ($\text{Na}_2\text{SO}_4 \cdot 10\text{H}_2\text{O}$), or Glauber's salt, is occasionally encountered. Its properties are given below:




Melting point	32.4°C (loses water) (Kirk-Othmer 1983)
Density	1.468 g/cm ³ (20°C) (Ullmann 1975)
Molecular weight	322.19 (Ullmann 1975)
Water content	55.9 percent (Ullmann 1975)
Refractive index	1.394 to 1.398 (Ullmann 1975)
Heat of formation	-4327 kJ/mole (Ullmann 1975)
Heat of solution	-78.5 kJ/mole (Ullmann 1975)
Heat capacity (C_p)	588.2 J/(mole·K) (27°C) (Ullmann 1975)

SODIUM SULPHATE

CONVERSION NOMOGRAMS

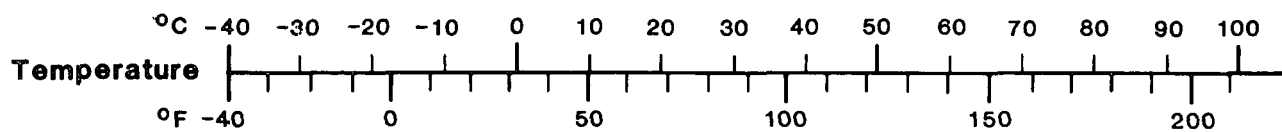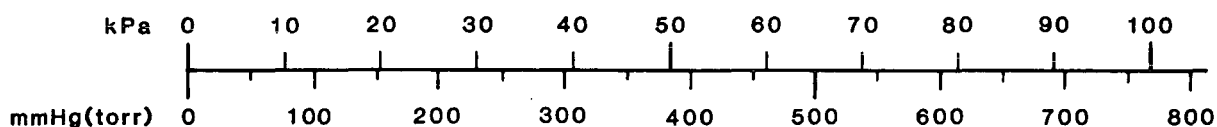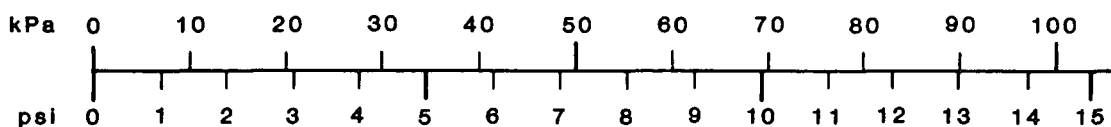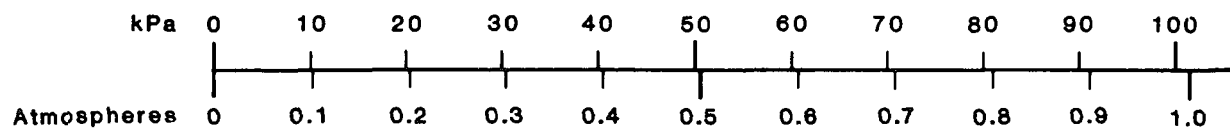**Pressure** 1 kPa = 1 000 Pa**Viscosity**


Dynamic 1 Pa·s = 1 000 centipoise (cP)

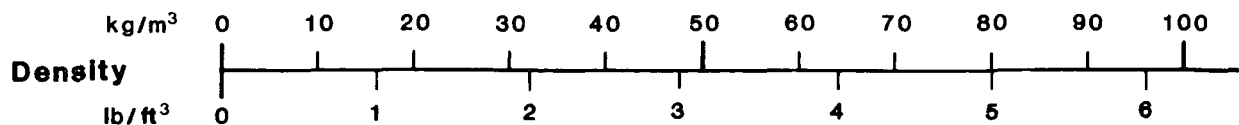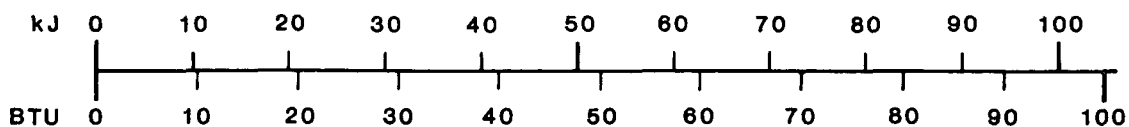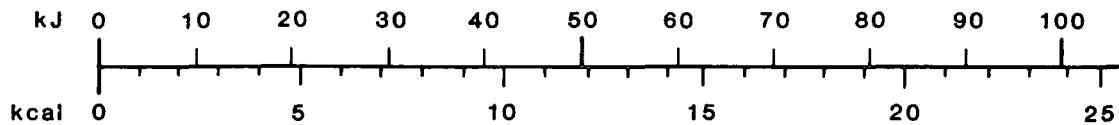Kinematic 1 m²/s = 1 000 000 centistokes (cSt)**Concentration (in water)**1 ppm \cong 1 mg/L**Energy (heat)** 1 kJ = 1 000 J

SODIUM SULPHATE

SOLUBILITY IN WATER VS TEMPERATURE

Reference: SEIDELL and LINKE 1965

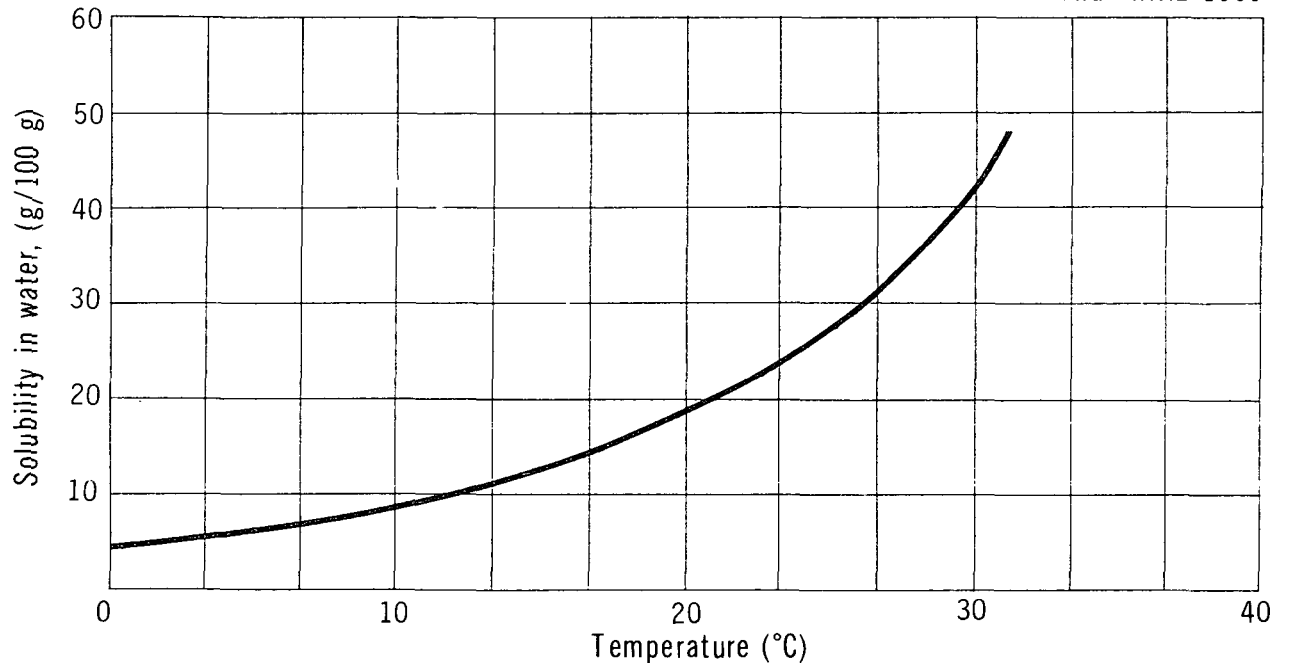

3 COMMERCE AND PRODUCTION

3.1 Grades, Purities (Corpus 1984; Koppers PD 1981; MCP 1979)

Sodium sulphate is produced in natural salt cake form, (purity, >90 percent), and in detergent and rayon (purity, >98 percent; NaCl, <2 percent; iron, 60 percent ppm), glassmakers (purity, >99 percent; low in metals and iron), technical calcined (purity, >94 percent), and U.S.P. (purity, >99 percent) grades.

3.2 Domestic Manufacturers (Corpus 1984; CBG 1980)

These are corporate headquarters' addresses and are not intended as spill response contacts:

Alberta Sulphate Ltd.
407-9900 Jasper Avenue
Edmonton, Alberta
T5J 1P6
(403) 426-6610

Courtaulds (Canada) Ltd.
1150 Montreal Road
Cornwall, Ontario
K6H 5S2
(613) 933-1180

Francona Minerals Ltd.
670 Bank of Canada Bldg.
Regina, Saskatchewan
S4P 0M8
(306) 352-5657

Hudson Bay Mining and Smelting
Co. Ltd.
P.O. Box 28
Toronto-Dominion Centre
Toronto, Ontario
M5K 1B8
(416) 362-2192

Midwest Chemicals Ltd.
P.O. Box 66
Edmonton, Alberta
(403) 426-1760

Noranda Sales Corp. Ltd.
P.O. Box 45, Commerce Court West
Toronto, Ontario
M5L 1B6
(416) 867-7111

Ontario Paper Co. Ltd.
80 King Street, Box 3026
St. Catherines, Ontario
L2R 7G2
(416) 688-5030

Ormiston Mining and Smelting Co. Ltd.
502 Scott Bldg.
Moose Jaw, Saskatchewan
S6H 0B9
(306) 692-9611

Saskatchewan Minerals
P.O. Box 120
Chaplin, Saskatchewan
S0H 0V0
(306) 395-2561

3.3 Other Suppliers (CBG 1980)

Arliss Chemical Co. Inc.
325 Hymus Blvd.
Pointe-Claire, Quebec
H9R 1G8
(514) 694-2170

Canada Chrome & Chemicals Ltd.
5468 Dundas Street West
Toronto, Ontario
M9B 6E3
(416) 239-8922

Canada Colours and Chemicals Ltd.
80 Scarsdale Road
Don Mills, Ontario
M3B 2R7
(416) 924-6831

C-I-L Inc.
90 Sheppard Avenue East
North York, Ontario
M2N 5S8
(416) 226-7532 or 226-7250

Coté Chemicals Inc.
111 Bombardier Park
Chateauguay Centre, Quebec
J6J 3X0
(514) 691-6260

International Chemical Canada Ltd.
P.O. Box 385
Brampton, Ontario
L6V 2L3
(416) 453-4234

Lawrason's Chemicals Ltd.
180 Adelaide Street South, Box 2425
London, Ontario
N6A 4G3
(519) 686-9335

3.4 Major Transportation Routes

Current Canadian production of sodium sulphate is located primarily in Saskatchewan, at Palo, Grant, Chaplin, Fox Valley, Hardene, Ormiston, Bishopric and Gladmar (78 percent of total production). Other production facilities are located in Alberta and Ontario. The product is shipped to all provinces for use in wood pulping.

3.5 Production Levels (Corpus 1984)

Company, Plant Location	Nameplate Capacity kilotonnes/yr (1983)
Alberta Sulphate, Metiskow, Alta.	90
Courtaulds Canada, Cornwall, Ont.*	20
Francana Minerals, Grant, Sask.	90
Francana Minerals, Hardene, Sask.	45
Midwest Chemicals, Palo, Sask.	109
Ontario Paper, Thorold, Ont.*	77
Ormiston Mining & Smelting, Ormiston, Sask.	90
Saskatchewan Minerals, Bishopric, Sask.	3
Saskatchewan Minerals, Chaplin, Sask.	135
Saskatchewan Minerals, Fox Valley, Sask.	135
Saskatchewan Minerals, Gladmar, Sask.	19
TOTAL	813

Company, Plant Location	Nameplate Capacity kilotonnes/yr (1983)
Domestic Productions (1983)	534.5
Imports (1983)	<u>22.5</u>
TOTAL SUPPLY	<u>557.0</u>

* by-product operation

3.6 Future Development (CCP 1982)

The British Columbia Ministry of Energy, Mines and Resources has received a proposal for a potassium sulphate/sodium sulphate plant to be built by Canterra Energy, Entreprise Minière et Chimique Sumitomo, with start-up scheduled for 1986.

3.7 Manufacture of Sodium Sulphate (Broughton 1974; FKC 1975)

3.7.1 General. Crude Glauber's salt is purified by recrystallization and heated to produce anhydrous sodium sulphate.

3.7.2 Process. Crude Glauber's salt is either mined from surface deposits and dissolved in water, or solution-mined. Insoluble impurities are settled and filtered out of the "brine" solution; the brine is then evaporated and chilled to produce a slurry of Glauber's salt crystals. The crystals are filtered from the mother liquor, which is returned to the process, then they are melted in an evaporator and dried in a rotary kiln.

3.8 Major Uses in Canada (Corpus 1984)

Sodium sulphate is used primarily in wood pulping. It is also used in detergents, glass making, textile mordant, animal feeds, and solar trays.

3.9 Major Buyers in Canada (Corpus 1984)

Abitibi-Price, Smooth Rock Falls, Ont.
 Abitibi-Price, Jonquièrre, Que.
 B.C. Forest Products, Crofton, MacKenzie, B.C.
 Boise Cascade, Ft. Frances, Ont.
 Boise Cascade, Miramichi, N.B.
 Canadian Cellulose, Prince Rupert, B.C.
 Canadian Forest Products, Port Mellon, B.C.
 Canadian International Paper, La Tuque, Que.
 Cariboo Pulp, Quesnel, B.C.

Colgate-Palmolive, Toronto, Ont.
Consolidated-Bathurst, Bathurst, N.B.
Consumers Glass, Toronto, Ont.
Crestbrook Forest Industries, Skookumchuk, B.C.
Crown Zellerbach, Campbell R., B.C.
Domglas, Hamilton, Ont.
Domtar, Windsor, Ont.
Eddy Forest Products, Espanola, Ont.
Eurocan Pulp, Kitimat, B.C.
Great Lakes Forest Products, Dryden, Ont.
Intercontinental Pulp, Prince George, B.C.
Irving Pulp, Saint John, N.B.
Kimberly-Clark, Terrace Bay, Ont.
Lever Detergents, Toronto, Ont.
MacMillan Bloedel, Nanaimo, B.C.
Manitoba Forestry Resources, Le Pas, Man.
Northwood Pulp, Prince George, B.C.
Prince Albert Pulp, Prince Albert, Sask.
Prince George Pulp, Prince George, B.C.
Proctor & Gamble, Hamilton, Ont.
St. Regis, Hinton, Alta.
Scott Maritime, Abercrombie, N.S.
Tahsis, Gold River, B.C.
Thurso Pulp & Paper, Thurso, Que.
Western Forest Products, Squamish, B.C.
Weyerhaeuser, Kamloops, B.C.
Witco Chemical Canada, Oakville, Ont.

4 MATERIAL HANDLING AND COMPATIBILITY

4.1 Containers and Transportation Vessels

4.1.1 General. Sodium sulphate solid is shipped primarily in bulk by rail or truck, or in drums and boxes.

4.1.1.1 Railway hopper cars. Railway hopper cars used to transport sodium sulphate are illustrated in Figure 2. Table 2 provides typical details.

4.1.1.2 Truck transport. Sodium sulphate solid is also shipped in trucks.

4.1.2 Packaging. In addition to bulk shipments, sodium sulphate solid is also transported in drums and boxes. Drums fabricated from a variety of construction materials are permitted. Table 3 lists drum types and descriptions (TDGC 1980). Metal, wooden or fiberboard boxes with inner containers fabricated from glass, metal, plastic or earthenware may also be used. Maximum net capacity of the box and the individual inside packagings is 23 and 11 kg (51 and 24 lb), respectively (HMR 1978).

4.2 Compatibility with Materials of Construction


The compatibility of sodium sulphate with materials of construction is indicated in Table 4. The unbracketed abbreviations are described in Table 5. The rating system for this report is briefly described below.

<u>Recommended:</u>	These materials will perform satisfactorily in the given application.
<u>Conditional:</u>	Material will show deterioration in the given application; however, it may be suitable for intermittent or short-term service.
<u>Not Recommended:</u>	Material will be severely affected in this application and should not be used.


SODIUM SULPHATE

COVERED HOPPER CARS - AAR CLASS LO

(Reference - CLC 1974, AAR 1983)

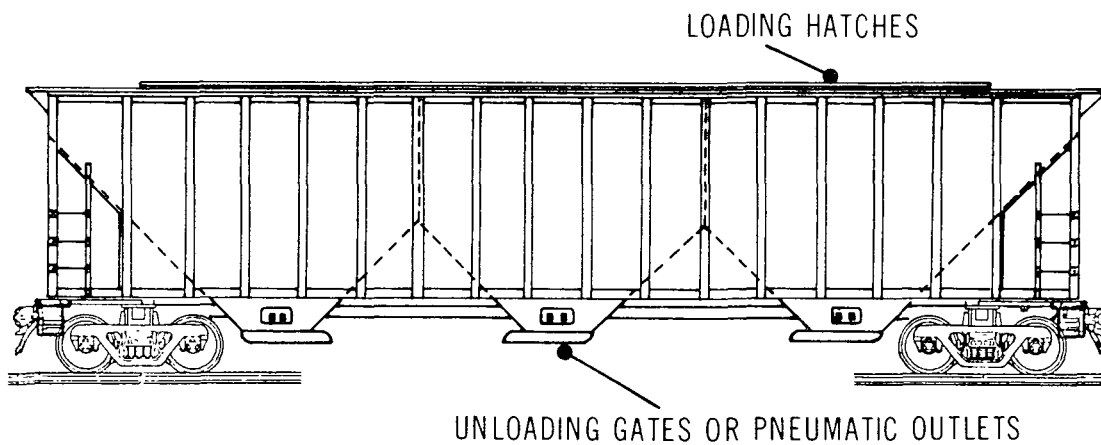

Typical 3 - Compartment Hopper Car

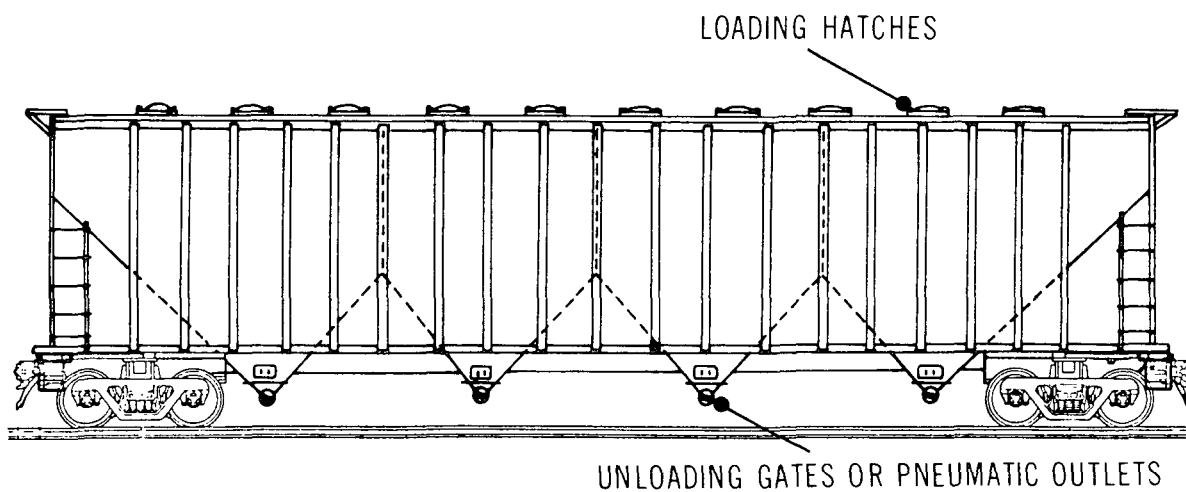

Typical 4 - Compartment Hopper Car

TABLE 2 TYPICAL RAILWAY HOPPER CAR SPECIFICATIONS - AAR CLASS LO (CLC 1974)

Description	Hopper Car Size (cu. ft.)	
	5800	4700
<u>Overall</u>		
Nominal capacity	164 m ³ (5800 cu. ft.)	133 m ³ (4700 cu. ft.)
Weight capacity	86 000 kg (190 000 lb.)	89 000 kg (196 000 lb.)
Car weight - empty	45 000 kg (100 000 lb.)	45 000 kg (100 000 lb.)
Car weight - max.	119 000 kg (263 000 lb.)	119 000 kg (263 000 lb.)
<u>Hoppers/Compartments</u>		
Number	4	3
Material	steel	
Inside length (typical)	410 cm (160 in.)	460 cm (180 in.)
Inside width (typical)	300 cm (118 in.)	300 cm (118 in.)
Spacing between outlets	4 m (13 ft.)	5 m (15 ft.)
Slope angle	40 to 45°	40 to 45°
<u>Approximate Dimensions</u>		
Coupled length	21 m (68 ft.)	18 m (60 ft.)
Length over strikers	20 m (65 ft.)	17 m (57 ft.)
Length of truck centres	16 m (54 ft.)	14 m (46 ft.)
Clearance height	5 m (15 ft.)	5 m (15 ft.)
Height to top of running board	5 m (15 ft.)	4 m (14 ft.)
Overall width	3.1 m (123 in.)	3.2 m (126 in.)
Inside length	19 m (63 ft.)	17 m (55 ft.)
<u>Loading/Unloading Fixtures</u>		
<u>Loading Hatches:</u>	Cars typically equipped with 4 to 12 loading hatches. Typical dimensions of these are 36 to 61 cm (14 to 24 in.) in diameter or square dimensions.	
<u>Unloading Fixtures:</u>	Equipped with unloading gates at bottom of 36 to 61 cm (14 to 24 in.) square and/or pneumatic unloading connections 10 to 20 cm (4 to 8 in.) in diameter.	

TABLE 3 DRUMS

Type of Drum	Designation	Description	Figure No. (If Any)
Steel	1A1	Nonremovable head, reusable	3
	1A1A	1A1 with reinforced chime	3
	1A1B	1A1 with welded closure flange	3
	1A1C	1A1 with lead coating	3
	1A1D	1A1 with coating (other than lead)	3
	1A2	Removable head, reusable	3
	1A2A	1A2 with reinforced chime	3
	1A2B	1A2 with lead coating	3
	1A3	Nonremovable head, single use only	3
	1A4	Removable head, single use only	3
Plywood	1D2		
Fibreboard	1G1	Convolutely wound plies. Maximum capacity 250 L (55 gal.) Maximum net mass 400 kg (882 lb.)	
Plastic	1H1	Nonremovable head. Maximum capacity 250 L (55 gal.) Maximum net mass 400 kg (882 lb.)	
	1H2	Same as 1H1 except head removable	
Steel Drums with inner plastic receptacles	6HA1	Outer steel sheet in the shape of drum. Inner plastic receptacle. Maximum capacity 225 L (49 gal.)	
Plywood Drums with inner plastic receptacles	6HD1	Outer plywood in shape of drum. Inner plastic receptacle. Maximum capacity 225 L (49 gal.)	
Fibreboard Drums with inside plastic receptacles	6HG1	Outer containers of convolutely wound plies of fibreboard. Inner plastic in shape of drum. Maximum capacity 225 L (49 gal.)	

* See Section 4.2 of this report.

SODIUM SULPHATE

TYPICAL DRUM CONTAINER**Typical steel drum**

MIN. 2.4 mm
LEAD COATING FOR
IAIC DESIGNATION

CONTENTS LABEL

BODY AND HEADS
CONSTRUCTED OF
ROLLED STEEL

MAX. CAPACITY
250 L

MAX. NET MASS
400 kg

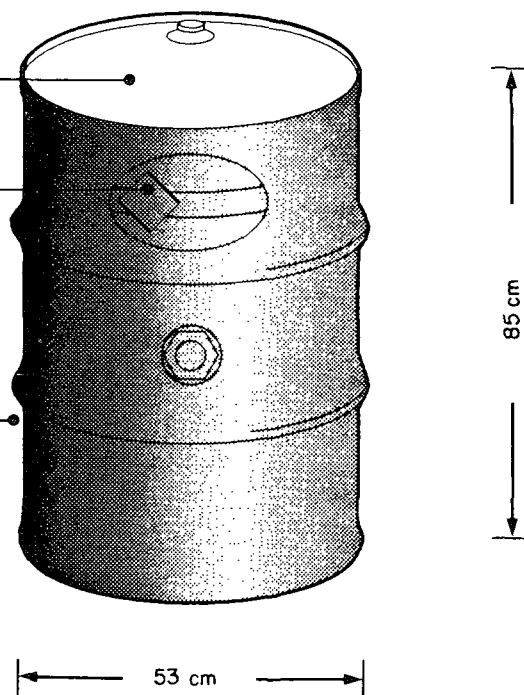


TABLE 4 COMPATIBILITY WITH MATERIALS OF CONSTRUCTION

Application	Chemical		Material of Construction		
	Conc.	Temp. (°C)	Recommended	Conditional	Not Recommended
1. Pipes and Fittings	All	49	PE (DPPED 1967)		
		60	PVC I PVC II (DPPED 1967)		
		71	ABS (DPPED 1967)		
		79	PVDC (DCRG 1978)		
		107	PP (DCRG 1978)		
		121	Chlorinated Polyether (DCRG 1978)		

TABLE 4 COMPATIBILITY WITH MATERIALS OF CONSTRUCTION (Cont'd)

Application	Chemical		Material of Construction		
	Conc.	Temp. (°C)	Recommended	Conditional	Not Recommended
1. Pipes and Fittings (Cont'd)		135	PVDF (DCRG 1978)		
		To operating limit of material	PVC I ABS, PE (MWPP 1978)		
2. Others	Most	Most	CS SS		

TABLE 5 MATERIALS OF CONSTRUCTION


Abbreviation	Material of Construction
ABS	Acrylonitrile Butadiene Styrene
	Aluminum
CS	Carbon Steel
	Chlorinated Polyether
	Glass
	Nickel
	Nickel-Copper Alloy (Monel)
PE	Polyethylene
PP	Polypropylene
PVC (followed by grade, if any)	Polyvinyl Chloride
PVDC	Polyvinylidene Chloride
PVDF	Polyvinylidene Fluoride
SS	Stainless Steel

5 CONTAMINANT TRANSPORT

5.1 General Summary

Sodium sulphate is transported as a solid, in hopper type or pneumatic bulk railway cars. When spilled in water, it will dissolve. Sodium sulphate is essentially nonvolatile, so dispersion in air is not a problem.

Factors considered for the transport of a sodium sulphate spill in water and soil are as follows:

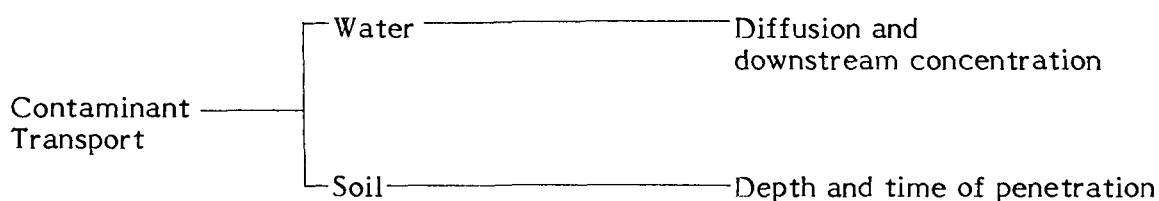

It is important to note that, because of the approximate nature of the contaminant transport calculations, the approach adopted throughout has been to use conservative estimates of critical parameters so that predictions are approaching worst case scenarios for each medium.

5.2 Leak Nomograms

Sodium sulphate is usually transported as a solid; as a result, no leak nomograms have been prepared.

5.3 Dispersion in Air

Sodium sulphate is nonvolatile in foreseeable spill circumstances, so there is no significant potential for dispersion in air. Dusting, which could cause irritation, may be a problem in some spill situations.

5.4 Behaviour in Water

5.4.1 Introduction. When spilled on a water surface, sodium sulphate will sink and dissolve. Mixing takes place and the spill is diluted. This mixing can generally be described by classical diffusion equations with one or more diffusion coefficients. In rivers, the principal mixing agent is stream turbulence while in calm water mixing takes place by molecular diffusion.

To estimate the pollutant concentration in a river downstream from a spill, the turbulent diffusion has been modelled. The one-dimensional model uses an idealized rectangular channel section and assumes a uniform concentration of the pollutant throughout the section. Obviously, this applies only to points sufficiently far downstream of the spill where mixing and dilution have distributed the pollutant across the entire river channel. The model is applicable to rivers where the ratio of width to depth is less than 100 ($W/d < 100$) and assumes a Manning's roughness coefficient of 0.03. Details of the model are outlined in the Introduction Manual.

No modelling has been carried out for molecular diffusion in still water. Rather, nomograms have been prepared to define the hazard zone and the average concentration within the hazard zone as a function of spill size, but independent of time.

5.4.2 Nomograms. The following nomograms are presented to calculate pollutant concentrations in non-tidal rivers and in lakes (still water).

Non-tidal Rivers

- Figure 5: time versus distance for a range of average velocities
- Figure 6: hydraulic radius versus channel width for a range of stream depths
- Figure 7: diffusion coefficient versus hydraulic radius for a range of average stream velocities
- Figure 8: α^* versus diffusion coefficient for various time intervals
- Figure 9: α versus Δ^* for a range of spill sizes
- Figure 10: maximum concentration versus Δ for a range of river cross-sectional areas


Lakes or Still Water Bodies

- Figure 11: volume versus radius for the hazard zone for a range of lake depths
- Figure 12: average concentration versus volume for the hazard zone for a range of spill sizes

The flowchart in Figure 4 outlines the steps required to estimate the downstream concentration after a spill and identifies the nomograms to be used. These nomograms (Figures 5 through 12) are described in the following subsections.

* α and Δ are conversion factors only and are of no significance other than to facilitate calculation of downstream concentration.

SODIUM SULPHATE

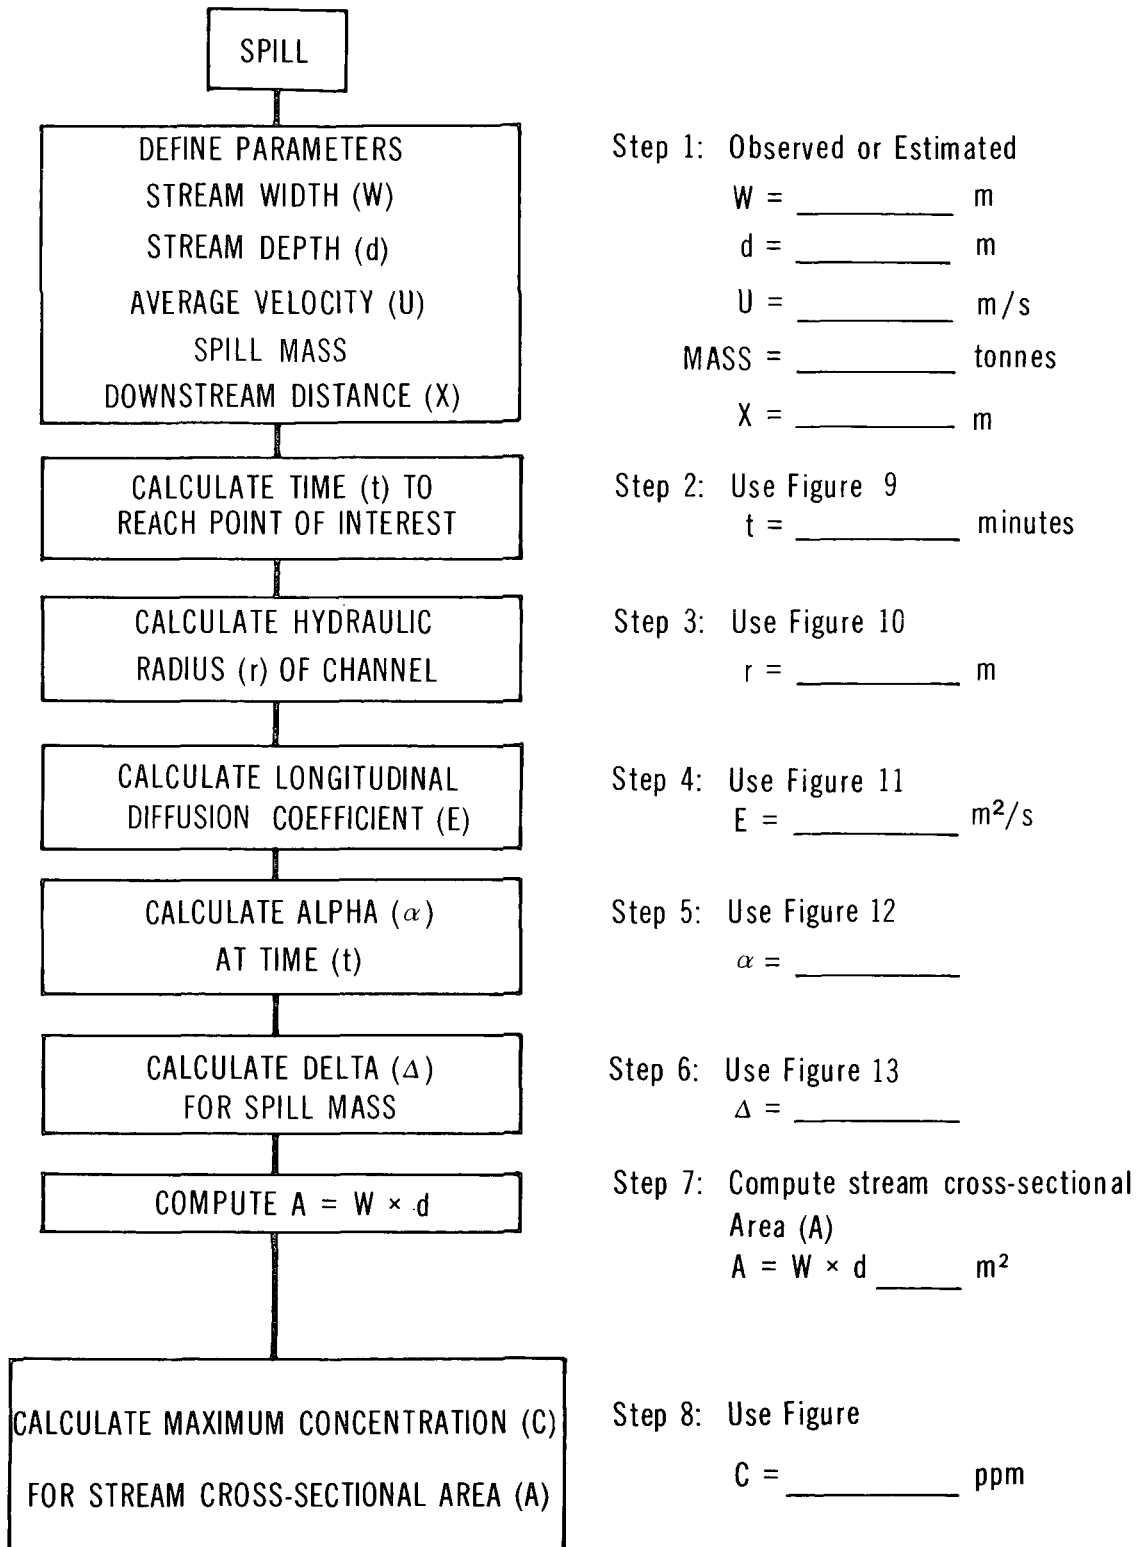**FLOW CHART TO DETERMINE POLLUTANT
CONCENTRATION IN NON-TIDAL RIVERS**


5.4.2.1 Nomograms for non-tidal rivers.

Figure 5: Time versus distance. Figure 5 represents a simple relationship between average stream velocity, time, and distance. Using an estimate of average stream velocity (U), the time (t) to reach any point of interest, at some distance (X) downstream of the spill, can be readily obtained from Figure 5.

Figure 6: Hydraulic radius versus channel width. The model used to estimate downstream pollutant concentrations is based on an idealized rectangular channel of width (W) and depth (d). The hydraulic radius (r) for the channel is required in order to estimate the longitudinal diffusion coefficient (E). The hydraulic radius (r) is defined as the stream cross-sectional area (A) divided by the wetted perimeter (P). Figure 6 is a nomogram for computation of the hydraulic radius (r) using the width and depth of the idealized river cross-section.

Figure 7: Diffusion coefficient versus hydraulic radius. Figure 7 permits calculation of the longitudinal diffusion coefficient (E), knowing the hydraulic radius (r) from Figure 6 and the average stream velocity (U).

Figure 8: Alpha versus diffusion coefficient. Figure 8 is used to estimate a conversion factor, alpha (α), which is a function of the diffusion coefficient (E) and the time (t) to reach the point of interest downstream of the spill.

Figure 9: Alpha versus delta. A second conversion factor, delta (Δ), must be estimated from Figure 9 to allow determination of the pollutant concentration at the point of interest. Delta (Δ) is a function of alpha (α) and the spill size.


Figure 10: Maximum concentration versus delta. Figure 10 represents the final step for calculation of the maximum downstream pollutant concentration (C) at the point of interest. Using the factor delta (Δ) and knowing the stream cross-sectional area (A), the concentration (C) is readily obtained from the nomogram. The value obtained from Figure 10 applies to neutrally buoyant liquids or solids and will vary somewhat for other pollutants which are heavier or lighter than water.

5.4.2.2 Nomograms for lakes or still water bodies.


Figure 11: Volume versus radius. The spill of a neutrally buoyant liquid in a lake in the absence of wind and current has been idealized as a cylinder of radius (r) and length (d), equivalent to the depth of the lake at the point of spill. The volume of water

SODIUM SULPHATE


TIME vs DISTANCE

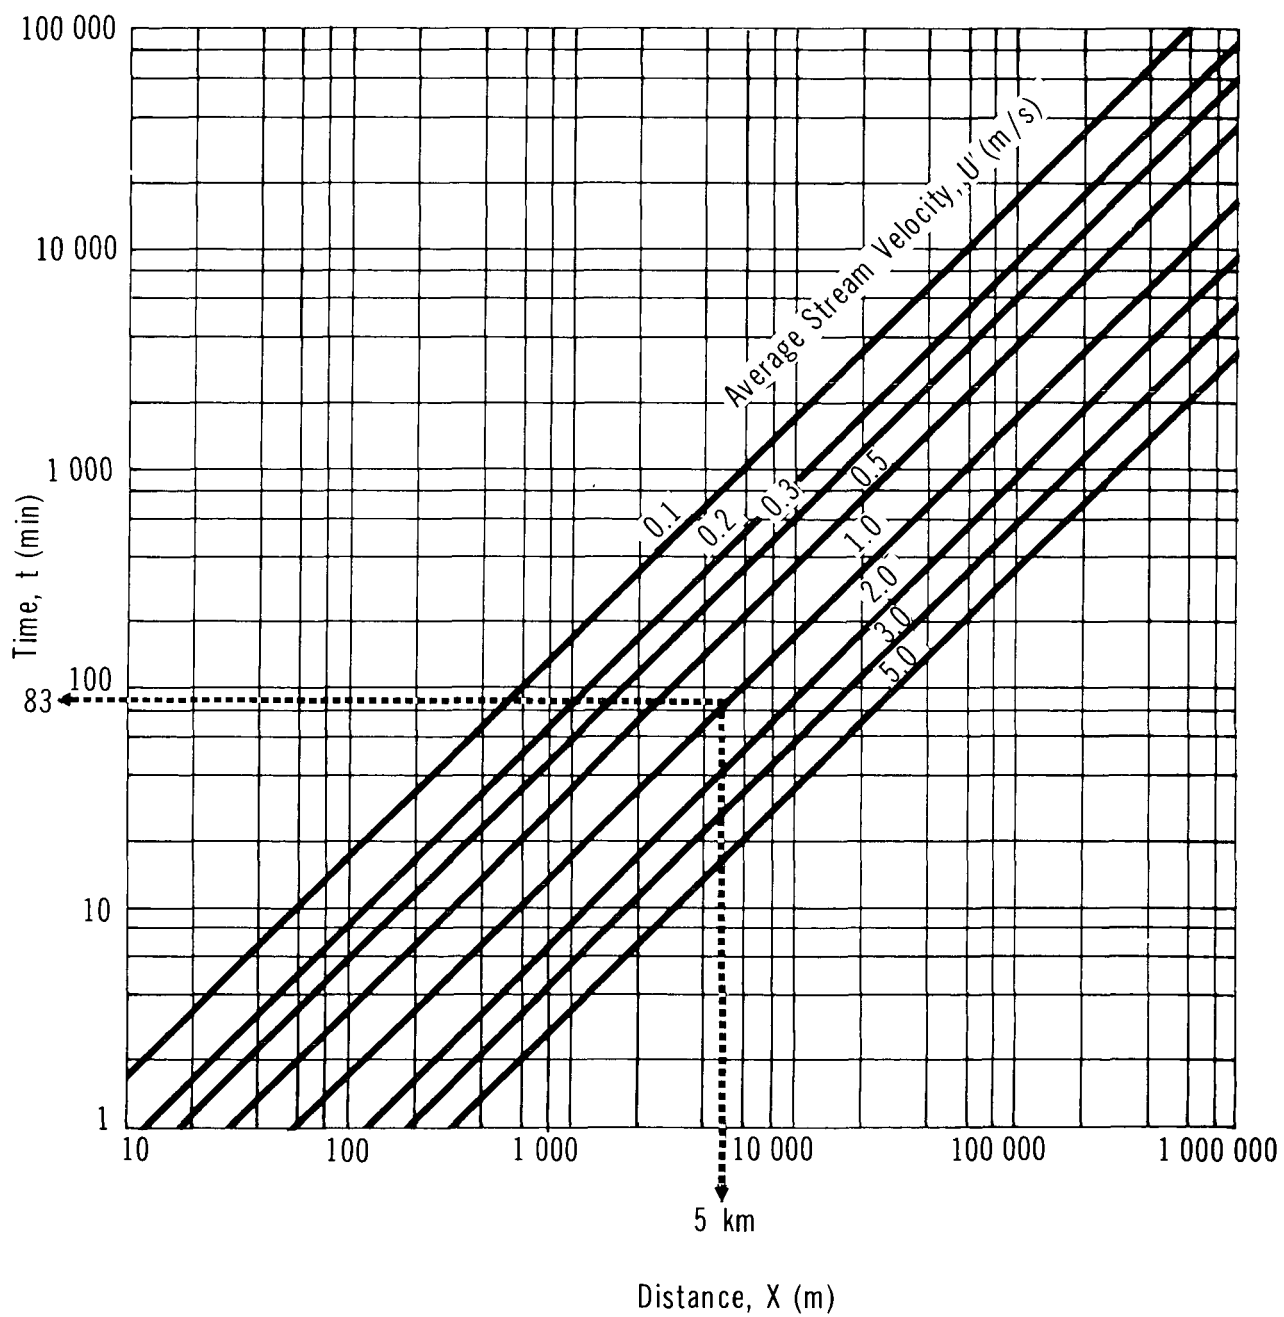

SODIUM SULPHATE

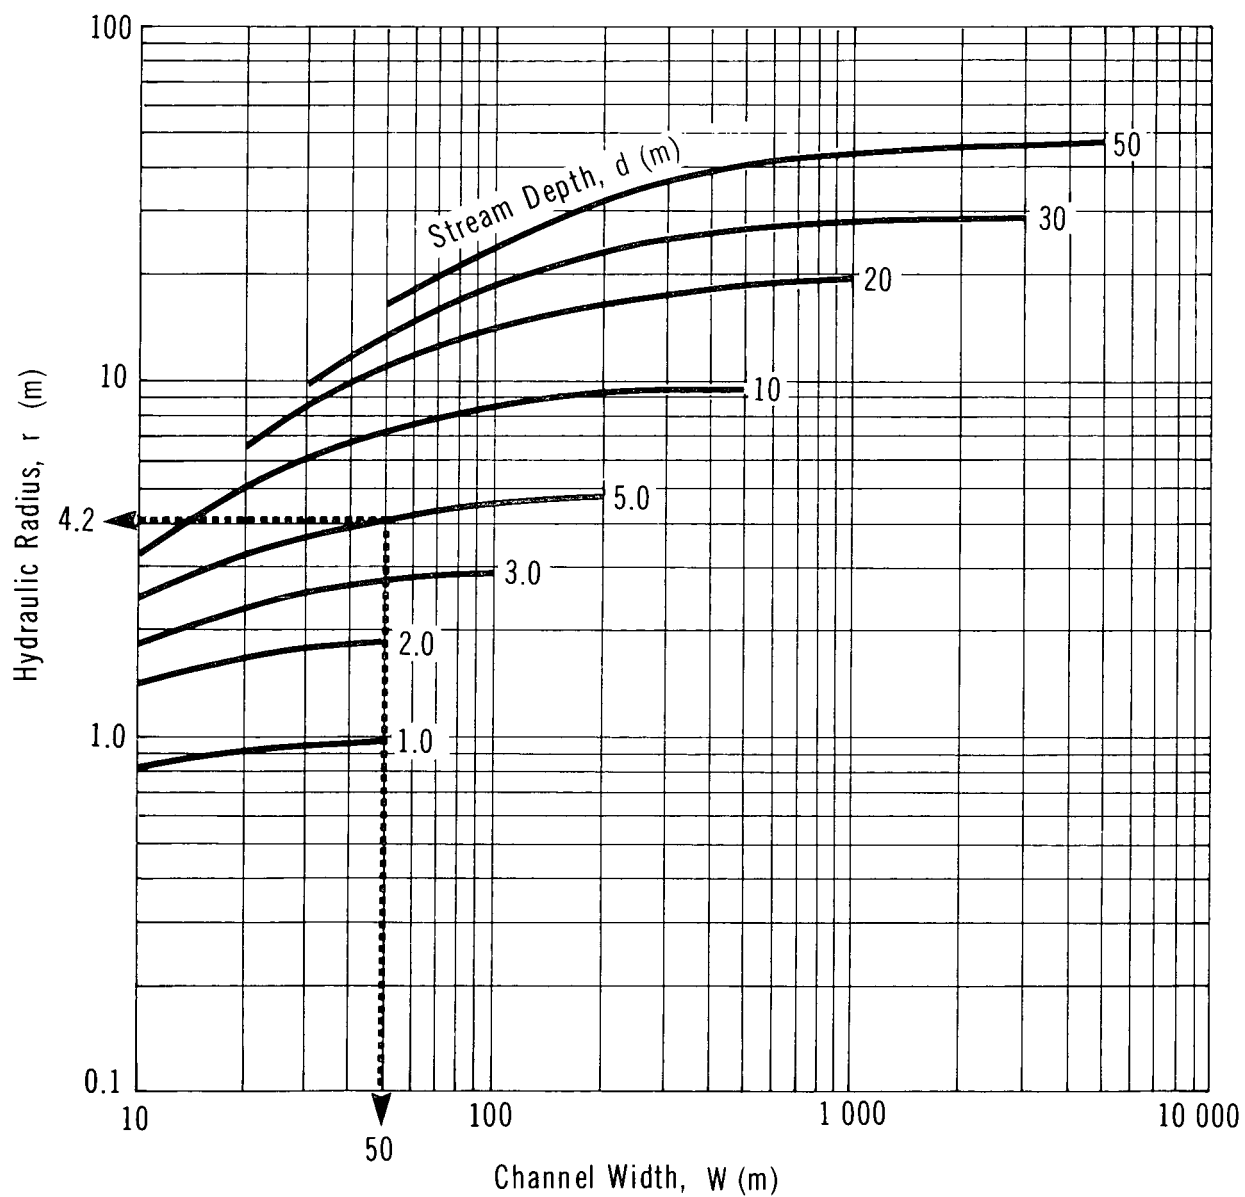
HYDRAULIC RADIUS VS
CHANNEL WIDTH

SODIUM SULPHATE

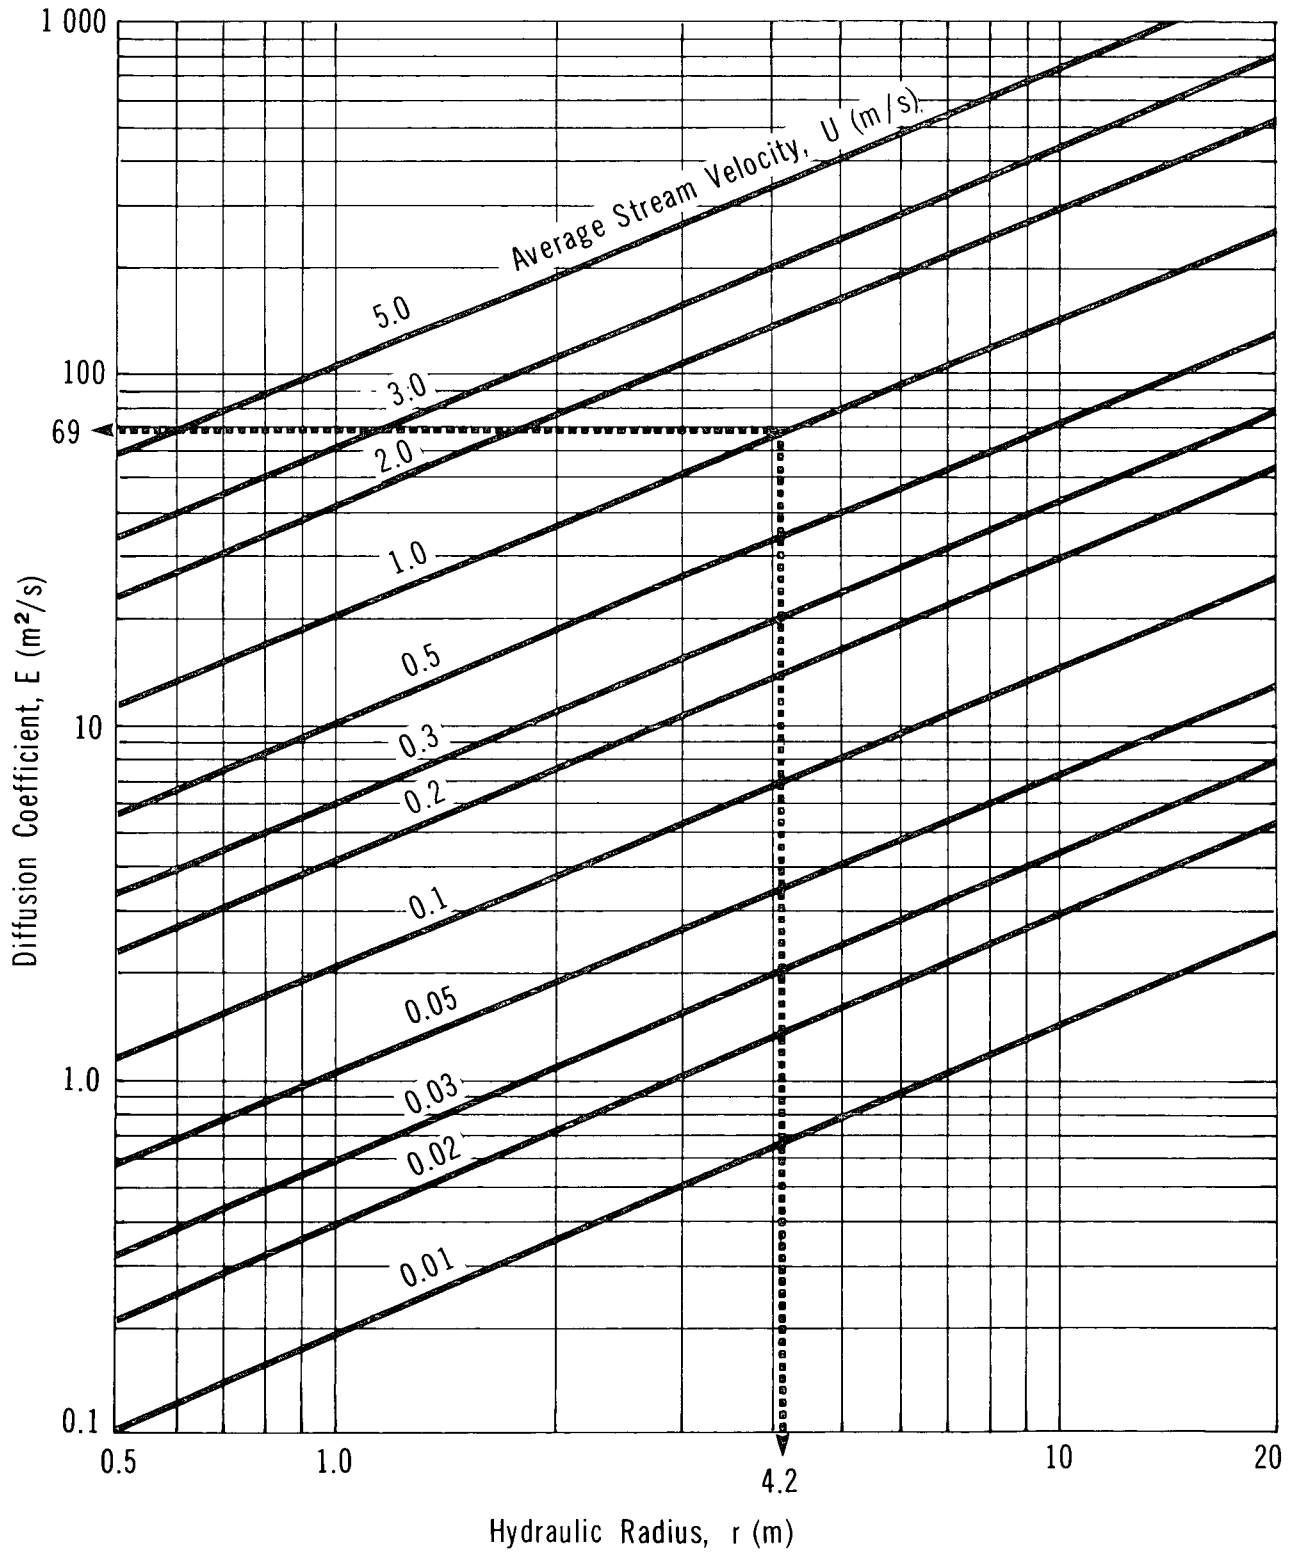DIFFUSION COEFFICIENT
VS HYDRAULIC RADIUS


SODIUM SULPHATE

ALPHA vs DIFFUSION COEFFICIENT

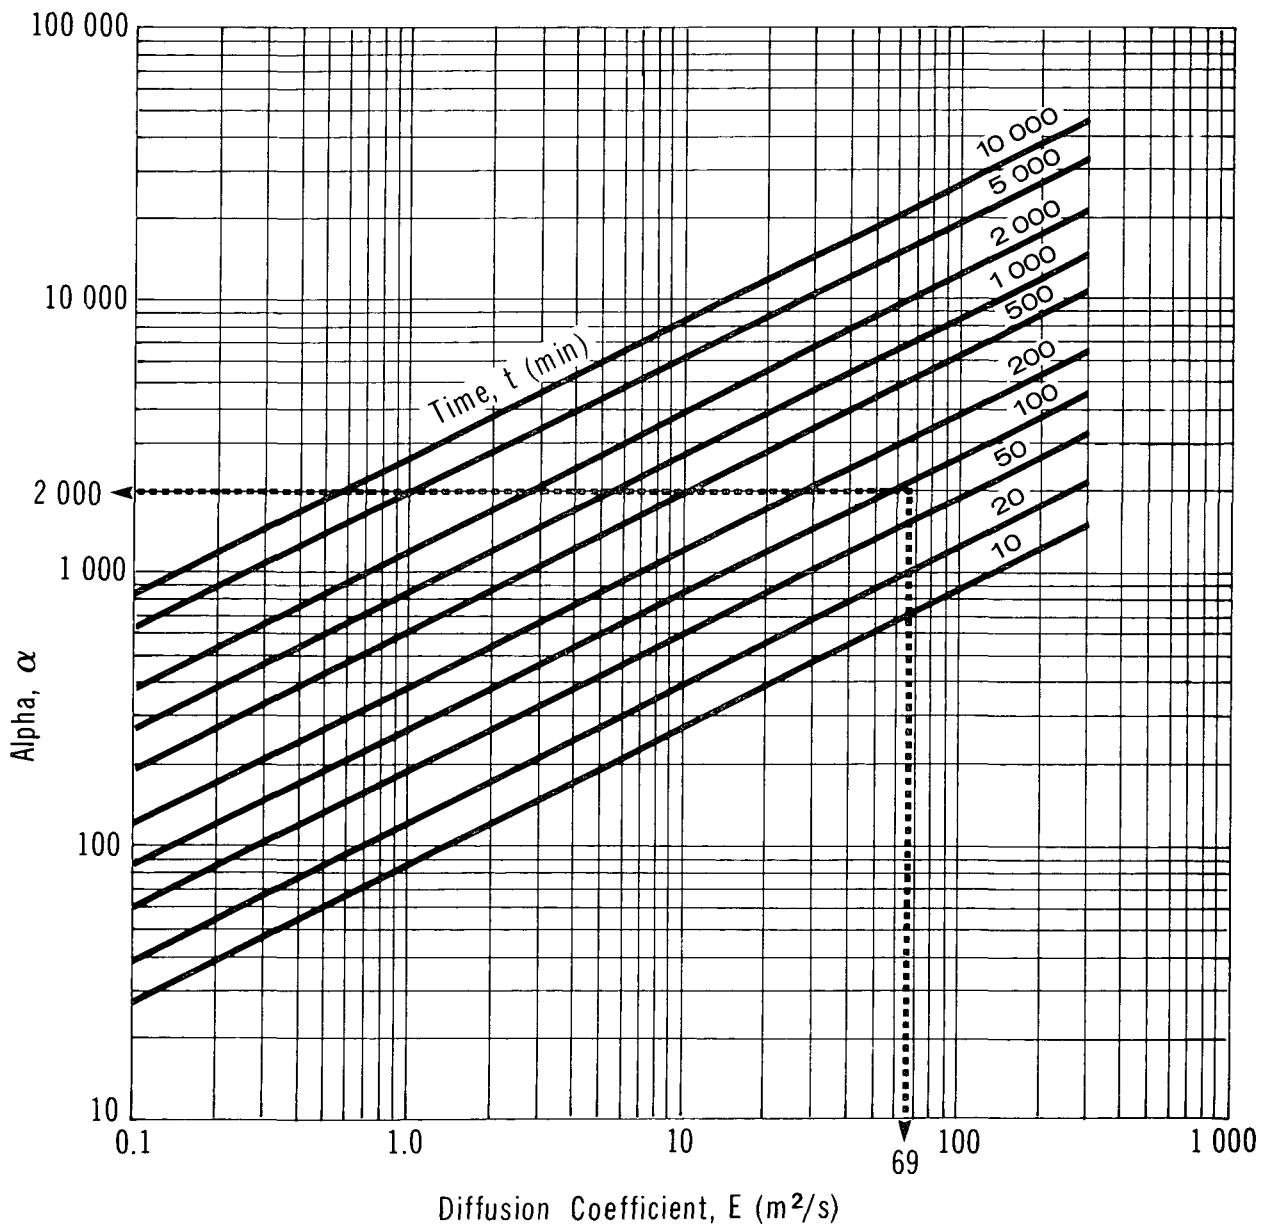


SODIUM SULPHATE

ALPHA vs DELTA

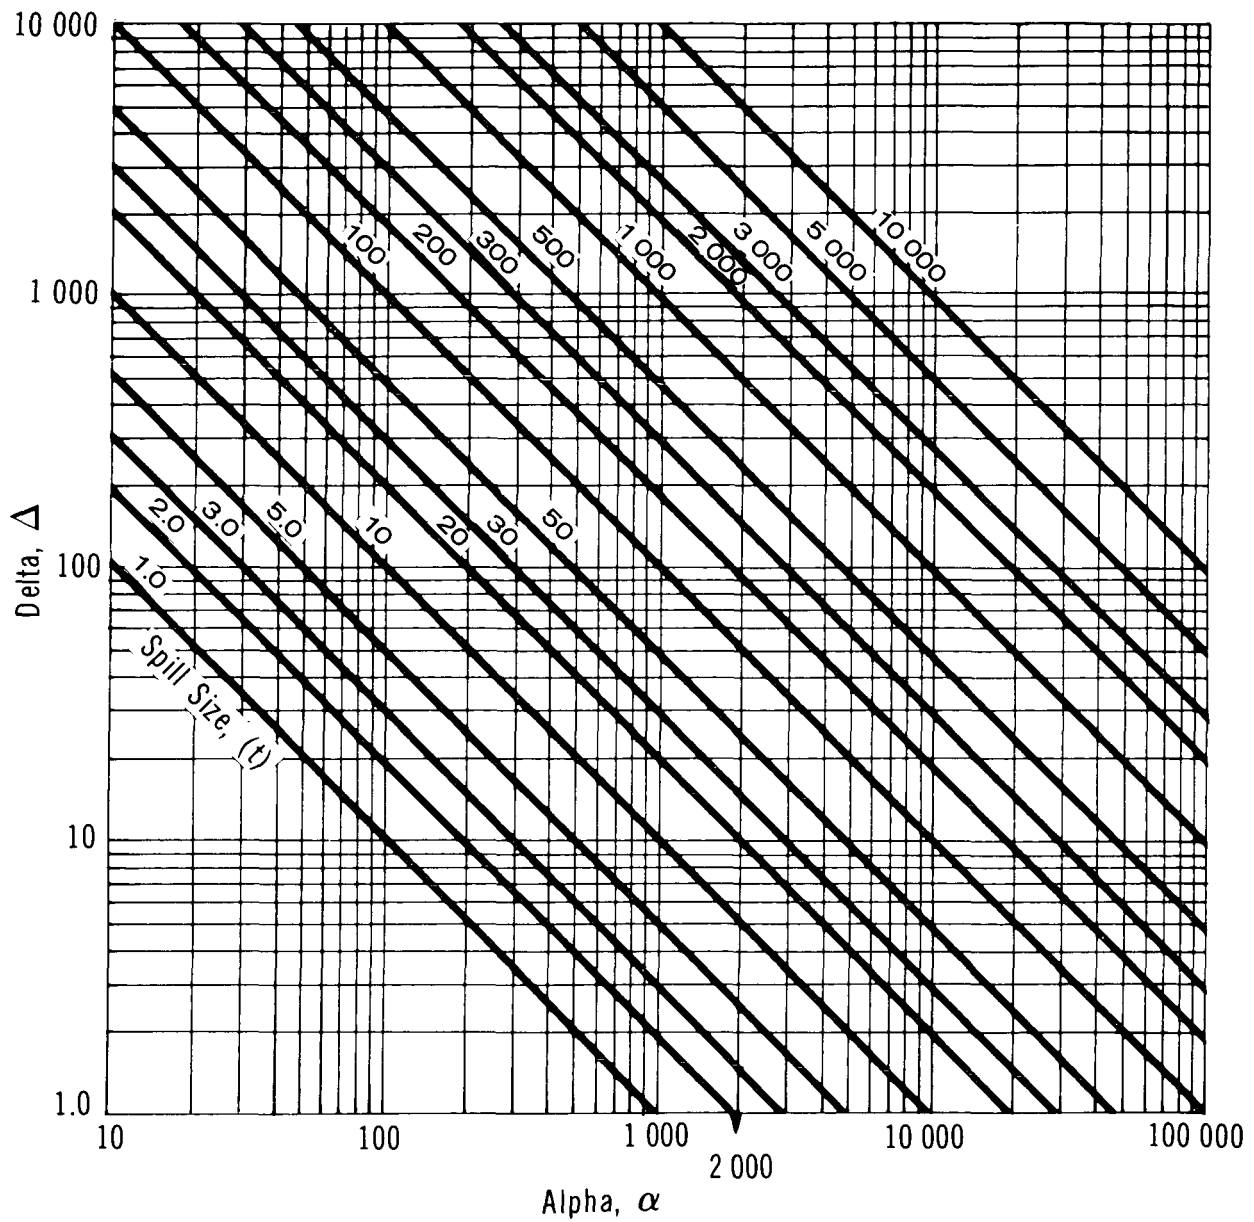

SODIUM SULPHATE

VOLUME vs RADIUS

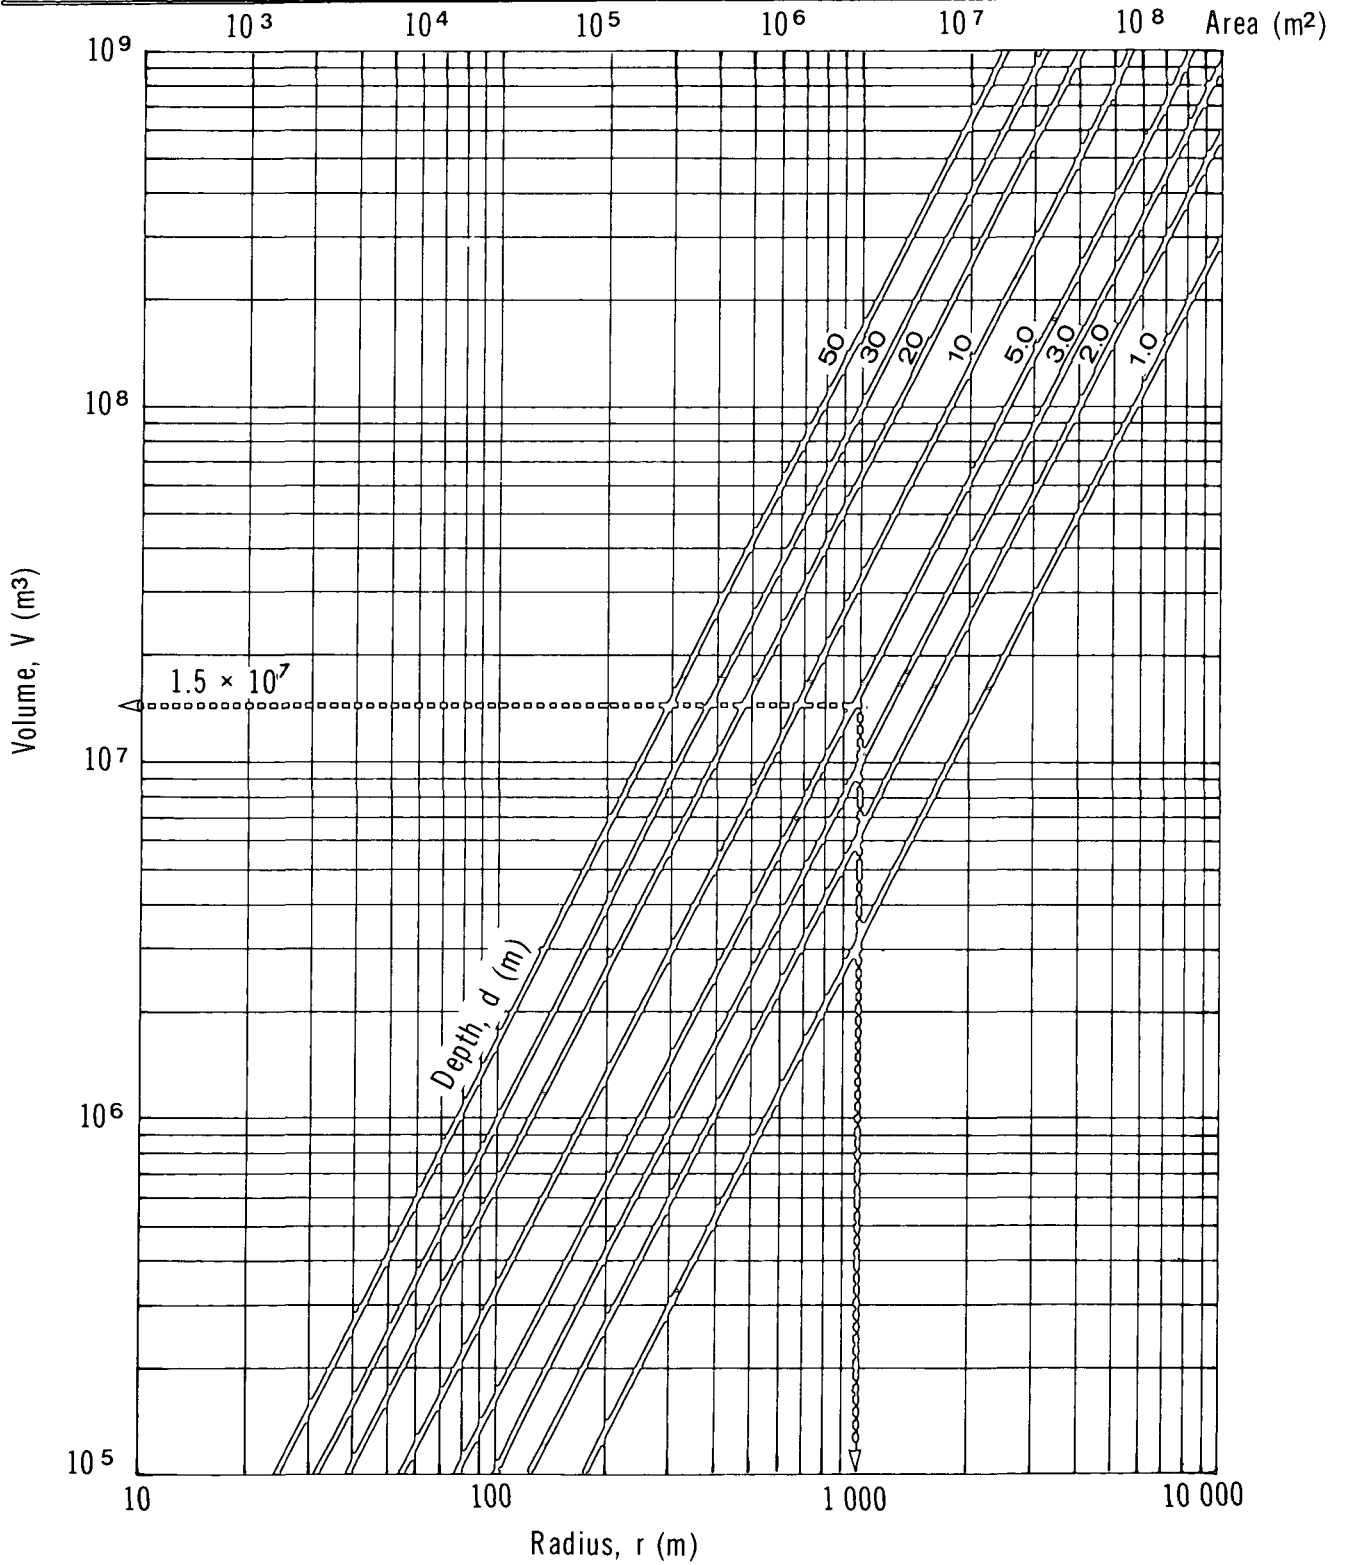

in the cylinder can be obtained from Figure 11. The radius (r) represents the distance from the spill to the point of interest.

Figure 12: Average concentration versus volume. For a known volume of water (within the idealized cylinder of radius (r) and length (d)), the average concentration of pollutant (C) can be obtained from Figure 12 for a known mass of spill. This assumes the pollutant is spread evenly throughout the cylinder. For pollutants that are more or less dense than water, the actual concentration at the bottom would be higher or lower, respectively.

5.4.3 Sample Calculations.

5.4.3.1 Pollutant concentration in non-tidal rivers. A 9-tonne spill of sodium sulphate has occurred in a river. The stream width is 50 m and the stream depth is 5 m. The average stream velocity is estimated at 1 m/s. What is the maximum concentration expected at a water intake located 5 km downstream?

Solution

Step 1: Define parameters

- . $W = 50$ m
- . $d = 5$ m
- . $U = 1$ m/s
- . Spill mass = 9 tonnes

Step 2: Calculate the time to reach the point of interest

- . Use Figure 5
- . With $X = 5000$ m and $U = 1$ m/s, $t = 83$ min

Step 3: Calculate the hydraulic radius (r)

- . Use Figure 6
- . With $W = 50$ m and $d = 5$ m, $r = 4.2$ m

Step 4: Calculate the longitudinal diffusion coefficient (E)


- . Use Figure 7
- . With $r = 4.2$ m and $U = 1$ m/s, $E = 69$ m²/s

Step 5: Calculate alpha (α)

- . Use Figure 8

SODIUM SULPHATE

AVERAGE CONCENTRATION vs VOLUME

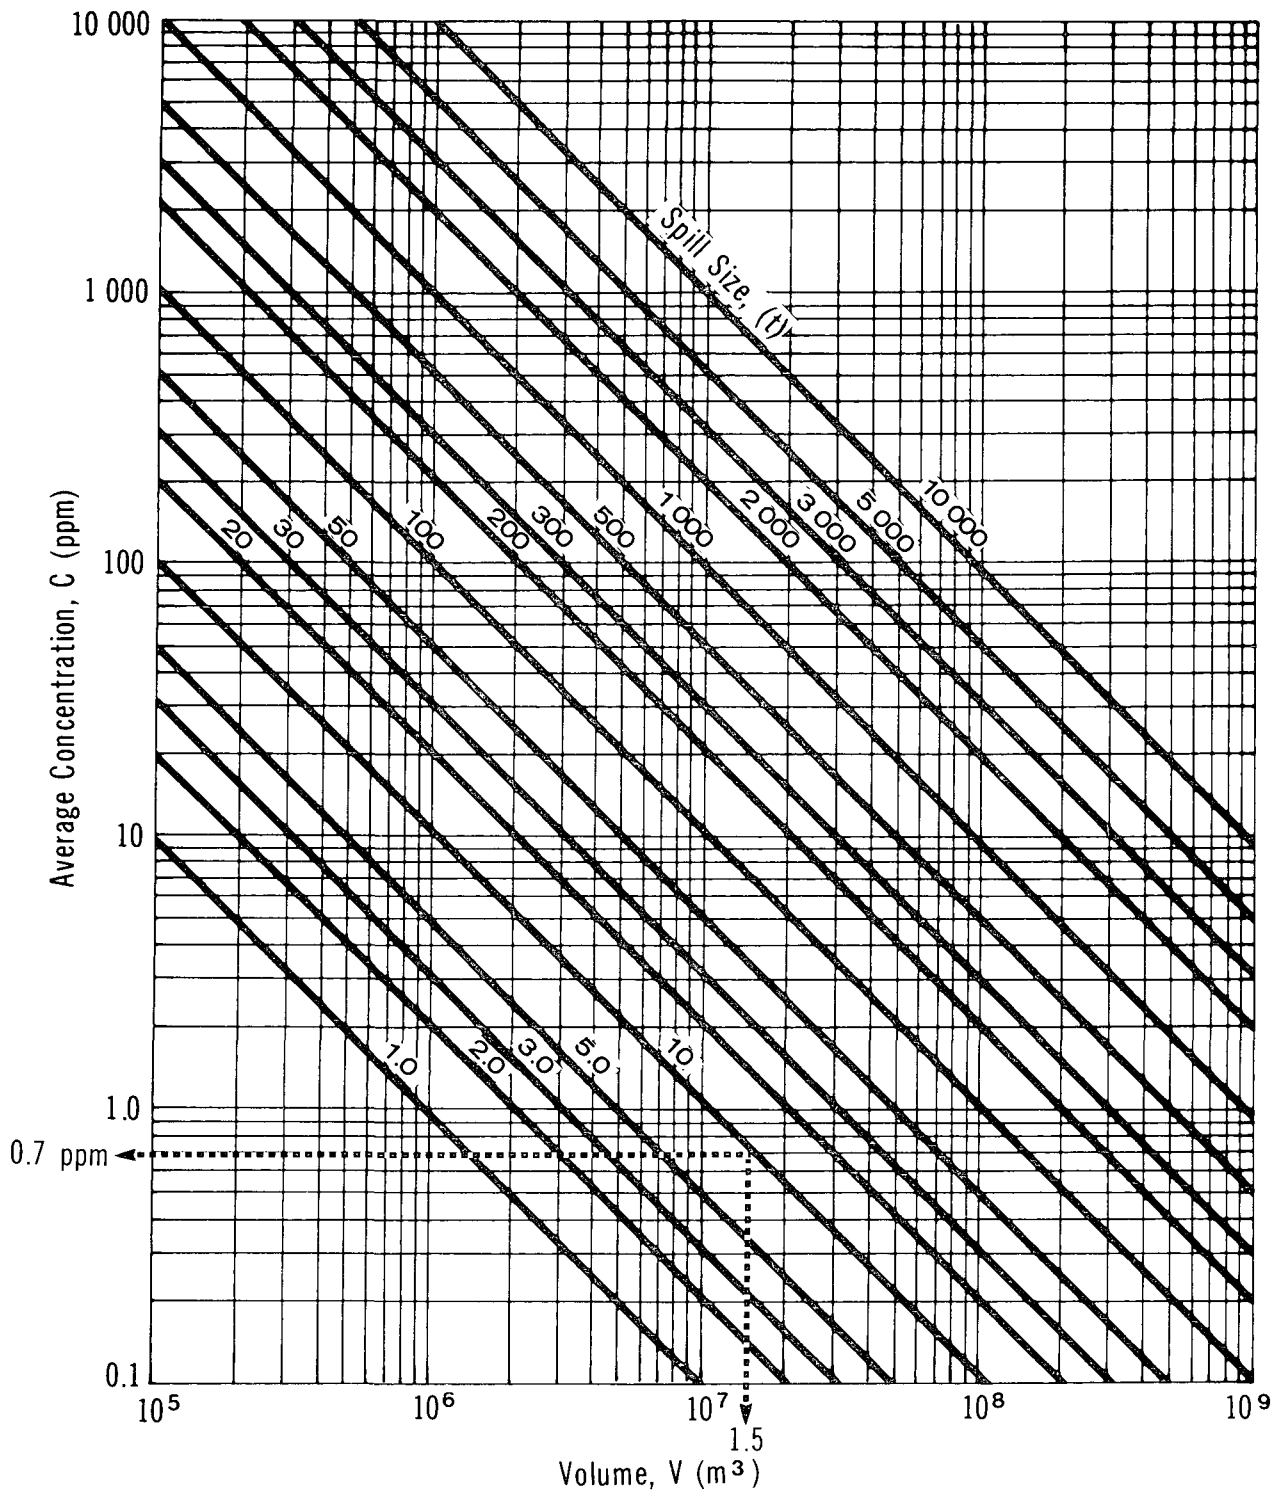

- With $E = 69 \text{ m}^2/\text{s}$ and $t = 83 \text{ min}$, $\alpha = 2000$

Step 6: Calculate delta (Δ)

- Use Figure 9
- With $\alpha (\alpha) = 2000$ and spill mass = 9 tonnes (sodium sulphate), $\Delta (\Delta) = 4.5$

Step 7: Compute the stream cross-sectional area (A)

- $A = W \times d = 50 \times 5 = 250 \text{ m}^2$

Step 8: Calculate the maximum concentration (C) at the point of interest

- Use Figure 10
- With $\Delta = 4.5$ and $A = 250 \text{ m}^2$, $C = 19 \text{ ppm}$

5.4.3.2 Average pollutant concentration in lakes or still water bodies. A 9-tonne spill of sodium sulphate has occurred in a lake. The point of interest is located on the shore approximately 1000 m from the spill. The average depth between the spill site and the point of interest is 5 m. What is the average concentration which could be expected?

Solution

Step 1: Define parameters

- $d = 5 \text{ m}$
- $r = 1000 \text{ m}$
- Spill mass = 9 tonnes

Step 2: Determine the volume of water available for dilution

- Use Figure 11
- With $r = 1000 \text{ m}$, $d = 5 \text{ m}$, the volume is approximately $1.5 \times 10^7 \text{ m}^3$

Step 3: Determine the average concentration

- Use Figure 12
- With $V = 1.5 \times 10^7 \text{ m}^3$ and spill mass = 9 tonnes, the average concentration is 0.7 ppm

5.5 Subsurface Behaviour: Penetration into Soil

5.5.1 Mechanisms. Sodium sulphate is conveyed primarily as a solid. When the solid is spilled, only a limited groundwater contamination hazard exists if the soil is dry and if no precipitation or other forms of moisture are present.

Since sodium sulphate is soluble in water, concentrated solutions can infiltrate the soil. Some interaction between sodium sulphate and the soil will occur. However, much of the sodium sulphate exchanged ions will migrate downward through the soil. One study on soil penetration showed that dilute solutions of sodium sulphate penetrated at about the same rate as water. Ionic interaction did not appear to affect this rate (Cairns 1973). If the soil is saturated with moisture at the time of the spill, as might be the case after a rainfall, the spilled chemical may run off with surface water.

For this work, the soils have been assumed to be at field capacity. This situation provides very little interstitial water to dilute the chemical during transport or to impede its downward movement and thus represents "worst case" analysis. Upon reaching the groundwater table, the contaminant will continue to move, now in the direction of groundwater flow. A contaminated plume will be produced, with diffusion and dispersion serving to reduce the concentration somewhat. This is shown schematically in Figure 13.

5.5.2 Equations Describing Dissolved Sodium Sulphate Movement into Soil. The equations and assumptions used to describe contaminant movement in solution downward through the unsaturated soil zone toward the groundwater table have been described in the Introduction Manual. Transport velocities have been based on Darcy's Law assuming saturated piston flow.

5.5.3 Saturated Hydraulic Conductivity of Dissolved Sodium Sulphate in Soil. The saturated hydraulic conductivity (K_0), in m/s, is given by:


$$K_0 = \frac{(\rho g)k}{\mu}$$

where: k = intrinsic permeability of the soil (m^2)
 ρ = mass density of the fluid (kg/m^3)
 μ = absolute viscosity of the fluid ($Pa \cdot s$)
 g = acceleration due to gravity = 9.81 m/s^2

Because of the manner in which the solution is created (i.e., precipitation falling on spilled solid) it is assumed that it has fluid properties similar to those of water:

SODIUM SULPHATE

SCHEMATIC SOIL TRANSPORT

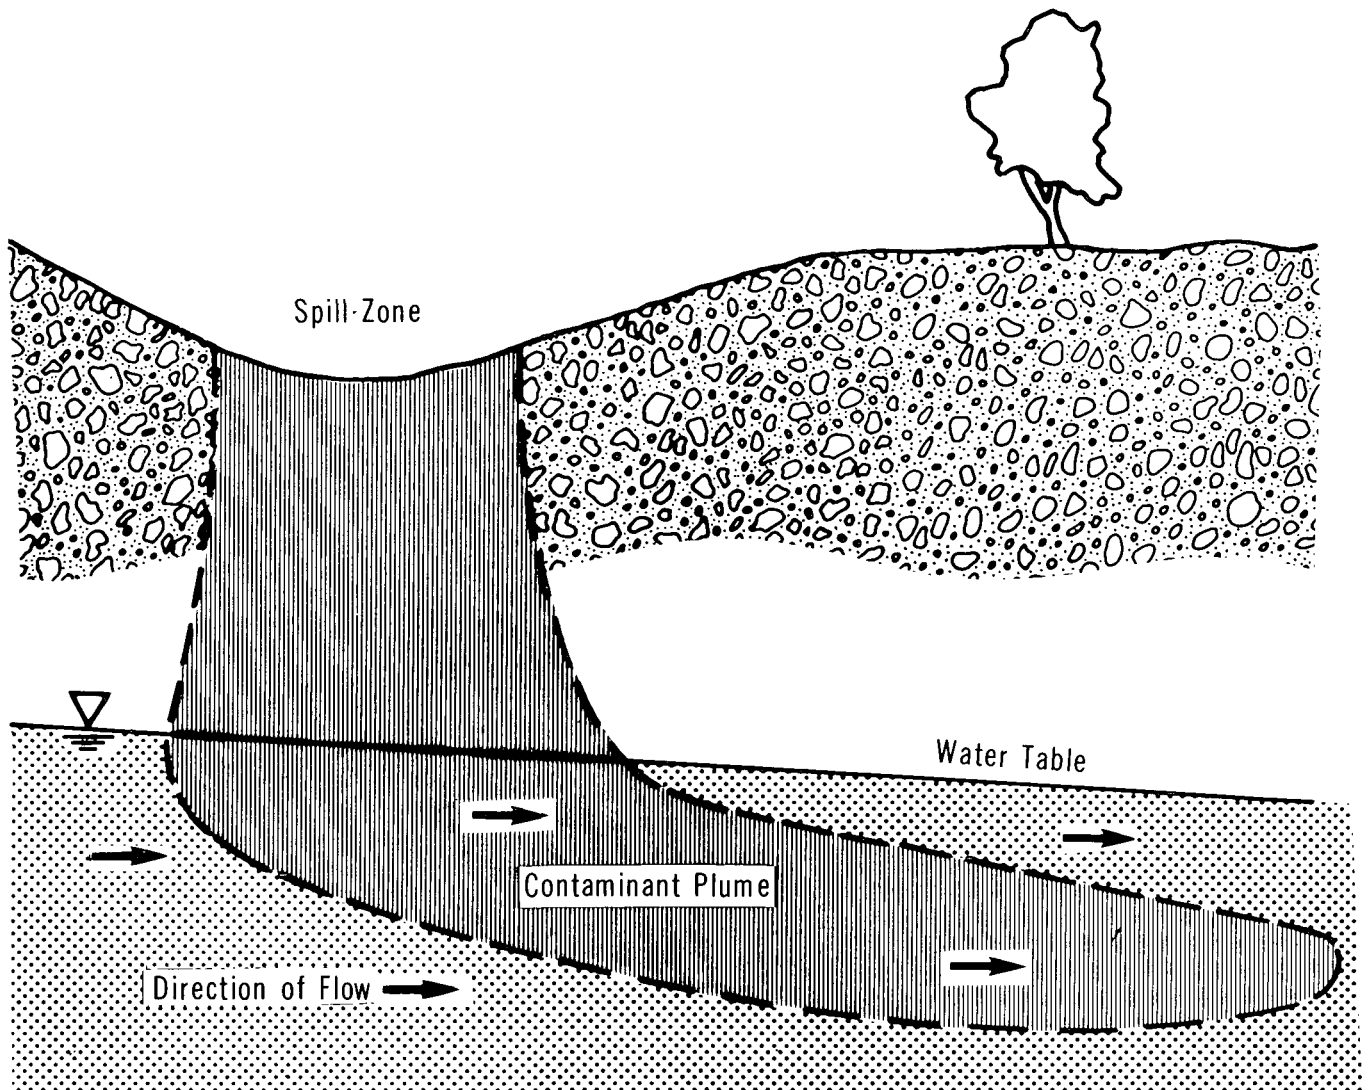

Soil: Coarse Sand

–Porosity (n) = 0.35

–Intrinsic Permeability (k) = 10^{-9} m^2

–Field Capacity (θ_{fc}) = 0.075

Property	Dilute Solution (4°C)	Water (20°C)
Mass density (ρ), kg/m ³	1000	998
Absolute viscosity (μ), Pa·s	1.57×10^{-3}	1.0×10^{-3}
Saturated hydraulic conductivity (K_0), m/s	$(0.62 \times 10^7)k$	$(0.98 \times 10^7)k$

5.5.4 Soils. The Introduction Manual describes the three soils selected for this work. Their relevant properties are:

Property	Soil Type		
	Coarse Sand	Silty Sand	Clay Till
Porosity (n), m ³ /m ³	0.35	0.45	0.55
Intrinsic permeability (k), m ²	10^{-9}	10^{-12}	10^{-15}
Field capacity (θ_{fC}), m ³ /m ³	0.075	0.3	0.45

5.5.5 Penetration Nomograms. Nomograms for the penetration of dissolved sodium sulphate into the unsaturated zone above the groundwater table were prepared for each soil. They present penetration time (t_p) plotted against depth of penetration (B). Because of the methods and assumptions used, the penetration depth should be considered as a maximum depth in time t_p . A flowchart for the use of nomograms is presented in Figure 14. The nomograms are presented as Figures 15, 16 and 17.

5.5.6 Sample Calculation. A 20-tonne spill of sodium sulphate has occurred on a silty sand soil. The radius of the spill is 8.6 m and the temperature is 20°C. Rain begins prior to cleanup. Calculate the depth of contaminant penetration 4 days after commencement of the rainfall.


Solution

Step 1: Define parameters

- Mass spilled = 20 000 kg (20 tonnes)
- $T = 20^\circ\text{C}$
- Soil = silty sand


SODIUM SULPHATE

FLOWCHART FOR NOMOGRAM USE

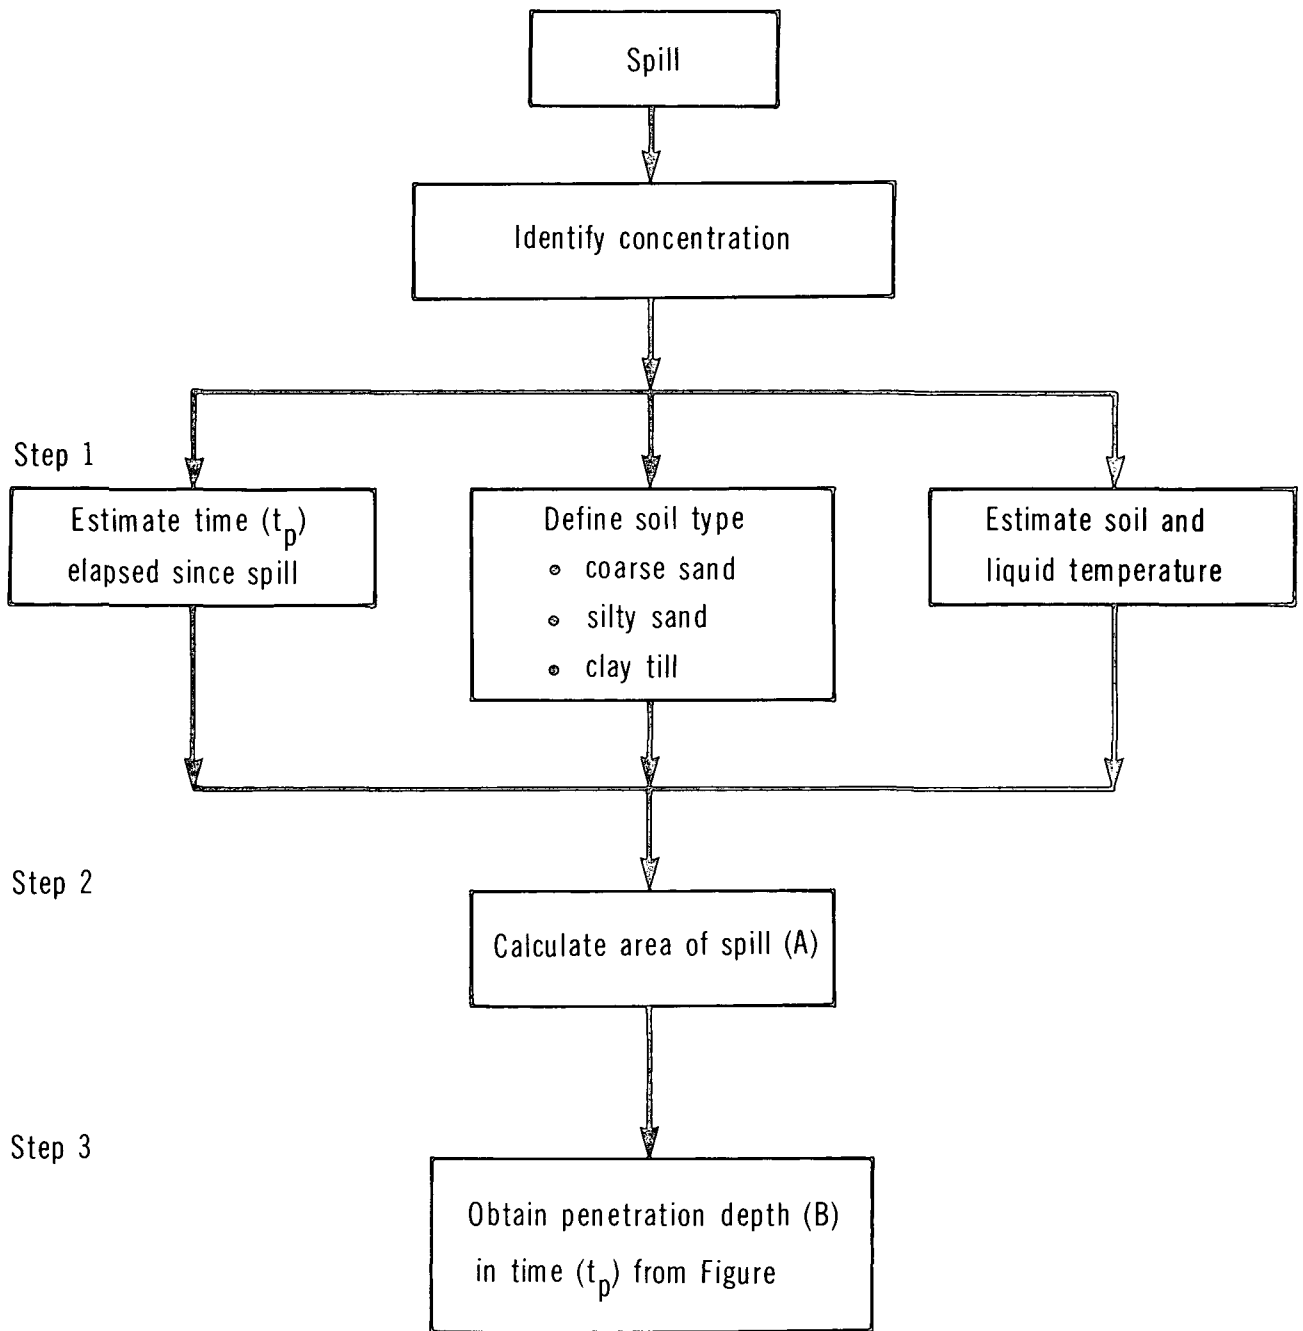


SODIUM SULPHATE

PENETRATION IN COARSE SAND

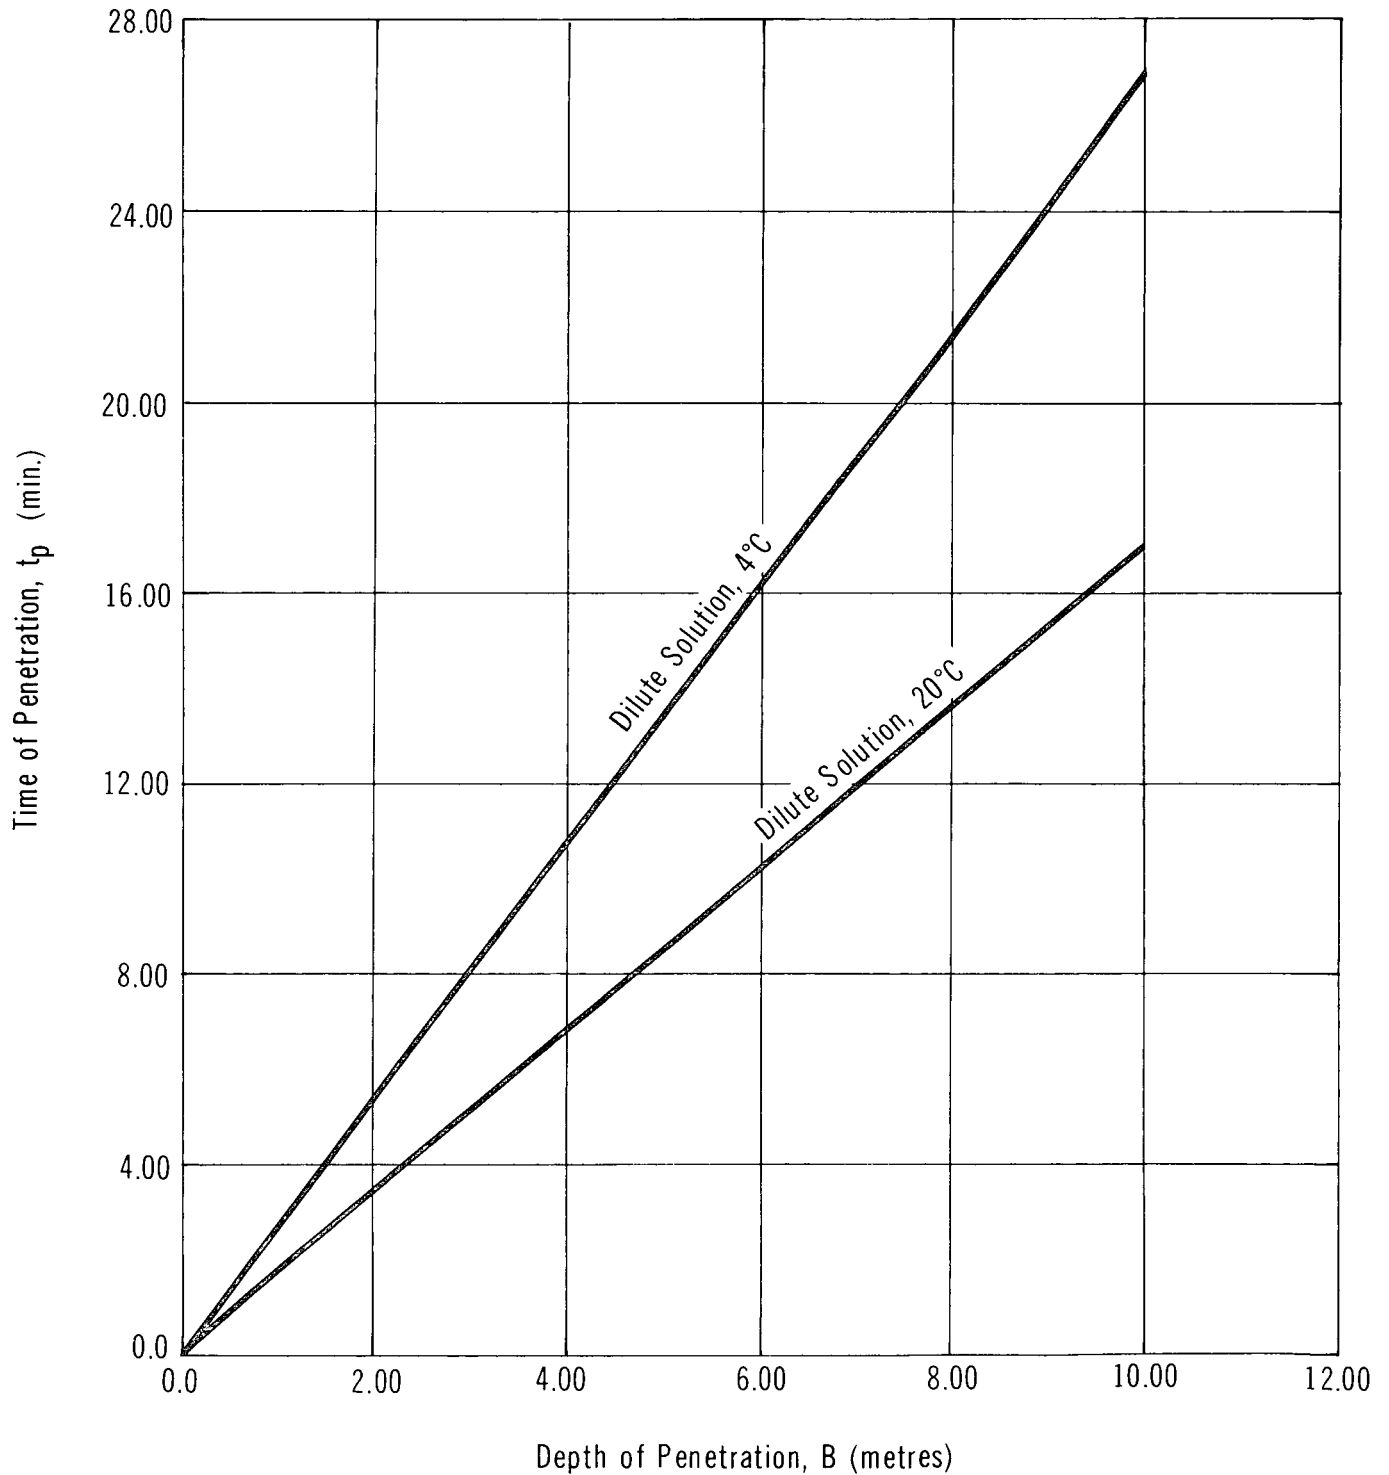


SODIUM SULPHATE

PENETRATION IN SILTY SAND

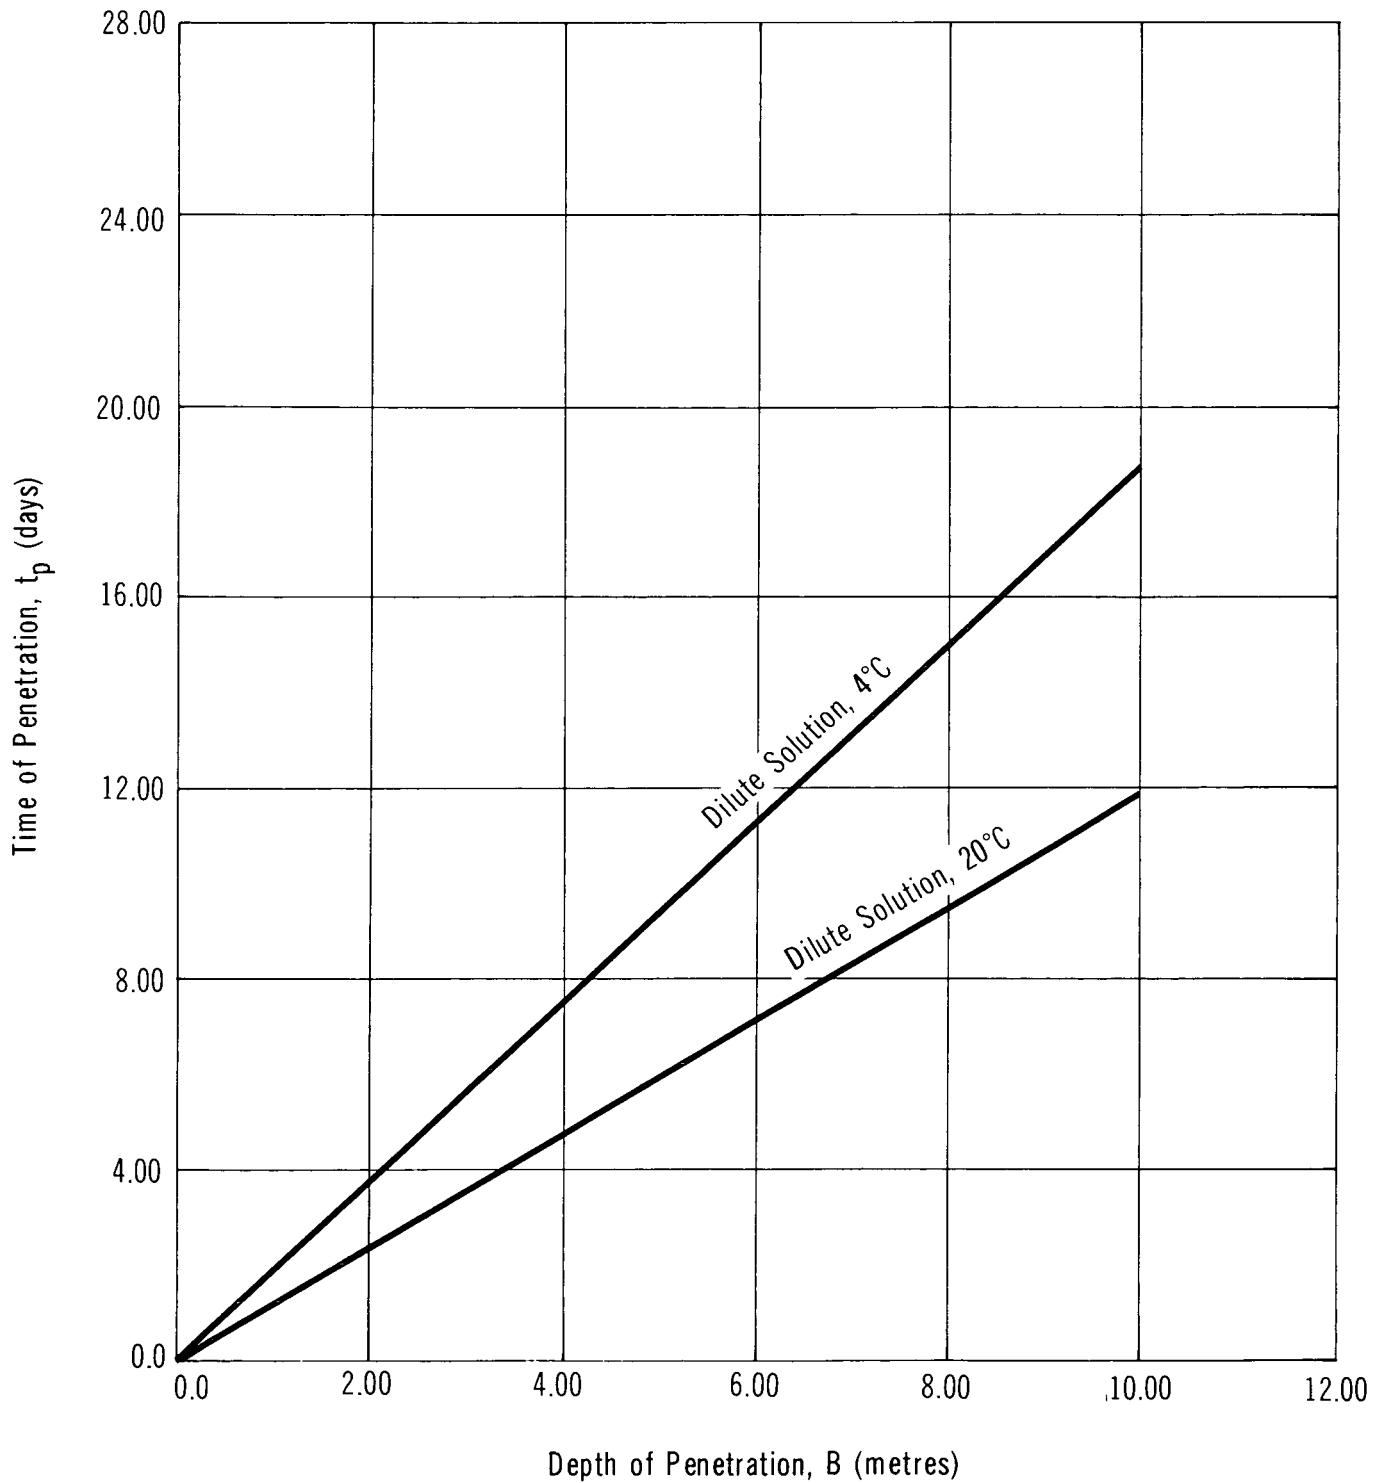

SODIUM SULPHATE

PENETRATION IN CLAY TILL

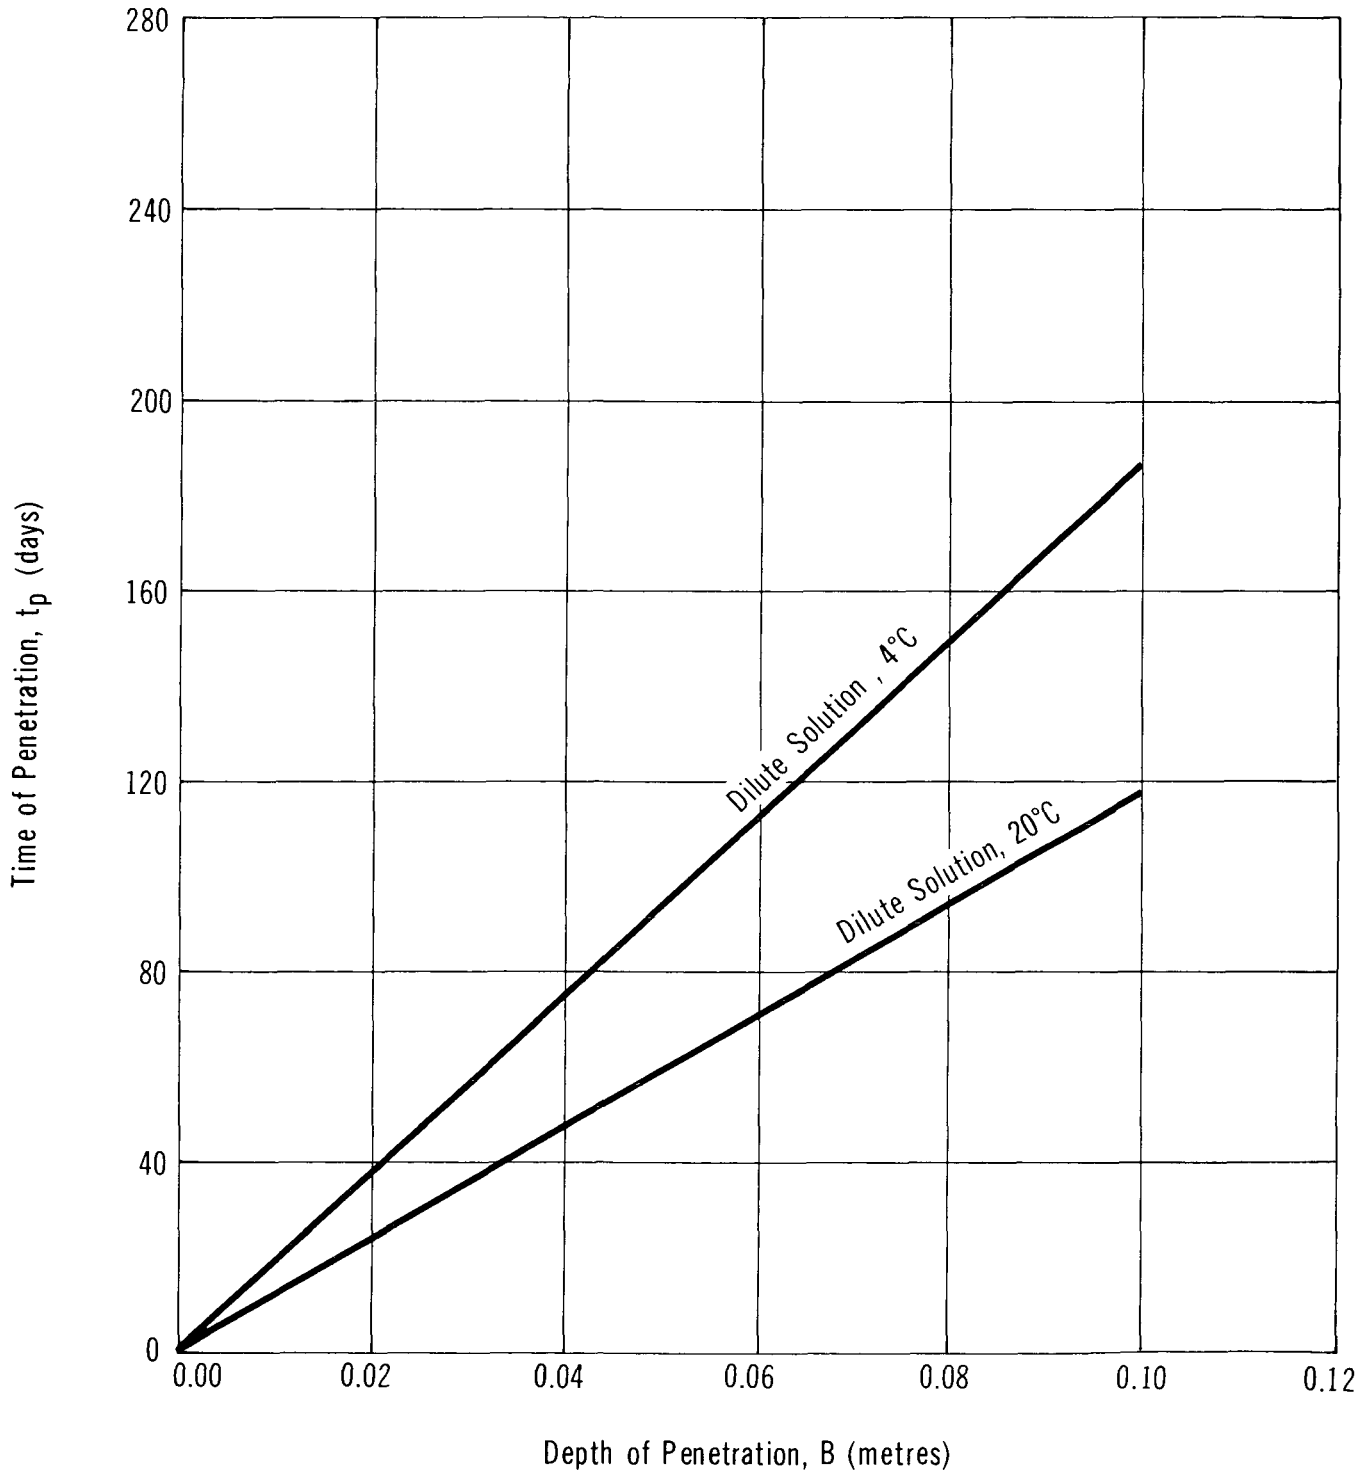

- Groundwater table depth (d) = 13 m
- Time since spill (t_p) = 4 days

Step 2: Estimate the depth of penetration (B) at time (t_p)

- For silty sand and $t_p = 4$ days, the depth of penetration is 3.4 m
- The spill has not reached groundwater in this time

6 ENVIRONMENTAL DATA

6.1 Suggested or Regulated Limits

6.1.1 Water. Sodium sulphate concentration in drinking water is not specifically regulated; however, health authorities should be notified when the sodium concentration exceeds 20 mg/L. For sulphate, the objective concentration is less than 150 mg/L, based on the taste threshold for sodium sulphate. The maximum acceptable is 500 mg/L (Guidelines/Canadian/Water 1978).

Ontario recommends that sulphate concentrations not exceed 250 mg/L (Water Management Goals 1978). This limit is the same as the 1961 WHO European Standard (WQCDB-2 1971).

6.1.2 Air. Not specifically regulated.

6.2 Aquatic Toxicity

6.2.1 Measured Toxicities.

Conc. (mg/L)	Time (hours)	Species	Result	Water Conditions	Reference
<u>Fish Toxicity Tests</u>					
13 500	96	Bluegill	LC ₅₀	static	WQCDB-5 1973
12 500	96	Bluegill	LC ₅₀	aerated	WQCDB-2 1971
100	120	Shiners	toxic		WQC 1963
17 500	48	Mosquito fish	LC ₅₀	turbid water	WQCDB-2 1971
9000 to 13 000	24 to 96	Fathead minnow	LC ₅₀	soft water	WQCDB-2 1971
13 500 to 14 000	24 to 96	Fathead minnow	LC ₅₀	hard water	WQCDB-2 1971
5000	24 to 120	Fingerling trout	toxic		WQC 1963
7000	24 to 48	Rainbow trout	toxic		WQC 1963
16 500	-	Silver salmon	toxic		WQC 1963
16 700	6	Minnows	toxic	hard water	WQC 1963

Conc. (mg/L)	Time (hours)	Species	Result	Water Conditions	Reference
16 500	120	Coho salmon	minimum fatal concentration		WQCDB-2 1971
6700	120	Cutthroat trout	minimum fatal concentration		WQCDB-2 1971
<u>Microorganisms</u>					
10 000		<i>Fragilaria</i>	no growth		Stalbb 1973
30 000		<i>Scenedesmus chlamydomonas</i>	no growth		Stalbb 1973
1900		<i>Nitzschia linearis</i>	LC ₅₀	static	WQCDB-5 1973
1000		Hydra	toxic		WQC 1963
6800	24	<i>Daphnia magna</i>	LC ₅₀		WQCDB-2 1971
4547	96	<i>Daphnia magna</i>	LC ₅₀		WQCDB-2 1971
7105	0	<i>Daphnia magna</i>	toxicity threshold	Lake Erie water	WQCDB-2 1971
5960	0	<i>Daphnia magna</i>	immobilization threshold	Lake Erie water	WQCDB-2 1971
2752		<i>Daphnia magna</i>	toxicity threshold	1.46 mg/L dissolved O ₂	WQC 1963
5514		<i>Daphnia magna</i>	toxicity threshold	6.6 mg/L dissolved O ₂	WQC 1963
<u>Invertebrates</u>					
35 600		Water beetles	stimulate movement		WQC 1963
320	960	Caddis fly (<i>Stenonema ares</i>)	LC ₅₀	soft water	WQCDB-2 1971
5000	68	Water snails	toxic		WQC 1963
5000	24 to 144	Microcrustacea	toxic		WQC 1963
6820		<i>Polycelis nigra</i>	toxic		WQC 1963
2380	24	various amphipods	LC ₅₀	lake water	WQCDB-2 1971

Conc. (mg/L)	Time (hours)	Species	Result	Water Conditions	Reference
1110	48	Various amphipods	LC ₅₀	lake water	WQCDB-2 1971

6.3 Mammalian Toxicity

Water with sulphate concentrations above 500 mg/L may result in gastrointestinal irritation (Water Quality Sourcebook 1979). Sulphate levels of 7000 mg/L resulted in weight loss in cattle; rats were not harmed by 15 000 mg/L (WQC 1963).

6.4 Other Land and Air Toxicity

Poultry mortality was 33 percent after drinking water containing 7500 mg/L sodium sulphate for 15 days (WQC 1963). Plants were injured by sodium sulphate levels of 4000 mg/L in soil; 710 mg/L depressed root growth and water absorption. Crop weight reductions ranging up to 85 percent have been demonstrated for rice, tomato and beans with sodium sulphate levels up to 5120 mg/L (WQC 1963).

A study on soil changes with sodium sulphate showed that dilute solutions (0.1 and 0.01 N) penetrated at rates similar to that of water. The soil aggregation changed significantly in the top 10 cm as compared to water, but at depths greater than 10 cm was similar to water. The study also showed that a large amount of calcium was leached downward (Cairns 1973).

6.5 Long-term Fate and Effects

Sodium sulphate may persist indefinitely in the environment. It does not show bioaccumulation or food chain contamination effects (OHM-TADS 1981).

7 HUMAN HEALTH

There is very little information on the human toxicity of sodium sulphate in the published literature; no exposure standards were found. Sodium sulphate is considered nontoxic and nonirritating to the skin and mucous membranes (Lefèvre 1980). It acts as a laxative and has consequently been used as a first aid measure to accelerate the elimination of toxic products from the intestine.

No information was found concerning the chemical's potential as a mutagen, teratogen or carcinogen. The compound is reported in the EPA TSCA Inventory. The toxicological data summarized here have been extracted from reliable standard reference sources and are representative of information in the literature.

7.1 Recommended Exposure Limits

No exposure standards for sodium sulphate were found in the literature.

7.2 Irritation Data

7.2.1 Skin Contact.

Exposure Level (and Duration)	Effects	Reference
SPECIES: Unspecified		
40 percent suspension in mineral oil	No effect.	Koppers PD 1981

7.2.2 Eye Contact.

Exposure Level (and Duration)	Effects	Reference
SPECIES: Unspecified		
40 percent suspension in mineral oil	No effect.	Koppers PD 1981
40 mg/eye	Powder instilled in eye. No effects.	Koppers PD 1981

7.3 Threshold Perception Properties

7.3.1 **Odour.** Odour Characteristics: Odourless.

7.3.1 **Taste.**

Parameter	Media	Concentration	Reference
Lower Taste Threshold	Water	250 ppm	OHM-TADS 1981
Upper Taste Threshold	Water	500 ppm	OHM-TADS 1981

7.4 Toxicity Studies

7.4.1 **Inhalation.**

Exposure Level (and Duration)	Effects	Reference
<u>Acute Exposures</u>		
SPECIES: Rat		
Unspecified concentration (6 h)	No effect.	Koppers PD 1981

7.4.2 **Ingestion.**

Exposure Level (and Duration)	Effects	Reference
<u>Acute Exposures</u>		
SPECIES: Human		
500 mg/L	In drinking water with 1200 mg/L of magnesium sulphate, occasionally has caused diarrhea among human beings.	OHM-TADS 1981
SPECIES: Livestock		
2050 mg/L	Threshold limit in water.	OHM-TADS 1981
SPECIES: Rat		
7.07 g/kg	LD50	Koppers PD 1981

Exposure Level (and Duration)	Effects	Reference
SPECIES: Mouse		
5989 mg/kg	LD ₅₀	RTECS 1979

7.4.3 Percutaneous.

Exposure Level (and Duration)	Effects	Reference
SPECIES: Rabbit		
>4.0 g/kg	LD ₅₀	Koppers PD 1981

7.4.4 Intravenous.

Exposure Level (and Duration)	Effects	Reference
SPECIES: Rabbit		
4470 mg/kg	LD _{LO}	RTECS 1979
SPECIES: Mouse		
1220 mg/kg	LD _{LO}	RTECS 1979

7.4.5 **Mutagenicity, Teratogenicity and Carcinogenicity.** No data.

7.5 Symptoms of Exposure

General symptoms of exposure found in most information sources have not been specifically referenced. Only those of a more specific or unusual nature have their sources indicated.

7.5.1 **Inhalation.** No data.

7.5.2 **Ingestion.**

1. Discomfort.

2. Stomach pains.

7.5.3 Skin. Considered nontoxic and nonirritating to skin and mucous membranes (Lefèvre 1980).

7.5.4 Eye Contact.

1. Mechanical irritation (Lefèvre 1980).

2. Watering of eyes (Lefèvre 1980).

8 CHEMICAL COMPATIBILITY

8.1 Compatibility of Sodium Sulphate with Other Chemicals and Chemical Groups

SPECIFIC CHEMICAL OR CHEMICAL GROUP	HEAT GENERATION	FIRE	EXPLOSION	FORMATION OF VIOLENT	DECOMPOSITION OF FLAMMABLE GASES	POLYMERIZATION	FORMATION OF TOXIC FUMES	PRESSURIZATION OF VESSELS	TOXICITY	SOLUBILIZATION IN CLOSED	REACTION	NON-HAZARDOUS REACTION	SPECIFICS	REFERENCE
<u>GENERAL</u>														
Fire				•	•								Toxic fumes of sulphur oxides may be emitted.	Sax 1979
Heat				•	•								Toxic fumes of sulphur oxides may be emitted.	Sax 1979
<u>SPECIFIC CHEMICALS</u>														
Aluminum		•											At a temperature of 800°C.	Bretherick 1979
Magnesium								•						Sax 1979

9 COUNTERMEASURES

9.1 Recommended Handling Procedures

The following procedures have been derived from a literature review. To avoid any deviation from the intended meaning, the wording of the original source has been presented essentially unchanged - in so doing, it is recognized that there may be discrepancies between different sources of information. It is recognized that countermeasures are dependent on the situation, and thus what may appear to be conflicting information may in fact be correct for different situations. The following procedures should not be considered as Environment Canada's recommendations.

9.1.1 Fire Concerns. Sodium sulphate is a noncombustible solid (ERM 1982).

9.1.2 Fire Extinguishing Agents. Most fire extinguishing agents may be used in fires involving sodium sulphate (ERM 1982).

9.1.3 Spill Actions, Cleanup and Treatment.

9.1.3.1 General. Stop or reduce discharge of material if this can be done without risk.

9.1.3.2 Spills on land. Contain if possible by forming mechanical barriers to prevent spreading (EPA 670/2-75-042). Shovel material into containers for recovery or disposal.

9.1.4 Disposal. Waste sodium sulphate must never be discharged directly into sewers or surface waters. With environmental authorities, approval, recovered sodium sulphate may be disposed of by burial in a landfill.

9.1.5 Protective Measures. For entry into a situation where the spilled material and its characteristics are unknown, self-contained breathing apparatus and a totally encapsulated chemical suit should be worn.

If the spilled material is known to be sodium sulphate:

- Tight-fitting safety goggles, rubber gloves and protective clothing should be worn (ERM 1982).

10 PREVIOUS SPILL EXPERIENCE

This section contains information on previous spill experience which will be useful to readers in understanding spill response and countermeasures. Only those which meet the criteria are included, and thus, the number of experiences is not an indication of the problems or frequency of spillage. As technology in spill control advances, this section will be updated in future manual revisions to include the most useful information.

11 ANALYTICAL METHODS

The general approach adopted for each of the Priority Chemicals was as follows.

Methods have been documented here for the analysis of samples from air, water and soil in a normally equipped chemical laboratory remote from the spill site. Customary sources of standard or recommended analytical methods were consulted, and outlines are presented for each chemical. These sources included publications of the U.S. National Institute for Occupational Safety and Health (NIOSH), the U.S. Environmental Protection Agency (EPA), the American Water Works Association (AWWA), the American Society for Testing and Materials (ASTM), and the American National Standards Institute (ANSI).

If the standard or recommended methods were judged to be reliable and specific enough for the analysis of environmental and materials samples from spill sites and if they do not require highly specialized laboratory equipment, no additional methods were sought. If especially simple, reliable tests (e.g., commonly used industrial methods) were found, they have been presented as well.

11.1 Quantitative Method for the Detection of Sodium Sulphate in Water

11.1.1 Flame Photometry (ASTM 1979). Concentrations greater than 1 mg/L (ppm) of sodium sulphate as sodium may be determined by flame photometry. A minimum volume of 2 L of representative sample is collected in an appropriate container. A suitable volume of sample is atomized into the flame of a suitable flame photometer and the emission intensity determined at 589 nm. The sample concentration is determined using a calibration curve.

11.2 Quantitative Method for the Detection of Sodium Sulphate in Soil

11.2.1 Flame Photometry (Hess 1972). A variable range of concentrations of sodium sulphate as sodium in soil may be determined depending on the aliquot of extract atomized into a suitable flame photometer.

A 5 g sample of 2 mm (sieve-size) soil, accurately weighed, is placed in a 50 mL narrow neck centrifuge tube. A 30 mL volume of 0.5 M magnesium acetate solution is added, the tube stoppered, and centrifuged for 5 minutes at 400 rev/s.

The supernatant is decanted into a 100 mL volumetric flask. The extraction is repeated twice more and the extracts combined in the volumetric flask. The combined

extracts are diluted to volume with 0.5 M magnesium acetate. A suitable aliquot of sample is atomized into the flame of a suitable flame photometer and the emission intensity determined at 589 nm. The sample concentration is determined using a calibration curve.

12 REFERENCES AND BIBLIOGRAPHY

12.1 References

AAR 1983: Association of American Railroads, Washington, DC, private communication (1983).

ASTM 1979: American Society for Testing and Materials, Annual Book of ASTM Standards, Part 31, Water, Philadelphia, PA, D1428A, D1192, D3370 (1979).

Bretherick 1979: Bretherick, L., Handbook of Reactive Chemical Hazards, second edition, Butterworths, London, England (1979).

Broughton 1974: Broughton, P.L., "Alkaline Lakes in Southern Saskatchewan and the Sodium Sulphate Industry", Blue Jay, 32 (3), pp. 183-186 (1974).

Cairns 1973: Cairns, R.R. and I. Szabolcs, "Effects of Sodium Sulphate and Sodium Carbonate Solutions on Chemical and Physical Properties of a Chernozem Soil", Can. J. Soil Sci., 53 pp. 399-403 (1973).

CBG 1980: Southam Business Publications Ltd., "1981 Chemical Buyers' Guide", Canadian Chemical Processing, Vol. 64, No. 9, Don Mills, Ontario (December, 1980).

CCD 1977: Hawley, G.G., The Condensed Chemical Dictionary, ninth edition, Van Nostrand Reinhold Company, New York, NY (1977).

CCP 1982: "Ambitious Plans for BC Gas", Canadian Chemical Processing, 66 (1), p. 14 (February 19, 1982).

CLC 1974: Association of American Railroads, The Car and Locomotive Cyclopedia of American Practices, published by Simmons-Boardman, Omaha, NB (1974).

Corpus 1984: Corpus Information Services Ltd., "Sodium Sulphate", Chemical Product Profiles, Don Mills, Ontario (May 31, 1984).

CRC 1980: Weast, R.C. (ed.), CRC Handbook of Chemistry and Physics, 60th edition, Chemical Rubber Publishing Company, Cleveland, OH (1980).

DCRG 1978: Dow Chemical Company, Dow Chemical Resistance Guide for Dow Plastic Lined Piping Products, Midland, MI (1978).

Dillon 1982: M.M. Dillon Ltd., Survey of Countermeasures Systems for Hazardous Material Spills, Environment Canada, Ottawa, Canada (1982).

DPPED 1967: DOM-X, DOM-X Plastic Pipe Engineering Data, Toronto, Ontario (1967).

EPA 670/2-75-042: Pilie, R.J. et al., Methods to Treat, Control and Monitor Spilled Hazardous Materials, U.S. Environmental Protection Agency, National Environmental Research Center, Cincinnati, OH, EPA 670/2-75-042 (June, 1975).

ERM 1982: Environmental Emergency Branch, Emergency Response Manual, second draft, Environment Canada, Ottawa, Canada (February, 1982)

FKC 1975: Lowenheim, F.A. and M.K. Moran, Faith, Keye's and Clark's Industrial Chemicals, Wiley-Interscience, New York, NY (1975).

Guidelines/Canadian/Water 1978: Federal-Provincial Working Group on Drinking Water of the Federal-Provincial Advisory Committee on Environmental and Occupational Health, Guidelines for Canadian Drinking Water Quality 1978, Ministry of National Health and Welfare, Ottawa, Canada (1978).

Hesse 1972: Hesse, P.R., A Textbook of Soil Chemical Analysis, Chemical Publishing Co. Inc., New York, NY, pp. 146-147 (1972).

HIS 1969: Hydraulic Institute, Hydraulic Institute Standards, 12th edition, New York, NY (1969).

HMR 1978: Association of American Railroads, Hazardous Material Regulations of the Department of Transportation, Washington, DC (1978).

JANAF 1971: Stull, D.R. and H. Prophet, JANAF Thermochemical Tables, second edition, Office of Standard Reference Data, U.S. National Bureau of Standards, Washington, DC (June, 1971).

Kirk-Othmer 1983: Grayson, M. and D. Eckroth (eds.), Kirk-Othmer Encyclopedia of Chemical Technology, third edition, Vol. 21, John Wiley and Sons Inc., New York, NY (1983).

Koppers PD 1981: Koppers Company Inc., Product Data, Pittsburgh, PA (July, 1981).

Lange's Handbook 1979: Dean, J.A. (ed.), Lange's Handbook of Chemistry, 12th edition, McGraw-Hill Book Company Inc., New York, NY (1979).

Lefèvre 1980: Lefèvre, M.J. and E.O. Becker, First Aid Manual for Chemical Accidents - For Use with Nonpharmaceutical Chemicals, Dowden, Hutchinson, and Ross, Inc., Stroudsburg, PA (1980).

MCP 1979: U.S. Department of the Interior, Soda Ash (Sodium Carbonate), Sodium Sulphate and Sodium - Mineral Commodity Profiles, Washington, DC (1979).

MWPP 1978: Rehau, Mechan-O-Joint Water Pressure Pipe and Fittings, Montreal, Quebec (1978).

NIOSH 1979: National Institute for Occupational Safety and Health, Manual of Analytical Methods, second edition, Vol. 5, Cincinnati, OH, P&CAM 173 (August, 1979).

OHM-TADS 1981: Oil and Hazardous Materials Technical Assistance Data System, U.S. Environmental Protection Agency, Oil and Special Materials Control Division, Office of Water Program Operations, Washington, DC (1981).

Perry 1973: Perry, R.H. and C.H. Chilton, (eds.), Chemical Engineer's Handbook, fifth edition, McGraw-Hill Book Company Inc., New York, NY (1973).

RTECS 1979: Lewis, R.J. and R.L. Tatken, Registry of Toxic Effects of Chemical Substances, 1979, Vols. 1 and 2, National Institute for Occupational Safety and Health (NIOSH), Cincinnati, OH (September, 1980).

Sax 1979: Sax, N.I., Dangerous Properties of Industrial Materials, fifth edition, Van Nostrand Reinhold Company, New York, NY (1979).

Seidell and Linke 1965: Seidell, A. and W.F. Linke, Solubilities - Inorganic and Metal Organic Compounds, fourth edition, American Chemical Society, Washington, DC (1965).

Stalbb 1973: Stalbb, R.S., J.W. Appling and J. Haas, Effects of Industrial Effluents on Primary Phytoplankton Indicators, NTIS PB.220 741 (1973).

TCM 1979: General American Transportation Corporation, Tank Car Manual, Chicago, IL (May, 1979).

TDGC 1980: Transport Canada, Transportation of Dangerous Goods Code, Vol. 1 (Lists), Vol. 2, Ottawa, Canada (June, 1980).

Ullmann 1975: Ullmanns Encyklopaedie der technischen Chemie, Verlag Chemie, Weinheim (1975).

Water Management Goals 1978: Ontario Ministry of the Environment, Water Management Goals, Policies, Objectives and Implementation Procedures for the Ministry of the Environment, Toronto, Ontario (November, 1978).

Water Quality Sourcebook 1979: Environment Canada, Water Quality Sourcebook, Inland Waters Directorate, Water Quality Branch, Ottawa, Ontario (1979).

Welcher 1955: Welcher, F.J. and R.B. Hahn, Semimicro Qualitative Analysis, D. Van Nostrand Co., Inc., Princeton, NJ, p. 432 (1955).

WQC 1963: McKee, J.E. and H.W. Wolf, Water Quality Criteria, second edition, Resources Agency of California, State Water Quality Control Board (1963).

WQCDB-2 1971: Water Quality Criteria Data Book: Inorganic Chemical Pollution of Freshwater, U.S. Environmental Protection Agency, Water Quality Office, Washington, DC, Vol. 2 (1971).

WQCDB-5 1973: Water Quality Criteria Data Book: Effects of Chemicals on Aquatic Life, U.S. Environmental Protection Agency, Water Quality Office, Washington, DC, Vol. 5 (September, 1973).

WQCDB 1973: Water Quality Criteria Data Book, Vol. 3, Batelle Columbus Laboratories for U.S. Environmental Protection Agency, Washington, DC (1973).

12.2 Bibliography

American Society for Testing and Materials, Annual Book of ASTM Standards, Part 31, Water, Philadelphia, PA, D1428A, D1192, D3370 (1979).

Association of American Railroads, Washington, DC, private communication (1983).

Association of American Railroads, The Car and Locomotive Cyclopedea of American Practices, published by Simmons-Boardman, Omaha, NB (1974).

Association of American Railroads, Hazardous Material Regulations of the Department of Transportation, Washington, DC (1978).

Bretherick, L., Handbook of Reactive Chemical Hazards, second edition, Butterworths, London, England (1979).

Broughton, P.L., "Alkaline Lakes in Southern Saskatchewan and the Sodium Sulphate Industry", Blue Jay, 32 (3), pp. 193-186 (1974).

Cairns, R.R. and I. Szabolcs, "Effects of Sodium Sulphate and Sodium Carbonate Solutions on Chemical and Physical Properties of a Chernozem Soil", Can. J. Soil Sci., 53, pp. 339-403 (1973).

Canadian Chemical Processing, "Ambitious Plans for BC Gas", Vol. 66, No. 1, p. 14 (February 19, 1982).

Corpus Information Services Ltd., "Sodium Sulphate", Chemical Product Profiles, Don Mills, Ontario (May 31, 1984).

Dean, J.A. (ed.), Lange's Handbook of Chemistry, 12th edition, McGraw-Hill Book Company Inc., New York, NY (1979).

M.M. Dillon Ltd., Survey of Countermeasures Systems for Hazardous Material Spills, Environment Canada, Ottawa, Canada (1982).

DOM-X, DOM-X Plastic Pipe Engineering Data, Toronto, Ontario (1967).

Dow Chemical Company, Dow Chemical Resistance Guide for Dow Plastic Lined Piping Products, Midland, MI (1978).

Environment Canada, Water Quality Sourcebook, Inland Waters Directorate, Water Quality Branch, Ottawa, Ontario (1979).

Environmental Emergency Branch, Emergency Response Manual, second draft, Environment Canada, Ottawa, Canada (February, 1982).

Federal-Provincial Working Group on Drinking Water of the Federal-Provincial Advisory Committee on Environmental and Occupational Health, Guidelines for Canadian Drinking Water Quality 1978, Ministry of National Health and Welfare, Ottawa, Canada (1978).

General American Transportation Corporation, Tank Car Manual, Chicago, IL (May, 1979).

Grayson, M. and D. Eckroth, (eds.), Kirk-Othmer Encyclopedia of Chemical Technology, third edition, Vol. 21, John Wiley and Sons Inc., New York, NY (1983).

Hawley, G.G., The Condensed Chemical Dictionary, ninth edition, Van Nostrand Reinhold Company, New York, NY (1977).

Hesse, P.R., A Textbook of Soil Chemical Analysis, Chemical Publishing Co. Inc., New York, NY, pp. 146-147 (1972).

Hydraulic Institute, Hydraulic Institute Standards, 12th edition, New York, NY (1969).

Koppers Company Inc., Product Data, Pittsburgh, PA (July, 1981).

Lefèvre, M.J. and E.O. Becker, First Aid Manual for Chemical Accidents -For Use with Nonpharmaceutical Chemicals, Dowden, Hutchinson, and Ross, Inc., Stroudsburg, PA (1980).

Lewis, R.J. and R.L. Tatken, Registry of Toxic Effects of Chemical Substances, 1979, Vols. 1 and 2, National Institute for Occupational Safety and Health (NIOSH), Cincinnati, OH (September, 1980).

Lowenheim, F.A. and M.K. Moran, Faith, Keye's and Clark's Industrial Chemicals, Wiley-Interscience, New York, NY (1975).

McKee, J.E. and H.W. Wolf, Water Quality Criteria, second edition, Resources Agency of California, State Water Quality Control Board (1963).

National Institute for Occupational Safety and Health, Manual of Analytical Methods, Second Edition, Vol. 5, Cincinnati, OH, P&CAM 173 (August, 1979).

Oil and Hazardous Materials Technical Assistance Data System, U.S. Environmental Protection Agency, Oil and Special Materials Control Division, Office of Water Program Operations, Washington, DC (1981).

Ontario Ministry of the Environment, Water Management Goals, Policies, Objectives and Implementation Procedures for the Ministry of the Environment, Toronto, Ontario (November, 1978).

Perry, R.H. and C.H. Chilton, (eds.), Chemical Engineer's Handbook, fifth edition, McGraw-Hill Book Company Inc., New York, NY (1973).

Pilie, R.J. et al., Methods to Treat, Control and Monitor Spilled Hazardous Materials, U.S. Environmental Protection Agency, National Environmental Research Center, Cincinnati, OH, EPA 670/2-75-042 (June, 1975).

Rehau, Mechan-O-Joint Water Pressure Pipe and Fittings, Montreal, Quebec (1978).

Sax, N.I., Dangerous Properties of Industrial Materials, fifth edition, Van Nostrand Reinhold Company, New York, NY (1979).

Seidell, A. and W.F. Linke, Solubilities - Inorganic and Metal Organic Compounds, fourth edition, American Chemical Society, Washington, DC (1965).

Southam Business Publications Ltd., "1981 Chemical Buyers' Guide", Canadian Chemical Processing, Vol. 64, No. 9, Don Mills, Ontario (December, 1980).

Stalbb, R.S., J.W. Appling and J. Haas, Effects of Industrial Effluents on Primary Phytoplankton Indicators, NTIS PB.220 741 (1973).

Stull, D.R. and H. Prophet, JANAF Thermochemical Tables, second edition, Office of Standard Reference Data, U.S. National Bureau of Standards, Washington, DC (June, 1971).

Transport Canada, Transportation of Dangerous Goods Code, Vol. 1 (Lists), Vol. 2, Ottawa, Canada (June, 1980).

Ullmanns Encyklopaedie der technischen Chemie, Verlag Chemie, Weinheim (1975).

U.S. Department of the Interior, Soda Ash (Sodium Carbonate), Sodium Sulphate and Sodium - Mineral Commodity Profiles, Washington, DC (1979).

Water Quality Criteria Data Book, Vol. 3, Batelle Columbus Laboratories for U.S. Environmental Protection Agency, Washington, DC (1973).

Water Quality Criteria Data Book: Inorganic Chemical Pollution of Freshwater, U.S. Environmental Protection Agency, Water Quality Office, Washington, DC, Vol. 2 (1971).

Water Quality Criteria Data Book: Effects of Chemicals on Aquatic Life, U.S. Environmental Protection Agency, Water Quality Office, Washington, DC, Vol. 5 (September, 1973).

Weast, R.C. (ed.), CRC Handbook of Chemistry and Physics, 60th edition, Chemical Rubber Publishing Company, Cleveland, OH (1980).

Welcher, F.J. and R.B. Hahn, Semimicro Qualitative Analysis, D. Van Nostrand Co., Inc., Princeton, NJ, p. 432 (1955).

EnviroTIPS
Common Abbreviations

BOD	biological oxygen demand	°Be	degrees Baumé (density)
b.p.	boiling point	MMAD	mass median aerodynamic diameter
CC	closed cup	MMD	mass median diameter
cm	centimetre	m.p.	melting point
CMD	count median diameter	MW	molecular weight
COD	chemical oxygen demand	N	newton
conc	concentration	NAS	National Academy of Sciences
c.t.	critical temperature	NFPA	National Fire Protection Association
eV	electron volt	NIOSH	National Institute for Occupational Safety and Health
g	gram	nm	nanometre
ha	hectare	o	ortho
Hg	mercury	OC	open cup
IDLH	immediately dangerous to life and health	p	para
Imp. gal.	imperial gallon	P _c	critical pressure
in.	inch	PEL	permissible exposure level
J	joule	pH	measure of acidity/alkalinity
kg	kilogram	ppb	parts per billion
kJ	kilojoule	ppm	parts per million
km	kilometre	P _s	standard pressure
kPa	kilopascal	psi	pounds per square inch
kt	kilotonne	s	second
L	litre	STEL	short-term exposure limit
lb.	pound	STIL	short-term inhalation limit
LC ₅₀	lethal concentration fifty	T _c	critical temperature
LC _{LO}	lethal concentration low	TC _{LO}	toxic concentration low
LD ₅₀	lethal dose fifty	Td	decomposition temperature
LD _{LO}	lethal dose low	TD _{LO}	toxic dose low
LEL	lower explosive limit	TL _m	median tolerance limit
LFL	lower flammability limit	TLV	Threshold Limit Value
m	metre	Ts	standard temperature
m	meta	TWA	time weighted average
M	molar	UEL	upper explosive limit
MAC	maximum acceptable concentration	UFL	upper flammability limit
max	maximum	VMD	volume mean diameter
mg	milligram	v/v	volume per volume
MIC	maximum immission concentration	w/w	weight per weight
min	minute or minimum		
mm	millimetre		
µg	microgram		
µm	micrometre		