



Environment Environment
Canada Canada
Environmental Gestion de
Management l'environnement

YU78-2

Final Draft of SMALL STREAM HYDROLOGY section only. Final Report, to include Appendices for Water Quality and River Hydraulics will be available on 31 December 1978.

HYDROLOGIC RECONNAISSANCE
OF THE
ALASKA HIGHWAY PIPELINE ROUTE
IN THE YUKON TERRITORY

October, 1978

TD
227
B74
YU78-2

Inland Waters Directorate
Pacific and Yukon Region
Vancouver, B.C.

el and X

BVAE North Van. Env. Can. Lib./Bib.



36 002 323

YU78-2

HYDROLOGIC RECONNAISSANCE
OF THE
ALASKA HIGHWAY PIPELINE ROUTE
IN THE YUKON TERRITORY

INLAND WATERS DIRECTORATE
PACIFIC AND YUKON REGION

Vancouver, B.C.

October, 1978

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
Small Stream Hydrology	1
Water Quality	1
River Hydraulics	2
PHYSIOGRAPHY AND DRAINAGE	2
CLIMATE	5
SOURCES OF DATA	6
RESULTS	6
Small Stream Hydrology	6
Water Quality	9
River Hydraulics	9
TABLE 1 -- Water Survey of Canada Gauging Stations Considered in the Analysis	10
TABLE 2 -- Small Stream Network - Alaska Highway-1978	12
TABLE 3 -- Peak Discharge Comparisons Along Alaska Highway	13
FIGURE 1 - Physiographic Divisions and Gauging Station Locations	31

APPENDIX A - Streamflow Data And Suspended Sediment Along the Alaska Highway Pipeline Route in the Yukon Territory	
APPENDIX B - A Study of Selected Hydrologic Quantities of the Yukon Territory for Examination of Pipeline Proposals	
APPENDIX C - Channel Geometry of Streams in the Yukon Territory	
APPENDIX D - Kinematic Wave Model	
APPENDIX E - Water Quality)) will be included in December 1978	
APPENDIX F - River Hydraulics)	

INTRODUCTION

Assessment of the hydrologic impact of the proposed Alaska Highway gas pipeline is contained in the Inland Waters Directorate report dated June 3, 1977. The purpose of the present report is to present estimates of baseline data to facilitate review of the proponent's Environmental Impact Statement. Information collected from the field is limited, but was aimed at areas where data deficiencies are of greatest importance. Three disciplinary areas are involved:

Small Stream Hydrology

For consideration of mitigative measures related to erosion, drainage disruption, drainage diversions and siltation, an understanding of flood characteristics of streams is required along the pipeline corridor. However, very little baseline information exists particularly for streams with small drainage areas. Traditional methods for estimating flood-frequency characteristics at ungauged sites include the use of rainfall records, and the relationships between streamflow records and basin characteristics. These methods alone are insufficient for the Alaska Highway Pipeline route because of inadequate precipitation and streamflow records and because of their variability among subregions. Empirical and/or synthetic approaches, therefore, have to be included in generating the necessary hydrologic data. However, full reliance cannot be placed on any one particular approach; experience indicates that different approaches produce differing results with attendant wide confidence limits.

The main focus of the report is a reference on design flows for small streams based on various estimating techniques, against which estimates made by others could be compared.

Water Quality

The question that relates to water quality is whether increased suspended sediment loads in streams caused by construction and maintenance of the Alaska Highway Pipeline will degrade the quality of the river systems.

Most of the available knowledge on the effects of increased sedimentation, increased turbidity and oxygen depletions has been derived from studies of streams in temperate and hot climates and very little work has been done in cold climates.

Since needed information is required within a very short period of time, only a minimum amount of investigation could be carried out. It was considered that this could be done best on the basis of a short-term study of two representative river basins: Swift and Ogilvie Rivers.

River Hydraulics

Mitigative measures associated with river crossings are expected to require special attention during Environmental Impact Statement review particularly at rivers located along the corridor extending 150 miles south of the Alaska-Yukon border. These rivers are glacier-fed, are prone to flash flooding and are constantly changing channels; some have scour depths of over 20 feet. During 1978 high water period a pilot scour assessment was made of one large and a number of typical small streams. An aerial photo and map interpretation was made of meander patterns and areas determined where pipeline activities may have a detrimental effect.

Logarithmic relationships between suspended sediment concentrations and discharge are presented in Appendix F which permit tentative estimates to be made of a stream's capability to transport sediment, and to project increases in suspended and deposited sediments that could result from increased supply from construction activity.

PHYSIOGRAPHY AND DRAINAGE

Alaska Highway traverses five physiographic divisions in the Yukon Territory. Starting from Alaska-Yukon border they are: Yukon Plateau, Shakwak Trench, Boundary Ranges of the Coast Mountains, Cassiar Mountains and the Liard Plain (Bostock, 1967). Within these divisions lie the six main drainage basins crossed by the Alaska Highway Pipeline route: White River, Alsek River, Takhini River, Yukon River, Teslin River and Laird River. (Figure 1)

Yukon Plateau North - Location : MP 1221 - 1117

Topography : Generally flat with areas of low muskeg, laden with shallow lakes and sloughs; elevations vary between 1850 and 2400 feet.

Except for Beaver Creek, tributary streams in this area generally have a very constant discharge; increases in discharge that can be observed during summer months are attributed to the melting of permafrost. Beaver Creek with its drainage area originating in the Wrangell mountains at elevations of between 7000 and 8000 feet is not typical for the area; it is violent at flood stage and its gravel banks are highly erodable.

Soils : Peat and volcanic ash overlying gravels; underlain with discontinuous permafrost.

Major Drainage Basins : White River, a tributary of the Yukon River; larger streams are glacier fed.

Shakwak Trench - Location : MP 1177 - 1036

Topography : Trench is long, narrow, generally flat (floor elevation 2400 feet) confined by the Kluane Plateau to the N.E. and the St. Elias Mountains to the S.W. Within the trench streams are glacier fed, steep and subject to flash floods; large rivers cross the Trench at right-angles in the northwesterly direction.

Kluane Lake, the largest lake in the Yukon, lies within the Shakwak Trench valley floor; its west shore is characterized by high energy, gravel-fed streams whose fans are actively aggrading. The fan of the Duke River substantially controls the level of the lake.

Soils : Outwash deposits, volcanic ash and silt; alluvial fan deposits along the western shore of Kluane Lake.

Major Drainage Basins : Donjek River, tributary of White River, and Duke and Slims Rivers, tributaries of Kluane River and Kluane Lake respectively.

Yukon Plateau South - Location : MP 1036 - 996

Topography : Follows Dezadeash Valley (elevation 2500 feet) to the southern end of the Sifton Range (elevation 3500 feet), the divide between Alsek and Takhini River drainage basins.

Soils : Till, sand, gravel with local occurrences of volcanic ash and lacustrine silt.

Major Drainage Basins : Aishihik River, tributary of Dezadeash River; Dezadeash River, tributary of Alsek River (coast drainage).

Boundary Ranges,
Coastal Mountains - Location : MP 996 - 815

Topography : Crosses Takhini River at elevation 2200 feet; climbs steeply to elevation 4500 feet in the Boundary Ranges; descends across Yukon River at elevation 2400 feet; continues across Yukon Plateau to Teslin River (elevation 2300 feet); follows northern shoreline of Teslin Lake and crosses Nisutlin Bay; climbs along Morley River valley to elevation 2800 feet near Smart River.

Soils : Till, sand gravel with local occurrences of volcanic ash and lacustrine silt.

Major Drainage Basins : Takhini, Teslin and M'Clintock Rivers, tributaries of the Yukon River.

Cassiar Mountains - Location : MP 815 - 751

Topography : Moderately rugged with numerous broad

valleys; route climbs to 5000 feet at the divide between Swift and Rancheria Rivers and descends to 3000 feet to Rancheria River.

Soils : Sand, gravel and some till.

Major Drainage Basins : Swift River, tributary of Teslin River; Rancheria River, tributary of Liard River.

Liard Plain

Location : MP 751 - 712

Topography : Flat and at elevation of 3000 feet, with relatively deep river valleys.

Soils : Glacial till with local occurrences of silt, sand, gravel and volcanic ash.

Major Drainage Basins : Rancheria and Little Rancheria Rivers.

CLIMATE

The Coast and the St. Elias Mountains that form the western boundary of the Yukon drainage are an effective barrier against Pacific weather influences because of their continuity and height. In the east, the Rockies present a barrier against winter flow of cold polar air from Northwest Territories. However, this barrier is considerably lower and less continuous; consequently, "continental" influences are strong, causing occasional extremely cold periods in the winter.

The North American record of -81°F was established at Snag.

Because of the generally rugged terrain along the Alaska Highway, consisting of mountains, plateaux and valleys, it is difficult to map the climate accurately; altitude appears to be more of a climatic determinant than latitude.

The following data* illustrate temperature and precipitation values:

	<u>Mean Annual Temperature (°F)</u>	<u>Mean Annual Rainfall (inches)</u>	<u>Mean Annual Precip. (inches)</u>
Snag	21.5	8.68	14.16
Haines Junction	26.3	6.29	11.12
Whitehorse	30.5	5.60	10.24
Teslin	29.2	6.62	12.83
Watson Lake	26.8	8.99	17.01

SOURCES OF DATA

Table 1 lists Water Survey of Canada gauging stations considered in the analysis. Sources for these data are the annual and historical streamflow summaries of Surface Water Data for the Yukon and Northwest Territories, and British Columbia published by Environment Canada, Inland Waters Directorate. Table 2 lists the small stream network operated by the Department of Indian and Northern Affairs in 1978. 1978 data for these stations are given in Appendix A of this report; data for stations operated in previous years are available from Department of Indian and Northern Affairs, Northern Affairs Program, Whitehorse, Y.T.

RESULTS

A. SMALL STREAM HYDROLOGY

To assure adequate pipeline design and construction at channel crossings, information on magnitude and frequency of river flows must be available. However, very little baseline data exist on which to base reliable flow predictions, particularly for streams with small drainage areas. There are 19 streamflow observation sites in the near vicinity of the pipeline route, but usefulness of data at about half is very limited because of large upstream storage and the large-sized streams on which most stations are

*Development of Power in the Yukon, Appendix 2, Hydrology, January 1975.
Sigma Resource Consultants Ltd.

located. Areas where lack of hydrologic information is particularly critical are the northeastern side of the St. Elias and the southwestern side of the Cassiar Mountains. These also are the areas wherein hydrological impact of pipeline construction and operation is expected to be the greatest. Expansion of the network for the purpose of this study would not be sufficient as data from newly established stations would not be for a long enough period to provide reasonable measures of streamflow characteristics needed for calculation of peak flows. The deficiency in data led to estimation of extreme values based on a number of approaches:

1. Dimensionless ratio to the mean annual flood - - - Appendix B
2. Envelope curve, relating maximum known floods to drainage area size - - - Appendix B
3. Channel geometry versus flow characteristics - - - Appendix C
4. Kinematic Wave technique - - - Appendix D
5. Culvert size

Comparison of results are shown in Table 3. The sites are arranged in the order in which they occur starting with Snag Creek at Alaska-Yukon border to Albert Creek at B.C.-Yukon border. The data allow direct comparisons to be made of flood magnitudes at sites for which they were calculated and to provide some transfer value for estimating flood values on other or nearby streams having similar basin and channel characteristics. Details on various approaches used are given in the above Appendices.

Discussion

The majority of streamflow records on which the first two approaches are based concerns large, and in many cases, lake-controlled rivers; therefore, there is a built-in bias towards large streams. An attempt was made during 1978 snowmelt runoff to reduce this bias through operation of a network of crest-stage gauges on small streams along the highway. However, because the level of runoff was generally low there was insufficient basis on which to modify the relationships developed earlier.

Traditional methods for estimation of flood-frequency characteristics at an ungauged stream, those based principally on precipitation data and those which use relations between streamflow and basin characteristics sometimes are inadequate because of large spacial variability in precipitation, dominance of geologic factors or insufficient streamflow data from comparable basins. An approach wherein channel geometry is related to known flow characteristics at existing gauging stations provides an alternative for estimating flow characteristics at ungauged sites. This method does not require the detailed basin information needed for the traditional methods; channel size and shape are indicators of the topographic, geologic and climatic characteristics upstream. The reliability of flow predictions, however, is determined largely by the consistency of data obtained at gauging stations which is dependent on the existence of good hydraulic conditions and on satisfactory evidence of bankfull stage. Therefore, there are some streams or stream reaches where the method is not useful or could give misleading results. Examples are the ephemeral drainages along the west shore of Kluane Lake and the braided channels of Slims, Donjek and White Rivers. In addition, occasionally geographic locations for a stream indicates a particular flow regime, yet the relationship for the regime does not apply because of major difference in local terrain and/or material through which the channel is cut from the overall basin characteristics. Examples are the Lubbock and Tagish streams. Thus, geographic location is not always an acceptable criterion for applicability of a particular relation.

Most culverts and bridges along the Alaska Highway appear to have adequate openings for passage of flood flows, as any overtopping that has occurred historically can be attributed to morphological problems. Accordingly, where a culvert has been in existence for sufficient number of years the calculated capacity can be a simple rational indicator of the maximum flood flow of the stream.

When there is insufficient hydrologic data for dependable flood-frequency analysis, empirical approaches are often used for determination of peak flows. Commonly, basin drainage area modified for topography and climate is the basic parameter for empirical estimates of design floods. Such empirical techniques serve a useful purpose in being a further check on the application of other methods. The Kinematic Wave Model has been used here as such an empirical technique. The method used combines the Kinematic Wave

theory for determining peak flows from climatic and topographic parameters with statistical theory, and analyzes precipitation data to produce estimates of the flood frequency data for ungauged basins.

B. WATER QUALITY

Preliminary results will be available on November 1, 1978 and final report by December 31, 1978.

C. RIVER HYDRAULICS

Time schedule is the same as for Water Quality.

Table 1 WATER SURVEY OF CANADA GAUGING STATIONS CONSIDERED IN THE ANALYSIS

W.S.C. No.	Name	Record Length (Yrs.)	Drainage Area (sq.mi.)
A. Yukon Territory			
08AA001	Aishihik River near Whitehorse	29	1,660
08AB001	Alsek River above Bates River	3	6,250
10MD002	Babbage River below Cariboo Creek	3	588
09AH003	Big Creek near Mouth	4	674
09AG001	Big Salmon River near Carmacks	20	2,610
08AA003	Dezadeash River at Haines Junction	25	3,280
10MD001	Firth River near Mouth	4	2,240
10AB001	Frances River near Watson Lake	16	4,950
10AD002	Hyland River at Mi. 67.4 Nahanni Rge. Rd.	3	211
08AA004	Kathleen River near Haines Junction	6	249
10AB003	King Creek at Mi. 13 Nahanni Rge. Rd.	3	5.3
09EA003	Klondike River above Bonanza Creek	12	3,010
09CA002	Kluane River at Outlet of Kluane Lake	26	1,910
10AA001	Liard River at Upper Crossing	19	12,900
09AA007	Lubbock River near Atlin	16	684
09AB008	M'Clintock River near Whitehorse	22	597
09EA004	North Klondike River near Mouth	4	423
09FC001	Old Crow River near the Mouth	3	5,370
10MA002	Ogilvie River at Mile 123 Dempster Hwy.	4	2,090
10MA001	Peel River above Canyon Creek	13	10,200
09BC001	Pelly River at Pelly Crossing	24	18,900
09BC002	Pelly River at Ross River	20	7,670
09BC004	Pelly River below Vangorda Creek	6	8,490
09FB001	Porcupine River below Bell River	4	13,900
09FD001	Porcupine River at Old Crow	17	20,900
09BA001	Ross River at Ross River	16	2,800
10MB001	Snake River above Iron Creek	5	1,070
10MB003	Snake River near the Mouth	2	3,440
09BB001	S. MacMillan River at Mi. 249 Canol Rd.	4	385
09DC002	Stewart River at Mayo	29	12,100
09DD003	Stewart River at the Mouth	15	19,700

Table 1 WATER SURVEY OF CANADA GAUGING STATIONS CONSIDERED IN THE ANALYSIS
 (Cont'd)

W.S.C. No.	Name	Record Length (Yrs.)	Drainage Area (sq.mi.)
09DD002	Stewart River at Stewart Crossing	14	13,500
09AA011	Tagish Creek near Carcross	11	31
09AC004	Takhini River at Outlet of Kusawa Lake	21	1,570
09AC001	Takhini River near Whitehorse	30	2,700
09AE001	Teslin River near Teslin	31	11,700
09AF001	Teslin River near Whitehorse	19	13,700
10AA002	Tom Creek at Mi. 21.7 Robt. Campbell Hwy.	4	168
09AA009	Watson River near Carcross	15	452
09AA012	Wheaton River near Carcross	18	337
09AH001	Yukon River at Carmacks	27	33,600
09EB001	Yukon River at Dawson	31	106,000
09AB009	Yukon River above Frank Creek	26	12,000
09CD001	Yukon River above White River	20	58,400
09EB002	Yukon River at Stewart River	9	97,300
09AB001	Yukon River at Whitehorse	35	7,500

B. British Columbia

09AA006	Atlin River near Atlin	28	2,630
09AA014	Fantail River at Outlet of Fantail Lake	20	289
09AE004	Gladys River at Outlet of Gladys Lake	17	737
10AD001	Hyland River near Lower Post	24	3,650
09AA010	Lindeman Creek near Bennett	22	92
09AA008	Pine Creek near Atlin	19	269
08BB002	Sloko River near Atlin	18	165
09AE003	Swift River near Swift River	19	1,280
09AA013	Tutshi River at Outlet of Tutshi Lake	19	366
09AA015	Wann River near Atlin	18	104

Table 2

SMALL STREAM NETWORK - ALASKA HIGHWAY - 1978Operated by Department of Indian and Northern Affairs

Name	Drainage Area (sq. mi.)	Remarks
Snag Creek at MP 1208.0	380	Water stage recorded; seasonal daily discharge
Dry Creek at MP 1184.0	52)
Sanpete Creek at MP 1178.4	29)
Long's Creek at MP 1156.0	44)
Burwash Creek at MP 1103.9	65)
Unnamed Creek at MP 1082.5	3.4)
Silver Creek at MP 1053.6	38)
Bear Creek at MP 1022.3	30)
Marshall Creek at MP 1005.6	83)
Mendenhall Creek at MP 968.0	293	Water stage recorder; seasonal daily discharge
Stoney Creek at MP 956.0	19)
Deadmans Creek at MP 822.3	84)
Logjam Creek at MP 751.1	33)
Partridge Creek at MP 736.4	24	Water stage recorder; seasonal daily discharge
Spencer Creek at MP 695.3	62)
Big Creek at MP 674.0	405)

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Snag Creek	1208.0	2.33-year 50-year 100-year Max. Daily Culvert Cap.	see Appendix A	2,670 4,830 5,610 -	1,020 3,200 3,650 -	2,060 4,420 5,410 -	- - - -		Generally swampy low ground; pipeline trench could induce toxic waters to clear creek channels. Widespread discontinuous permafrost; considerable frost heave potential because of poorly drained silty sand and volcanic ash.
	8.5						6,010	Bridge	
Beaver Creek	1200.7	2.33-year 50-year 100-year Max. Daily Culvert Cap.	see Appendix A	4,750 8,600 9,980 -	6,830 12,600 13,900 -	3,750 8,080 9,880 -	- - - -		Beaver Creek originating in the Wrangell mountains at elevations of 7000-8000 feet is not typical for the area; it is violent at flood stage and its gravel banks are highly erodable.
	15.8						10,300	Bridge	
Enger Creek	1200.0	2.33-year 50-year 100-year Max. Daily Culvert Cap.				533 977 1,080 -	340 731 894 -	- - - -	See Snag Creek
	23.6							1,180	
Dry Creek	1184.0	2.33-year 50-year 100-year Max. Daily Culvert Cap.	see Appendix A	150 272 315 -	887 1,610 1,780 -	338 728 891 -	- - - -	See Snag Creek	
	31.0							1,180	Bridge

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Sanpete Creek	1178.0	2.33-year 50-year 100-year Max. Daily	see Appendix A Culvert Cap.	- - - -	618 1,120 1,230 -	201 432 529 -	- - - -	- - - -	See Snag Creek
29.4	36.7					745		850	12' - 10" x 8' - 4" Pipe Arch x 70' long; installed in 1961
White River	1169.2	2.33-year 50-year 100-year Max. Daily	only 4 years of record	- - - -	- - - -	- - - -	- - - -	Subject to severe scour. Glacier dammed lakes could have substantial effect on hydrology. Discontinuous permafrost is widespread, and aueis and frost heave are definite hazards.	
2410	43.5 to 45.5		Culvert Cap.	-	-	-	-	-	Bridge
Koidern	1164.0	2.33-year 50-year 100-year Max. Daily	Culvert Cap.	- - - -	3,300 6,090 6,710 -	2,290 4,930 6,030 -	- - - -	Drainage diversion from surrounding swamps and lakes is a possibility. Erosion, slumping and solifluction from induced permafrost thawing during construction along the steep gradient immediately east of Koidern River is a hazard requiring close attention; could cause deterioration in water quality.	
428	48.8								Bridge
Long's Creek	1156.0	2.33-year 50-year 100-year Max. Daily	see Appendix A Culvert Cap.	1,270 2,300 2,670 -	561 1,010 1,120 -	290 624 764 -	- - - -	Bridge	
44.1	58.1							1,040	Bridge
									See Koidern at MP 1164

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Wolf Creek 66.7	1155.5 58.7	2.33-year	-	-	-	423	-	Bridge	See Koidern at MP 1164
		50-year	-	-	-	910	-		
		100-year	-	-	-	1,113	-		
		Max. Daily Culvert Cap.	-	-	-	-	1,450		
Koidern River 260	1152.2 62.5 to 63.0	2.33-year	-	1,670	2,180	1,460	-	Bridge	See Koidern at MP 1164
		50-year	-	3,020	3,990	3,130	-		
		100-year	-	3,510	4,390	3,830	-		
		Max. Daily Culvert Cap.	-	-	-	-	4,400		
Edith Creek 113	1146.6 67.6	2.33-year	-	-	-	683	-	Bridge	Discontinuous permafrost; frost heave potential
		50-year	-	-	-	1,470	-		
		100-year	-	-	-	1,800	-		
		Max. Daily Culvert Cap.	-	-	-	-	-		
Donjek River 1687	1132.8 80.2 to 80.8	2.33-year	-	-	-	-	-	Bridge	Concerns similar to those for White River, but perma- frost and frost heave hazards are expected to be relatively minor.
		50-year	see Appendix A	-	-	-	-		
		100-year	-	-	-	-	-		
		Max. Daily Culvert Cap.	-	-	-	-	-		

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Swede Johnson Creek	1119.2	2.33-year	-	-	389	241	-		
		50-year	-	-	713	519	-		
		100-year	-	-	785	635	-		
		Max. Daily	-	-	-	-	878		
36.0	93.7	Culvert Cap.	-	-	-	-	-	500	
		2.33-year	9,410	12,000	18,200	8,920	-		
		50-year	13,000	21,700	34,800	19,200	-		
		100-year	13,400	25,200	38,500	23,400	-		
Kluane River	1910	Max. Daily	13,600	-	-	-	22,500		
		Culvert Cap.	-	-	-	-	-	-	
		2.33-year	-	-	303	182	-		
		50-year	-	-	554	392	-		
Quill Creek	1111.6	100-year	-	-	610	479	-		
		Max. Daily	-	-	-	-	-	681	
		Culvert Cap.	-	-	-	-	-	Bridge	
		2.33-year	-	-	-	-	-		
Burwash Creek	106.3	50-year	see Appendix A	639	615	413	-		
		100-year		1,490	1,130	888	-		
		Max. Daily	1,820	1,250	-	1,090	-	1,420	
		Culvert Cap.	-	-	-	-	-	-	Bridge

Upstream placer mining activity likely has an effect on water quality.

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Duke River 255	1098.5	2.33-year	see Appendix A	4,440	3,830	1,430	-	4,340	The fan of the Duke River substantially controls the level of Kluane Lake. Deep scour potential; lateral stability is poor.
		50-year		7,960	7,340	3,080	-		
		100-year		9,240	8,120	3,760	-		
		Max. Daily		-	-	-	-		
	110.5	Culvert Cap.	-	-	-	-	-	Bridge	
Halfbreed Creek 26.7	1089.1	2.33-year	see Appendix A	716	281	184	-	1100	See Lewis Creek
		50-year		1,670	515	396	-		
		100-year		2,040	568	484	-		
		Max. Daily		-	-	-	-		
	118.7	Culvert Cap.	-	-	-	-	-	688	120" Dia. pipe, 92' long; installed in 1966
Lewis Creek 15.7	1087.0	2.33-year		-	-	-	-	Bridge	Slope stability, erosion and icing combined with drainage disruption are expected to be a major concern. Estimation and design flows by conventional means is difficult.
		50-year		-	-	-	-		
		100-year		-	-	-	-		
		Max. Daily		-	-	-	-		
	121.0	Culvert Cap.	-	-	-	-	-	1100	
Unnamed Creek 3.4	1082.0	2.33-year	see Appendix A	-	-	-	-	-58.0	Timber box culvert 52" x 72"
		50-year		-	-	-	-		
	100-year			-	-	-	-	-	
	Max. Daily			-	-	-	-	-	
	Culvert Cap.			-	-	-	-	-	

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Bock's Creek	1080.3	2.33-year	-	-	-	-	-	1,400	See Lewis Creek 14'0" x 9'8" pipe-arch x 68' long; installed in 1969.
		50-year	-	-	-	-	-		
		100-year	-	-	-	-	-		
Nines Creek	127.8	Max. Daily	-	-	-	-	-	Bridge	See Lewis Creek
		Culvert Cap.	-	-	-	-	-		
		2.33-year	-	-	-	-	-		
Congdon Creek	1078.9	50-year	-	-	-	-	-	Bridge	See Lewis Creek
		100-year	-	-	-	-	-		
		Max. Daily	-	-	-	-	-		
Williscroft Creek	130.5	Culvert Cap.	-	-	-	-	-	Bridge	See Lewis Creek
		2.33-year	-	-	-	-	-		
		50-year	-	-	-	-	-		
Williscroft Creek	1071.6	100-year	-	-	-	-	-	Bridge	See Lewis Creek
		Max. Daily	-	-	-	-	-		
		Culvert Cap.	-	-	-	-	-		
Williscroft Creek	135.7	2.33-year	-	-	-	-	-	Bridge	See Lewis Creek
		50-year	-	-	-	-	-		
		100-year	-	-	-	-	-		
Williscroft Creek	1077.1	Max. Daily	-	-	-	-	-	Bridge	See Lewis Creek
		Culvert Cap.	-	-	-	-	-		
		2.33-year	-	-	-	-	-		
Williscroft Creek	138.3	50-year	-	-	-	-	-	Bridge	See Lewis Creek
		100-year	-	-	-	-	-		
		Max. Daily	-	-	-	-	-		
Williscroft Creek	4.9	Culvert Cap.	-	-	-	-	-	Bridge	See Lewis Creek
		2.33-year	-	-	-	-	-		
		50-year	-	-	-	-	-		
Williscroft Creek	172	100-year	-	-	-	-	-	Bridge	See Lewis Creek
		Max. Daily	-	-	-	-	-		
		Culvert Cap.	-	-	-	-	-		

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Slims River	1059.8	2.33-year	-	-	-	-	-	-	Unstable streambed
		50-year	-	-	-	-	-	-	
		100-year	-	-	-	-	-	-	
		Max. Daily	-	-	-	-	-	-	
927	146.4	Culvert Cap.	-	-	-	-	-	-	Bridge
		2.33-year	-	-	28	17.5	-	-	
		50-year	-	-	51	37.5	-	-	
		100-year	-	-	56	45.9	-	-	
Topham Creek	1049.8	Max. Daily	-	-	-	-	83.0	-	Wood stove, 3 feet diameter
		Culvert Cap.	-	-	-	-	-	-	
		2.33-year	-	-	28	17.5	-	-	
		50-year	-	-	51	37.5	-	-	
37.6	157.5	100-year	-	-	56	45.9	-	-	Unstable streambed
		Max. Daily	-	-	-	-	-	-	
		Culvert Cap.	-	-	-	-	-	-	
		2.33-year	see Appendix A	729	360	252	-	-	
39.8	1053.8	50-year	1,320	663	543	-	-	-	16'-7" x 10'-11" double pipe-arch x 69' long; installed in 1972.
		100-year	1,530	731	664	-	-	-	
		Max. Daily	-	-	-	-	-	-	
		Culvert Cap.	-	-	-	-	-	-	
37.6	154.0	2.33-year	-	-	270	265	-	-	Erosion and consequent increase in turbidity are of major concern
		50-year	-	-	500	569	-	-	
		100-year	-	-	552	696	-	-	
		Max. Daily	-	-	-	-	-	-	
39.8	1046.4	Culvert Cap.	-	-	-	-	-	-	Double 6' x 4' laminated wood box, 56' long; installed in 1954
		2.33-year	-	-	270	265	-	-	
		50-year	-	-	500	569	-	-	
		100-year	-	-	552	696	-	-	
39.8	158.1	Max. Daily	-	-	-	-	-	-	56.0
		Culvert Cap.	-	-	-	-	-	-	
		2.33-year	-	-	270	265	-	-	
		50-year	-	-	500	569	-	-	
39.8	1046.4	100-year	-	-	552	696	-	-	56.0
		Max. Daily	-	-	-	-	-	-	
		Culvert Cap.	-	-	-	-	-	-	
		2.33-year	-	-	270	265	-	-	

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Jarvis River 288	1034.6	2.33-year 50-year 100-year Max. Daily	see Appendix A	1,270 2,300 2,670	948 1,970 2,200	1,600 3,440 4,200	- - -	- - 913	See Christmas Creek
	169.8	Culvert Cap.	-	-	-	-	-	-	Bridge
	1022.1	2.33-year 50-year 100-year Max. Daily	see Appendix A	1,570 1,820	869 404	191 537	203 439	- -	See Christmas Creek
	176.5	Culvert Cap.	-	-	-	-	-	1,700	Concrete culvert, double 9' x 9' barrel, 46' long; installed in 1955.
Bear Creek 29.9	1018.9	2.33-year 50-year 100-year Max. Daily	-	-	-	341	401	-	
	185.0	Culvert Cap.	-	-	-	658	863	-	
	1018.9	2.33-year 50-year 100-year Max. Daily	-	-	-	728	1,060	-	
	63.1	Culvert Cap.	-	-	-	-	-	265	Bridge
Dezadeash River 3280	Haines-Alaska Highway Bridge	2.33-year 50-year 100-year Max. Daily	5,880 10,900 11,800 10,100	5,280 9,560 11,100 -	5,720 12,800 14,300 -	14,600 31,400 38,400 -	- - - -	Bridge	

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
 Cubic Feet Per Second

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Stoney Creek	956.0	2.33-year 50-year 100-year Max. Daily Culvert Cap.	See Appendix A	438 1,020 1,240	118 233 259	138 296 362	- -	- 530	
19.4	216.5		-	-	-	-	-	- -	Bridge
Takhini River	946.3	2.33-year 50-year 100-year Max. Daily Culvert Cap.	8,370 14,500 15,800 17,200	12,900 23,300 27,100	5,270 11,100 12,300	12,200 26,300 32,200	- -	- 5,690	
2,700	206.8		-	-	-	-	-	- -	Bridge
McIntyre Creek	919.2	2.33-year 50-year 100-year Max. Daily Culvert Cap.	See Appendix A	600 1,090 1,260	102 204 228	117 251 308	- -	- 458	
16.2	270.2		-	-	-	-	-	- 440	Two 60" dia. pipes 110' long; installed in 1968.
Wolf Creek	907.0	2.33-year 50-year 100-year Max. Daily Culvert Cap.	-	-	-	346 713 800	442 950 1,160	- -	
69.5	277.3		-	-	-	-	-	- 287	15'8" x 9'-7" pipe-arch x 100' long; installed in 1960

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Cowley Creek	906.4	2.33-year	-	-	344	482	-	-	Storage in Marsh Lake Dam since 1926. Pondage at Whitehorse Rapids power plant since 1958.
		50-year	-	-	713	1,040	-	-	
		100-year	-	-	799	1,270	-	-	
		Max. Daily	-	-	-	-	310	-	
76.7	277.9	Culvert Cap.	-	-	-	-	-	Bridge	Bridge
		2.33-year	18,500	22,800	-	30,900	-	-	
		50-year	23,300	41,300	18,600	66,500	-	-	
		100-year	24,000	47,900	21,700	81,400	-	-	
		Max. Daily	22,800	-	-	-	13,100	-	
7500	285.4	Culvert Cap.	-	-	-	-	-	Bridge	Bridge
		2.33-year	2,030	1,090	1,750	3,370	-	-	
		50-year	5,500	4,470	3,750	7,250	-	-	
		100-year	6,500	5,450	4,220	8,880	-	-	
		Max. Daily	3,980	-	-	-	-	9,370	
655	293.4	Culvert Cap.	-	-	-	-	-	-	Bridge
		2.33-year	-	-	-	-	-	-	
		50-year	-	-	-	-	-	-	
		100-year	-	-	-	-	-	-	
307	329.6	Max. Daily	-	-	-	-	-	-	Divide between Squanga Lake system and Michie Creek in the M'Clintock drainage is poorly defined. Possibility of water migration and introduction of toxic substances into Squanga Lake exists.
		Culvert Cap.	-	-	-	-	-	-	
		-	-	-	-	-	-	-	
Squanga Creek	849.3	2.33-year	-	-	-	-	1,690	-	
		50-year	-	-	-	-	3,640	-	
		100-year	-	-	-	-	4,460	-	
		Max. Daily	-	-	-	-	-	5,050	-
		Culvert Cap.	-	-	-	-	-	-	

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Teslin River	-836.3	2.33-year	39,500	25,700	33,200	46,300	-	-	
		50-year	64,800	46,500	58,000	99,700	-	-	
		100-year	69,300	54,000	63,500	122,000	-	-	
	11700	Max. Daily	65,000	-	-	-	18,900	-	
		Culvert Cap.	-	-	-	-	-	Bridge	
Brook's Brook	829.7	2.33-year	see Appendix A	-	276	188	-	-	
		50-year	-	-	491	405	-	-	
		100-year	-	-	539	496	-	-	
	27.4	Max. Daily	-	-	-	-	703	-	
		Culvert Cap.	-	-	-	-	-	Bridge	
Deadmans Creek	822.4	2.33-year	see Appendix A	1,660	684	522	-	-	
		50-year	3,000	1,220	1,120	-	-	-	
		100-year	3,490	1,339	1,370	-	-	-	
	84.2	Max. Daily	-	-	-	-	1,760	-	
		Culvert Cap.	-	-	-	-	-	Bridge	
Lone Tree Creek	816.8	2.33-year	-	-	179	129	-	-	
		50-year	-	-	321	277	-	-	
		100-year	-	-	354	338	-	-	
	18.0	Max. Daily	-	-	-	-	-	-	
		Culvert Cap.	-	-	-	-	-	499	
	355.4	-	-	-	-	-	-	-	580
		-	-	-	-	-	-	-	10'8" x 6'11", pipe-arch x 66' long; installed in 1964

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Tennille Creek	813.1	2.33-year 50-year 100-year Max. Daily Culvert Cap.	see Appendix A	-	169 303 333 -	121 260 318 -	-	See Deadmans Creek	
16.8	360.0						472	1050 cfs	12'-10" x 8'-4" pipe-arch x 68' long; installed in 1964.
Fox Creek	808.0	2.33-year 50-year 100-year Max. Daily Culvert Cap.	-	-	144 257 283 -	100 216 264 -	-	See Deadmans Creek	
13.7	365.1						400	-	Bridge
Hays Creek	790.5	2.33-year 50-year 100-year Max. Daily Culvert Cap.	-	-	247 440 485 -	184 396 484 -	-		
26.7	380.0						-	688 - - -	10.0
Strawberry Creek	787.0	2.33-year 50-year 100-year Max. Daily Culvert Cap.	see Appendix A	-	228 407 448 -	169 363 445 -	-		
24.3	383.0						-	637 - - -	11'-5" x 7'-3" pipe-arch 98' long; installed in 1968. 750

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Morley River 608	778	2.33-year	see Appendix A	2,510	5,150	3,150	-	Bridge	Risk of introduction of suspended sediment is high.
		50-year		4,540	9,550	6,780	-		
		100-year		5,270	10,500	8,290	-		
		Max. Daily		-	-	-	1,680		
Hazel Creek 21.7	391.2	Culvert Cap.		-	-	-	-	Bridge	12'-6" x 7'11" pipe-arch 80' long; installed in 1958.
		2.33-year		-	218	152	-		
		50-year		-	384	328	-		
		100-year		-	422	401	-		
Swift below Smart River 1,280	397.5	Max. Daily		-	-	-	580	1,000	Risk of deterioration of water quality is high due to the additive effect of side creeks. Very little hydrologic information is available in this potentially difficult development area. Not crossed by Highway.
		Culvert Cap.		-	-	-	-		
		2.33-year	9,300	8,000	11,900	6,200	-		
		50-year	21,000	14,500	22,700	13,300	-		
Smart River 277		100-year	35,500	16,800	25,000	16,300	-	Bridge	See Swift River
		Max. Daily	15,500	-	-	-	-		
		Culvert Cap.	-	-	-	-	-		
		2.33-year	see Appendix A	1,880	3,150	1,540	-		
		50-year		3,400	5,720	3,320	-		Bridge
		100-year		3,950	6,290	4,060	-		
		Max. Daily		-	-	-	885		
		Culvert Cap.		-	-	-	-		

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Logjam Creek 33.5	751.7	2.33-year	see Appendix A	632	525	226	-		See Swift River below Smart River
		50-year		1,470	922	486	-		
		100-year		1,800	1,010	595	-		
		Max. Daily Culvert Cap.	-	-	-	-	828	Bridge	
Screw Creek 29.6	742.1	2.33-year	see Appendix A	444	468	202	-		See Swift River below Smart River
		50-year		1,030	824	435	-		
		100-year		1,260	904	532	-		
		Max. Daily Culvert Cap.	-	-	-	-	748	Bridge	
Partridge Creek 23.9	736.4	2.33-year	see Appendix A	590	399	166	-		See Swift River below Smart River
		50-year		1,370	696	358	-		
		100-year		1,680	763	438	-		
		Max. Daily Culvert Cap.	-	-	-	-	-	629	Bridge
Seagull Creek 31.5	428	2.33-year	-	442	502	214	-		See Swift River below Smart River
		50-year	-	1,030	879	460	-		
		100-year	-	1,260	964	563	-		
		Max. Daily Culvert Cap.	-	-	-	-	-	787	

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet per Second


STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Swift River 105	430	2.33-year	-	-	1,450	639	-		
		50-year	-	-	2,580	1,370	-		
		100-year	-	-	2,830	1,680	-		
		Max. Daily Culvert Cap.	-	-	-	-	400	Bridge	
Rancheria River (upper crossing of hwy) 261	720.0 442.6 to 443.4	2.33-year	-	-	3,410	1,460	-		
		50-year	-	-	6,070	3,140	-		
		100-year	-	-	6,660	3,840	-		
		Max. Daily Culvert Cap.	-	-	-	-	843	Bridge	
Carlick Creek 47.5	718.0 444	2.33-year	-	-	-	-	310	-	
		50-year	-	-	-	-	668	-	
		100-year	-	-	-	-	818	-	
		Max. Daily Culvert Cap.	-	-	-	-	-	1,100	Bridge
Rancheria River (pipeline crossing) 382	454	2.33-year	-	-	4,460	2,070	-		
		50-year	-	-	8,180	4,440	-		
		100-year	-	-	9,000	5,430	-		
		Max. Daily Culvert Cap.	-	-	-	-	-	1,150	Bridge

Potential for introduction
of sediment; volcanic rock.

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

STREAM & DRAINAGE AREA (sq. mi.)	MILEPOST & MILES FROM ALASKA BORDER	DISCHARGE EVENT	GAUGING STATION	CHANNEL GEOMETRY	KINEMATIC WAVE	RATIO TO MEAN	ENVELOPE CURVE	CULVERT CAPACITY	REMARKS
Boulder Creek 23.9	701.9	2.33-year	-	-	450	1.66	-	-	See Rancheria River Bridge
		50-year	-	-	777	358	-	-	
		100-year	-	-	850	438	629	-	
		Max. Daily	-	-	-	-	-	-	
Spencer Creek 61.6	460.7	Culvert Cap.	-	-	-	-	-	-	See Rancheria River Bridge
		2.33-year	see Appendix A	781	957	396	-	-	
		50-year	1,820	1,690	851	-	-	-	
		100-year	2,220	1,850	1,040	-	-	-	
Rancheria River (lower crossing of hwy) 837	467.1	Max. Daily	-	-	-	-	1,360	1,360	Two 14'-5" x 10'-0", 72' long pipe-arch; installed in 1970.
		Culvert Cap.	-	-	-	-	-	1,500	
		2.33-year	-	-	8,300	4,220	-	-	
		50-year	-	-	15,800	9,060	-	-	
Big Creek 405	674.1	100-year	-	-	17,400	11,100	-	-	See Rancheria River at MP 446.5 Bridge
		Max. Daily	-	-	-	-	-	2,190	
		Culvert Cap.	-	-	-	-	-	-	
		2.33-year	see Appendix A	4,060	4,470	2,180	-	-	
	487.0	50-year	7,350	8,390	4,680	-	-	-	See Rancheria River at MP 446.5 Bridge
		100-year	8,530	9,260	5,730	-	-	-	
		Max. Daily	-	-	-	-	-	1,210	
		Culvert Cap.	-	-	-	-	-	-	See Rancheria River at MP 446.5 Bridge
		-	-	-	-	-	-	-	

TABLE 3. - PEAK DISCHARGE COMPARISONS ALONG ALASKA HIGHWAY
Cubic Feet Per Second

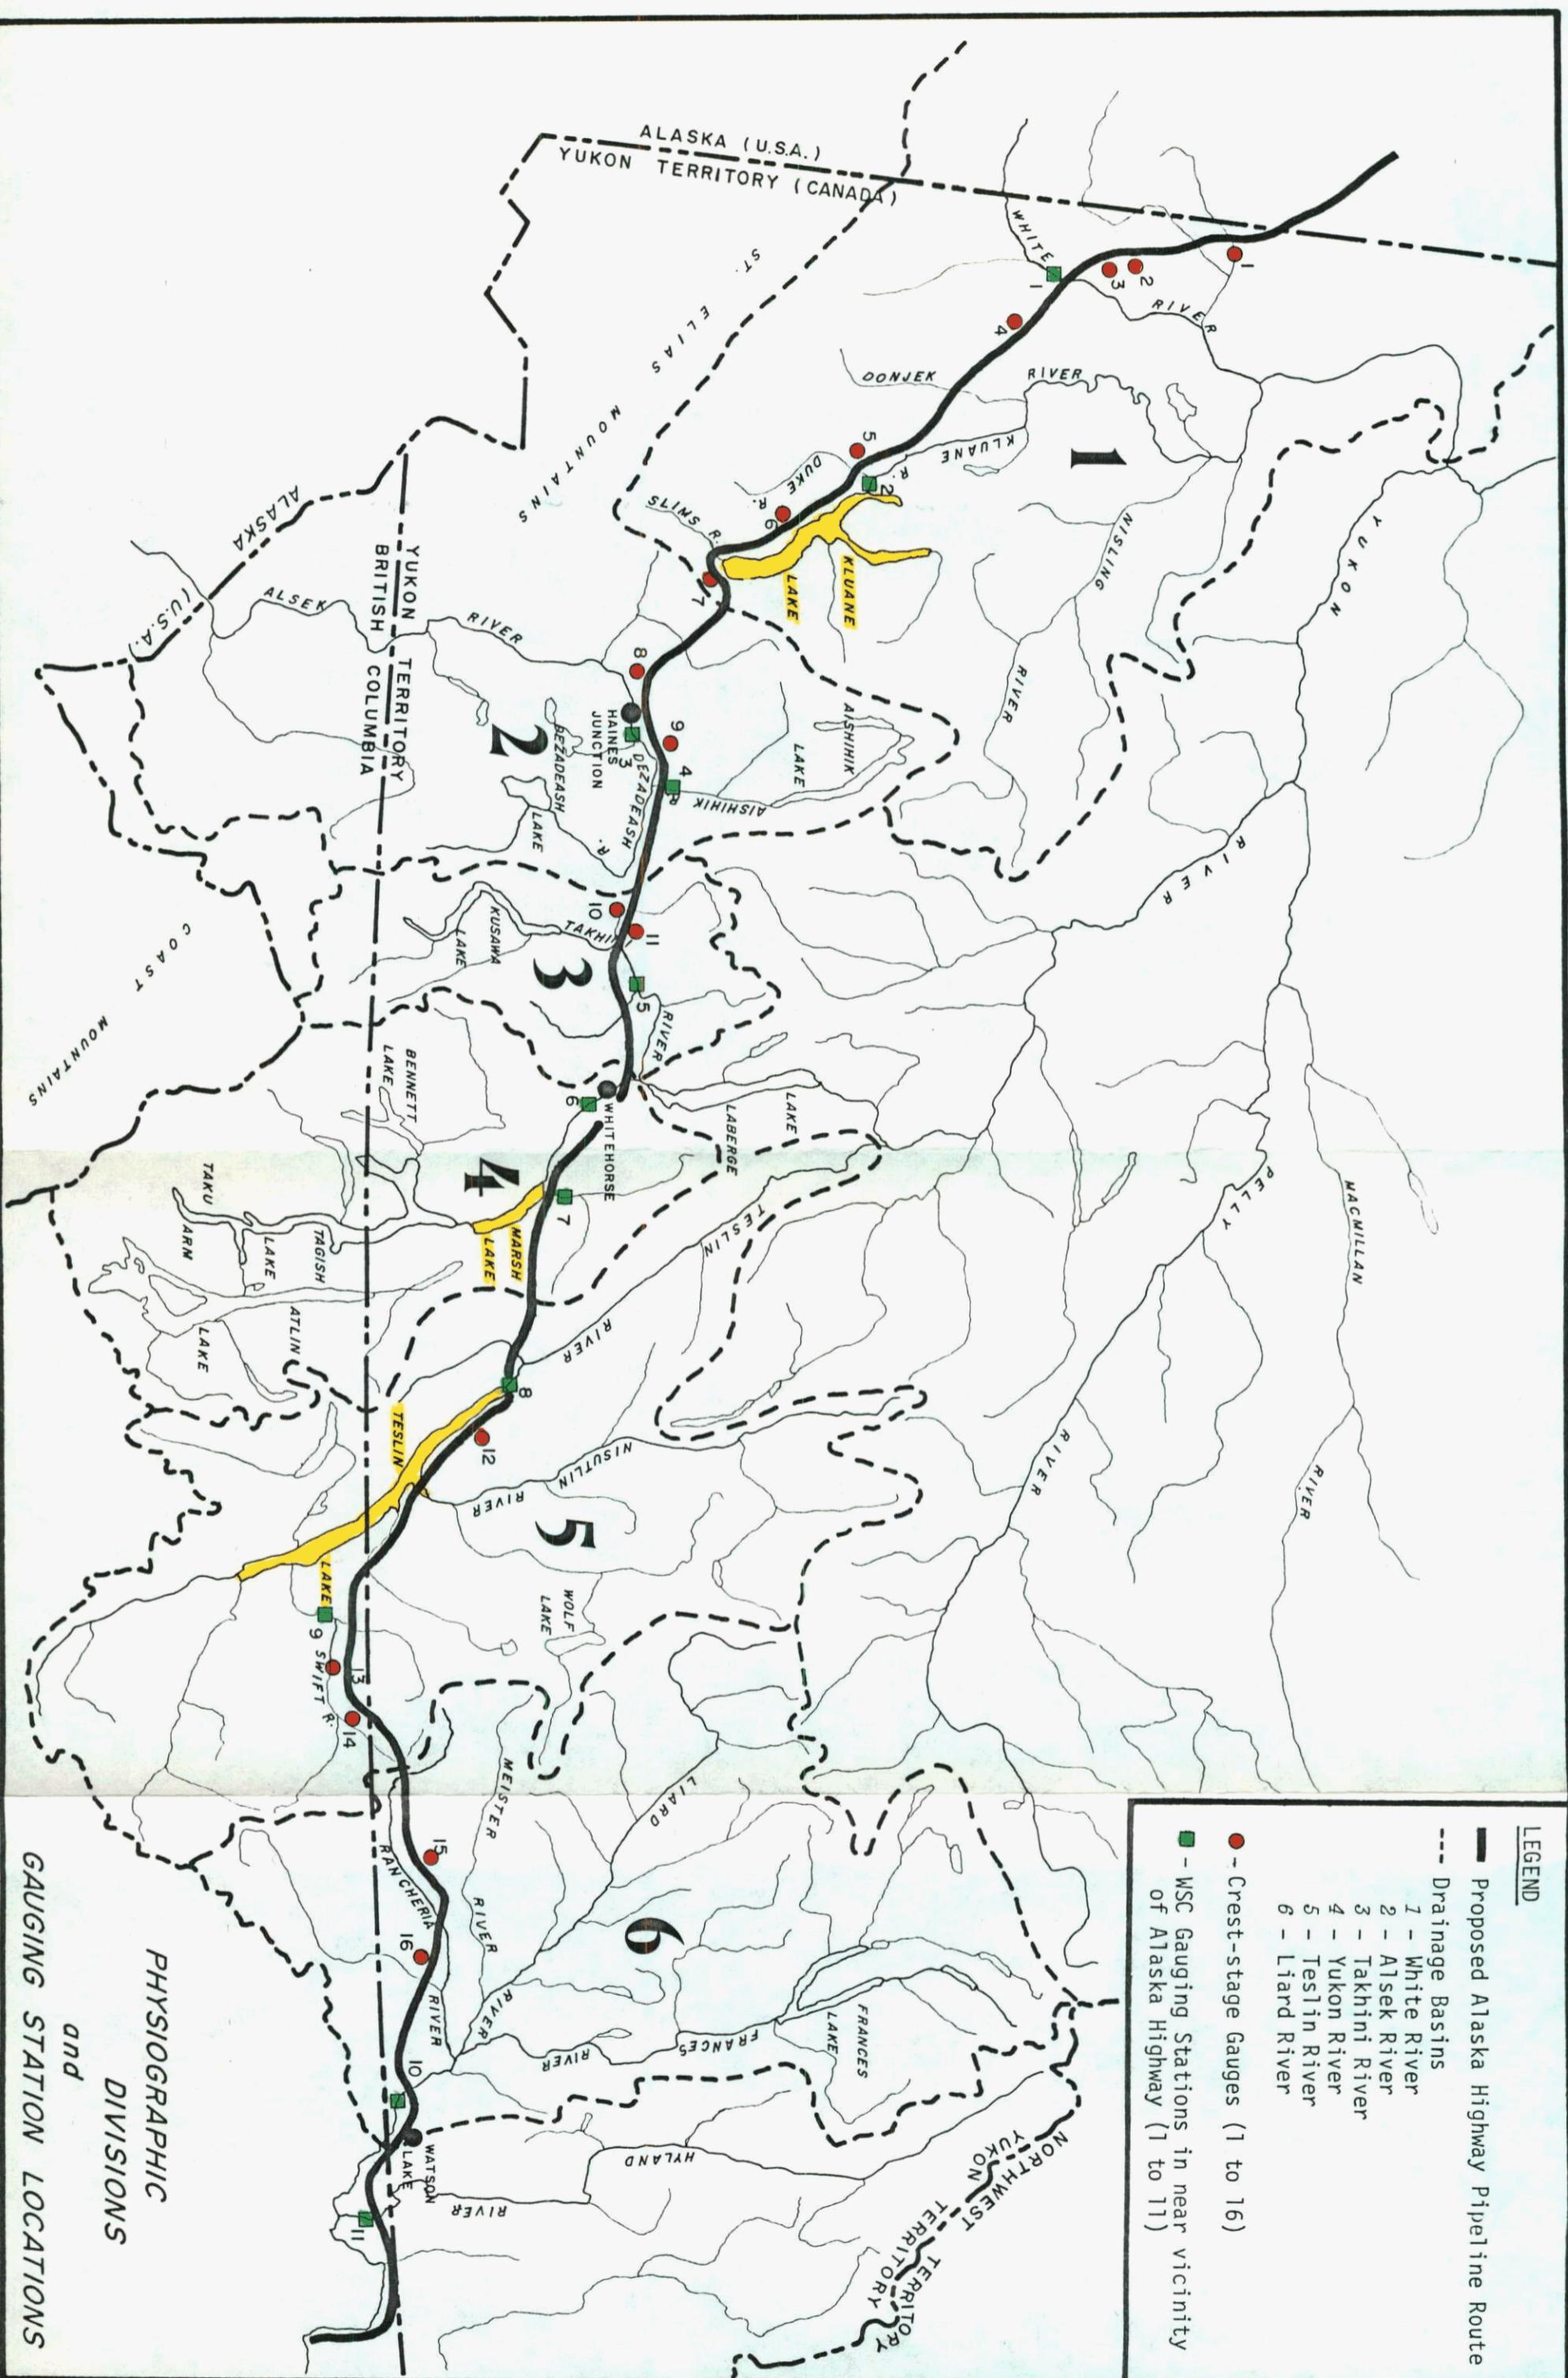

APPENDIX A

STREAMFLOW DATA AND SUSPENDED SEDIMENT
AT SELECTED SITES ALONG THE ALASKA HIGHWAY PIPELINE ROUTE
IN THE YUKON TERRITORY

INLAND WATERS DIRECTORATE
PACIFIC AND YUKON REGION

Vancouver, B.C.

October, 1978

TABLE OF CONTENTS

	<u>Page</u>	
INTRODUCTION	1	
ILLUSTRATIONS		
Table 1	List showing crest-stage gauges operated in 1978 along the Alaska Highway	2
Table 2	Miscellaneous Discharge Measurements at selected sites along the Alaska Highway	5
Table 3	Suspended Sediment and Discharge.	7
Figures 1 - 16	Hydrographs for the crest-stage gauge stations	12-27
Figure 1	Snag Creek at MP 1208.0	12
Figure 2	Dry Creek at MP 1184.0	13
Figure 3	Sanpete Creek at MP 1178.4	14
Figure 4	Long's Creek at MP 1156.0	15
Figure 5	Burwash Creek at MP 1103.9	16
Figure 6	Unnamed Creek at MP 1082.5	17
Figure 7	Silver Creek at MP 1053.6	18
Figure 8	Bear Creek at MP 1022.3	19
Figure 9	Marshall Creek at MP 1005.6	20
Figure 10	Mendenhall Creek at MP 968.0	21
Figure 11	Stoney Creek at MP 956.0	22
Figure 12	Deadmans Creek at MP 822.3	23
Figure 13	Logjam Creek at MP 751.1	24
Figure 14	Partridge Creek at MP 736.4	25
Figure 15	Spencer Creek at MP 695.3	26
Figure 16	Big Creek at MP 674.1	27

INTRODUCTION

A total of 16 crest-stage gauges were operated along the Alaska Highway pipeline route between May and September 1978. Ten were installed and operated by the Department of Indian and Northern Affairs, Whitehorse, Y.T. at the request of Environment Canada, Inland Waters Directorate, Vancouver, B.C., and six were operated by DINA as part of their ongoing crest-stage network. Five of the 16 stations were equipped with water-stage recorders. The network provides a representative runoff sample of the several types of drainage basins along the pipeline route.

Data are presented in graphic form and include: daily mean discharge for 5 sites, instantaneous discharge, miscellaneous measured discharge, bankfull discharge, and miscellaneous sampling of suspended and dissolved solids where such information was obtained.

A graphic format was selected as it facilitates comparisons to be made both in time and among gauge sites; it could thus serve as a tool for evaluating streamflow characteristics at ungauged streams.

Table 1 lists the 16 crest-stage gauges operated in 1978 and for which data are included in this report.

Table 2 lists miscellaneous discharge measurements obtained at other selected locations along the Alaska Highway.

Table 3 gives results of suspended sediment sampling in Yukon Territory and at a number of adjacent sites in British Columbia.

There are approximately 19 Water Survey of Canada gauging stations in the vicinity of the pipeline route which may be useful in providing additional streamflow information along the pipeline route. These data are available from Water Survey of Canada data files. For data at DINA crest-stage gauges prior to 1978, application should be made to that Department's office in Whitehorse.

TABLE 1 - SMALL STREAM NETWORK - ALASKA HIGHWAY - 1978

<u>Station</u>	<u>Purpose</u>	<u>Comments</u>
1) Snag Creek at MP 1208.0 (drainage area 380 sq.mi.) Equipped with water stage recorder	Between Alaska-Yukon Border and White River terrain is generally flat, comprising of muskeg, potholes and swamps. Pipeline trench could induce toxic waters into swamp-free basins such as Beaver Creek. These streams are expected to be representative of hydrology in the area.	Icing and frost heaving is expected to be severe because of terrain type. Permafrost is reported to be 4' below ground level.
2) Dry Creek at MP 1184.0 (drainage area 52 sq.mi.) DNA network station		
3) Sanpete Creek at MP 1178.4 (drainage area 29 sq.mi.)		
4) Long's Creek at MP 1156.0 (drainage area 44 sq.mi.) DNA network station, equipped with water stage recorder	Lakes and swamps may be drained into the Koidern River from upstream during and/or after construction. Thawing of the slope which the pipeline must ascend (gradient about 500 ft./mile) will probably cause erosion and slumping during construction.	High velocities with considerable drift and ice in the spring.
5) Burwash Creek at MP 1103.9 (drainage area 65 sq.mi.) Equipped with water-stage recorder	High energy streams between MP 1060 and 1100 are expected to be a source of drainage and icing problems during and after construction. To arrive at hydrologic estimates for this area is difficult by conventional means. Highway experience and snow survey data from Burwash Landing can contribute to the estimate.	Burwash Creek is glacier fed. Runoff is intermittent.
6) Unnamed Creek at MP 1082.5 (drainage area 3.4 sq.mi.)		
7) Silver Creek at MP 1053.6 (drainage area 38 sq.mi.)		

TABLE 1 - SMALL STREAM NETWORK - ALASKA HIGHWAY - 1978 (Cont'd)

<u>Station</u>	<u>Purpose</u>	<u>Comments</u>
8) Bear Creek at MP 1022.3 (drainage area 30 sq.mi.) DINA network station		Bank stability is a major problem in this area. Banks are high with evidence of seepage.
9) Marshall Creek at MP 1005.6 (drainage area 83 sq.mi.) DINA network station		
10) Mendenhall River at MP 968.0 (drainage area 293 sq.mi.) DINA network station, equipped with water-stage recorder	The potential instability problems in the Ibex River - Porter Creek area require an understanding of hydrologic variations.	Icing is expected to be intense some winters and runoff violent in the spring.
11) Stoney Creek at MP 956.0 (drainage area 19 sq.mi.)		
12) Deadmans Creek at MP 822.3 (drainage area 84 sq.mi.)	Lacustrine terraces are sharply incised by numerous small watercourses having extremely steep sidewalls; construction activity will be noteworthy for high sediment yields in presently clear water systems. Lacustrine deposits are known to be high in sodium and sulphate; could increase pH and specific conductivity.	

TABLE 1 - SMALL STREAM NETWORK - ALASKA HIGHWAY - 1978 (Cont'd)

<u>Station</u>	<u>Purpose</u>	<u>Comments</u>
13) Logjam Creek at MP 751.1 (drainage area 33 sq.mi.)	Swift River system is expected to suffer similar problems to those on the N.E. side of Teslin Lake.	
14) Partridge Creek at MP 736.4 (drainage area 24 sq.mi.)	DNA network station, equipped with water stage recorder	
15) Spencer Creek at MP 695.3 (drainage area 62 sq.mi.)	Relic moraines in the Rancheria River system represent concentrations of fine materials subject to degradation with disturbance.	
16) Big Creek at MP 674.0 (drainage area 405 sq.mi.)		

TABLE 2 - MISCELLANEOUS DISCHARGE MEASUREMENTS AT SELECTED
SITES ALONG THE ALASKA HIGHWAY

Stream	Date	Width (ft.)	Area (sq.ft.)	Velocity (ft./sec.)	Discharge (cfs)
Beaver	Aug. 7, 1978	128	304	4.38	1,330
White	Aug. 7	292	2,270	10.83	24,600
Koidern	May 18	52.0	69.9	1.19	83.4
Donjek	May 16, 1977		braided cross-section		826
	June 23				4,110
	July 14				8,810
	Aug. 10				13,900
	Sep. 29				1,310
	June 7, 1978				3,330
	June 26				5,000
	June 27				4,980
	June 28				5,180
	June 29				4,930
	June 30				5,380
	July 17				8,700
	July 18				8,840
	July 19				9,100
	July 20				11,900
	July 21				13,200
	Aug. 2				13,400
	Aug. 3				15,200
	Aug. 4				16,500
	Aug. 5				17,100
	Aug. 6				22,800
Swede Johnson	May 19	15.5	13.4	0.31	4.2
Quill	Aug. 8	22.5	10.7	1.87	20.0
Duke	May 20	34.0	31.5	1.46	45.9
	June 28	65.6	81.4	4.24	334
	July 19	64.0	104	5.13	539
	Aug. 9		braided cross-section		879

TABLE 2 - MISCELLANEOUS DISCHARGE MEASUREMENTS AT SELECTED
SITES ALONG THE ALASKA HIGHWAY (Cont'd)

Stream	Date	Width (ft.)	Area (sq.ft.)	Velocity (ft./sec.)	Discharge (cfs)
Halfbreed	Aug. 9, 1978	13.5	8.9	3.19	28.5
Christmas	May 15	22.5	20.1	3.37	67.7
Jarvis	May 17	70.0	124	2.25	279
Cracker	May 16	20.0	9.2	2.72	24.9
	Aug. 10	15.5	6.2	1.62	10.1
McIntyre	May 22	25.5	12.9	2.79	36.0
Brook's	July 11, 1977	18.0	14.4	2.49	35.8
	Aug. 14, 1978	6.0	7.4	1.13	8.3
Ten Mile	July 11, 1977	17.5	8.9	1.86	16.6
	Aug. 13, 1978	8.0	3.2	1.82	5.8
Strawberry	Aug. 12	11.5	4.7	1.47	6.9
Morley	Aug. 12	75.0	224	1.12	251
Smart	Aug. 13	83.0	201	1.03	207
Screw	Aug. 13	23.0	18.3	1.38	25.2
Rancheria	June 8, 1977	222	948	5.48	5,160
	July 13	202	687	3.32	2,280
	July 27	198	653	3.09	2,020
L. Rancheria	June 1	118	489	5.30	2,590
	July 12	114	368	4.38	1,610
	Aug. 12, 1978	100	196	2.05	1,630

TABLE 3 - SUSPENDED SEDIMENT AND DISCHARGE IN THE YUKON TERRITORY AND
AT A NUMBER OF ADJACENT SITES IN BRITISH COLUMBIA

Stream	Date	Total Concentration (mg/L)	Discharge (cfs)
Aishihik River near Whitehorse	June 15, 1972	219	2,020
Alsek River above Bates River	July 16, 1974	408	19,600
	Sep. 4	1,586	23,700
	May 2, 1975	50	1,760
	June 2	270	10,100
	July 16	1,171	34,000
	Aug. 12	146	17,160
	Sep. 4	104	11,600
	Oct. 10	93	6,810
	June 8, 1976	116	9,560
	Aug. 13	772	25,000
	Aug. 25	233	16,600
	Oct. 20	89	3,690
	May 10, 1977	65	3,340
	June 22	95	17,000
	July 26	511	24,600
Big Creek at Alaska Hwy.	July 13	14	603
Brooks Brook at Alaska Hwy.	July 11	4	35.8
Burwash Creek at Alaska Hwy.	June 4, 1978	53	115
Deadmans Creek at Alaska Hwy.	July 28, 1977	3	87
*Donjek River at Alaska Hwy.	May 16	588	826
	June 23	1,731	4,110
	July 14	3,678	8,810
	Aug. 10	4,170	13,900
	Sep. 29	35	1,310
	June 27, 1978	2,265	4,980
	June 28	1,986	5,180
	June 29	1,801	4,930
	June 30	2,467	5,380

*Average of several samples in the braided cross-section

TABLE 3 - SUSPENDED SEDIMENT AND DISCHARGE IN THE YUKON TERRITORY AND
AT A NUMBER OF ADJACENT SITES IN BRITISH COLUMBIA (Cont'd)

Stream	Date	Total Concentration (mg/L)	Discharge (cfs)
*Donjek River at Alaska Hwy.	July 17, 1978	2,932	8,700
	July 18	3,185	8,840
	July 19	3,320	9,100
	July 20	6,843	11,900
	July 21	5,074	13,200
	Aug. 2	5,545	13,400
	Aug. 3	6,424	15,200
	Aug. 4	5,966	16,500
	Aug. 5	6,099	17,100
	Aug. 6	10,726	22,800
Duke River at Alaska Hwy.	June 28, 1978	75	334
	July 19	209	539
Hyland River near Lower Post	June 1, 1972	572	39,900
Kechika River	June 6	245	20,800
Liard River at Lower Crossing	June 15, 1968	163	
Liard River at Upper Crossing	May 31, 1972	291	84,300
Liard River at Lower Crossing	June 2	822	273,000
Liard River at Upper Crossing	Dec. 11, 1974	15	5,280
Liard River at Upper Crossing	June 24, 1975	53	45,300
Little Rancheria at Alaska Hwy.	July 12, 1977	10	1,610
Rancheria River at Alaska Hwy.	July 27	2	2,010
M'Clintock River near Whitehorse	July 12	33	-
Mendenhall River at Alaska Hwy.	June 8, 1978	399	126
Ogilvie River at Dempster Hwy.	June 18, 1974	3	2,530
	Dec. 7	7	87
Pelly River at Pelly Crossing	June 5, 1968	204	56,700
	June 10, 1970	350	79,700
	June 11	355	66,500
	June 28	166	30,300
	July 31	102	34,400

*Average of several samples in the braided cross-section

TABLE 3 - SUSPENDED SEDIMENT AND DISCHARGE IN THE YUKON TERRITORY AND
AT A NUMBER OF ADJACENT SITES IN BRITISH COLUMBIA (Cont'd)

Stream	Date	Total Concentration (mg/L)	Discharge (cfs)
Pelly River at Pelly Crossing	Nov. 25, 1970	11	4,160
	Jan. 20, 1971	5	2,210
	Feb. 16	3	1,610
	Mar. 17	6	1,580
	May 26	291	47,700
	May 27	260	47,200
	June 22	210	50,600
	July 22	61	20,500
	Aug. 1, 1972	309	29,500
	Sep. 6	17	12,500
	Oct. 5	11	9,450
	Mar. 29, 1973	1	1,570
	July 29	40	16,800
	June 19, 1974	158	42,400
	Oct. 16	9	8,250
	Nov. 2	4	6,270
	June 7, 1975	462	91,300
	Aug. 18	37	17,400
	Oct. 10	30	19,600
	June 3, 1976	243	40,200
	Aug. 17	28	15,500
	Oct. 5	15	11,500
	June 22, 1977	114	32,800
	Aug. 8	61	18,200
	Oct. 5	39	16,000
Silver Creek at Alaska Hwy.	June 13, 1978	3,394	80.2
Snag Creek at Alaska Hwy.	June 14	31.5	155
Stewart River at Mouth	June 8, 1968	207	71,800
	Apr. 7, 1975	3	2,180
	June 20	244	79,200


TABLE 3 - SUSPENDED SEDIMENT AND DISCHARGE IN THE YUKON TERRITORY AND
AT A NUMBER OF ADJACENT SITES IN BRITISH COLUMBIA (Cont'd)

Stream	Date	Total Concentration (mg/L)	Discharge (cfs)
Stewart River at Mouth	Aug. 13, 1975	26	21,700
	Sept. 26	57	25,400
	Aug. 12, 1976	17	17,200
	Aug. 4, 1977	10	19,100
	Sep. 29	10	15,100
Stoney Creek at Alaska Hwy.	June 8, 1978	11	17.3
Takhini River near Whitehorse	(No date) 1972	36	-
Ten Mile Creek at Alaska Hwy.	July 11, 1977	2	16.6
White River at MP 1169.2	June 21, 1972	136 (at mouth)	-
	April 30, 1975	85	568
	May 11, 1977	332	1,430
	June 23	1,213	8,100
	July 13	3,593	13,400
	July 28	4,255	15,800
	Aug. 9	8,683	19,100
	Aug. 17	7,041	17,100
	Sep. 28	70	1,990
	June 5, 1968	229	223,000
Yukon River at Dawson	June 21, 1971	736	216,000
	Aug. 27	300	117,000
	June 12, 1974	177	156,000
	Dec. 4	13	26,500
	June 17, 1975	219	216,000
	Aug. 13	263	151,000
	Sep. 22	222	136,000
	June 11, 1976	1,166	228,000
	Oct. 1	53	72,500
	Aug. 4, 1977	612	147,000
	Sep. 30	108	90,900
	July 12	36	151,000

TABLE 3 - SUSPENDED SEDIMENT AND DISCHARGE IN THE YUKON TERRITORY AND
AT A NUMBER OF ADJACENT SITES IN BRITISH COLUMBIA (Cont'd)


Stream	Date	Total Concentration (mg/L)	Discharge (cfs)
Yukon River at Dawson	Aug. 3, 1977	17	154,000
Yukon River at Whitehorse	May 4, 1970	9	5,200
	May 22	781	3,920
	June 8	686	6,500
	June 29	868	9,420
	July 20	900	10,200
	July 31	735	12,000
	Aug. 31	850	12,100
	Sep. 30	842	8,370
	Oct. 27	798	7,500
	Nov. 26	858	5,550
	Jan. 5, 1971	0.3	5,160
	Feb. 1	2	4,200
	Mar. 15	2	4,280

Figure 1 - SNAG CREEK AT MP 1208.0

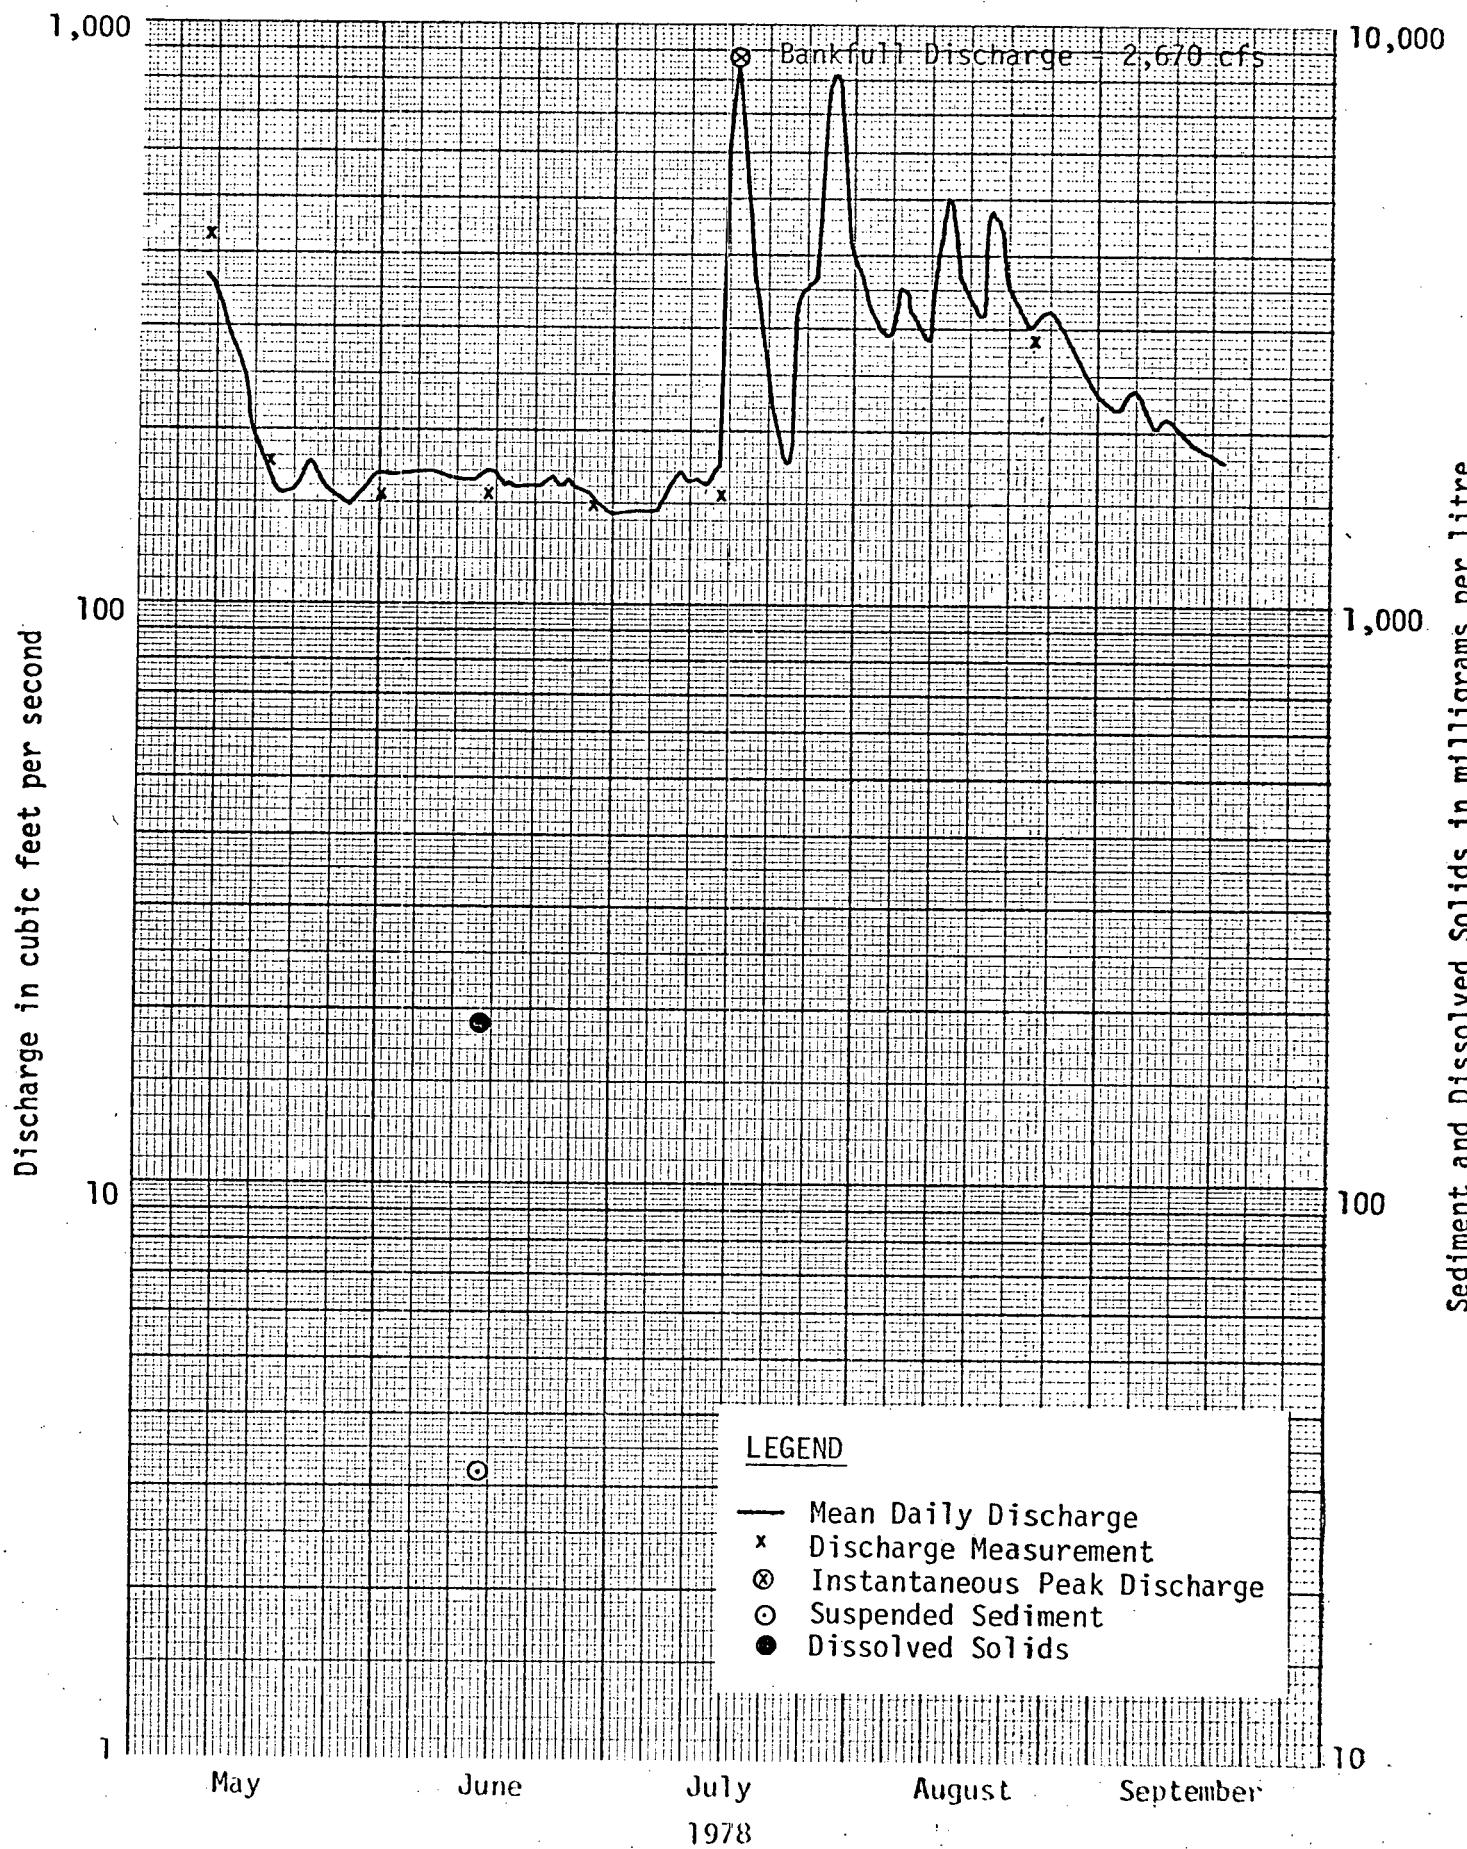

Sediment and Dissolved Solids in milligrams per litre

Figure 2 - DRY CREEK AT MP 1184.0

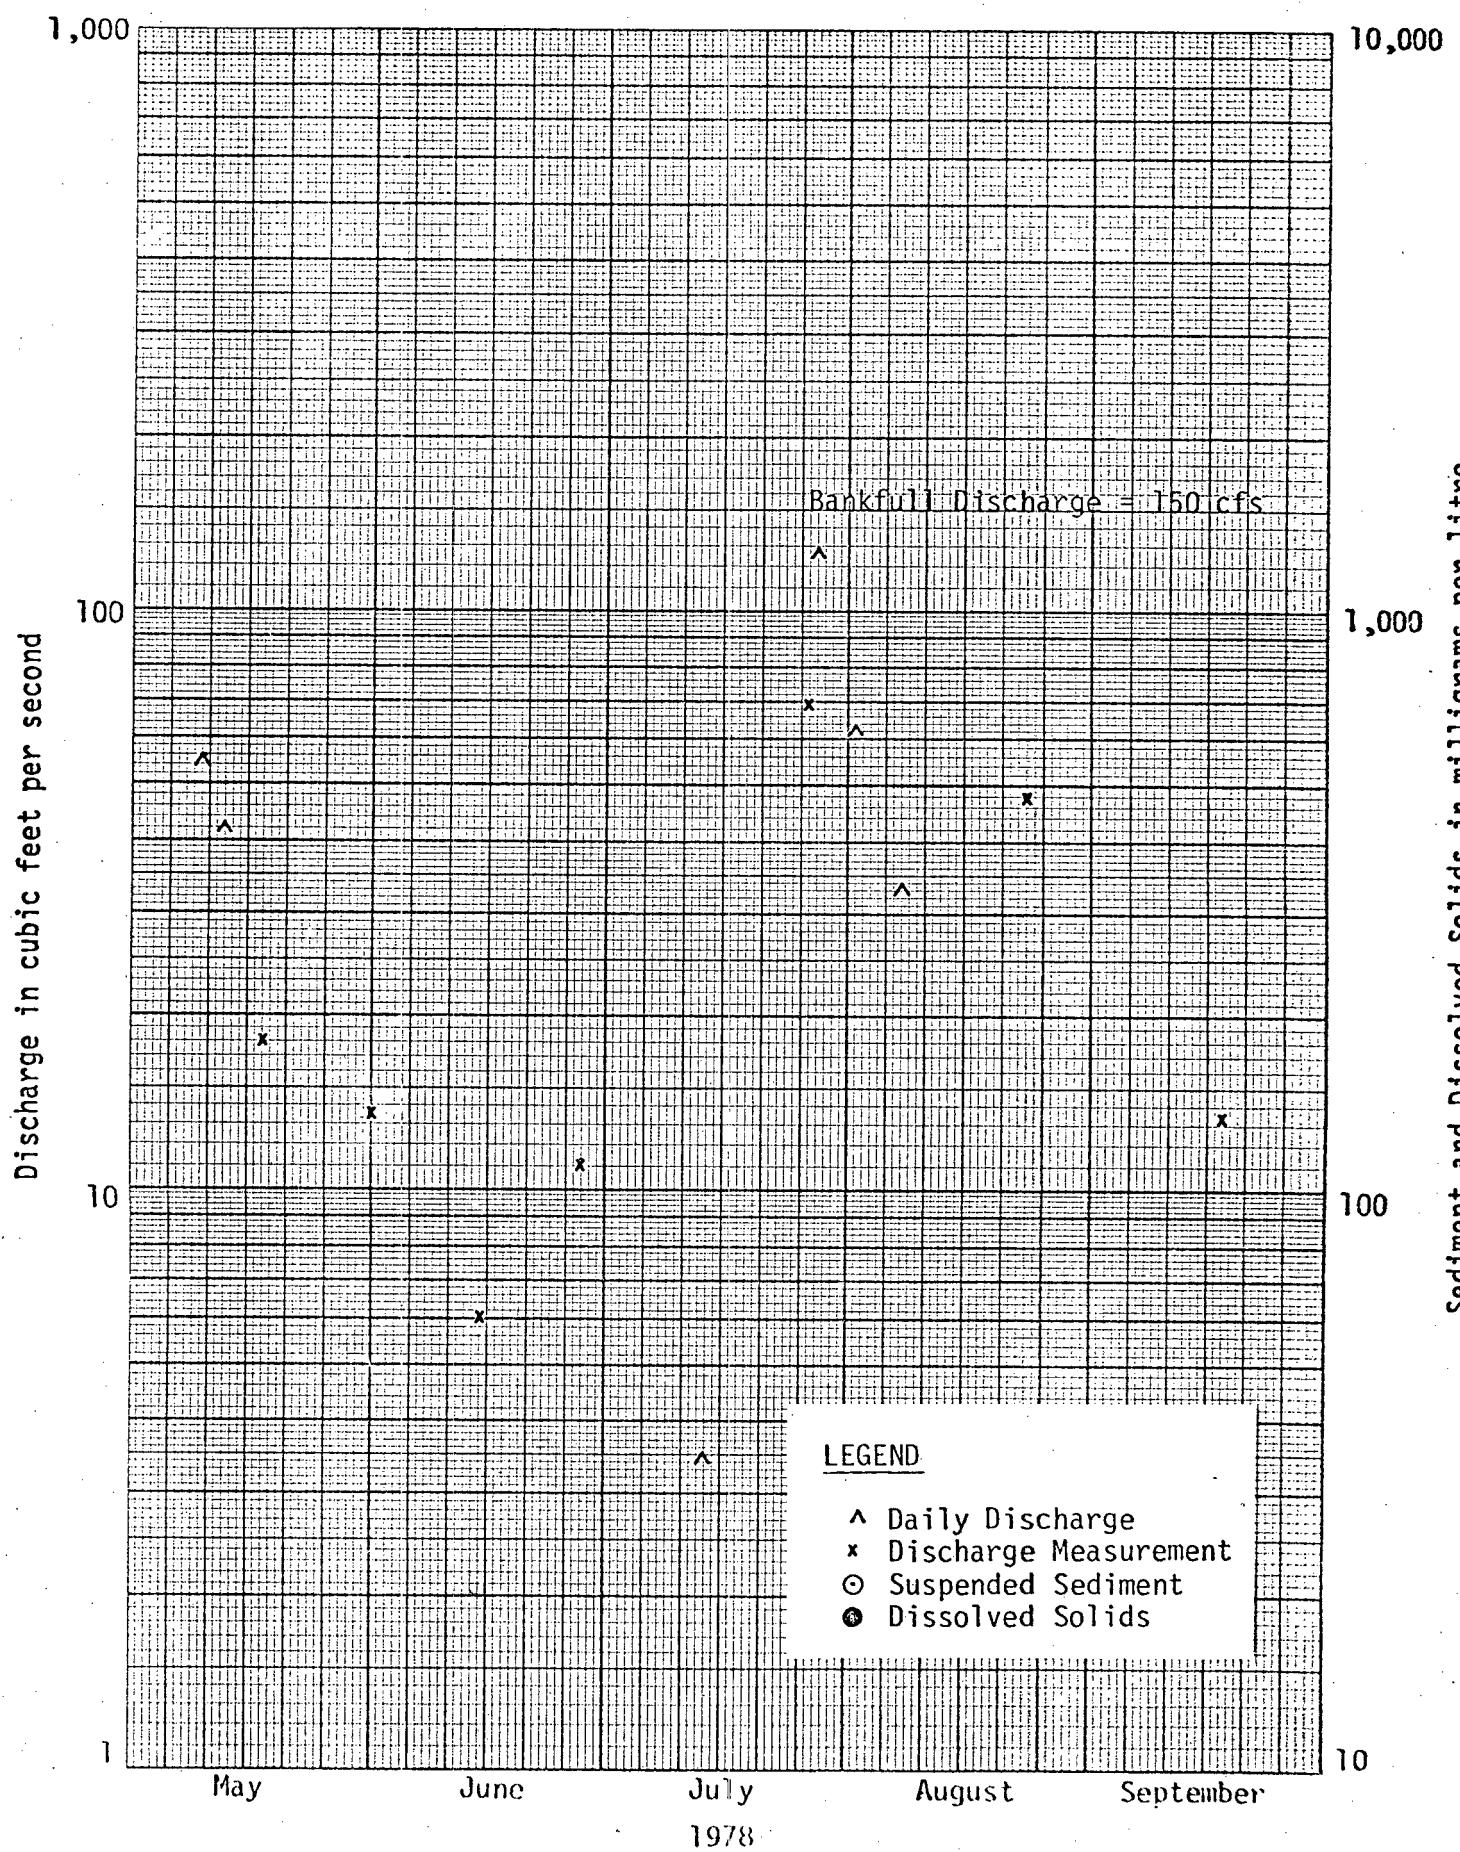

Sediment and Dissolved Solids in milligrams per litre

LEGEND

- ▲ Daily Discharge
- × Discharge Measurement
- Suspended Sediment
- Dissolved Solids

Figure 3 - SANPETE CREEK AT MP 1178.4

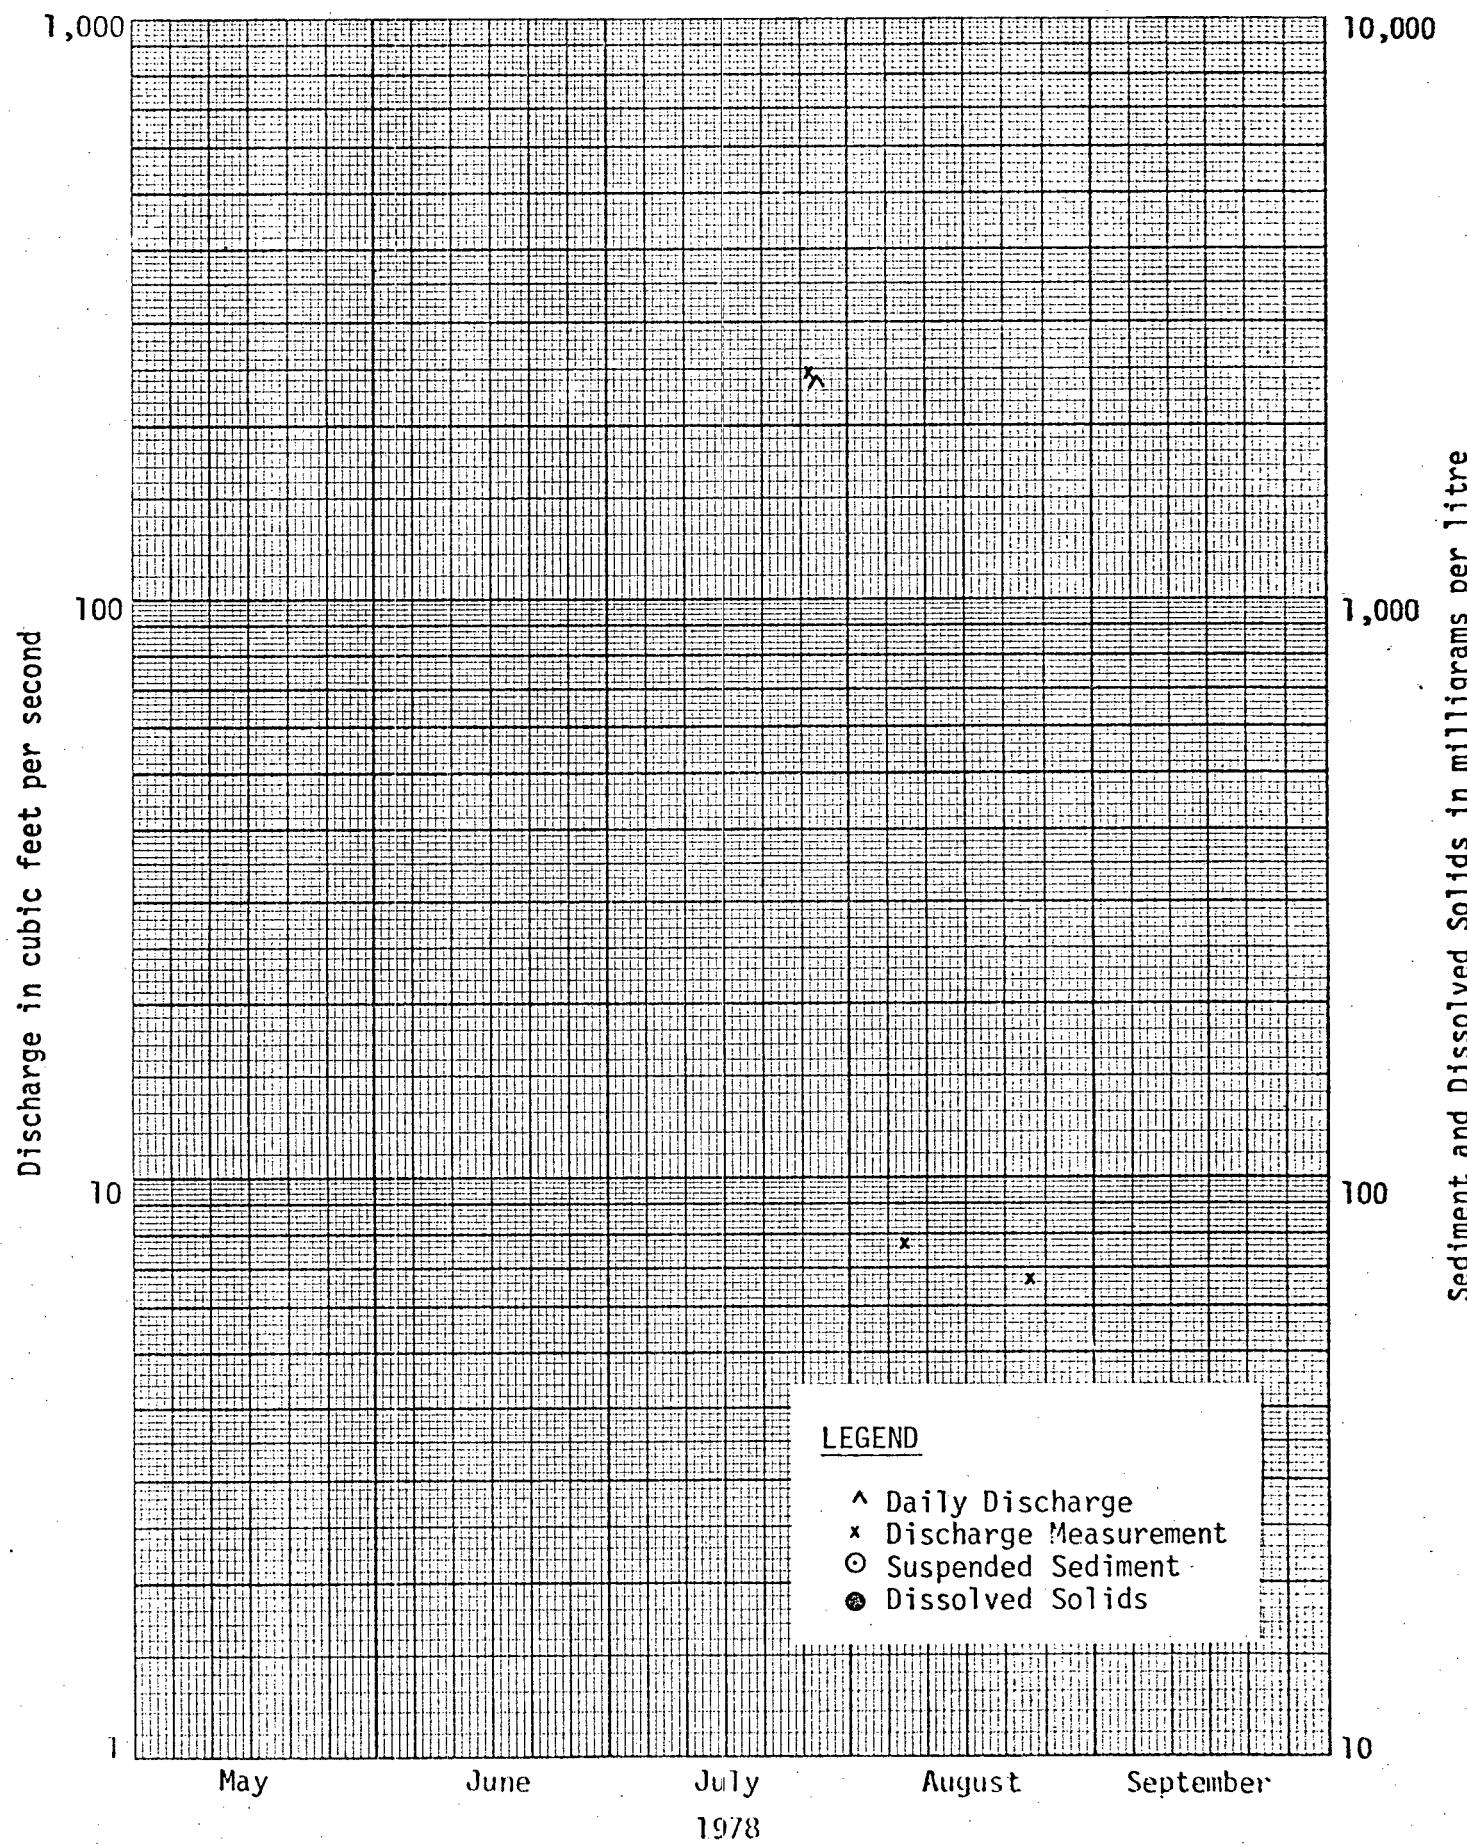


Figure 4 - LONG'S CREEK AT MP 1156.0

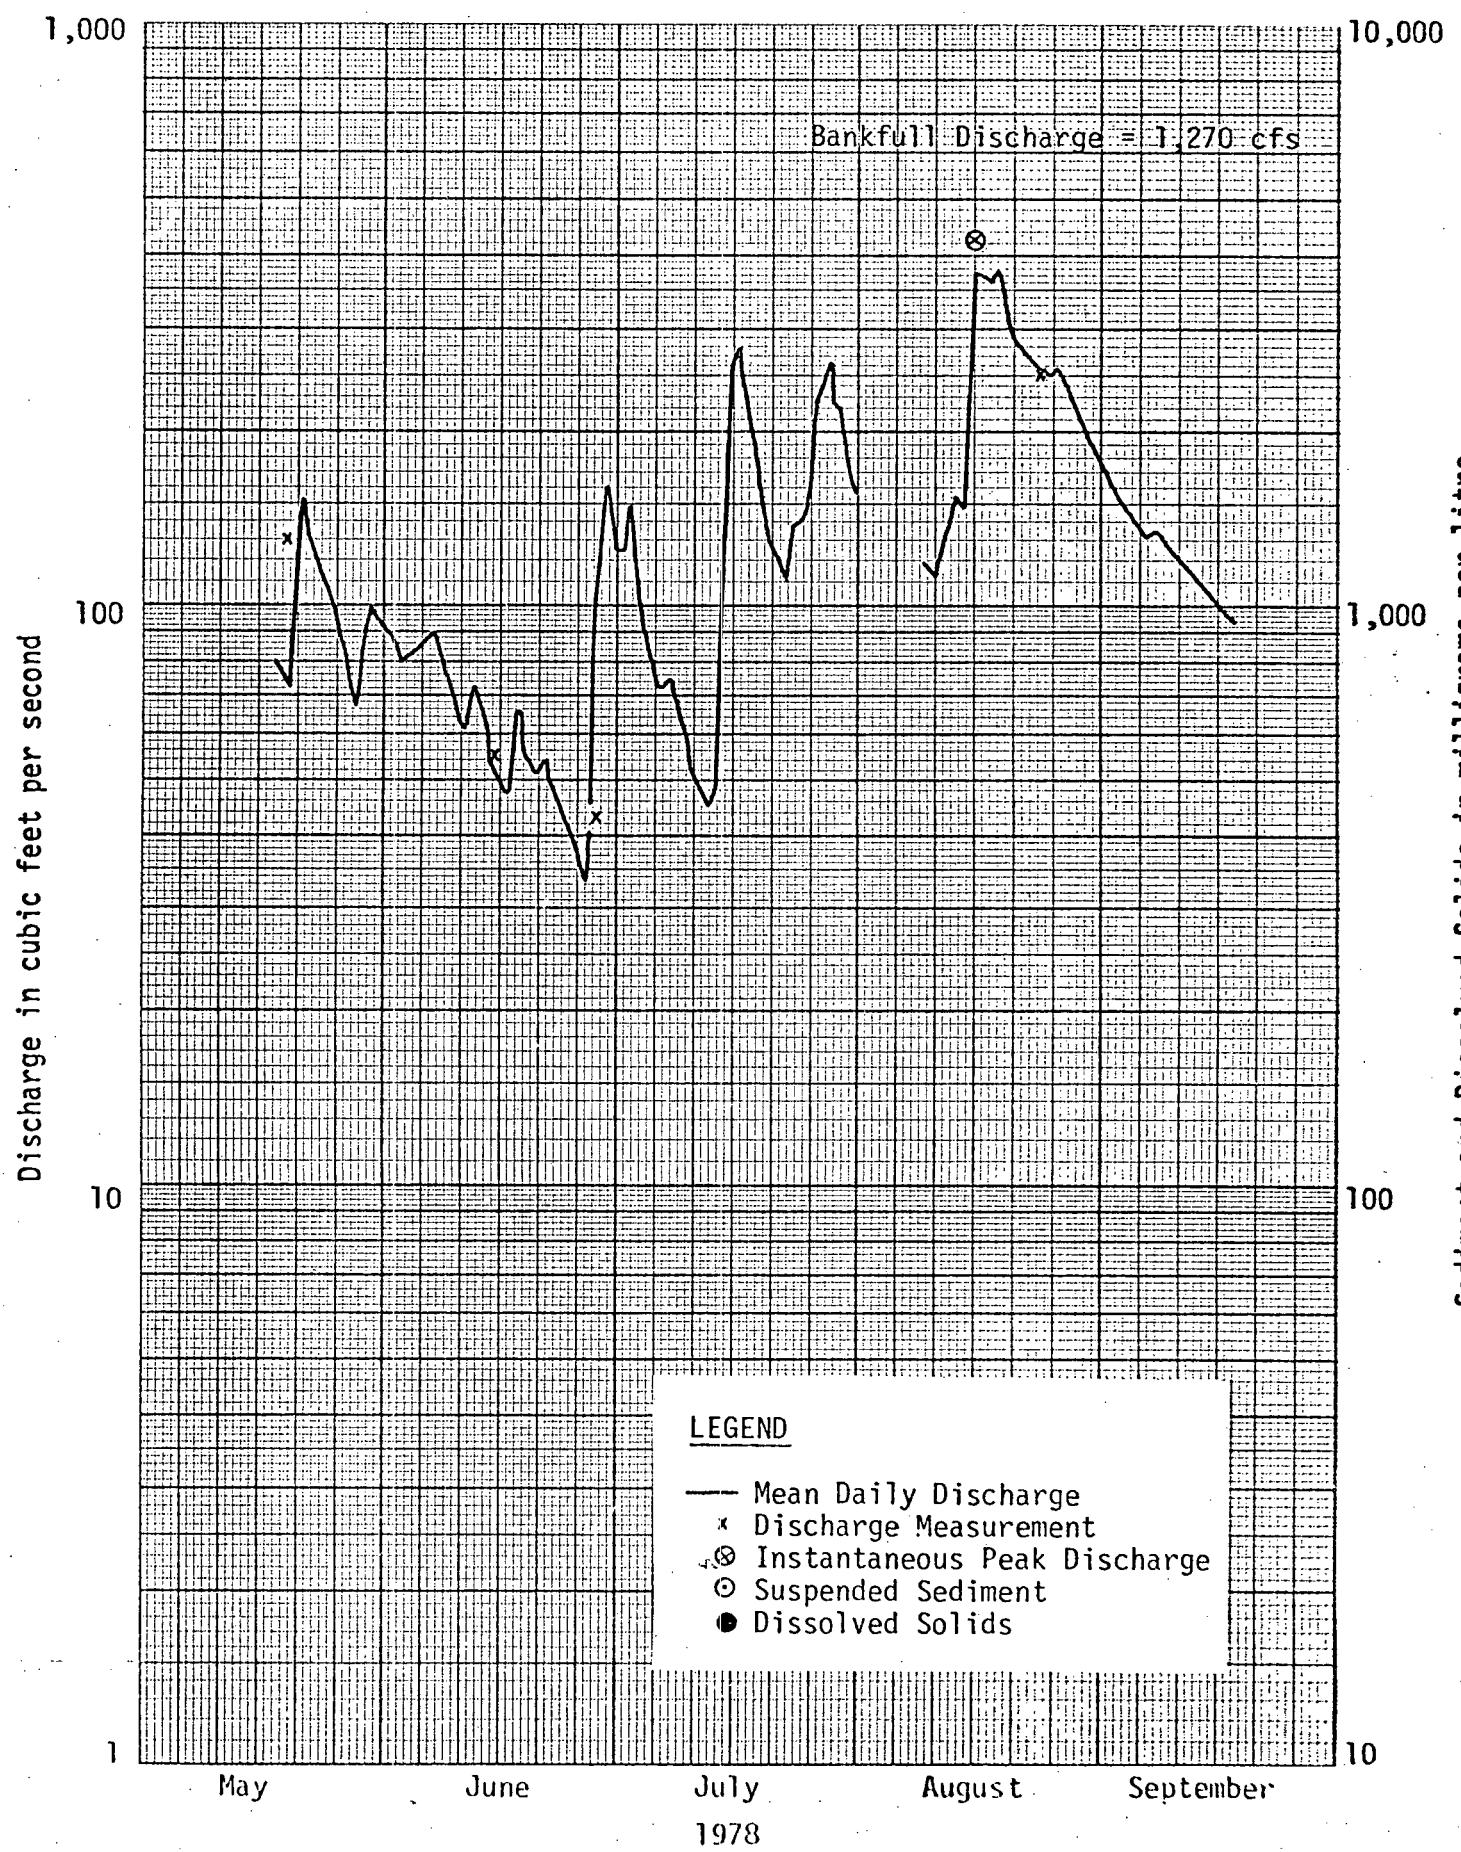
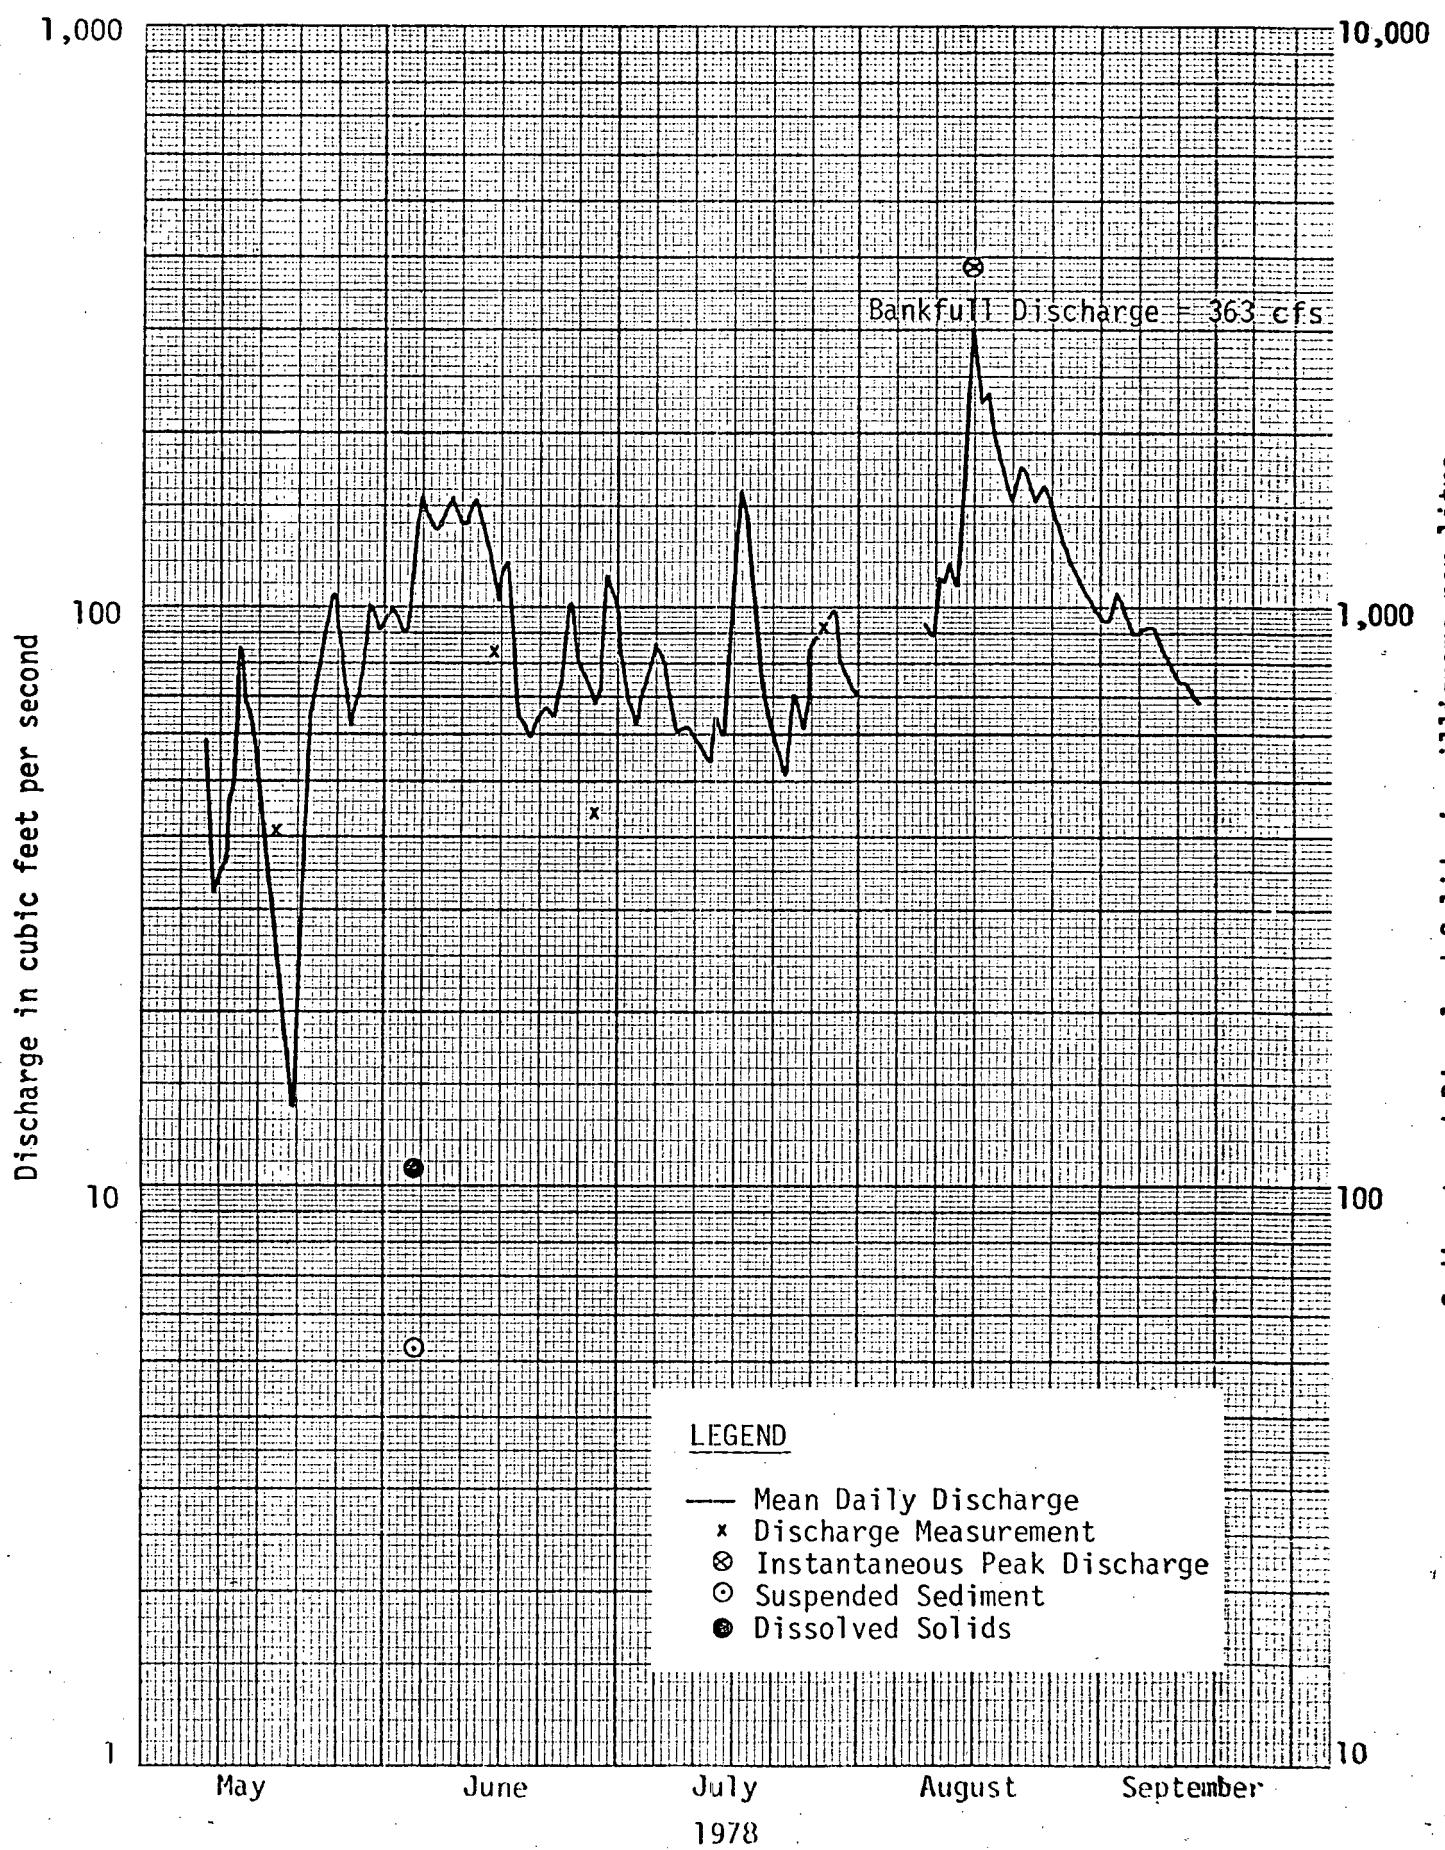


Figure 5 - BURWASH CREEK AT MP 1103.9

Sediment and Dissolved Solids in milligrams per litre

Figure 6 - UNNAMED CREEK AT MP 1082.5



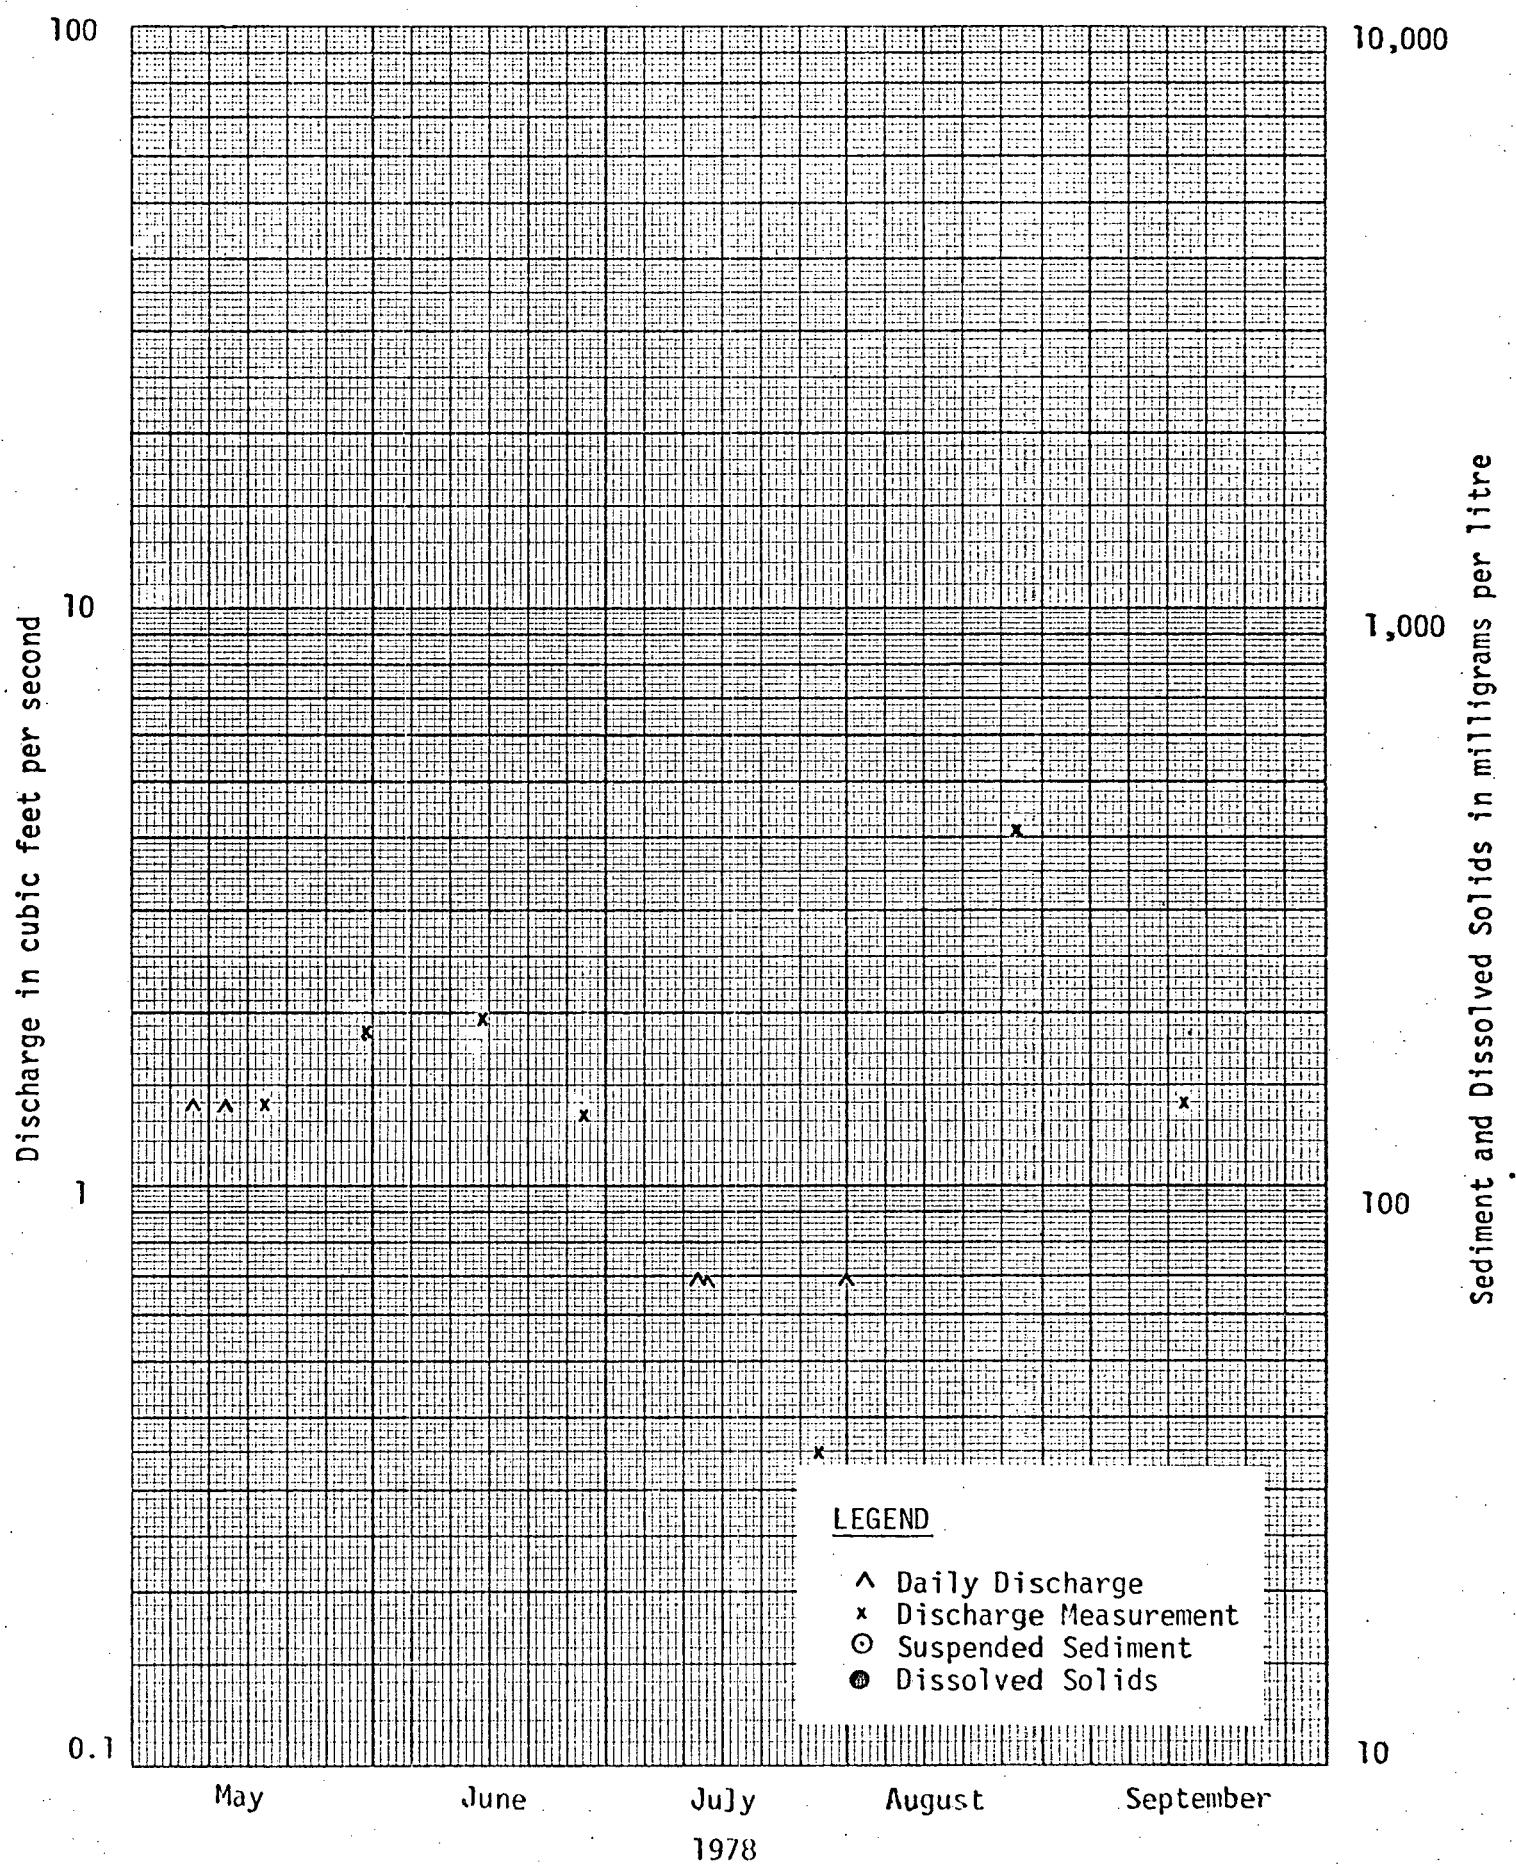


Figure 7 - SILVER CREEK AT MP 1053.6

LEGEND


- ^ Daily Discharge
- x Discharge Measurement
- Suspended Sediment
- Dissolved Solids

Figure 8 - BEAR CREEK AT MP 1022.3

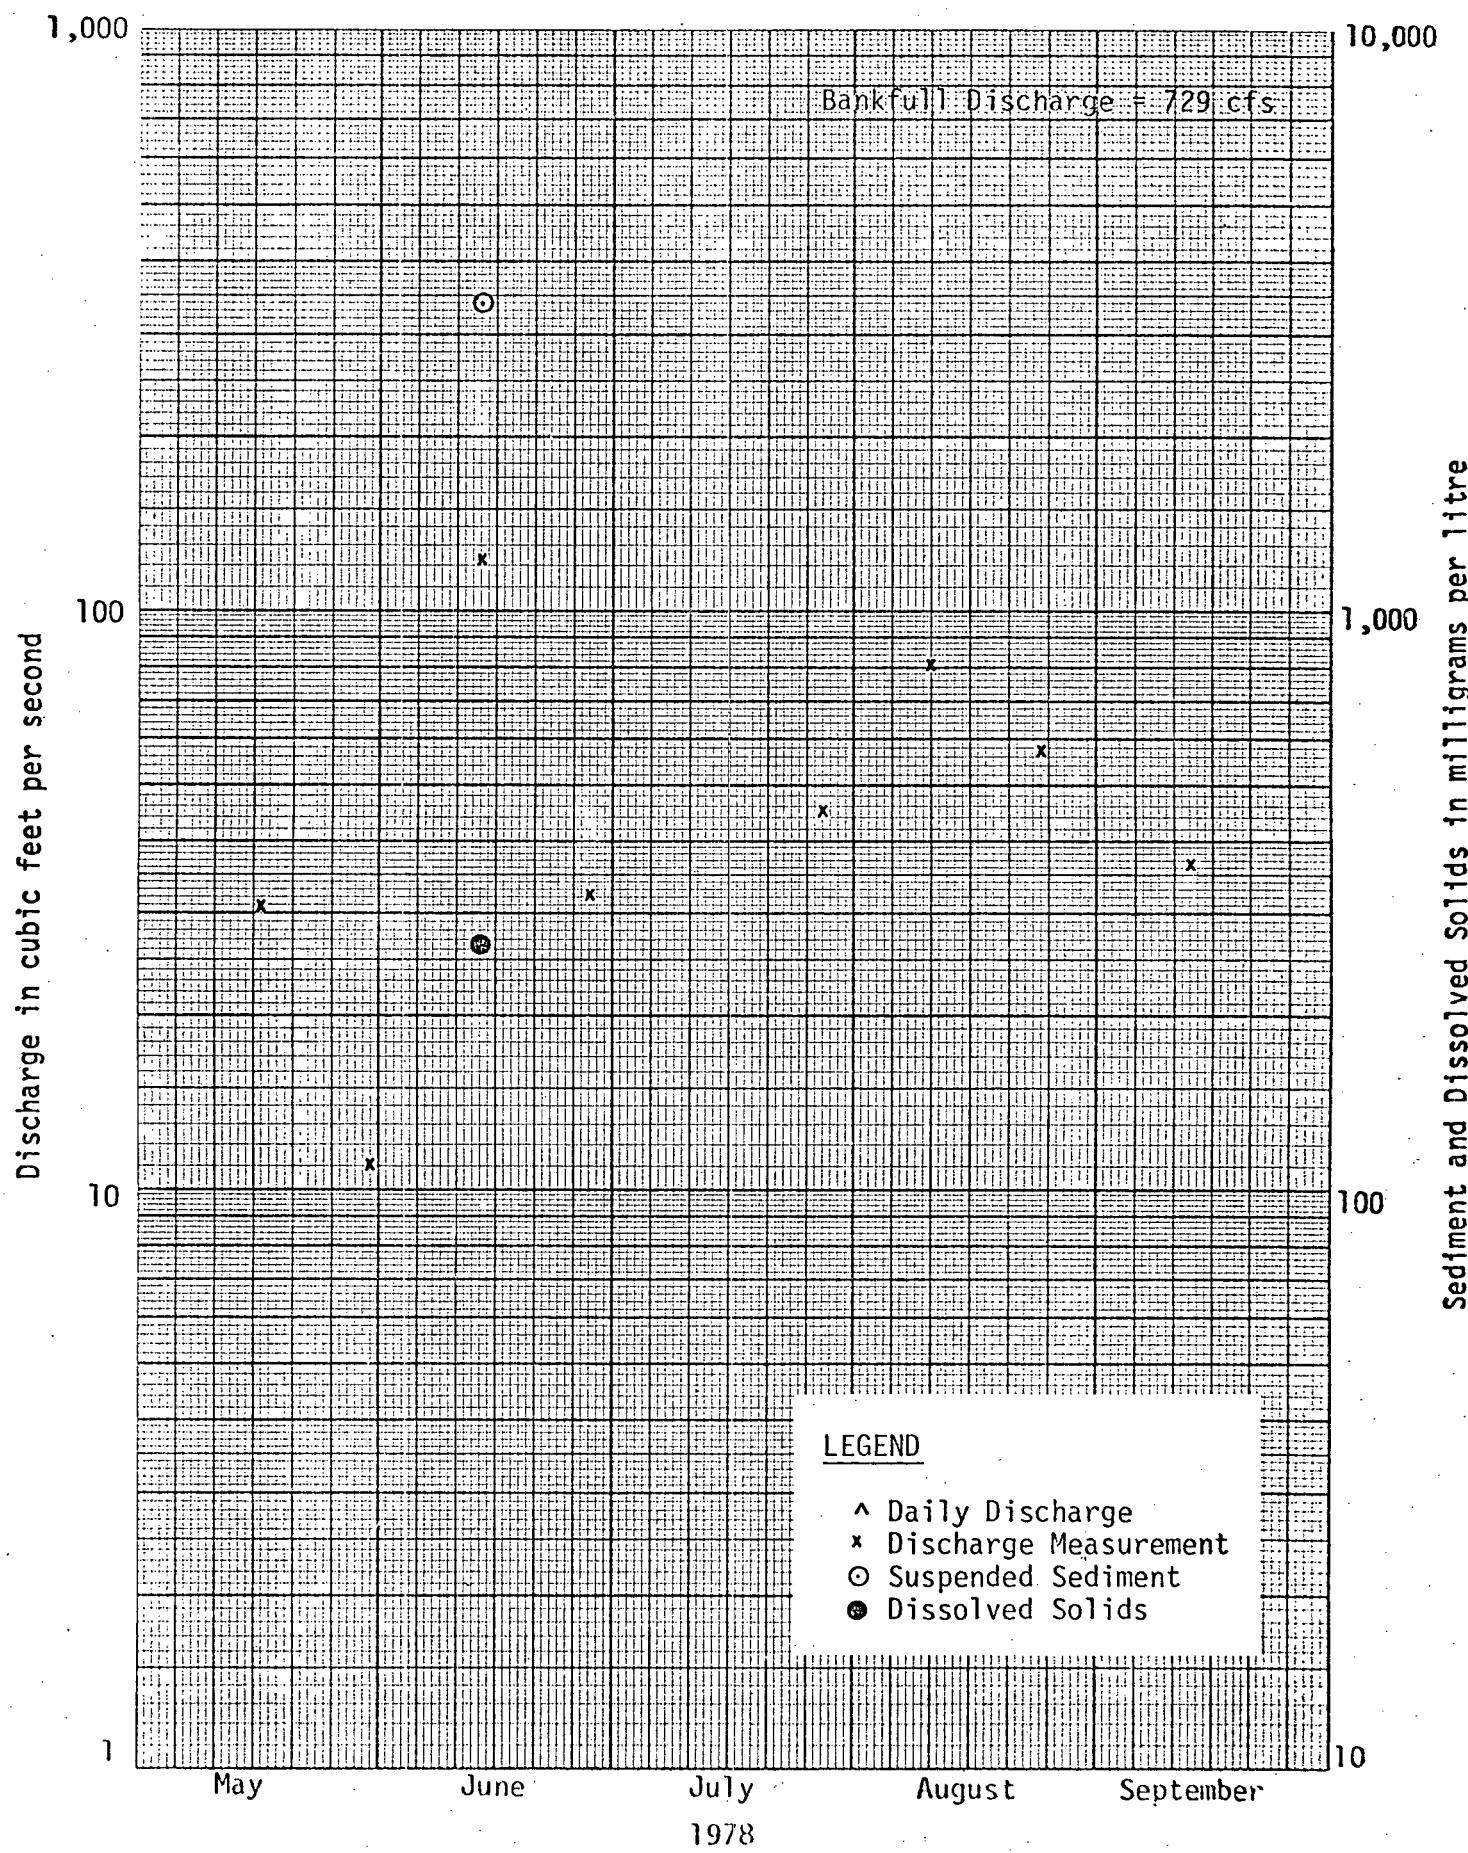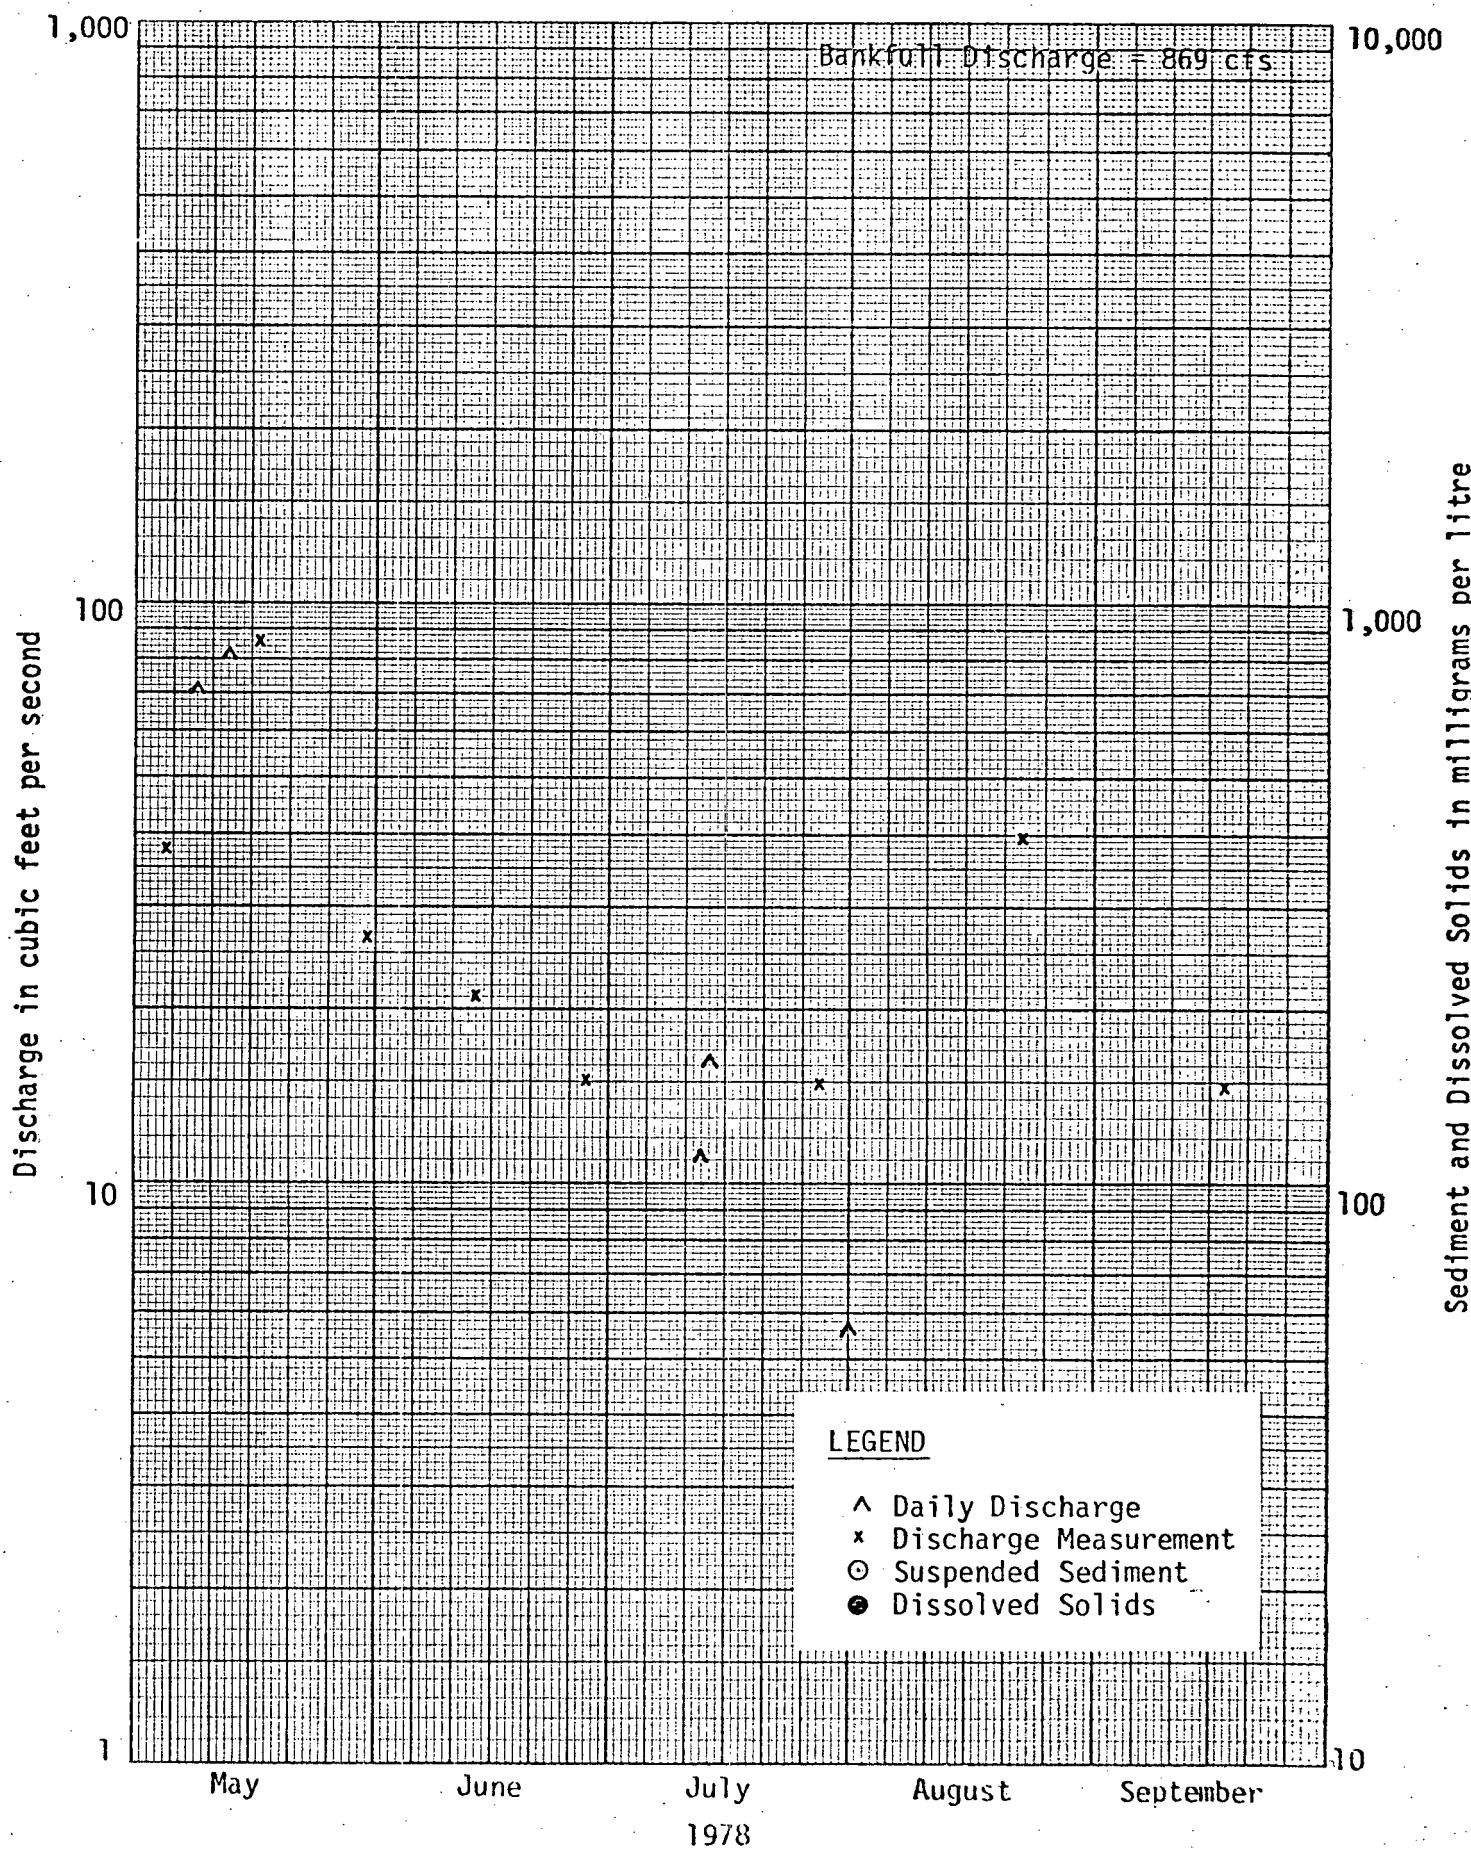


Sediment and Dissolved Solids in milligrams per litre

Figure 9 - MARSHALL CREEK AT MP 1005.6

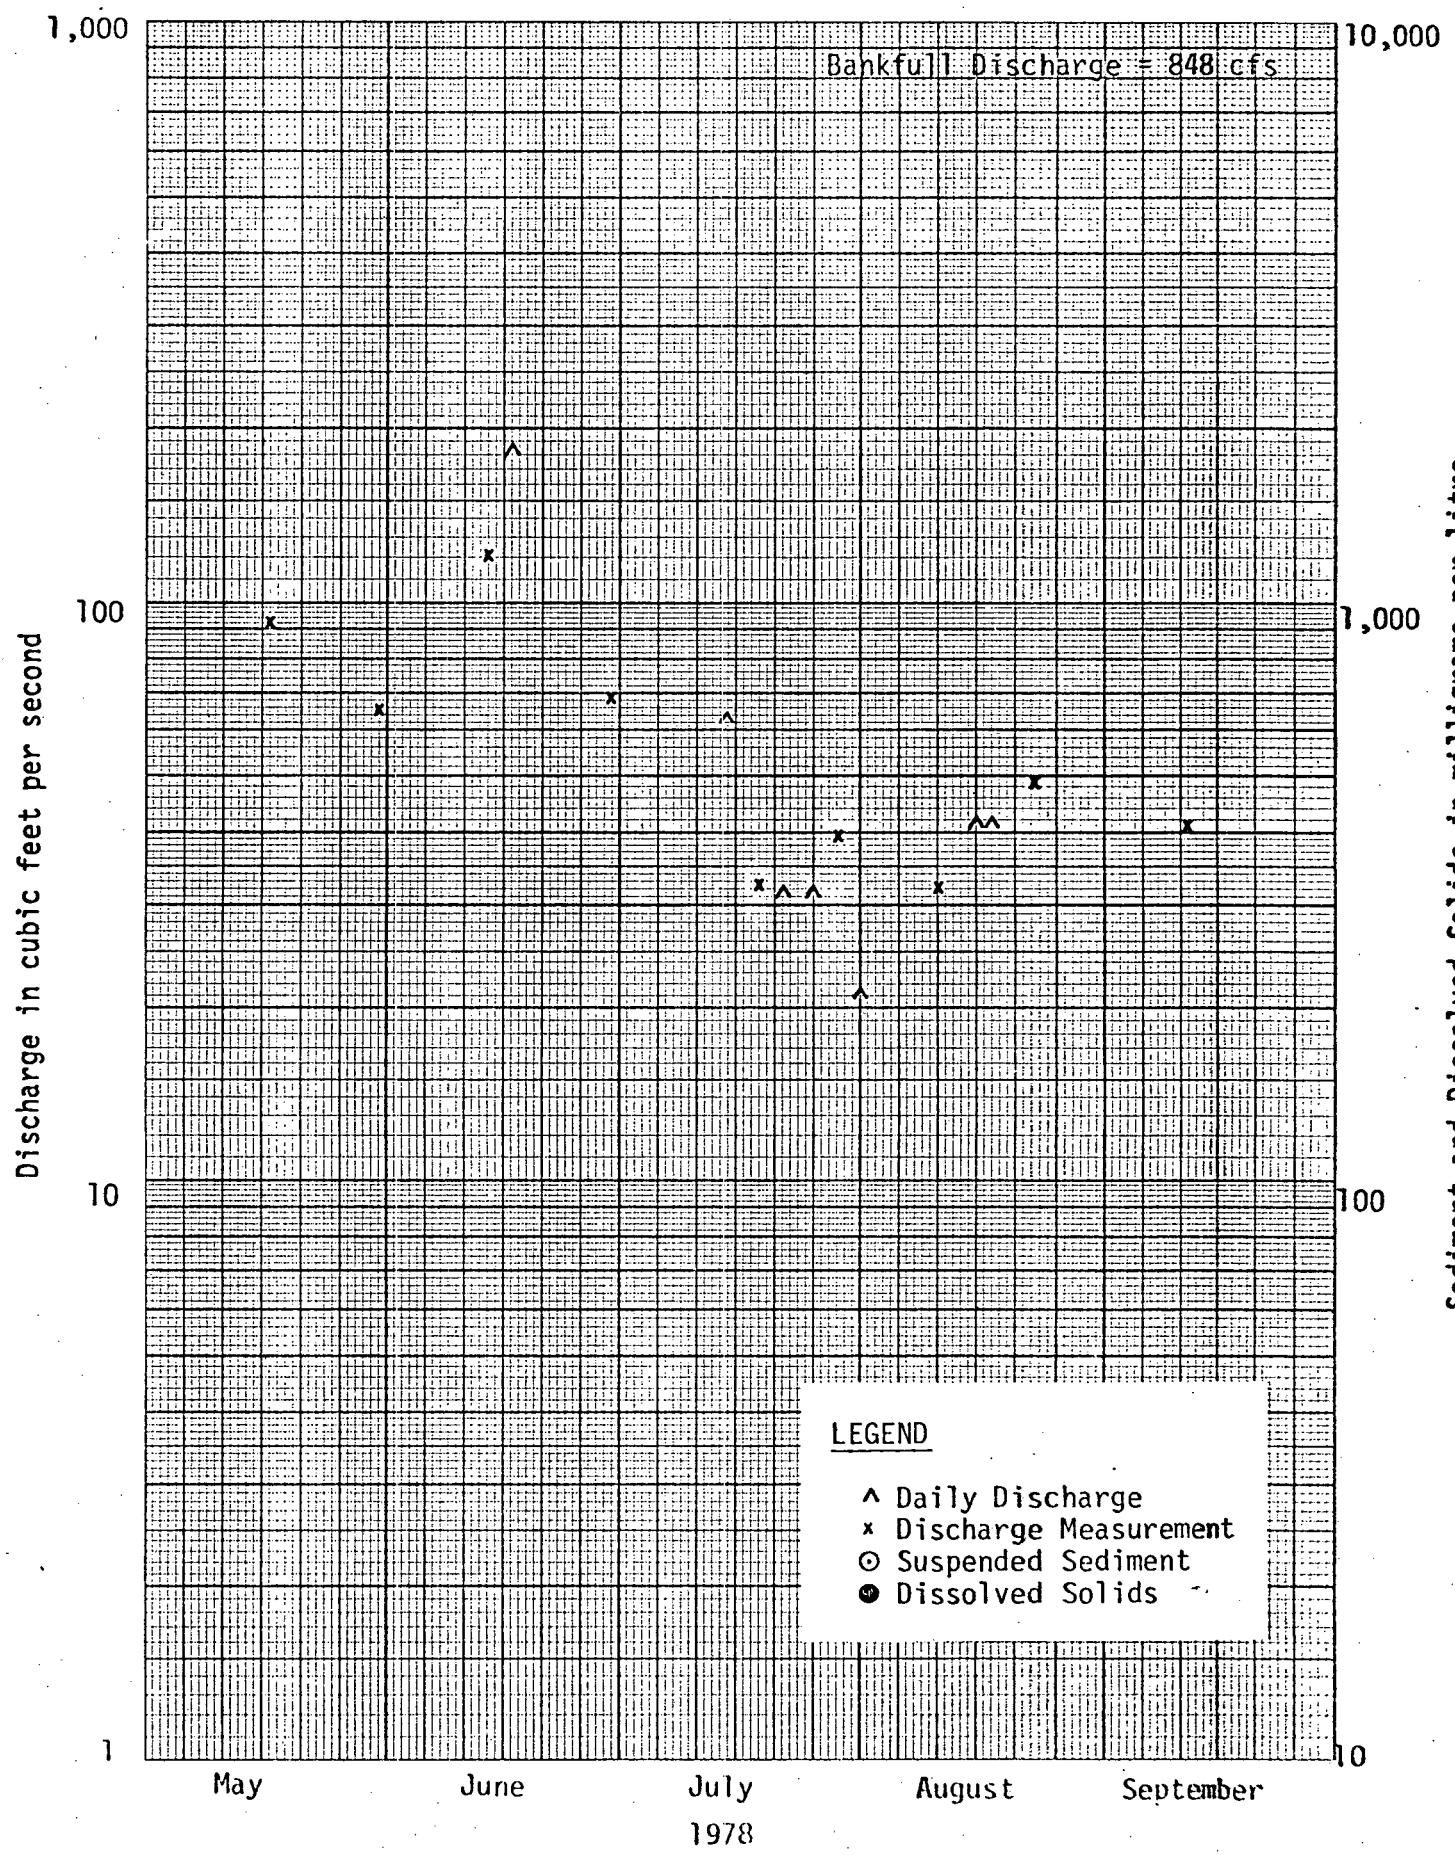

Sediment and Dissolved Solids in milligrams per litre

Figure 10 - MENDENHALL CREEK AT MP 968.0

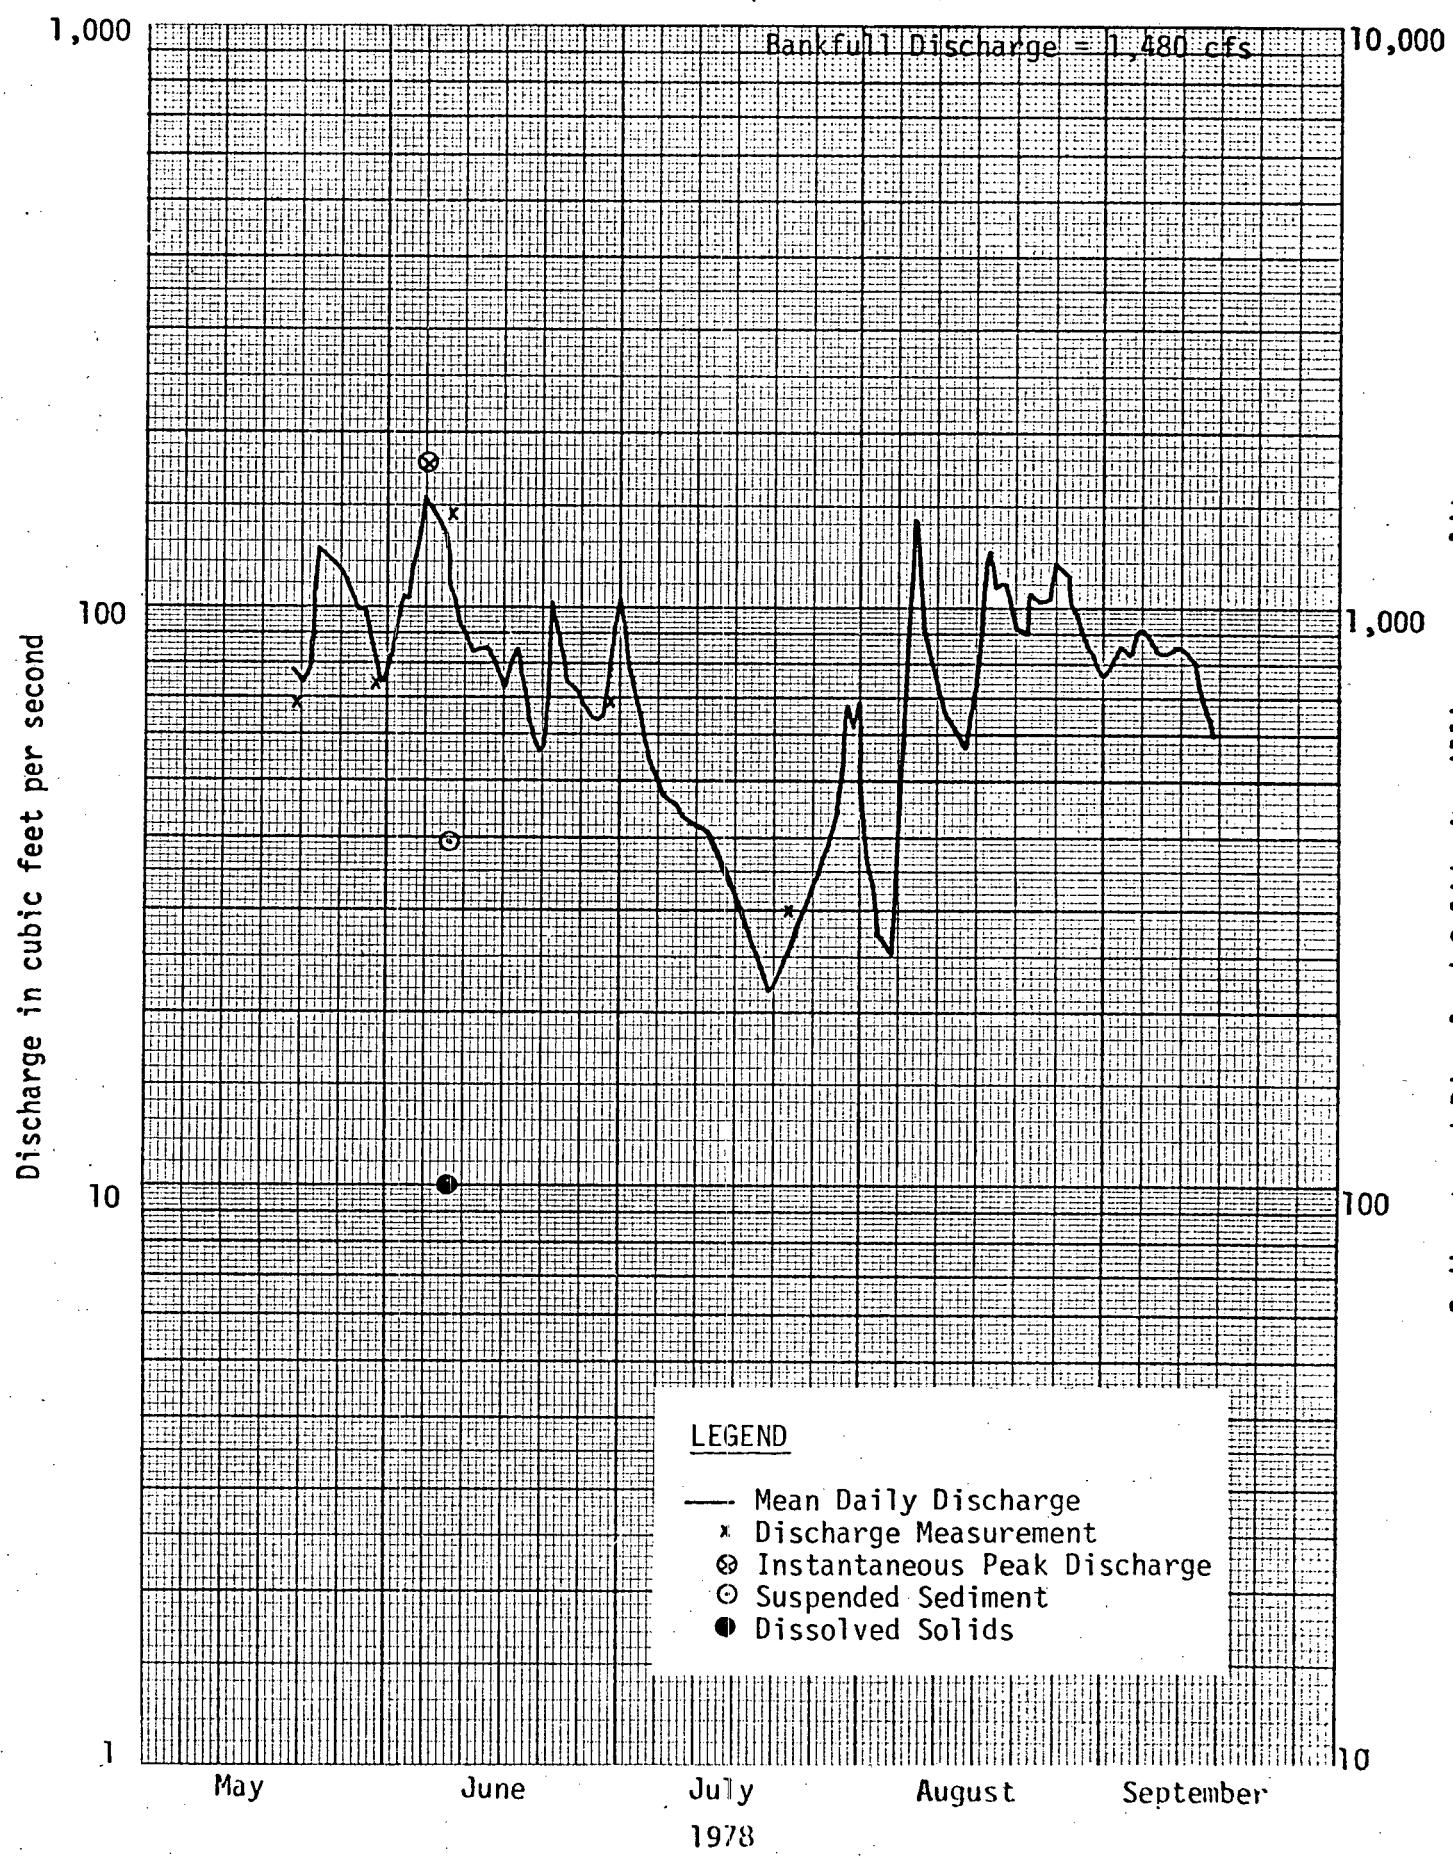

Sediment and Dissolved Solids in milligrams per litre

Figure 11 - STONEY CREEK AT MP 956.0



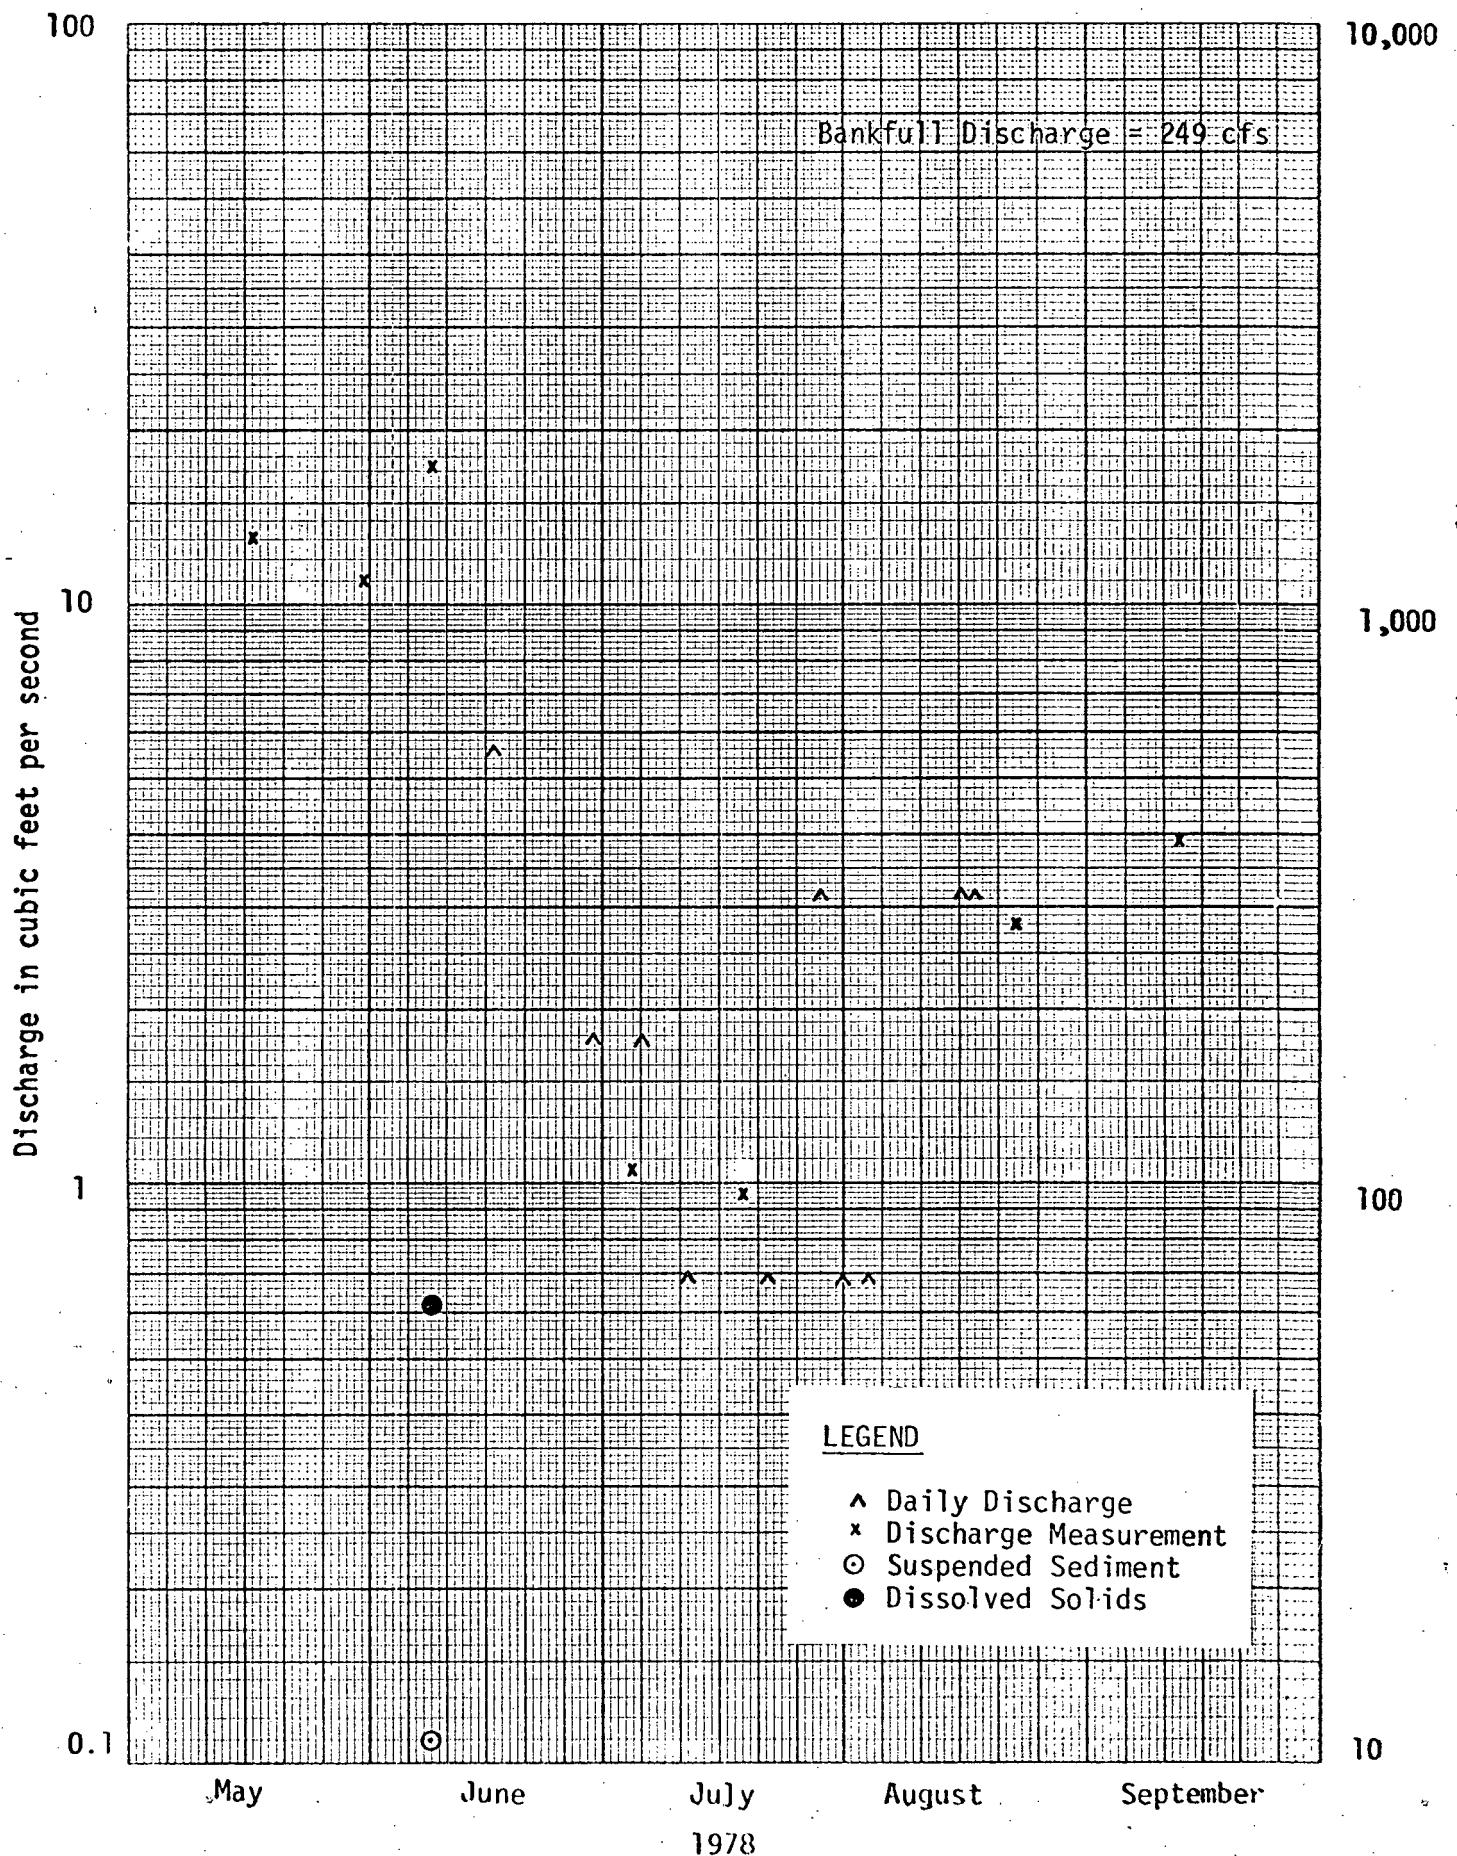


Figure 12 - DEADMANS CREEK AT MP 822.3

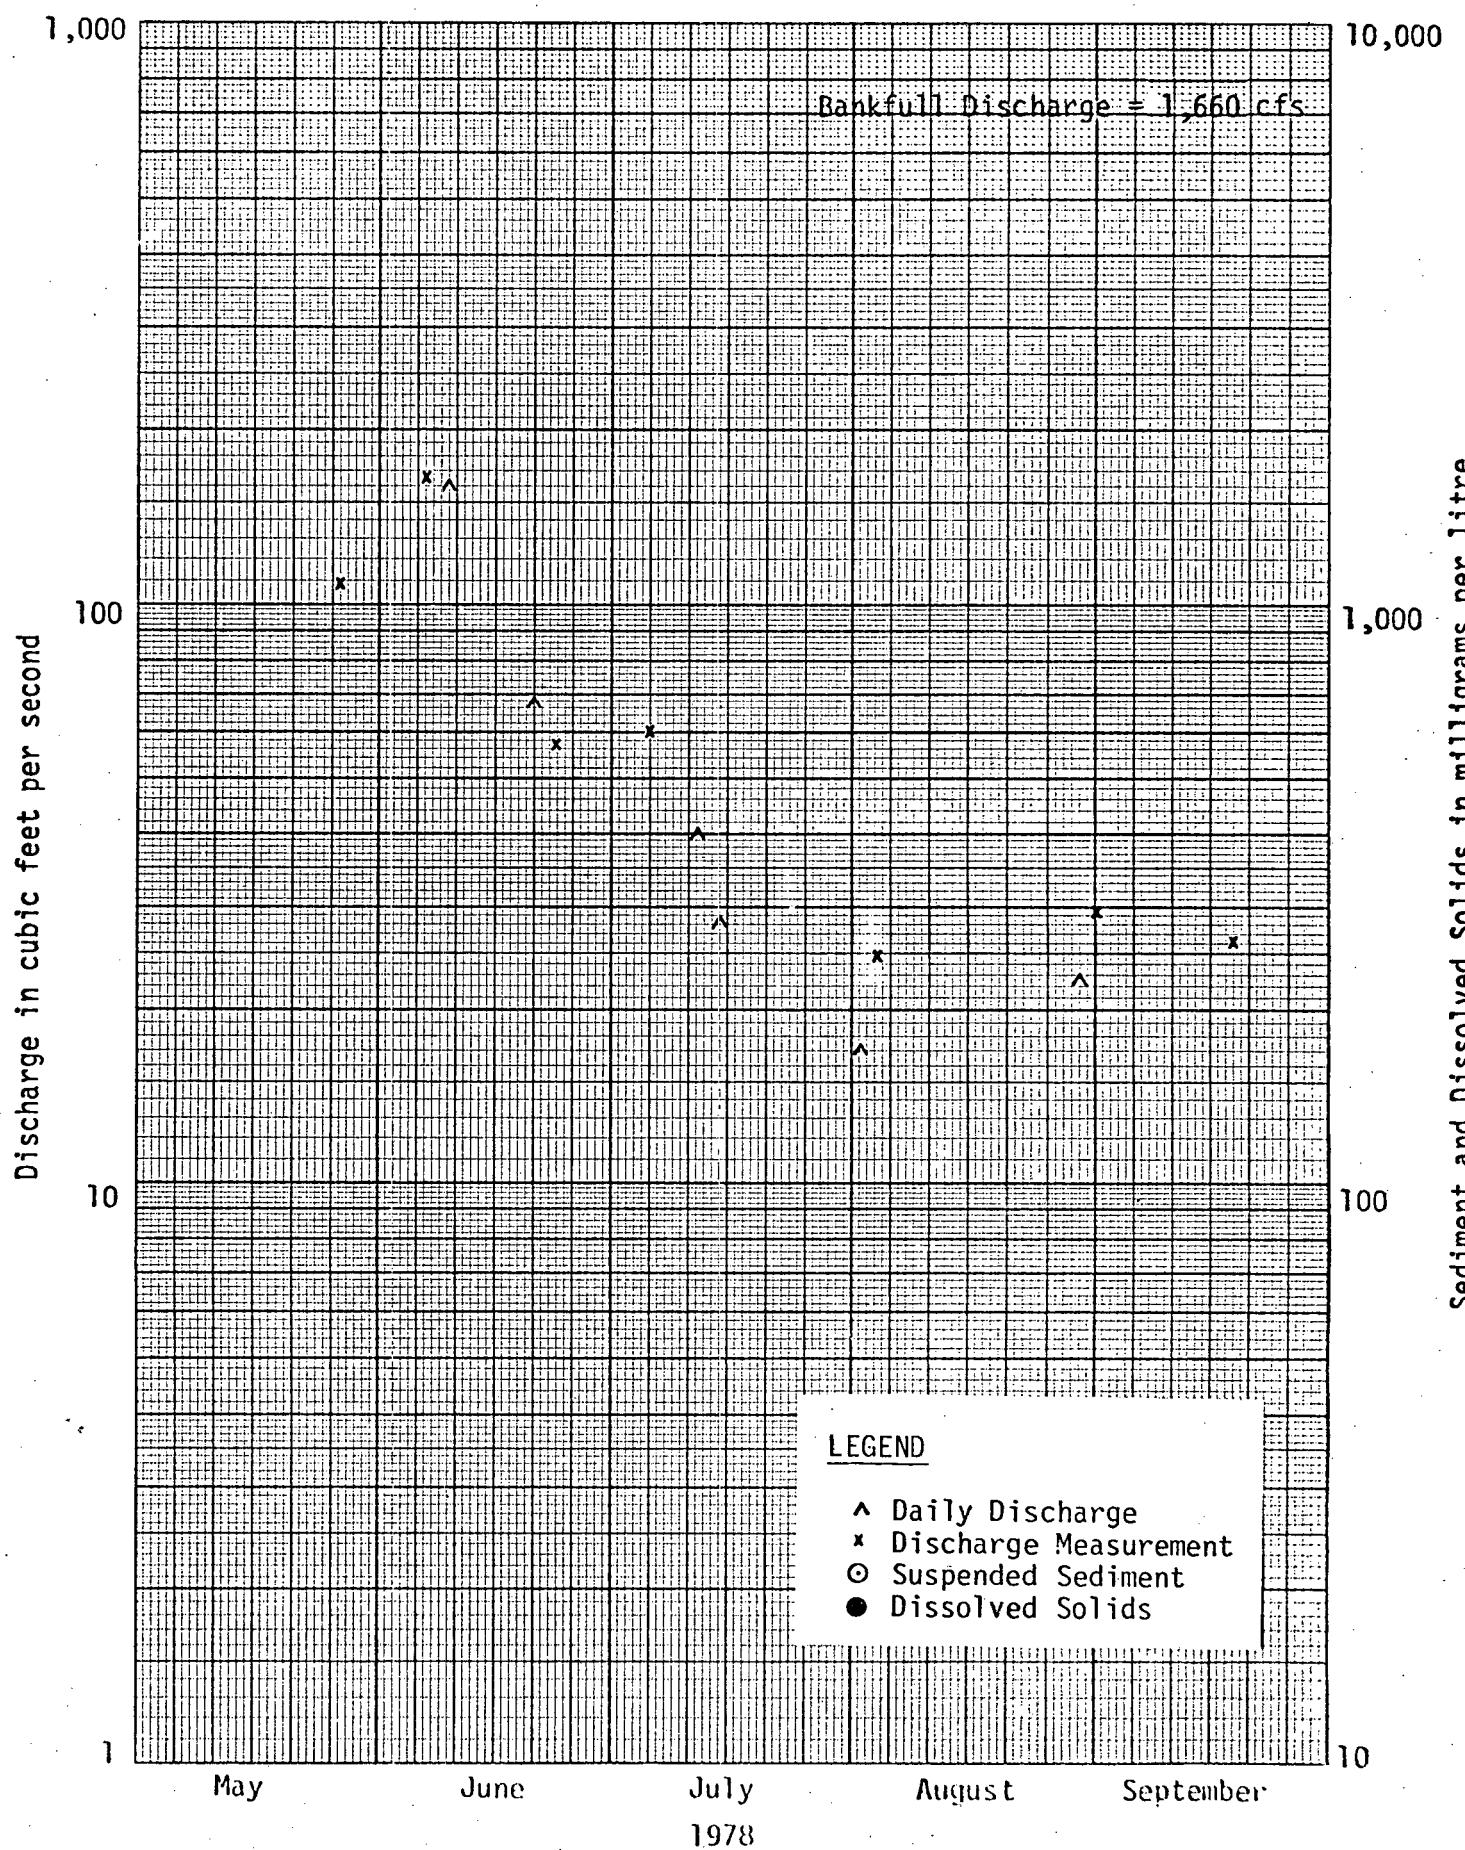

Sediment and Dissolved Solids in milligrams in litre

Figure 13 - LOGJAM CREEK AT MP 751.1

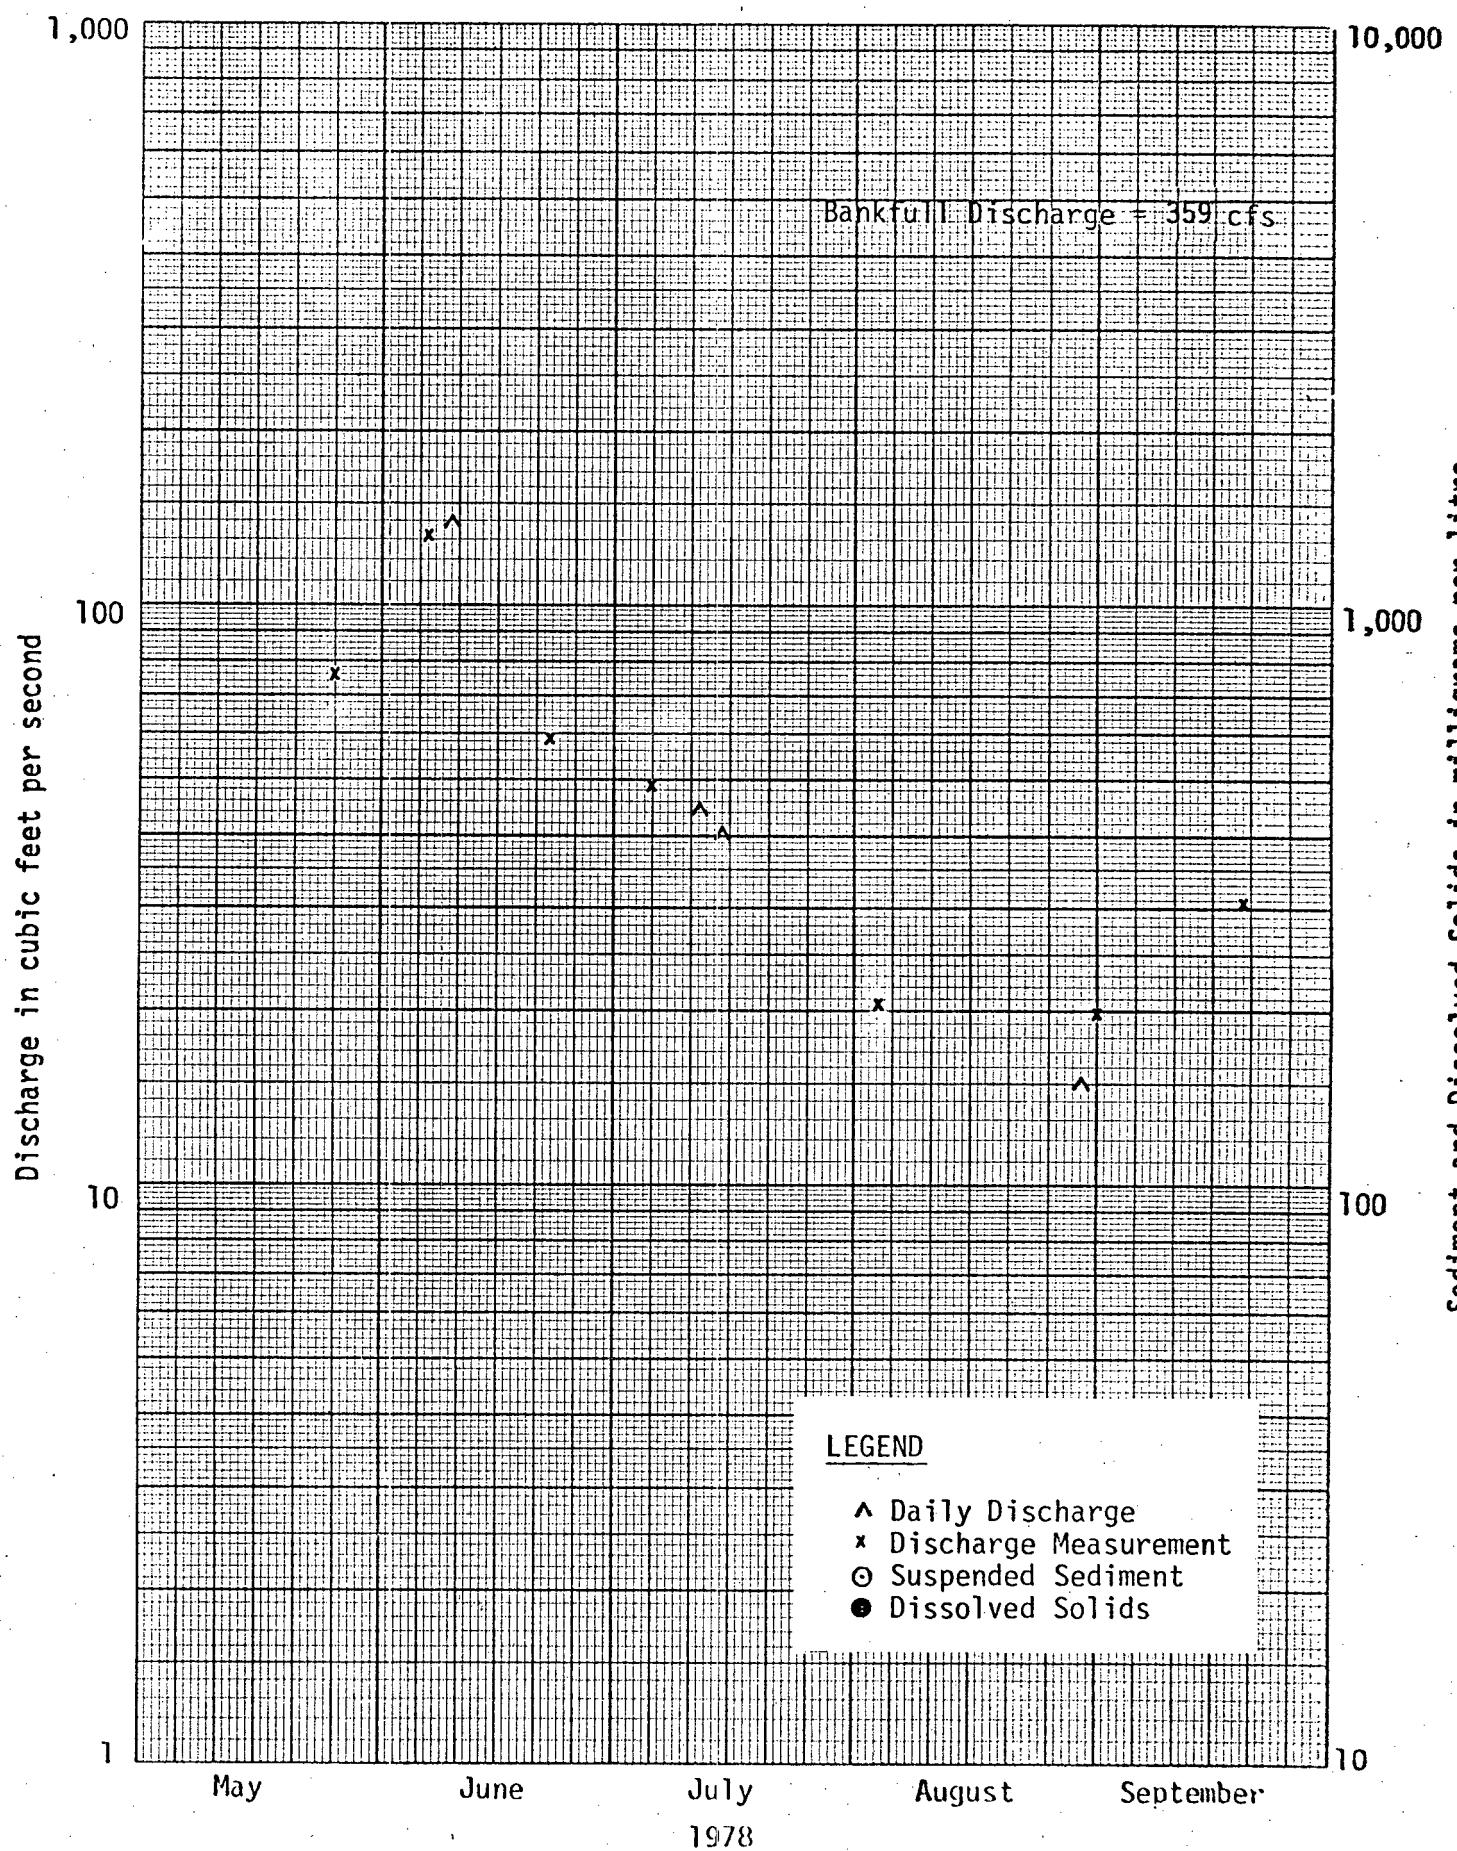

Sediment and Dissolved Solids in milligrams per litre

Figure 14 - PARTRIDGE CREEK AT MP 736.4



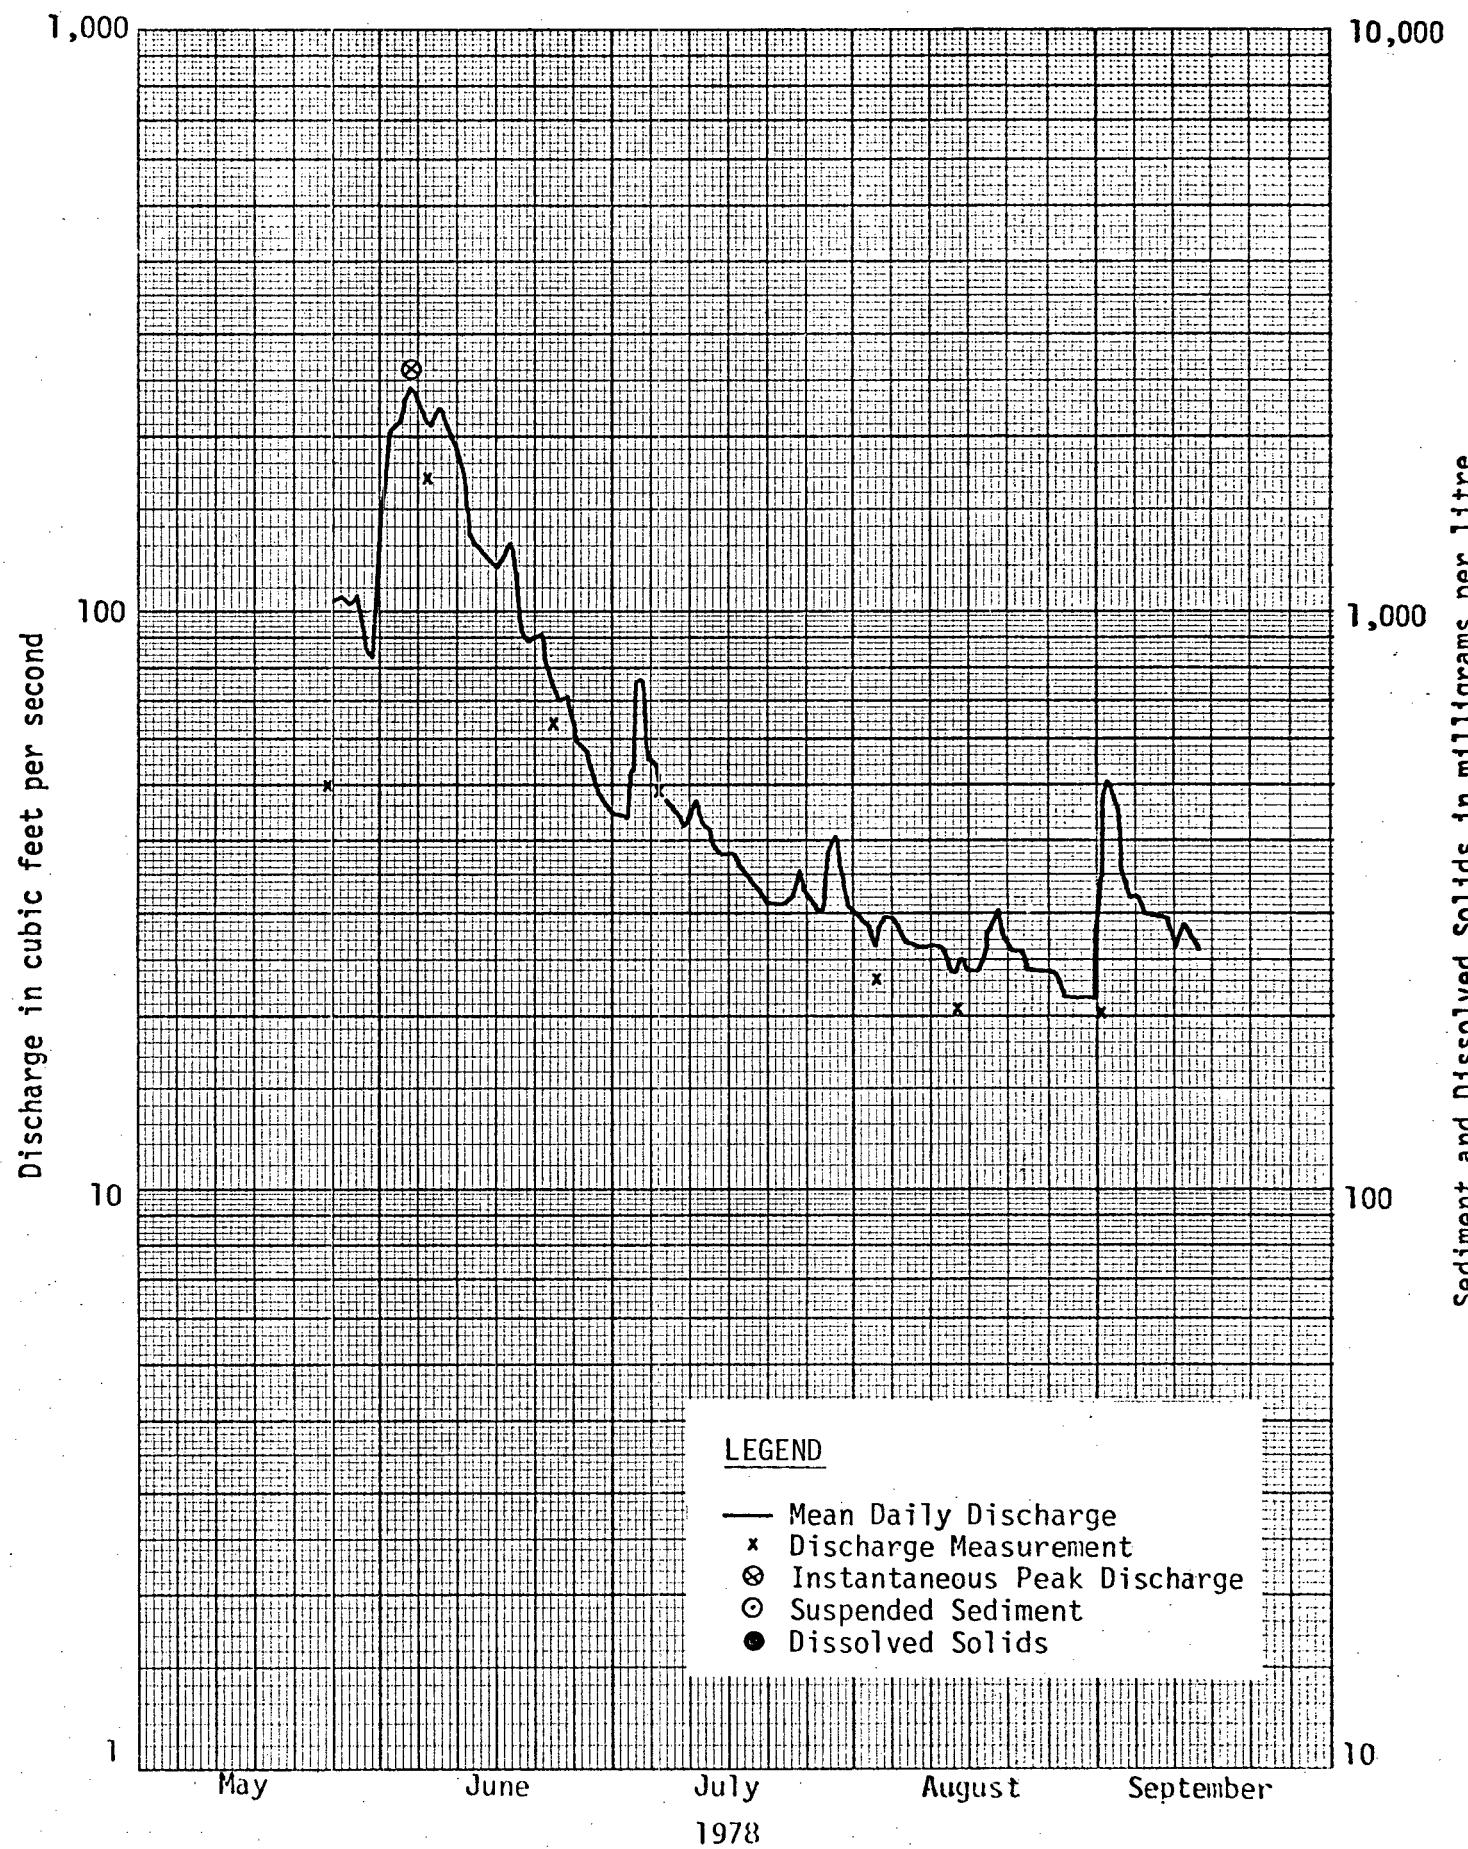


Figure 15 - SPENCER CREEK AT MP 695.3

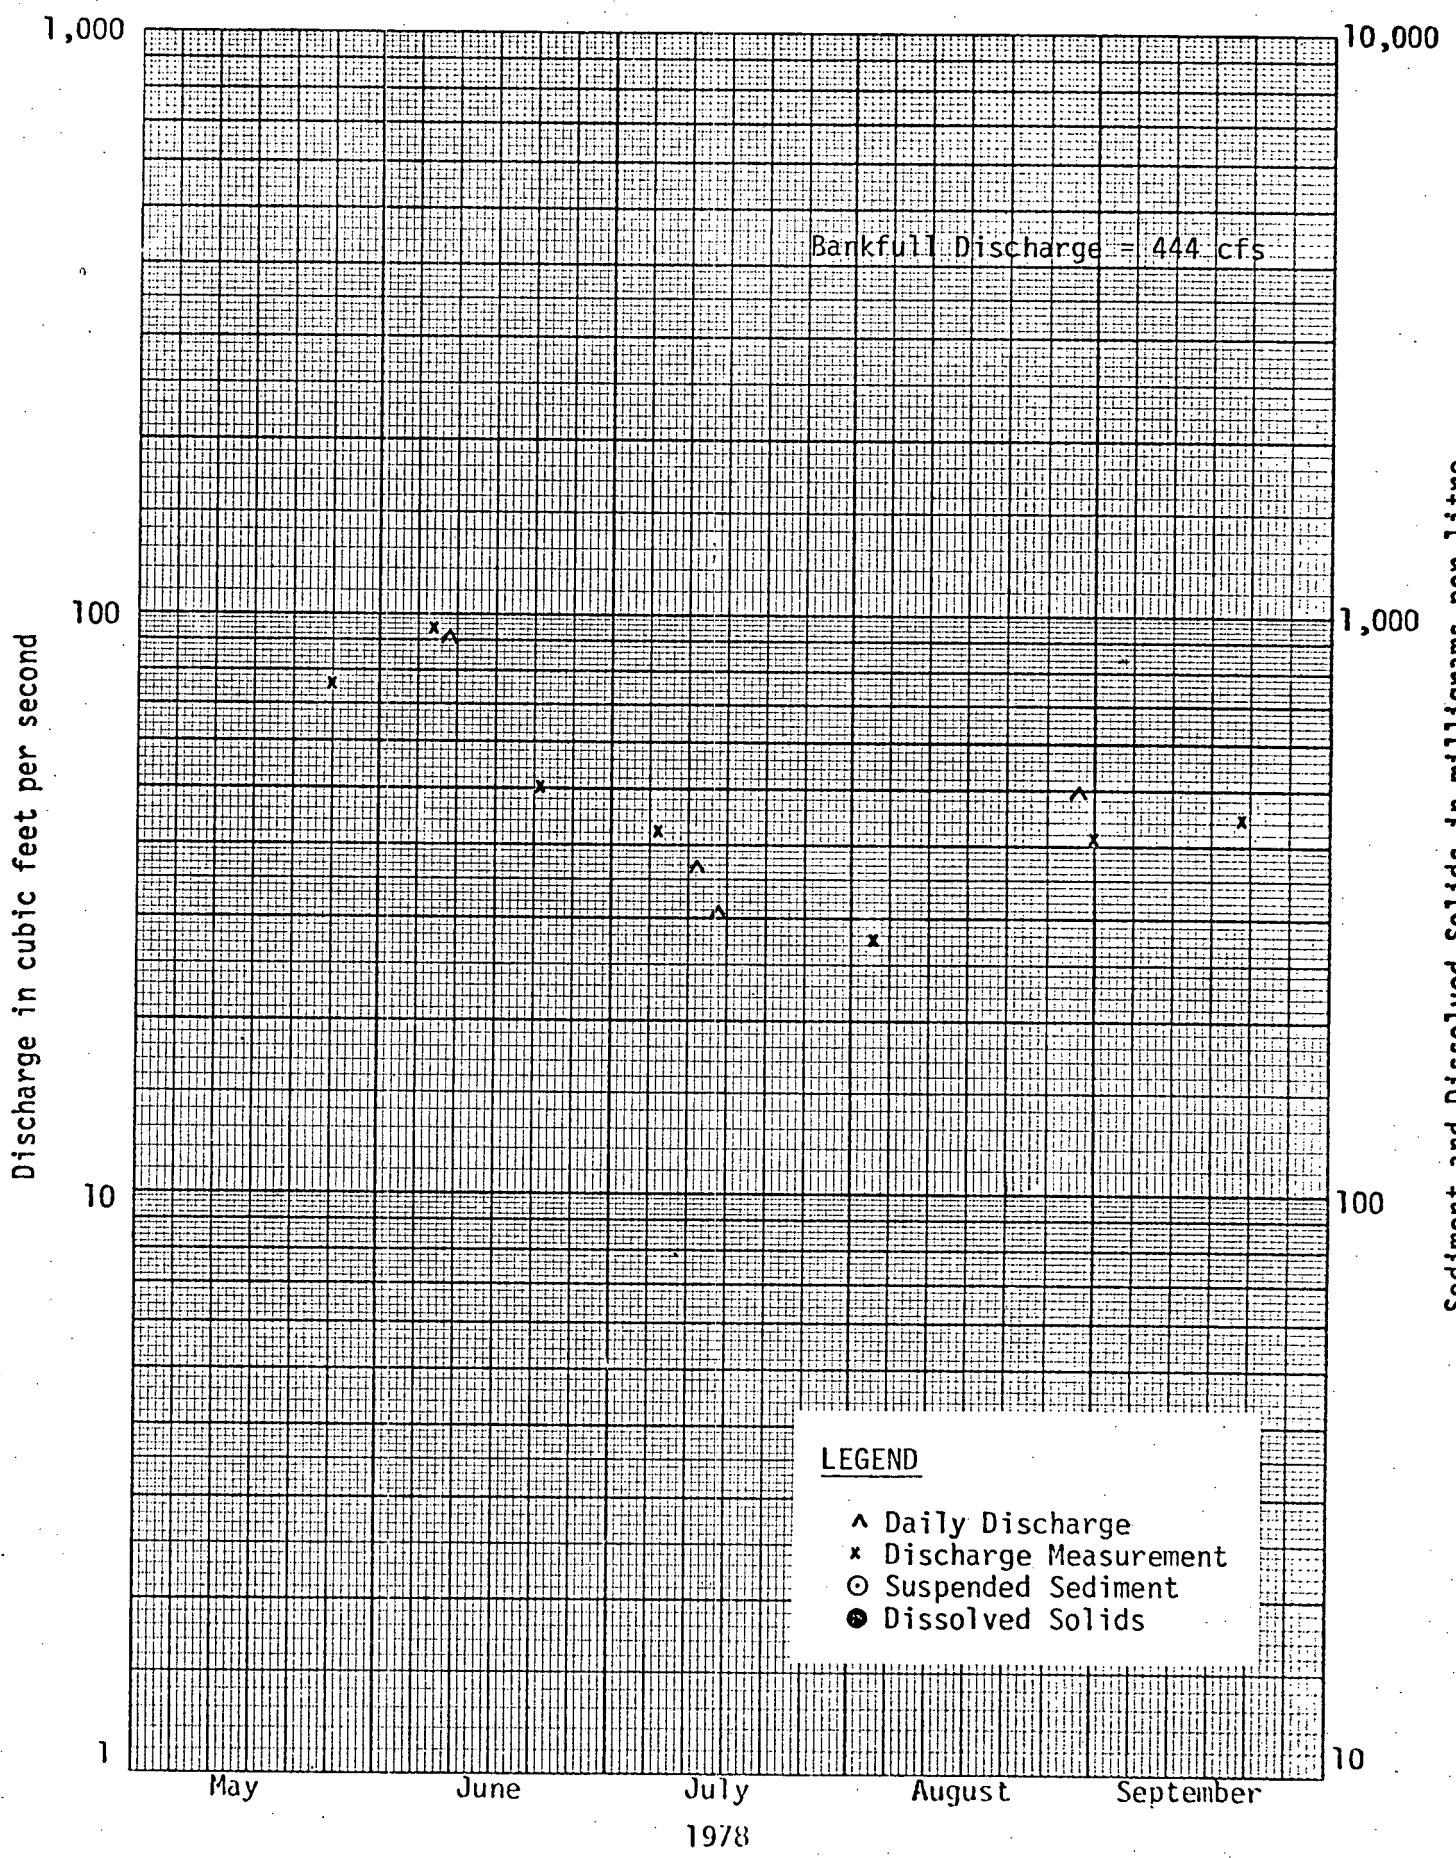

Sediment and Dissolved Solids in milligrams per litre

Figure 16 - BIG CREEK AT MP 674.1

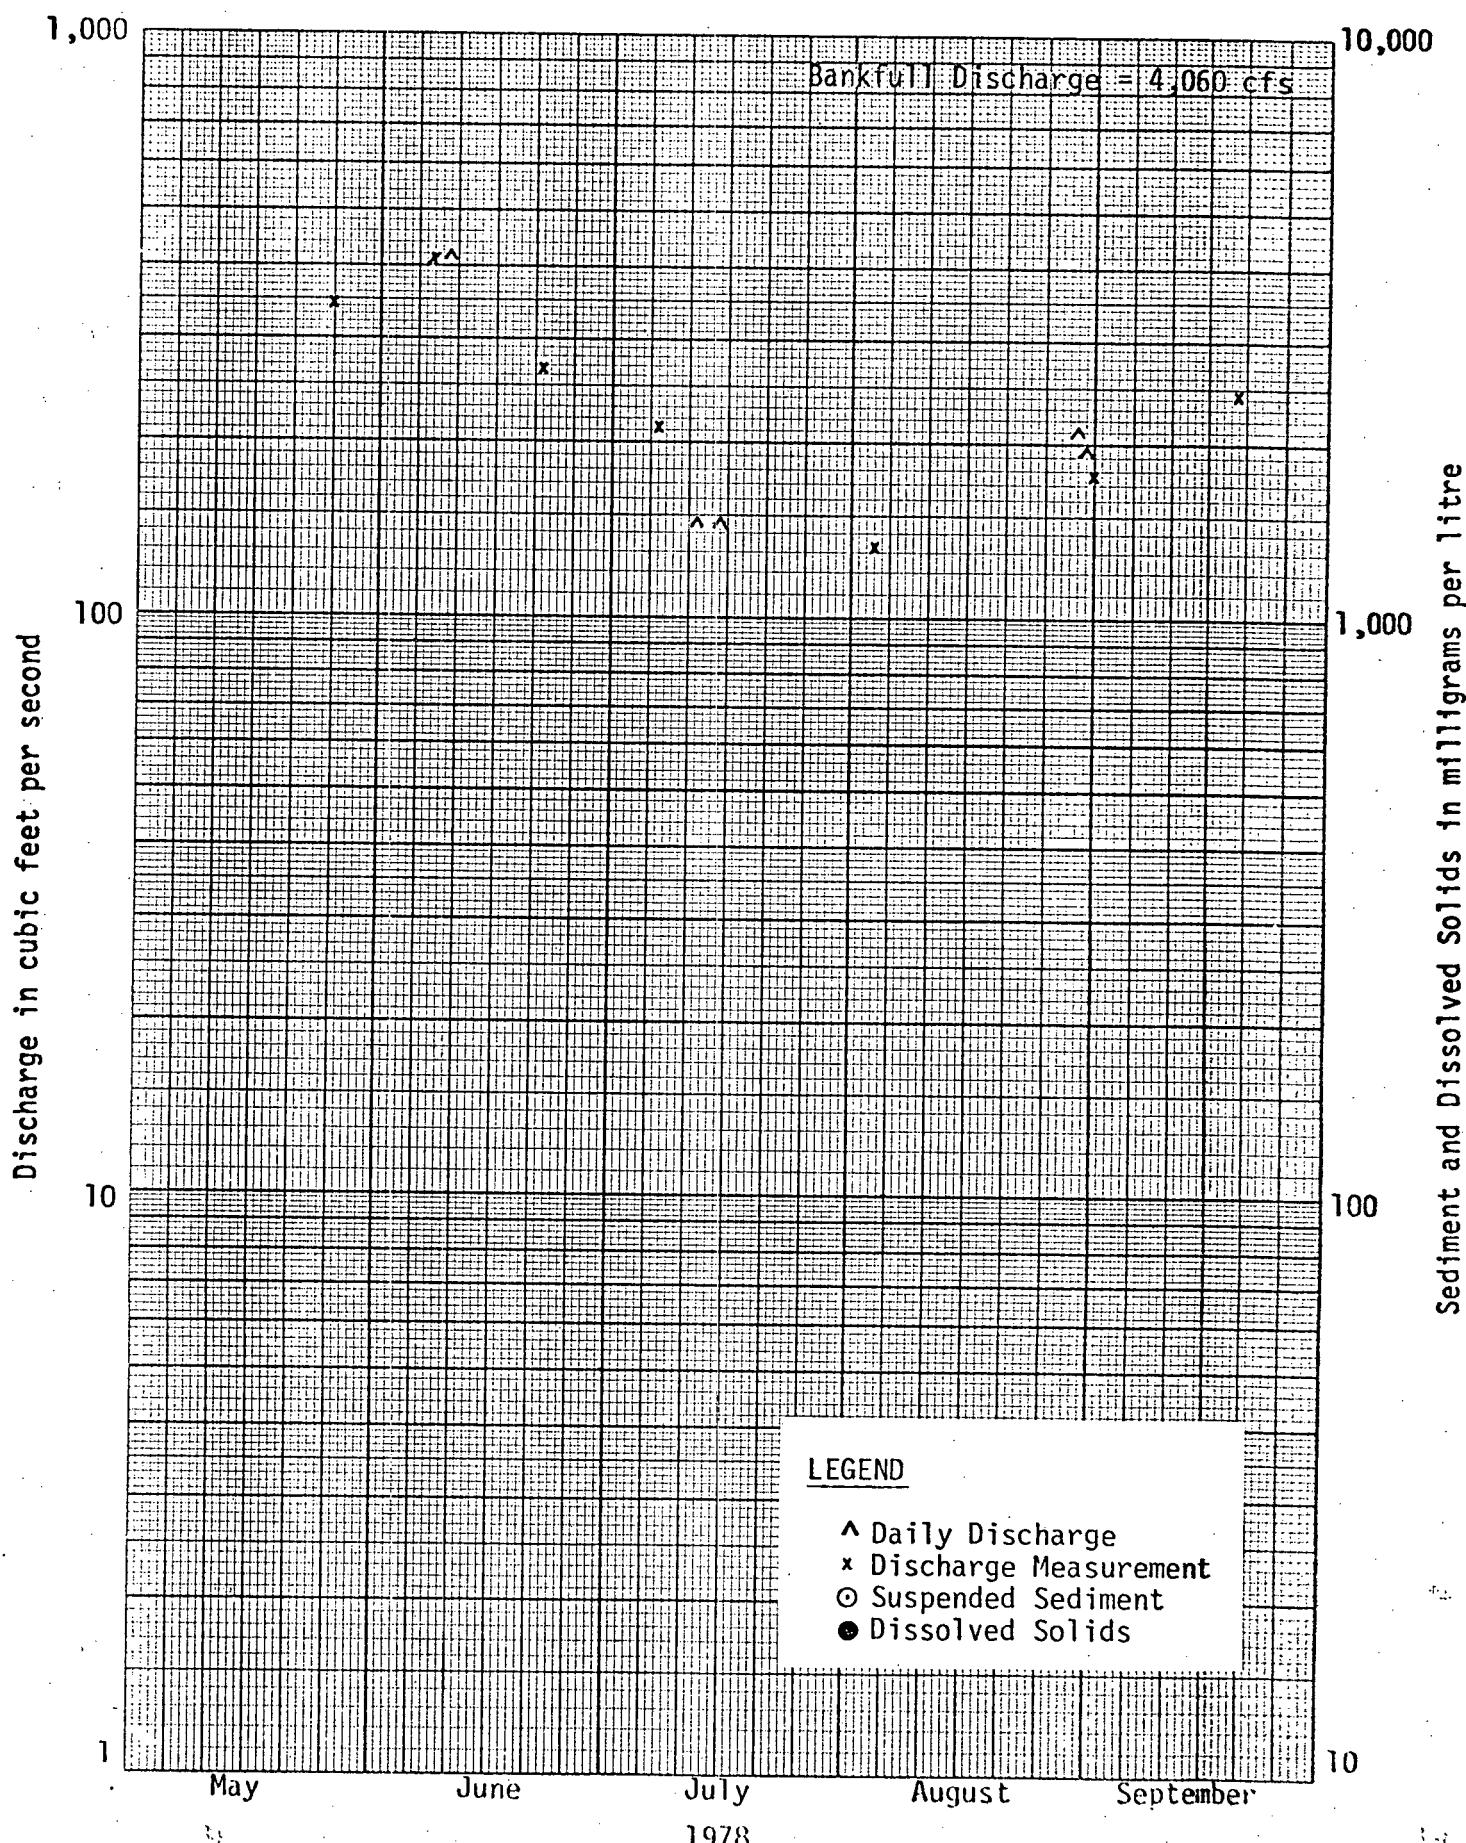

Sediment and Dissolved Solids in milligrams per litre

APPENDIX B

A STUDY OF SELECTED HYDROLOGIC QUANTITIES
OF THE YUKON TERRITORY
FOR EXAMINATION OF PIPELINE PROPOSALS

PLANNING AND STUDIES SECTION
WATER SURVEY OF CANADA
INLAND WATERS DIRECTORATE
PACIFIC & YUKON REGION
VANCOUVER, B.C.

1 JULY 1977
REVISED AUGUST 1978

CONTENTS

	Page
ABSTRACT	iv
1. INTRODUCTION	1
2. MAGNITUDE AND FREQUENCY OF FLOODS	2
1. Ratio to Mean Annual Flood	2
2. Envelope Curve	2
3. Regression on Physiographic Parameters	3
A. Mean Annual Flood (M.A.F.)	4
B. 10-year Flood (Q_{10})	6
C. 50-year and 100-year Floods (Q_{50} and Q_{100})	7
3. MEAN ANNUAL FLOW VOLUME	10
Regression on Physiographic Parameters	10
4. LOW FLOWS	11
1. Mean Annual 7-day Low Flow vs Drainage Area	11
2. Minimum Daily Discharge	11
3. Low Flow Regression Study	11
REFERENCES	15

FIGURES

	Page
Figure 1. $\text{Log}_{10}(\text{M.A.F.}) = 0.9683 + 0.9089\text{Log}_{10}$ (Drainage Area)	17
Figure 2. Flood Frequency Curve Alcan Pipeline Routes	18
Figure 3. Envelope Curve of Extreme Flood in the Yukon Territory	19
Figure 4. Residuals vs Predicted Mean Annual Flood in the Yukon Territory, Drainage Area Only	20
Figure 5. Residuals vs Predicted Mean Annual Flood in the Yukon Territory, 6-Variable Equation	21
Figure 6. $\text{Log}_{10}(Q_{2\min}) = -0.6770 + 0.9548\text{Log}_{10}$ (Drainage Area)	22
Figure 7. Minimum Recorded Daily Discharges in the Yukon Territory	23

TABLES

Table 1. Flood Data	24
Table 2. Extreme Maximum Daily Flows	26
Table 3. Low Flow Data	27
Table 4. Physiographic Parameters	29

ABSTRACT

Several methods have been used to aid in estimating selected hydrologic quantities of the Yukon Territory for an examination and adequate assessment of the pipeline proposals. Regression on physiographic parameters was used to compute the mean annual flood, the 10-year flood, the 50-year flood and the 100-year flood. The ratio to mean annual flood technique was another method to derive the same values; and the envelope curve approach served as a back-up to estimating extreme values. Regression studies were also conducted for mean annual flow volumes and low flows, defined as the average flow over a seven-day period.

1. INTRODUCTION

Water level records were collected on the Yukon River at Whitehorse as early as 1902, but streamflow data was not gathered until the early 1940's when several stations were established on the Yukon River. Presently (1977) records are available from approximately 50 locations for periods of time varying from one year to 35 years. Nearly half of these stations were established around Whitehorse and along the stem of the Yukon River. One of the results of this lack of network development is that large areas exist where little or no streamflow information is available. The vast size of the Territory, its great ranges of physiography, and the lack of data precluded a comprehensive analysis of the hydrologic characteristics of the Territory and, indeed, of the major drainage basins to be crossed by the proposed pipeline routes.

Streamflow records at about 40 sites in the Yukon Territory and Northern British Columbia were used to study the hydrology of the area. Peak flows were analyzed for mean, 10-year, 50-year and 100-year recurrence intervals. An analysis of the flood characteristics by multiple regression methods gave a set of equations which relate floods to drainage basin characteristics. Another method of estimating peak flows is presented by the "dimensionless ratio to the mean" technique, a simple technique of multiplying the mean annual flood by a factor derived from the slope of the frequency curve. Also, maximum known floods at more than 60 gauging stations in the Yukon Territory, Northern British Columbia, and Eastern Alaska were related to drainage area size; the resultant envelope curve gave yet another technique of estimating peak flows along the proposed pipeline routes.

Similarly, several methods were used to estimate average annual runoff and low flow volumes.

2. MAGNITUDE AND FREQUENCY OF FLOODS

1. Ratio to Mean Annual Flood

The mean annual flood values (which have a recurrence interval of 2.33 years according to the extremal distribution) and the 50-year and 100-year floods were taken from a compilation of peak flow data published by the Water Survey of Canada in 1972 and 1978 (References 5 and 6) and shown in Table 1. The mean annual flood data were plotted against size of drainage area; since only about forty sampling points could be used no separation of homogeneous regions became evident. The following equation was developed for estimating mean annual flood (M.A.F.) values along the proposed pipeline routes using drainage area size as the only independent variable:

$$\text{Log}_{10}(\text{M.A.F.}) = 0.968 + 0.909\text{Log}_{10}(\text{Drainage Area}) \quad (1)$$

Figure 1 depicts the mean line and the 90% confidence limits. The relationship is far from complete, but with the available data it gives another method of estimating floods along the pipeline routes.

Assuming some homogeneity the 50-year and 100-year floods expressed as ratios to mean annual floods for the 43 basins in Table 1 were averaged to obtain the following mean ratios for the area:

$$\text{mean 50-year ratio} = 2.01 \times \text{M.A.F.} \quad (2)$$

$$\text{mean 100-year ratio} = 2.34 \times \text{M.A.F.} \quad (3)$$

For 13 basins having drainage area less than 1000 square miles the mean ratios are:

$$\text{mean 50-year ratio} = 2.15 \times \text{M.A.F.}$$

$$\text{mean 100-year ratio} = 2.63 \times \text{M.A.F.}$$

The mean lines for the 43 and 13 basins are shown in Fig. 2.

2. Envelope Curve

Maximum known mean daily peak discharges for all gauging stations in the Yukon Territory and some in Northern

British Columbia are listed in Table 2 and were plotted in cubic feet per second per square mile in relation to drainage area size. The plot on Figure 3 shows one envelope curve for drainage basins originating in the Ogilvie-Selwyn Mountains, one curve for the Plateau Mountains on the northeastern side of the St. Elias Mountains and one curve for the Plateau areas generally along the Alaska Highway east of Kluane Lake. The following equations may be used for drainage areas ranging in size from about 50 square miles to 10,000 square miles:

$$q(\text{cfs/sq.mi.}) = 106 \text{ Area}^{-0.18} \quad (\text{Ogilvie-Selwyn Mountains}) \quad (4)$$

$$q = 46 \text{ Area}^{-0.18} \quad (\text{Plateau Mountains}) \quad (5)$$

$$q = 8.6 \text{ Area}^{-0.18} \quad (\text{Plateau}) \quad (6)$$

About halfway between curves (4) and (5), a curve may be drawn for drainage areas in the Northern British Columbia highlands (Dease Plateau).

3. Regression on Physiographic Parameters

The following notes outline a regression study of certain hydrologic quantities upon basin-averaged physiographic parameters. The basins under consideration were in the Yukon Territory or close to the Yukon Territory for which the physiographic characteristics and at least 5 years of streamflow record were available. The purpose of the study was to provide a means of estimating the hydrologic quantities for ungauged basins along the proposed pipeline routes in the Yukon. The hydrologic quantities under consideration were: the mean annual flow, the mean annual flood, the 10-year flood, the 50-year flood, the 100-year flood, the mean annual 7-day low flow, the 10-year 7-day low flow, and the 50-year 7-day low flow.

The regression study was conducted using UBC's TRIP package and the equations have been examined through tests on the residuals as discussed in Draper and Smith (Reference 9).

Tabulation and description of the physiographic parameters are given in Table 4, at the back of this report.

A. Mean Annual Flood (M.A.F.)

Considering basin drainage area only, a logarithmic transformation of data was undertaken to bring the variance to a more uniform band; two equations were produced, one with intercept, the other without.

With intercept:

$$\text{Log}_{10}(\text{M.A.F.}) = 0.9683 + 0.9089 \text{Log}_{10}(\text{Drainage Area}) \quad (7)$$

$R^2 = 0.8330$ S.E. = 23,055 cfs Skew = 0.859 Kurtosis = 6.25
For normal distribution of residuals skew = 0.0, kurtosis = 3.0. The normalcy of the residuals is a basic assumption of regression analysis; if the residuals are not normal then probably the equation will not be correct and tests on the residuals will not be conclusive. The mean for the sample was 10,700 cfs (mean of mean annual floods). This equation was used in Section 1, Ratio to Mean Annual Flood.

Without intercept:

$$\text{Log}_{10}(\text{M.A.F.}) = 1.181 \text{Log}_{10}(\text{Drainage Area}) \quad (8)$$

$R^2 = 0.9929$ S.E. = 53,000 cfs Skew = -3.94 Kurtosis = 19.5
This appears to be a considerably weaker equation in view of the higher standard error, larger magnitude of skew and kurtosis.

When the residuals for the equation with intercept are plotted against observed mean annual flood a non-uniform variance is obvious; largest residuals appear for largest mean annual floods. As well a sloped band of residuals gives indication of missing terms. There is a suggestion of regionality with a concentration of negative residuals, i.e. overprediction, occurring in the southwestern section of the Territory.

With the remaining 10km x 10km grid basin-averaged physiographic parameters added to the study, 37 stations were used in developing a 10-variable equation.

$$\begin{aligned} \text{Log}_{10}(\text{M.A.F.}) = & 20.1529 + 0.9484\text{Log}_{10}(\text{AREA}) - 0.7732\text{Log}_{10}(\text{NPOS I}) \\ & - 4.3917\text{Log}_{10}\text{NPOS J} + 1.9478\text{Log}_{10}(\text{ELEV}) - 0.3026\text{Log}_{10}\text{RA LKE} \\ & + 0.2716\text{Log}_{10}(\text{RA GLC}) - 2.7439\text{Log}_{10}(\text{SE NW}) - 0.3339\text{Log}_{10}(\text{SE W}) \\ & + 0.0246\text{Log}_{10}(\text{SS E}) - 0.0263\text{Log}_{10}(\text{SS SE}) \end{aligned} \quad (9)$$

FPROB critical was 0.05 so all the variables appear to be significant. The Standard Error was 10,200 cfs. Skew = -1.55 Kurtosis = 14.9

By a rule of thumb used in regression building there are too many predictor variables for 37 observations. Usually 5 observations are required per parameter or predictor variable used in an equation. Also, signed slopes are not properly admitted to equations that involve log transformation, as these variables take negative and zero values. In using log transformations, zero and negative values are translated to one's or some other value.

In view of the excessive number of variables, the signed slopes were removed and a shorter equation developed.

$$\begin{aligned} \text{Log}_{10}(\text{M.A.F.}) = & 5.0702 + 0.9400\text{Log}_{10}(\text{AREA}) + 1.8651\text{Log}_{10}(\text{ELEV}) \\ & - 0.2853\text{Log}_{10}(\text{RA LKE}) + 0.3229\text{Log}_{10}(\text{RA GLC}) - 1.6721\text{Log}_{10}(\text{SE NW}) \\ & - 0.5111\text{Log}_{10}(\text{SE W}) \end{aligned} \quad (10)$$

The Standard Error was 10,750 cfs. Skew = -0.207 Kurtosis = 6.87 Residuals are not normal but are more nearly so than for the previous equation. The largest residuals for the three equations are shown on the next page. Plots of Residuals vs Predicted Mean Annual Flood show largest residuals occurring with largest floods. i.e. non-uniform variance, but the 6-variable equation does move toward a more uniform variance band than the drainage area only equation can. (Figures 4 and 5)

Mean Annual Flood - Largest Residuals in Cfs

River & Station No.	Drainage Area Only with Intercept Equation (7)	6-variable Equation (10)	10-variable Equation (9)
Yukon	09AB001 - 12,400		
	09AB009 - 23,000		
	09AH001 - 50,300		
	09CD001 † - 46,800		
	09EB002	- 20,700	15,300
Liard	10AA001 †	12,000	5,810
	10BE001	4,700	- 44,400
Pelly	09BC001 †	4,160	424
Stewart	09DC002 † 37,600		
	09DD002 † 39,300	- 30,600	- 3,040
	09DD003 †	- 23,800	1,990
Porcupine	09FD001 † 78,500	34,000	- 4,300
Peel	10MA001 † 60,100	11,500	15,400

† These also appeared as large residuals for the 50-year Flood Regression Study.

B. 10-year Flood (Q_{10})

Equations for the 10-year or 10 percent flood and the 50-year or 2 percent flood were handled in a similar manner i.e. logarithmic transformation of physiographic parameters (predictor variables). For the 10-year flood (Q_{10}) 6-variable equation:

$$\begin{aligned} \text{Log}_{10}(Q_{10}) = & 4.3960 + 0.9246\text{Log}_{10}(\text{AREA}) + 1.7945\text{Log}_{10}(\text{ELEV}) \\ & - 0.5044\text{Log}_{10}(\text{DS W}) - 0.3354\text{Log}_{10}(\text{RA LKE}) + 0.2658\text{Log}_{10}(\text{RA GLC}) \\ & - 1.6271\text{Log}_{10}(\text{SE NW}) \end{aligned} \quad (11)$$

The Standard Error was 14,000 cfs. Skew = 0.796 Kurtosis = 6.55
No residual plots have been done.

10-year flood, 50-year flood and mean annual flood are

closely related; there is very nearly a common ration for
10-year and 50-year Mean Annual and Mean Annual for the stations in the study.

The largest residuals occurred for the following stations:

10-year Flood - Largest Residuals in Cfs

River & Station No.	6-variable Equation (11)
Yukon 09CD001	22,000
Stewart 09DC002	20,100
	- 32,800
Porcupine 09FD001	44,400
Liard 10AA001	28,000
Pelly 09BC001	24,300
Peel 10MA001	24,200

These stations also show largest residuals for 50-year flood (the equations have the same variables and similar coefficients). The equation for 10-year flood was "tested" by applying it to ungauged basins near basins for which physiographic parameters are available. Estimates could then be made of the physiographic parameters of the ungauged basins.

C. 50-year & 100-year Floods (Q_{50} and Q_{100})

As a first step, equations were developed for the 50-year and 100-year floods in cfs for drainage areas in square miles.

$$\text{Log}_e(Q_{50}) = 3.08 + 0.887 \times \text{Log}_e(\text{D.A.}) \quad R^2 = 0.793 \quad (12)$$

$$\text{or } Q_{50} = 21.8 \times (\text{D.A.})^{0.887}$$

$$\text{Log}_e(Q_{100}) = 3.26 + 0.880 \times \text{Log}_e(\text{D.A.}) \quad R^2 = 0.775 \quad (13)$$

$$\text{or } Q_{100} = 26.1 \times (\text{D.A.})^{0.880}$$

Notes:

- (1) Residuals from these equations show a non-uniform distribution, with a large divergence for larger floods.
- (2) Considering the standard errors for the coefficients there is no significant difference between the equations.
- (3) The equations should not be used for drainage areas of less than one hundred square miles. They will be most reliable for streams with drainage areas of about 2500 square miles.

As an example of the use of the equations consider Station 09BA001:

Drainage area = 2800 square miles

$$Q_{50} = 21.8 \times (2800)^{0.887} = 24893 \text{ (24900) cfs}$$

Q "observed" was 29200 cfs.

$$Q_{100} = 26.1 \times (2800)^{0.880} = 28193 \text{ (28200) cfs}$$

Q "observed" was 32500 cfs.

The next step was utilization of additional information provided by the correlation with other physiographic parameters. Equations were developed by forward selection for Q_{50} and Q_{100} .

For Q_{50} :

RSQ = 0.9826

FPROB = 0.0

STD ERR Y = 0.2357

VAR	COEFF	STD ERR	F-RATIO	FPROB
CONST	30.0859	5.1163		
AREA	0.9491	0.0368	663.8878	0.0
ELEV	1.1510	0.4238	7.3755	0.0104
RA_LKE	-0.3317	0.0735	20.3380	0.0001
RA_FOR	-0.8821	0.1775	24.6849	0.0000
BH_W	0.7887	0.3129	6.3533	0.0163
SE_NW	-2.2147	0.2653	69.7068	0.0000
SE_W	-1.2739	0.2216	33.0366	0.0000

where variables are logarithms to the base e

i.e.

ELEV	mean basin elevation
RA LKE	relative area of lakes
RA FOR	relative area of forests
BH W	barrier height to the west
SE NW	shield effect to the northwest
SE W	shield effect to the west

$$\begin{aligned}\text{Log}_e(Q_{50}) &= 30.1 + 0.9491 \times \text{Log}_e(\text{AREA}) + 1.1510 \times \text{Log}_e(\text{ELEV}) \\ &\quad - 0.3317 \times \text{Log}_e(\text{RA LKE}) + \dots\end{aligned}$$

For Q_{100} :

$$\text{RSQ} = 0.9746$$

$$\text{FPROB} = 0.0$$

$$\text{STD ERR Y} = 0.2817$$

VAR	COEFF	STD ERR	F-RATIO	FPROB
CONST	15.0187	3.0778		
AREA	0.9577	0.0444	464.5321	0.0
ELEV	1.9587	0.4219	21.5475	0.0001
DS W	-0.7939	0.1013	61.4329	0.0000
RA LKE	-0.3432	0.0874	15.4241	0.0005
RA FOR	-0.4537	0.1398	10.5371	0.0028
SE NW	-1.8166	0.2237	65.9406	0.0000

DS W distance to the sea to the west

Again all variables are logarithms to the base e.

3. MEAN ANNUAL FLOW VOLUME

Regression on Physiographic Parameters

For the Regression Study of mean annual flow, no logarithmic transformation was used. The response variable was the unit mean annual flow or mean annual flow per unit area. This transformation removed the spurious effect of drainage area.

42 stations were employed to develop the following equation:

$$\begin{aligned} \text{Unit Mean Annual Flow (cfs/sq.mi.)} &= 3.3020 + 0.0152(\text{SLP \%}) \\ &+ 0.006671(\text{DS N}) - 0.004113(\text{DS NW}) - 0.0008409(\text{DSSW}) + 0.1096(\text{RA GLC}) \\ &- 0.0002479(\text{BH N}) - 0.00002049(\text{SE NW}) \end{aligned} \quad (14)$$

The Standard Error was 19% of the mean response of 0.969 cfs/sq.mi. The skew of the residuals was 0.737 and the kurtosis was 3.37. The largest residuals occurred for the following stations:

Unit Mean Annual Flow -- Largest Residuals in Cfs/Sq.mi.				
River & Station No.		Observed	Predicted	Residual
Atlin	09AA006	1.270	0.976	0.294
Tutshi	09AA013	1.519	1.134	0.385
Swift	09AE003	1.352	1.046	0.306
Blue	10AC004	0.954	1.252	- 0.299
Cottonwood	10AC005	1.950	1.535	0.415
Coal	10BC001	1.027	0.714	0.313
Turnagain	10BA001	1.178	1.432	- 0.255
Aishihik	08AA001	0.336	0.608	- 0.272

A geographical plot revealed a cluster of negative residuals in the southwest corner of the Territory indicating the equation overpredicts in this region. Overall this equation may be applied to ungauged basins with fair confidence provided

that the physiographic parameters of that basin are not outside the range of those used in developing the equation.

4. LOW FLOWS

Low flow data in the form of annual 7-day average low flows were compiled and published by the Water Survey of Canada in 1974 (References 7 and 8).

For this study 47 gauging stations in the Yukon Territory and Northern British Columbia were utilized to extract the mean annual 7-day low flows ($Q_{2\min}$), 10-year 7-day low flows, and 50-year 7-day low flows; the data are shown in Table 2.

1. Mean Annual 7-day Low Flow vs Drainage Area

The Q_{\min} values were plotted on log paper against size of drainage area to study the relationship. As expected the size of the sample is too small to define a useful relationship. If necessary the following equation may be used to estimate low flows in ungauged areas where the pipeline may traverse:

$$\text{Log}_{10}(Q_{2\min}) = -0.6770 + 0.9548 \text{Log}_{10}(\text{Drainage Area}) \quad (15)$$

2. Minimum Daily Discharge

The minimum daily discharges as recorded at over 50 gauging stations are listed in Table 3. These values are mean daily flows which are lower than the 7-day averages mentioned in the previous section. By dividing the mean daily low flow by the drainage area one derives a unit low flow in cfs per square mile, which may help in assessing the low unit discharge along the pipeline routes. There is no evidence that regional variations exist along different routes, which would refine the estimates.

3. Low Flow Regression Study

For low flow regression studies, three hydrologic quantities were studied: mean annual 7-day low flow, the 10-year

7-day low flow and the 50-year 7-day low flow. Logarithmic transformations were used for all equations. For the mean annual 7-day low flow, 44 stations produce the equation:

$$\begin{aligned} \text{Log}_{10}(\text{Mean Annual 7-day Low Flow in cfs}) (\text{Q}_{2\text{min}}) = & 11.5545 \\ & + 0.0811\text{Log}_{10}(\text{AREA}) - 2.3420\text{Log}_{10}(\text{ELEV}) + 1.0624\text{Log}_{10}(\text{SLP \%}) \\ & + 2.7878\text{Log}_{10}(\text{DS NW}) - 1.5352\text{Log}_{10}(\text{DSSW}) - 0.4549\text{Log}_{10}(\text{BH SW}) \\ & - 1.8878\text{Log}_{10}(\text{SE NW}) \end{aligned} \quad (16)$$

The Standard Error was 328 cfs. The skew for the residuals was 0.519, kurtosis 6.76 so they are not normally distributed. (Figure 8) The largest residuals occurred for the largest basins:

Mean Annual 7-day Low Flow - Largest Residuals in Cfs

River & Station No.		Observed	Predicted	Residual
Yukon	09AB001	2,400	1,710	688
	09AB009	3,700	2,780	916
	09CD001	9,860	9,040	818
	09AH001	7,510	6,850	657
Pelly	09BC001	1,560	2,480	- 917
Stewart	09DD002	1,710	1,290	419
Atlin	09AA006	904	571	333

44 stations were used to develop the following equation for the 10-year, or 10 percent, 7-day low flow.

$$\begin{aligned} \text{Log}_{10}(\text{Q}_{10\text{min}}) = & 17.7940 + 0.1060\text{Log}_{10}(\text{AREA}) - 3.2120\text{Log}_{10}(\text{ELEV}) \\ & + 1.2203\text{Log}_{10}(\text{SLP \%}) + 3.4080\text{Log}_{10}(\text{DS NW}) - 2.0580\text{Log}_{10}(\text{DS SW}) \\ & - 0.6166\text{Log}_{10}(\text{BH SW}) - 2.6299\text{Log}_{10}(\text{SE NW}) \end{aligned} \quad (17)$$

$R^2 = 0.7573$ FPROB = 0.0000 S.E. = 0.1245 log units or 328 cfs. The skew was 3.33, the kurtosis 19.2 indicating a definitely non-normal distribution of residuals, so the equation is suspect

although it provides relatively good results for the observations. Again the largest residuals occur for the largest basins, indicating the bias of the equation.

10-year 7-day Low Flow - Largest Residuals in Cfs

River & Station No.		Observed	Predicted	Residual
Yukon	09AB001	1,800	1,310	488
	09AB009	2,700	2,140	559
	09CD001	8,200	6,590	1,610
Pelly	09BC001	1,200	1,810	- 614
Atlin	09AA006	740	450	290

For the 50-year or 2 percent 7-day low flow 42 observations were used to develope the equation. Plots of selected physiographic parameters indicated that there was non-uniform variance even with the logarithmic transformation. This makes the equation unreliable with respect to significance of variables and coefficients.

$$\begin{aligned} \text{Log}_{10}(Q_{50\text{min}}) = & 24.1632 + 0.1295\text{Log}_{10}(\text{AREA}) - 4.6780\text{Log}_{10}(\text{ELEV}) \\ & + 1.1952\text{Log}_{10}(\text{SLP \%}) + 6.4308\text{Log}_{10}(\text{DS NW}) - 3.0125\text{Log}_{10}(\text{DS SW}) \\ & - 0.9455\text{Log}_{10}(\text{BH N}) - 4.1279\text{Log}_{10}(\text{SE NW}) \end{aligned} \quad (18)$$

$R = 0.6660$ $\text{FPROB} = 0.0000$ $S.E. = 0.1683$ log units or 309 cfs. The skew and kurtosis of the residuals were 3.40 and 19.4 respectively, bearing out the warning of the non-uniform variance. The largest residuals are again from the largest basins.

The largest residuals, using equation (15) are listed on the following page.


50-year 7-day Low Flow - Largest Residuals in Cfs

<u>River & Station No.</u>		<u>Observed</u>	<u>Predicted</u>	<u>Residual</u>
Yukon	09AB001	1,400	1,100	300
	09AB009	2,100	1,720	385
	09CD001	6,800	5,300	1,500
Liard	10AA001	1,600	1,210	394
Atlin	09AA006	640	352	288
Dease	10AC002	370	659	- 289


REFERENCES

1. Water Survey of Canada, 1976. Surface Water Data Reference Index. Inland Waters Directorate, Department of the Environment, Ottawa.
2. Water Survey of Canada, 1974. Historical Streamflow Summary, British Columbia to 1973. Inland Waters Directorate, Department of the Environment, Ottawa.
3. Water Survey of Canada, 1974. Historical Streamflow Summary, Yukon and Northwest Territories to 1973. Inland Waters Directorate, Department of the Environment, Ottawa.
4. Water Survey of Canada, 1973. Reference Index Hydro-metric Map Supplement. Inland Waters Directorate, Department of the Environment, Ottawa.
5. Water Survey of Canada, 1972. Magnitude of Floods in British Columbia. Inland Waters Directorate, Department of the Environment, Vancouver.
6. Water Survey of Canada, 1978. Magnitude of Flood - Yukon Territory. Inland Waters Directorate, Department of the Environment, Vancouver.
7. Water Survey of Canada, 1974. Low Flows - Yukon Territory. Inland Waters Directorate, Department of the Environment, Vancouver.
8. Water Survey of Canada, 1974. Low Flows in British Columbia. 2 volumes. Inland Waters Directorate, Department of the Environment, Vancouver.

9. Draper, N.R. and H. Smith, 1966. Applied Regression Analysis. John Wiley and Sons Inc., New York.
10. Leith, R.M., 1975. Streamflow Regionalization in British Columbia, No. 1: Regression of Mean Annual Floods on Physiographic Parameters. Inland Waters Directorate Report Series No. 40, Vancouver.
11. Dalrymple, Tate, 1960. Flood-Frequency Analyses. U.S. Geological Survey Water-Supply Paper 1543-A.
12. Cruff, R.W. and S.E. Rantz, 1965. A Comparison of Methods Used in Flood-Frequency Studies for Coastal Basins in California. U.S. Geological Survey Water-Supply Paper 1580-E.
13. Childers, Joseph M., 1970. Flood Frequency in Alaska. U.S. Geological Survey Water Resources Division, Alaska District Open-File Report.

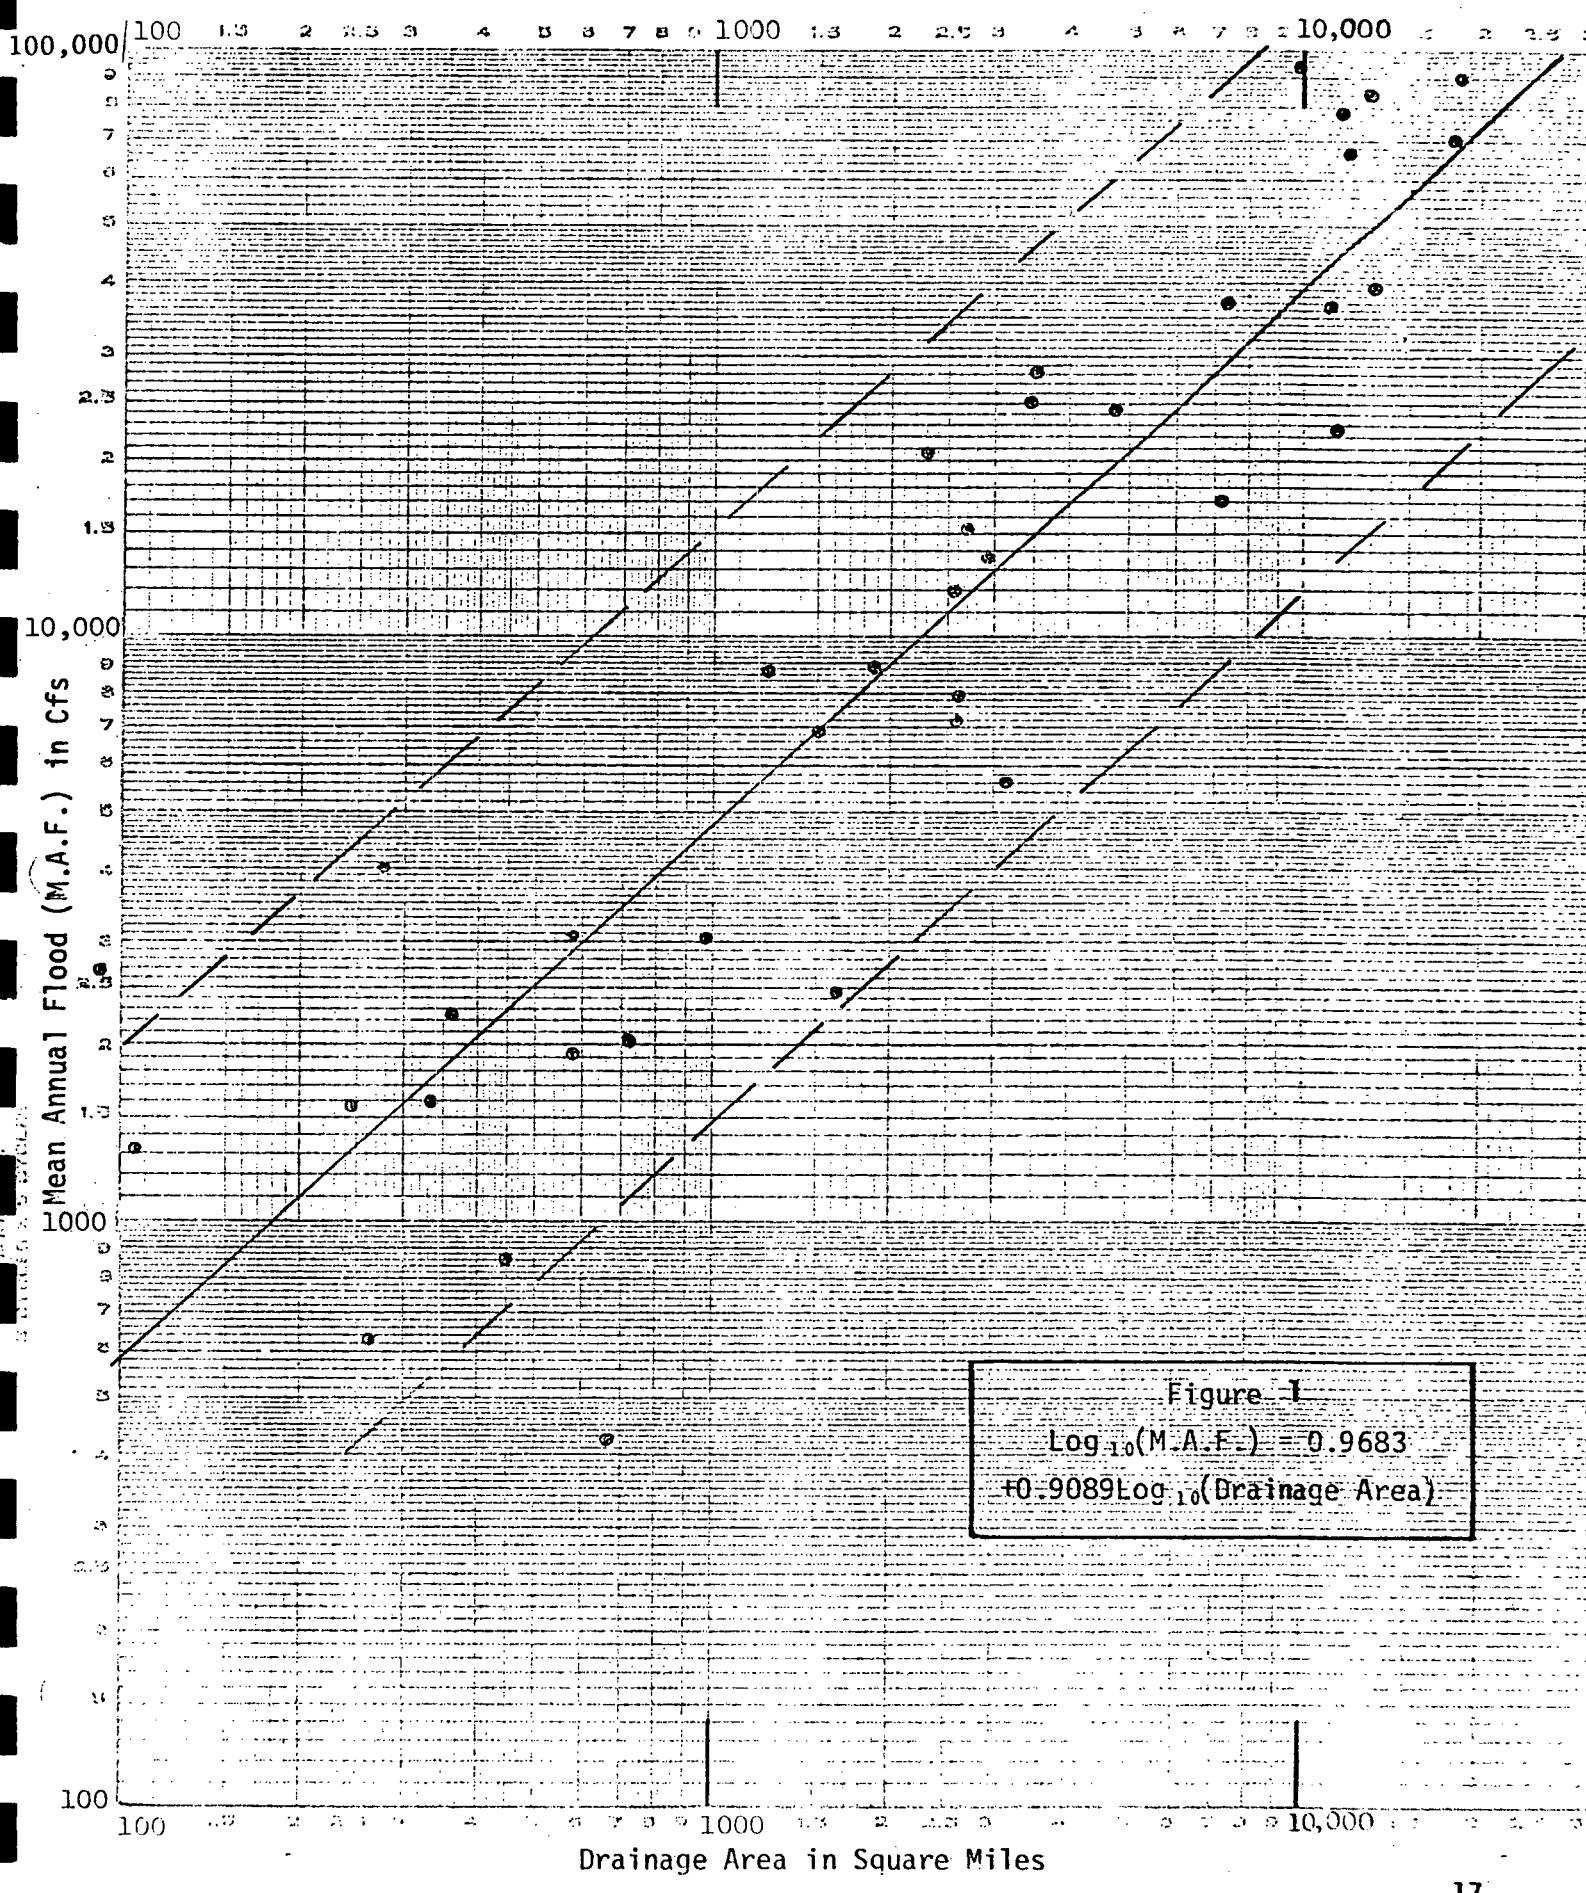

EXTRAPOLATION BY LOGGING SLOPE METHOD
GRAPH PAPER 1/5 INCH CIRCLE:

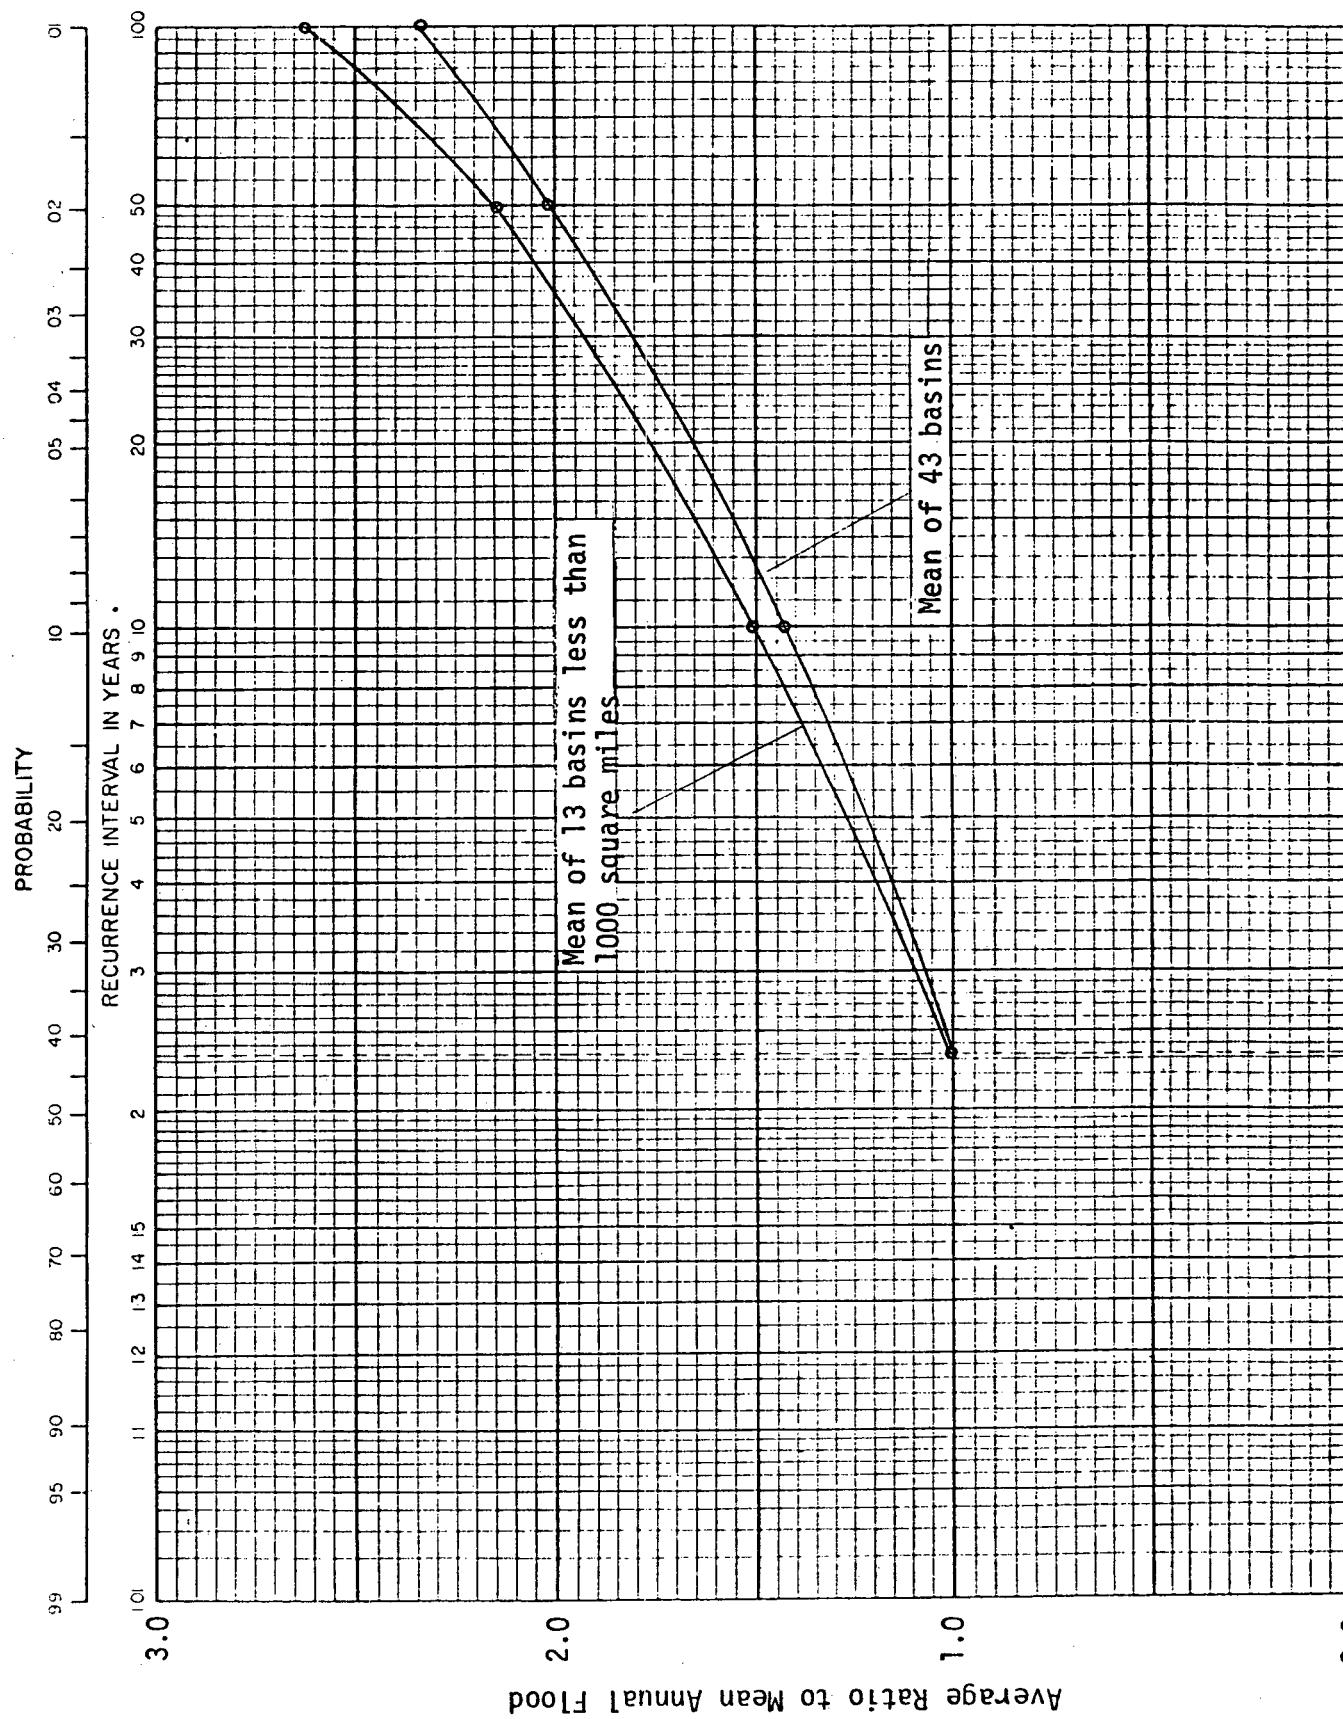

0.0

18.


FIGURE. -- 2 -- TITLE. Flood Frequency - Alcan Pipeline Routes

PREPARED BY - M.L.K. -

DATE August 15/78

ENVELOPE CURVE OF EXTREME FLOODS IN THE YUKON TERRITORY

DAILY MEAN DISCHARGE IN CFS PER SQUARE MILE

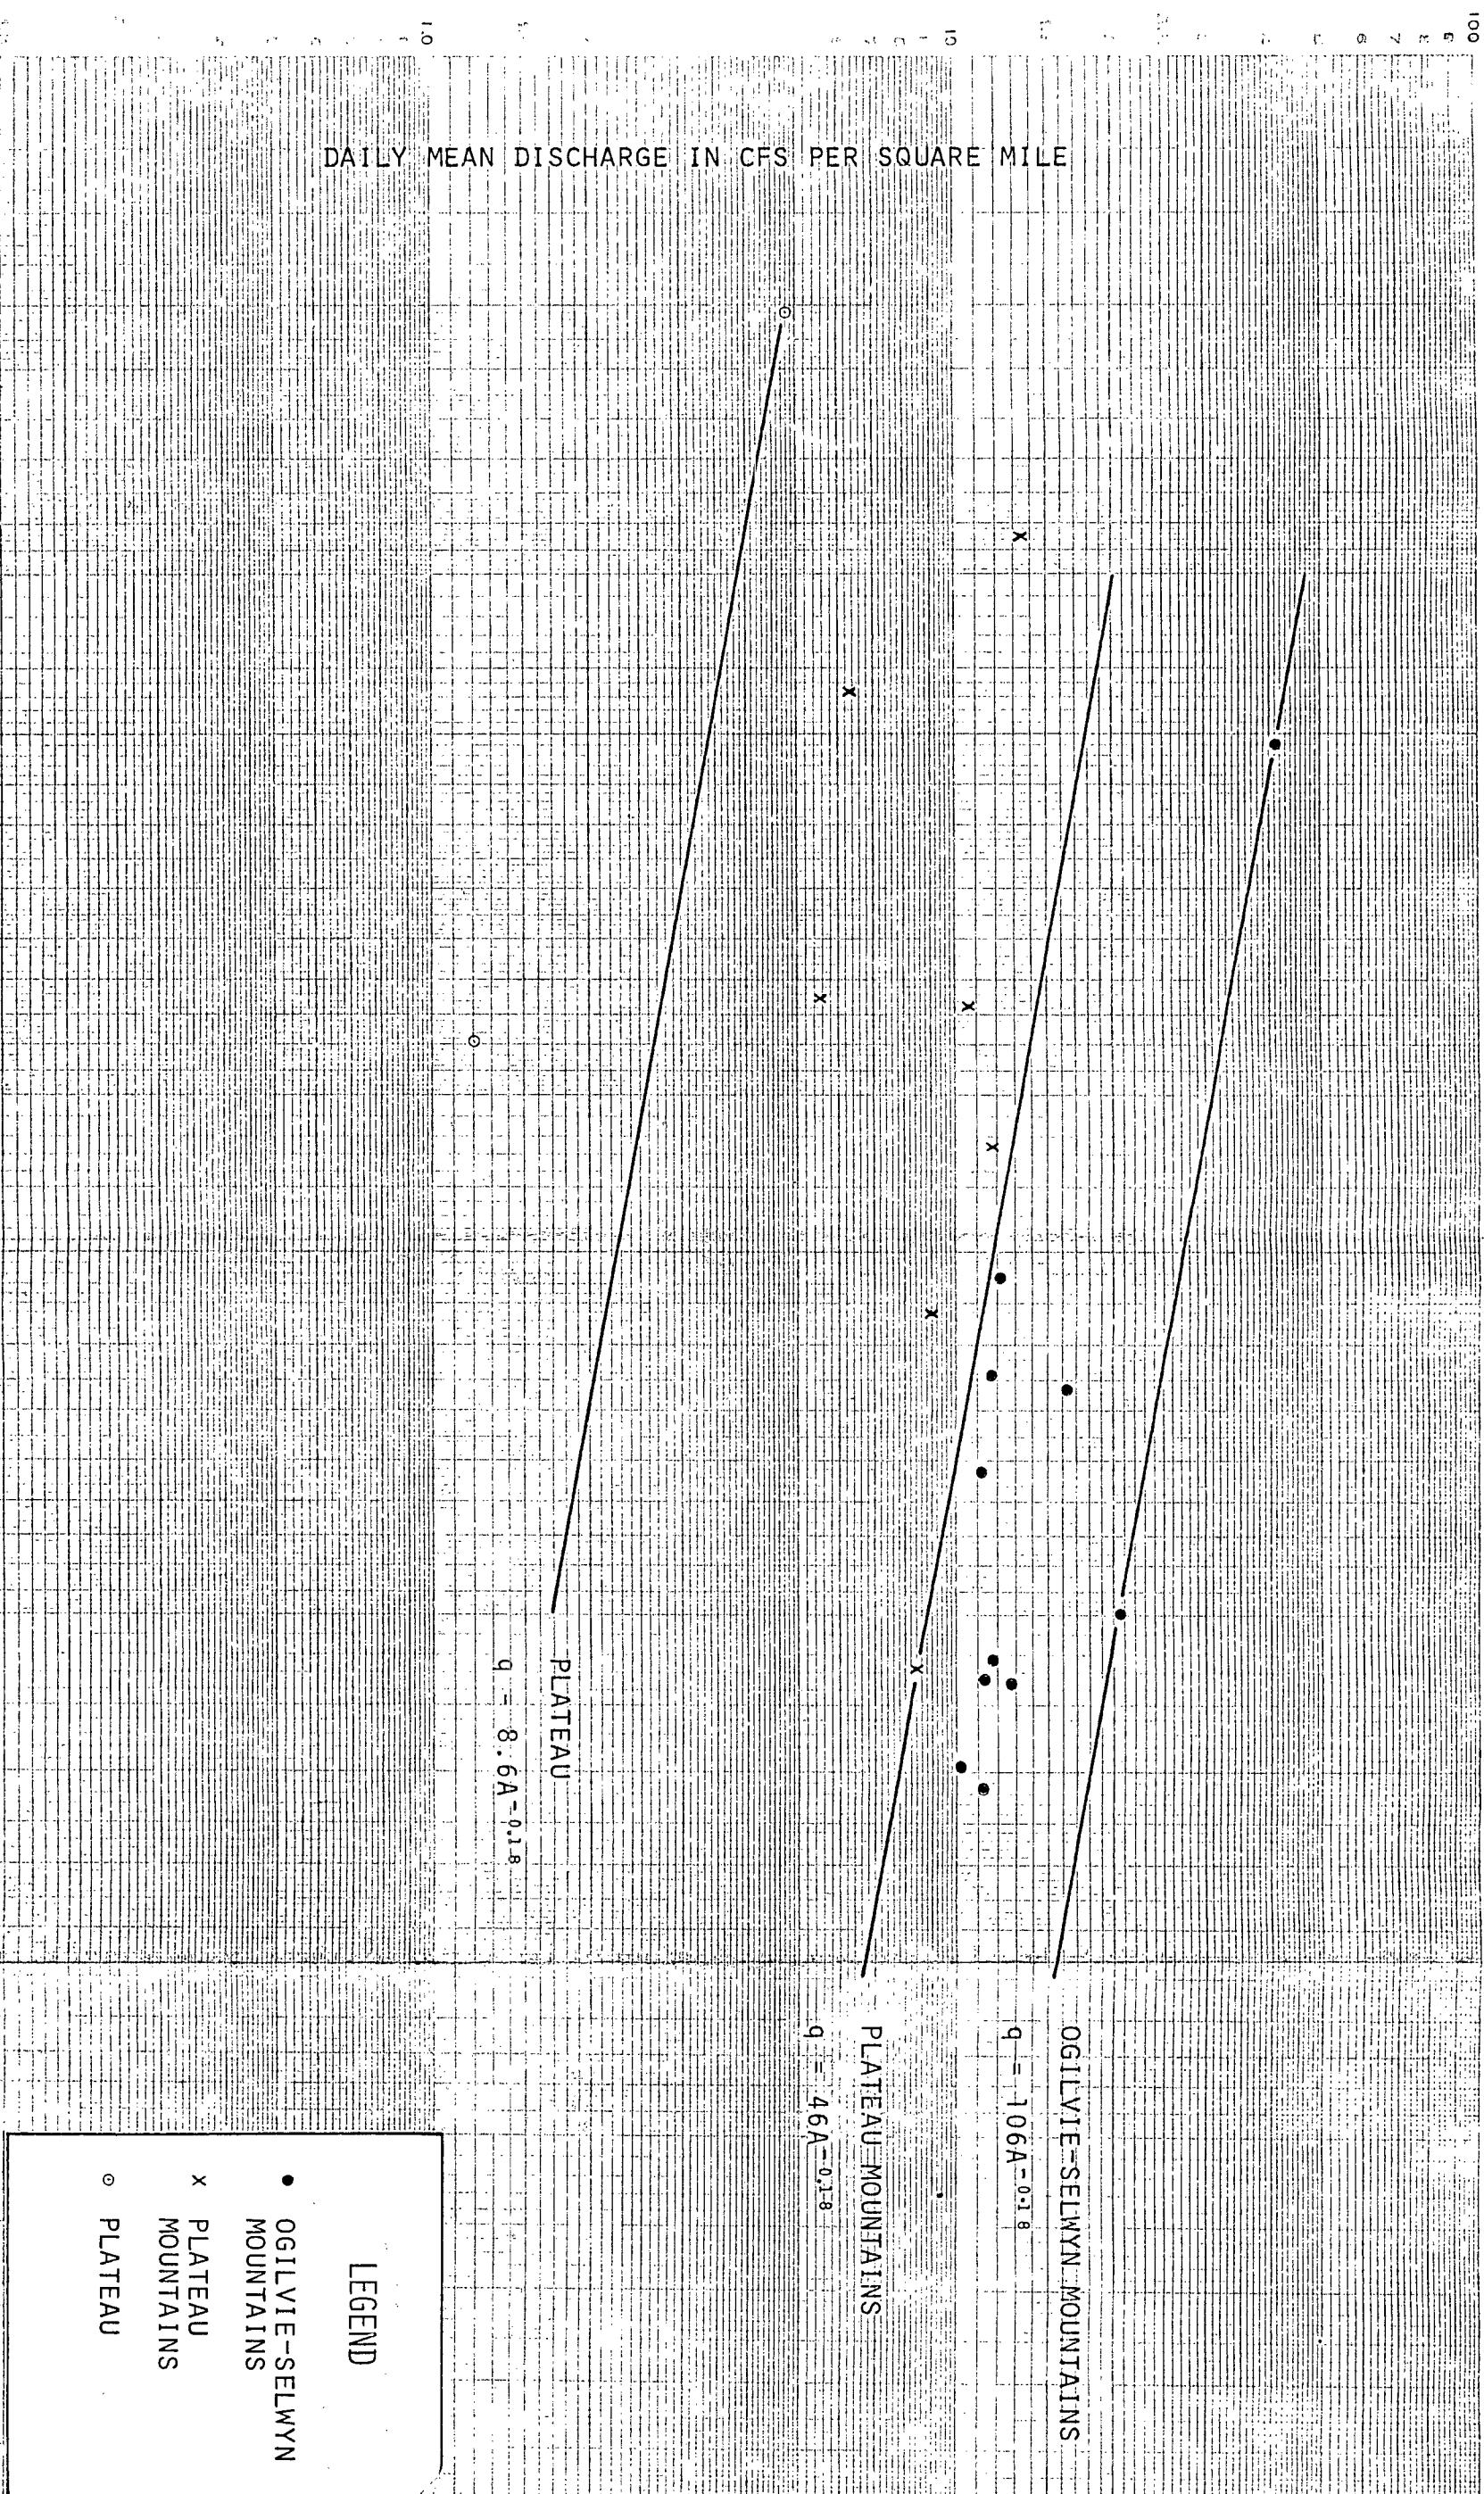


LOGARITHMIC
SCUTTLE & ESSER CO. MADE IN U.S.A.
4 CYCLES X 70 DIVISIONS

60,100 . . . 785

60.1↑ 28.300 78.500 ↑

卷之三

1
9
8
7
6
5
4
3
2
1
1
9
8
7
6
5
4
3
2
1
1
9
8
7
6
5
4
3
2
1

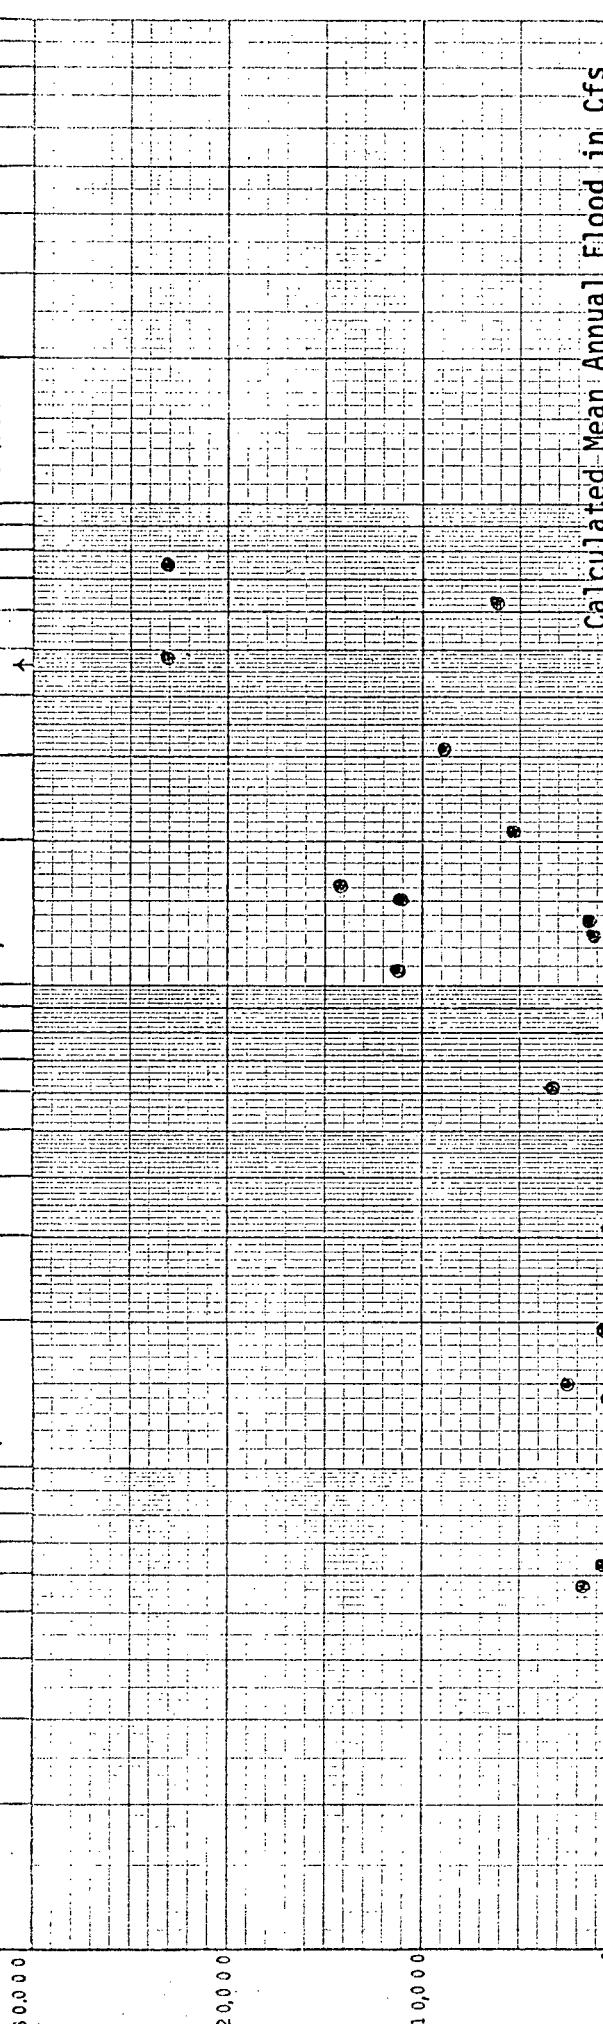

Calculated Mean Annual Flood in Cfs

Figure 4

Residuals vs Predicted Annual Flood in the Yukon Territory - Drainage Area Only

$$\text{Log}_{10}(\text{M.A.F.}) = 0.9683 + 0.9089 \text{Log}_{10}(\text{Drainage Area})$$

20

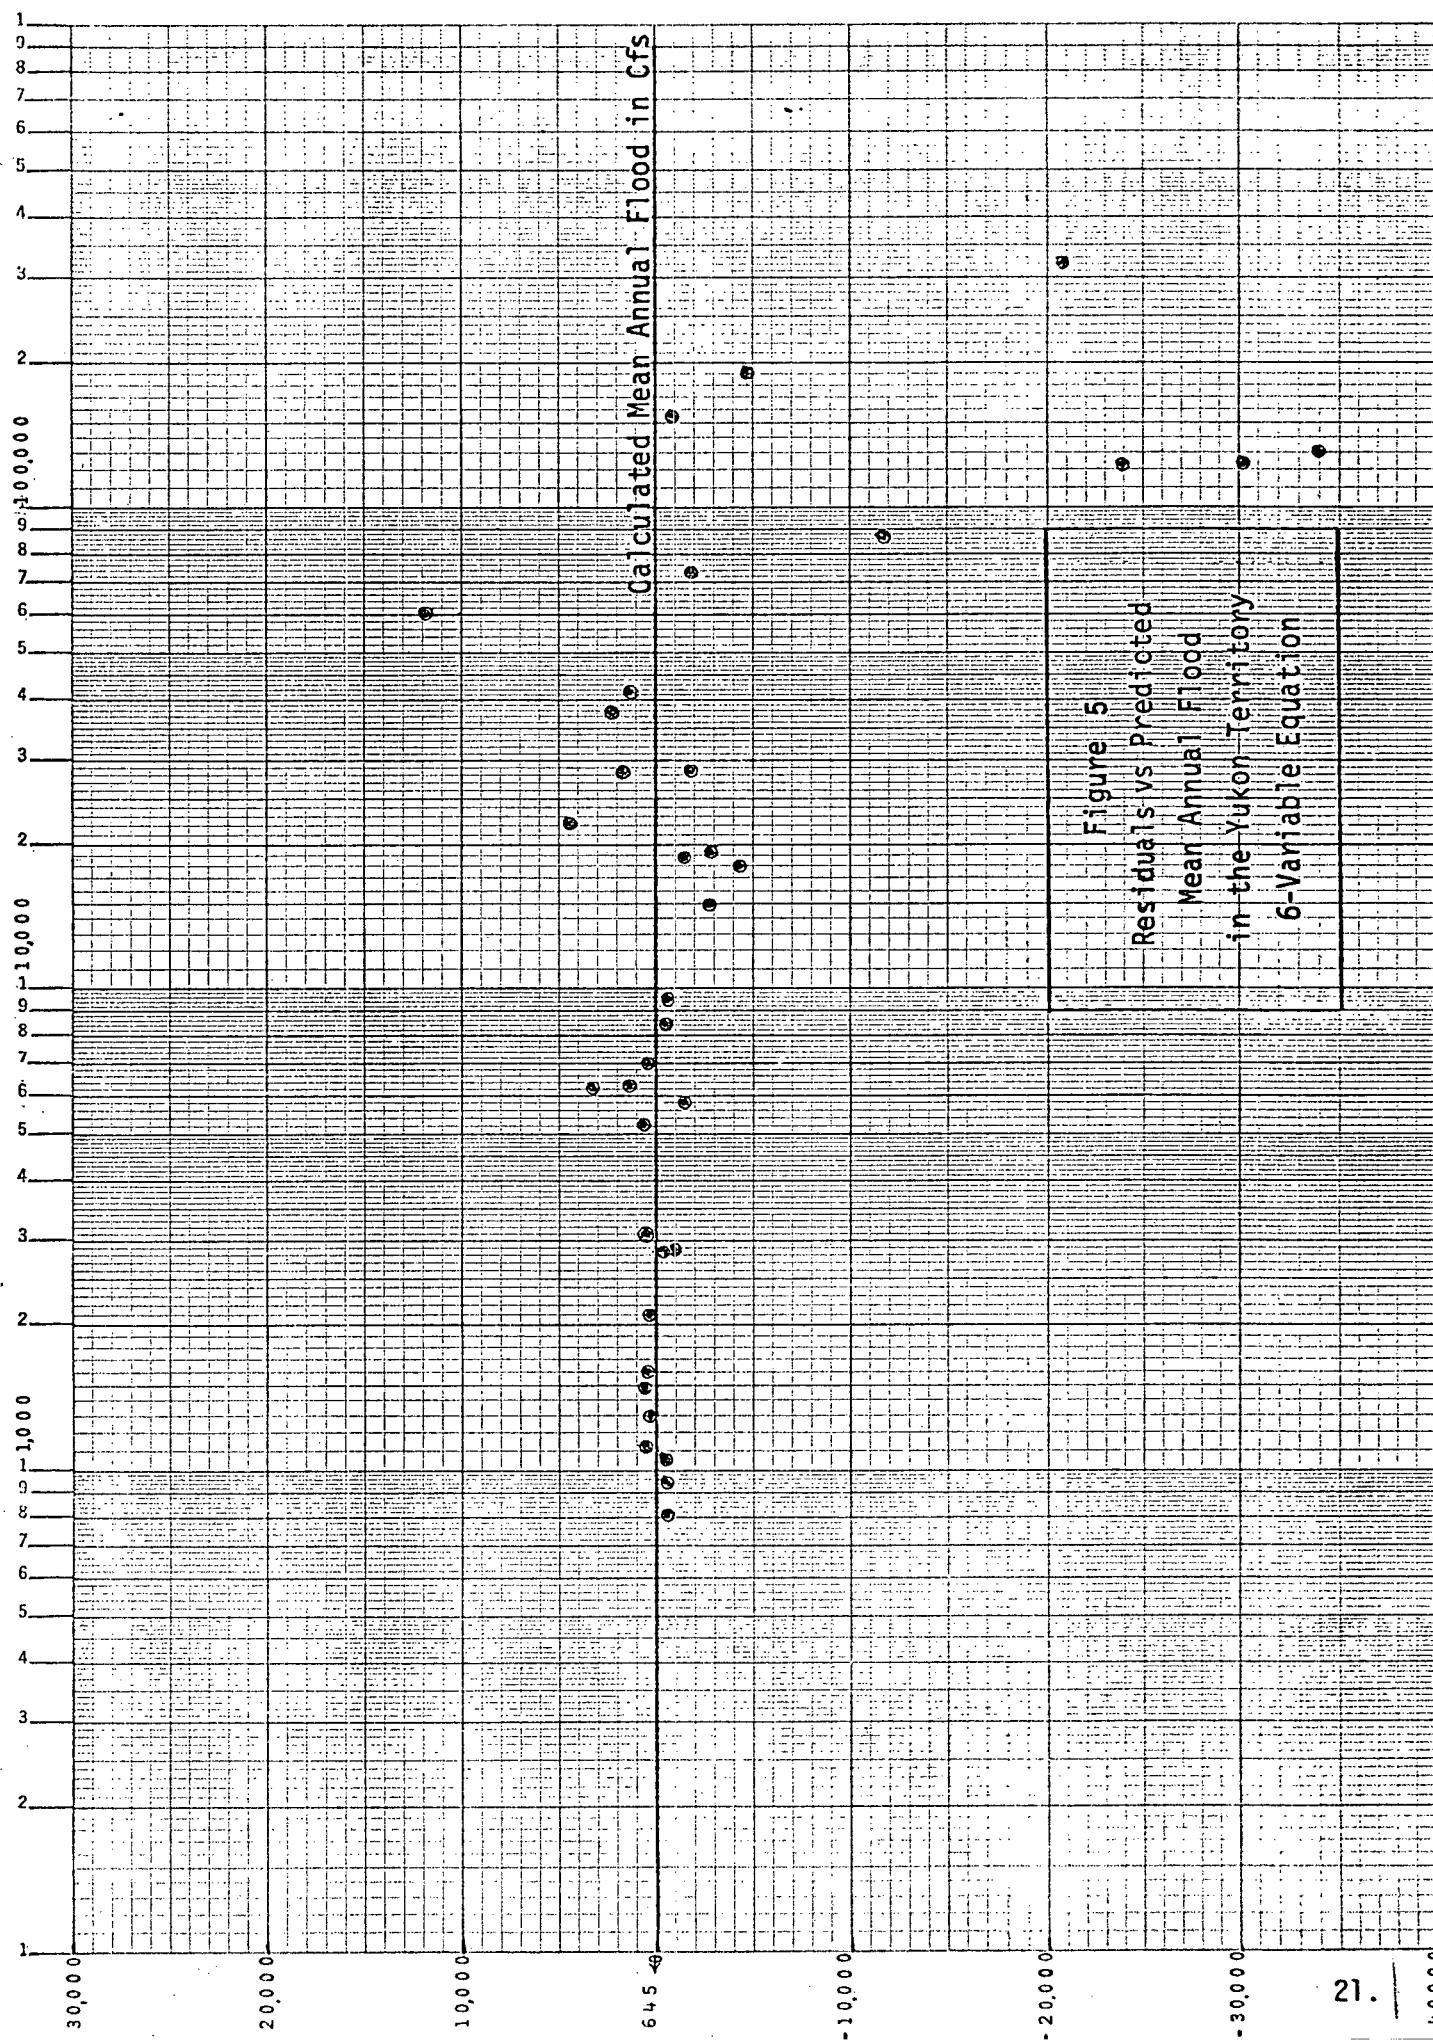
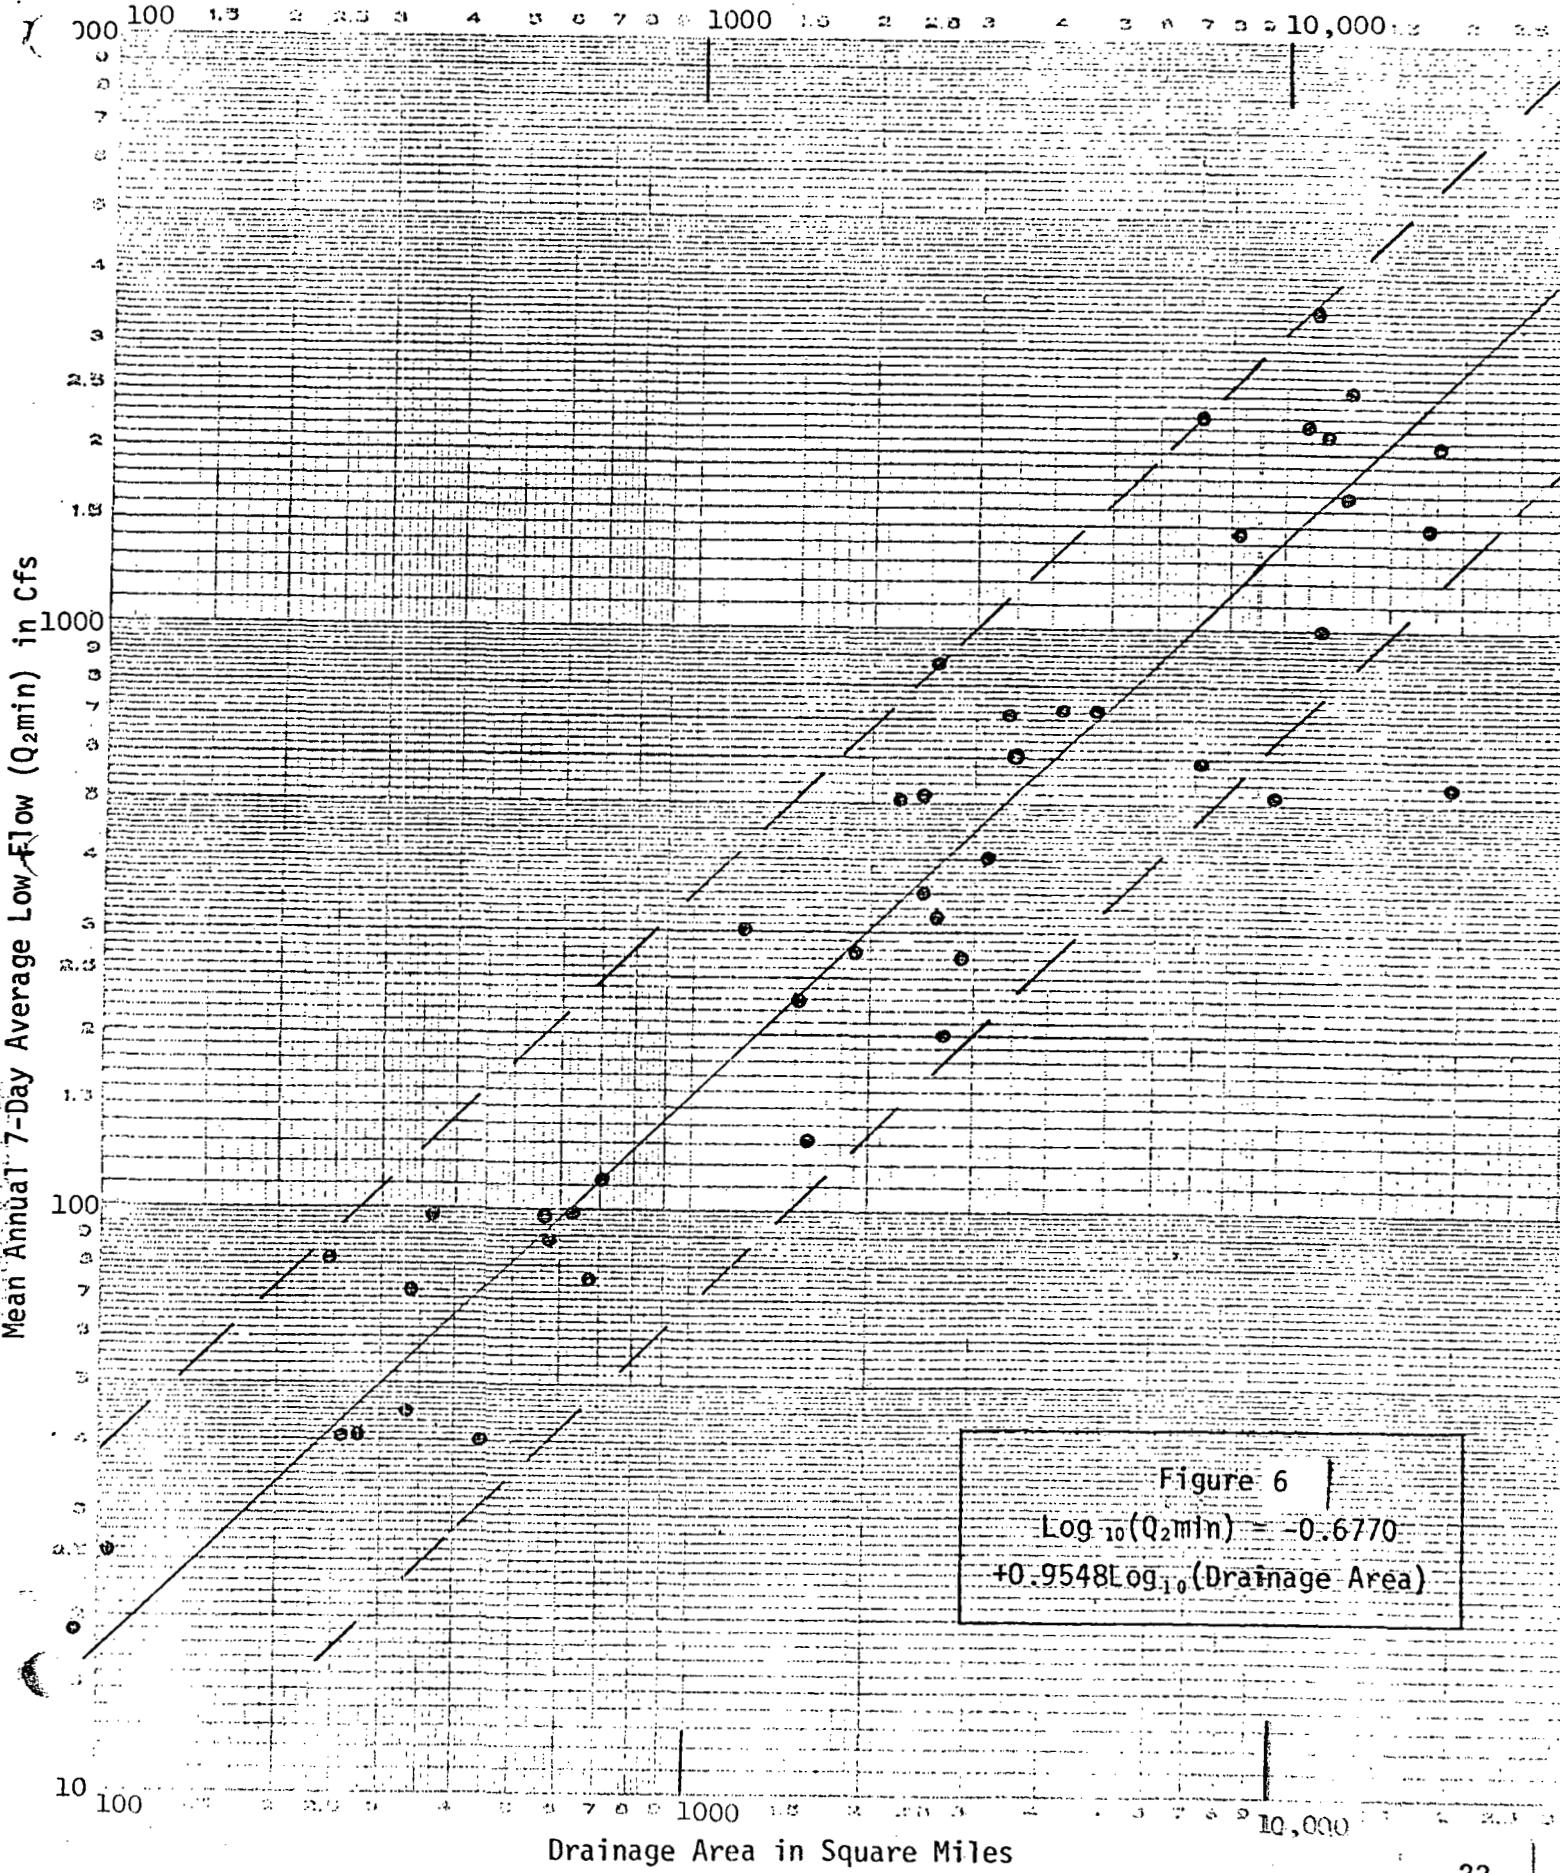


Figure 5
Residuals vs Predicted
Mean Annual Flood
in the Yukon Territory
6-Variable Equation






Figure 7
Minimum Recorded Daily Discharges
in the Yukon Territory

23.

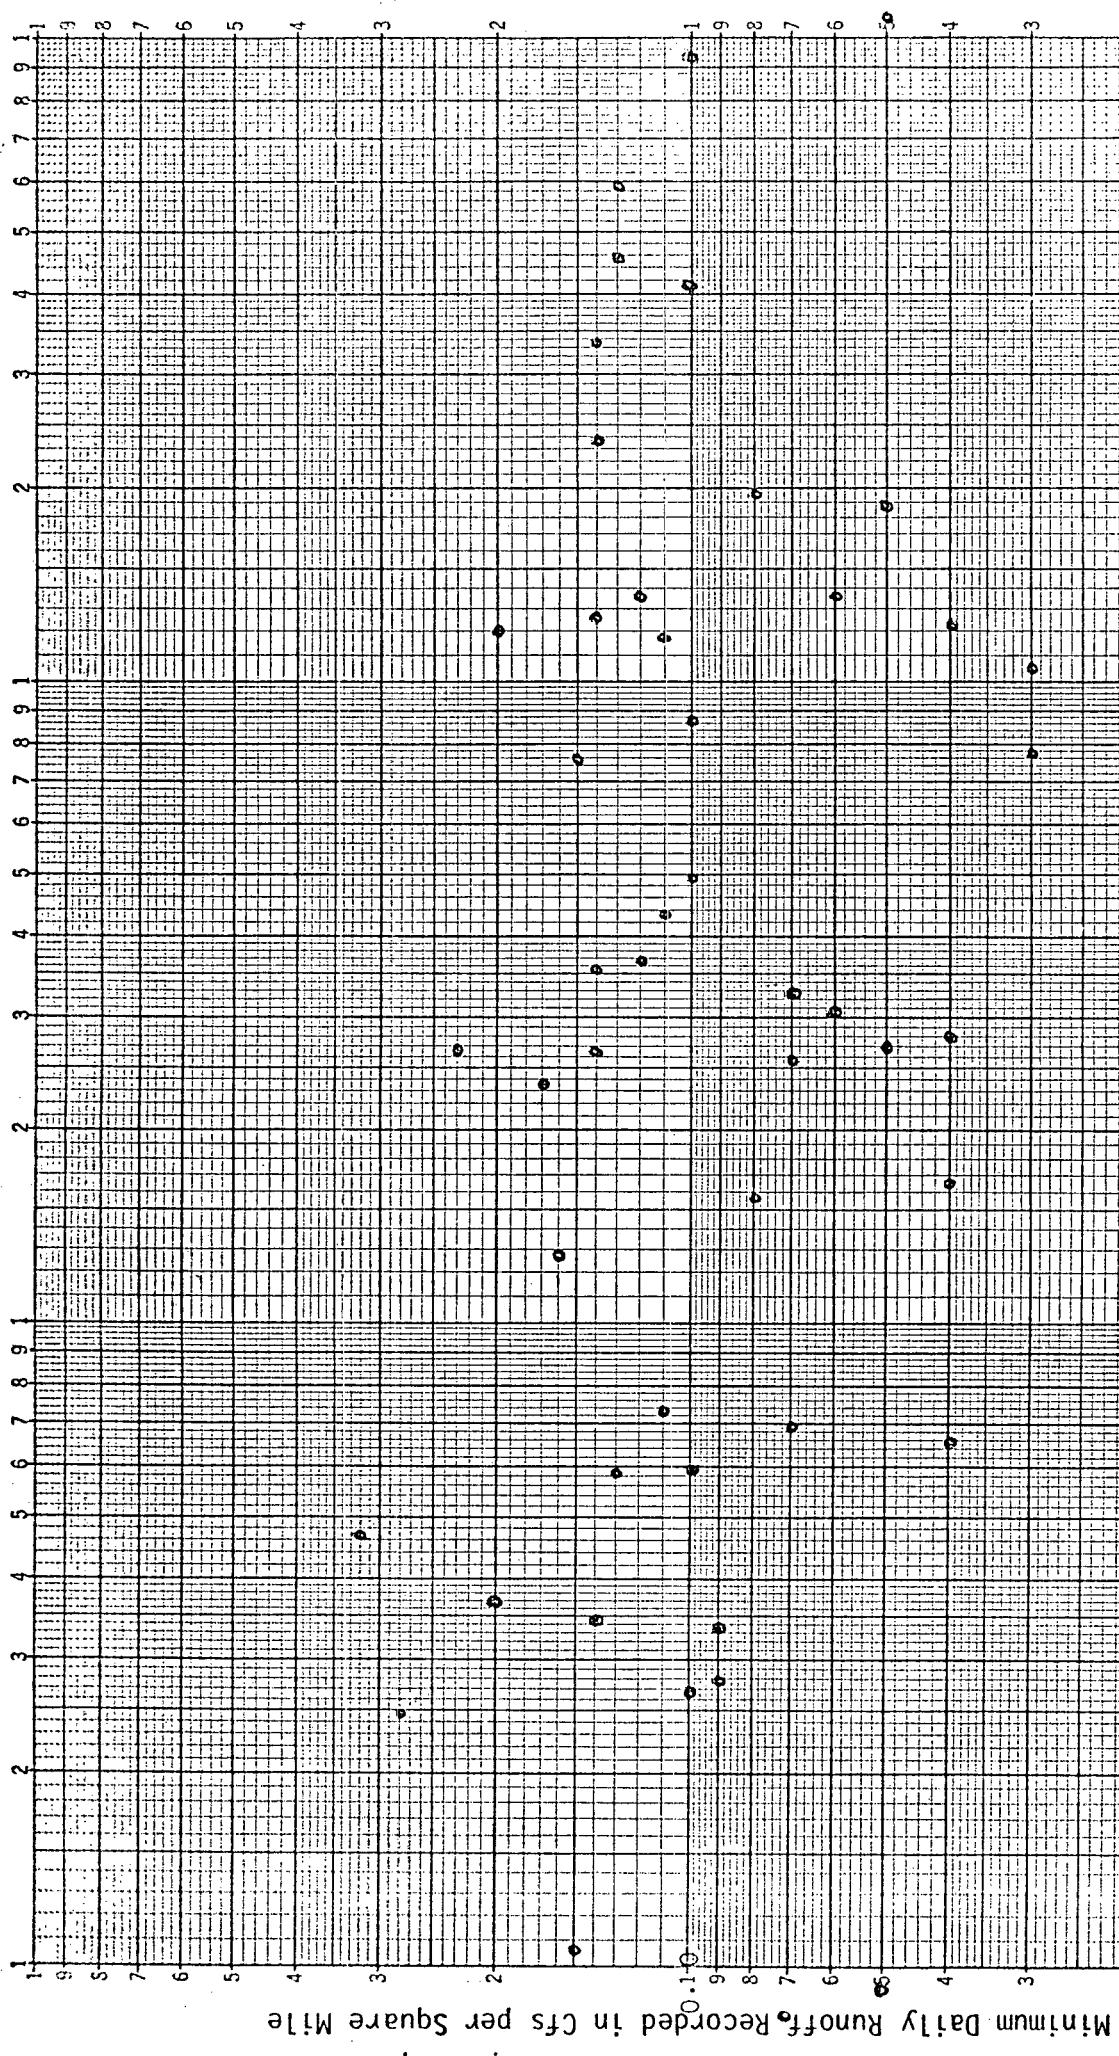


Table 1.

FLOOD DATA

Station No. & Stream	D.A. sq.mi.	M.A.F. cfs	Q_{50} cfs	Q_{50} M.A.F.	Q_{100} cfs	Q_{100} M.A.F.
08AA003 Dezadeash	3280	5880	10900	1.85	11800	2.01
08AA001 Aishihik	1660	2570	5080	1.98	5560	2.16
08AA004 Kathleen	249	1630	3900	2.39	4600	2.82
09AA007 Lubbock	684	422	916	2.17	1050	2.49
09AA009 Watson	444	893	1840	2.06	2010	2.25
09AA011 Tagish Creek	30	70	150	2.14	166	2.37
09AA012 Wheaton	337	1740	2850	1.64	3060	1.76
09AB001 Yukon	7500	18500	23300	1.26	24000	1.30
09AB008 M'Clintock	655	2030	4350	2.14	4870	2.40
09AB009 Yukon	12000	24500	31700	1.29	32800	1.34
09AC001 Takhini	2700	8370	14500	1.73	15800	1.89
09AC004 Takhini	1570	7240	11500	1.59	12200	1.68
09AE001 Teslin	11700	39500	64800	1.64	69300	1.75
09AF001 Teslin	14100	42400	74800	1.76	81700	1.93
09AG001 Big Salmon	2610	12000	23500	1.96	26400	2.20
09AH001 Yukon	33600	70600	119000	1.69	129000	1.83
09BA001 Ross	2790	15900	29200	1.83	32500	2.04
09BC001 Pelly	18900	76700	173000	2.26	200000	2.61
09BC002 Pelly	7130	39700	76300	1.92	84700	2.13
09CA002 Kluane	1910	9410	14300	1.52	15200	1.62
09CD001 Yukon	57800	147000	307000	2.09	352000	2.39
09DC002 Stewart	12200	81900	143000	1.75	154000	1.88
09DD002 Stewart	13500	92100	192000	2.08	223000	2.42
09DD003 Stewart	19700	96300	313000	3.25	411000	4.27
09EA003 Klondike	3010	14800	25900	1.75	28700	1.94
09EB001 Yukon	102000	275000	477000	1.73	524000	1.91
09FD001 Porcupine	21400	161000	328000	2.04	363000	2.25
10AA001 Liard	12900	70300	168000	2.39	205000	2.92
10AB001 Frances	4950	26600	43600	1.64	46800	1.76
10AD001 Hyland	3650	30100	52900	1.76	59200	1.97
10MA001 Peel	9940	83700	315000	3.76	402000	4.80

Table 1. (Continued)

Station No. & Stream	D.A. sq.mi.	M.A.F. cfs	Q_{50} cfs	$\frac{Q_{50}}{M.A.F.}$	Q_{100} cfs	$\frac{Q_{100}}{M.A.F.}$
British Columbia						
09AA006 Atlin	2630	7760	15000	1.93	17000	2.19
09AA008 Pine Creek	269	642	1800	2.80	2200	3.43
09AA015 Wann	104	1380	2850	2.06	3300	2.39
09AA014 Fantail	277	4220	11000	2.61	13500	3.20
09AA013 Tutshi	366	2370	4750	2.00	5400	2.28
09AA010 Lindeman Creek	92	2280	5700	2.50	7000	3.07
09AE003 Swift	1280	9300	21000	2.26	25000	2.69
09AE004 Gladys	737	2120	4700	2.22	5500	2.59
10BE001 Liard	40300	190000	420000	2.21	500000	2.63
10AC003 Dease	588	3220	8200	2.55	10000	3.11
10AC002 Dease	2380	22300	45000	2.02	52000	2.33
10BC001 Coal	3550	27900	41700	1.49	43500	1.56

TABLE 2 - EXTREME MAXIMUM DAILY FLOWS

STATION NUMBER	STATION NAME	DRAINAGE AREA IN SQ MI	DATE	MAXIMUM DAILY FLOW IN CFS	MAXIMUM RUNOFF IN CRS/SQ MI
0SAAG01	AISHIHIK RIVER NEAR WHITEHORSE	•	•	1660	20 Jun 1962
0SAEBC01	ALSEK RIVER ABOVE BATES RIVER	•	•	6250	13 Jul 1975
0GAHJ03	BIG CREEK NEAR THE MOUTH	•	•	674	15 Jul 1976
09AGC01	BIG SALMON RIVER NEAR CARMACKS	•	•	2610	23 Jun 1962
10EBC001	COAL RIVER AT THE MOUTH	•	•	3550	30 May 1972
08AA003	DEZADEASH RIVER AT HAINES JUNCTION	•	•	3280	28 Jun 1961
10MJD001	FIRTH RIVER NEAR THE MOUTH	•	•	2240	29 May 1975
10AD001	FRANCES RIVER NEAR WATSON LAKE	•	•	4950	12 Jun 1964
0SDAC01	HESS RIVER ABOVE EMERALD CREEK	•	•	1870	30 May 1977
10AD002	HYLAND RIVER AT MILE 67.4 NAHANNI RANGE ROAD	•	•	211	21 Jun 1977
10AD001	HYLAND RIVER NEAR LOWER POST	•	•	3650	20 Jun 1961
08AA004	KATHLEEN RIVER NEAR HAINES JUNCTION	•	•	248	20 Jun 1964
10AEC003	KING CREEK AT MILE 13 NAHANNI RANGE ROAD	•	•	5.3	3 Jul 1976
09EA003	KLONDIKE RIVER ABOVE BONANZA CREEK	•	•	3010	29 May 1972
09CA002	KLUANE RIVER AT OUTLET OF KLUANE LAKE	•	•	1910	14 Aug 1971
10AAC01	LIARD RIVER AT UPPER CROSSING	•	•	12900	2 Jun 1972
09AA007	LUESOCK RIVER NEAR ATLIN	•	•	634	4 Jun 1972
09ABD008	M:CLINTOCK RIVER NEAR WHITEHORSE	•	•	655	1 Jun 1972
09DC001	MAYO RIVER NEAR MAYO	•	•	873	6 Jun 1949
09EA004	NORTH KLONDIKE RIVER NEAR THE MOUTH	•	•	423	4 Jun 1975
10MA002	OGLIVIE RIVER AT MILE 123 DEMPSTER HIGHWAY	•	•	2090	31 May 1975
09FC001	OLD CROW RIVER NEAR THE MOUTH	•	•	5370	4 Jun 1977
10MA001	PEEL RIVER ABOVE CANYON CREEK	•	•	5370	4 Jun 1977
09EC001	PELLY RIVER AT PELLY CROSSING	•	•	9940	4 Jun 1964
09BC002	PELLY RIVER AT ROSS RIVER	•	•	18900	28 May 1957
09BC004	PELLY RIVER BELOW VANGORDA CREEK	•	•	7130	7 Jun 1964
09FD001	PORCUPINE RIVER AT OLD CROW	•	•	8540	6 Jun 1975
09FB001	PORCUPINE RIVER BELOW BELL RIVER	•	•	21400	4 Jun 1964
09BC003	ROSE CREEK BELOW FARO CREEK	•	•	13900	19 May 1977
09BA001	ROSS RIVER AT ROSS RIVER	•	•	80.5	31 May 1967
10MB001	SHAKE RIVER ABOVE IRON CREEK	•	•	2790	1 Jun 1972
10MB003	SHAKE RIVER NEAR THE MOUTH	•	•	1070	7 Jun 1964
09BB001	SOUTH MACNILLIAN RIVER AT MILE 249 CANOL ROAD	•	•	3440	19 May 1977
09DC002	STEWART RIVER AT MAYO	•	•	305	4 Jun 1975
09DD002	STEWART RIVER AT STEWART CROSSING	•	•	12200	10 Jun 1964
09DD003	STEWART RIVER AT THE MOUTH	•	•	13500	11 Jun 1964
09AE003	SWIFT RIVER NEAR SWIFT RIVER	•	•	19700	12 Jun 1964
09AA011	TAGISH CREEK NEAR CARCROSS	•	•	1280	11 Jun 1964
09AC004	TAKHINI RIVER AT OUTLET OF KUSAWA LAKE	•	•	30.0	21 May 1957
09AC001	TAKHINI RIVER NEAR WHITEHORSE	•	•	1570	21 Jun 1964
09AE001	TESLIN RIVER NEAR TESLIN	•	•	2700	2 Sep 1949
09AF001	TESLIN RIVER NEAR WHITEHORSE	•	•	11700	28 Jun 1962
10AA002	TOM CREEK AT MILE 21.7 ROBERT CAMPBELL HIGHWAY	•	•	14100	28 Jun 1962
09AA009	WATSON RIVER NEAR CARCROSS	•	•	168	3 May 1976
09AA012	WHEATON RIVER NEAR CARCROSS	•	•	444	26 Jun 1971
09CB001	WHITE RIVER AT MILE 1169.2 ALASKA HIGHWAY	•	•	337	10 Jun 1964
09AB009	YUKON RIVER ABOVE FRANK CREEK	•	•	2410	2 Aug 1976
09CD001	YUKON RIVER ABOVE WHITE RIVER	•	•	12000	29 Aug 1961
09AH001	YUKON RIVER AT CARMACKS	•	•	57800	25 Jun 1962
09EB001	YUKON RIVER AT DAWSON	•	•	33600	24 Jun 1962
09EB002	YUKON RIVER AT STEWART RIVER	•	•	102000	11 Jun 1964
09AB001	YUKON RIVER AT WHITEHORSE	•	•	97100	12 Jun 1964
				7500	9 Aug 1953

Table 3.

LOW FLOW DATA

Station No. & River	D.A. sq.mi.	Q _{2min} cfs	Q _{10min} cfs	Q _{50min} cfs	Q _{min} recorded	Q _{min/D.A.} cfs/sq.mi.
08AA003 Dezadeash	3280	419	300	240	238	0.07
08AA001 Aishihik	1660	133	85	68	79	0.04
08AA004 Kathleen	249	84	70	60	71	0.28
09AA007 Lubbock	684	77	50	36	52	0.07
09AA009 Watson	452	41	18	8	10	0.02
09AA011 Tagish Creek	31	4	3	2	3	0.09
09AA012 Wheaton	337	45	32	24	33	0.09
09AB001 Yukon	7500	2400	1800	1400	1150	0.15
09AB008 M'Clintock	597	89	63	50	60	0.10
09AB009 Yukon	12000	3700	2700	2100	2500	0.20
09AC001 Takhini	2700	324	240	175	153	0.05
09AC004 Takhini	1570	234	190	170	128	0.08
09AE001 Teslin	11700	2310	1600	1300	1350	0.11
09AF001 Teslin	13700	2640	1900	1650	1780	0.12
09AG001 Big Salmon	2610	535	440	360	388	0.14
09AH001 Yukon	33600	7510	5400	4100	4800	0.14
09BA001 Ross	2800	206	150	140	100	0.04
09BC001 Pelly	18900	1560	1200	1000	1000	0.05
09BC002 Pelly	7670	608	440	360	219	0.03
09BC003 Rose Creek	85	-	-	-	6	0.07
09CA002 Kluane	1910	283	-	-	19	0.01
09CD001 Yukon	58400	9860	8200	6800	8000	0.13
09DC002 Stewart	12100	1030	700	540	538	0.04
09DD002 Stewart	13500	1710	1100	760	900	0.06
09DD003 Stewart	19700	2160	1550	1200	1250	0.06
09EA003 Klondike	3010	279	170	115	170	0.06
09EB001 Yukon	106000	13500	8400	-	6350	0.05
09EB002 Yukon	97300	-	-	-	10600	0.10
09FD001 Porcupine	20900	554	420	330	425	0.02
10AA001 Liard	12500	2250	1750	1600	1740	0.14
10AB001 Frances	4950	759	580	470	486	0.10

Table 3. (Cont'd)

Station No. & River	D.A. sq.mi.	LOW FLOW DATA					Qmin/D.A. cfs/sq.mi.
		Q _{2min} cfs	Q _{10min} cfs	Q _{50min} cfs	Qmin recorded		
10MA001 Peel	10200	536	380	290	404	0.03	
10MB001 Snake	1070	-	-	-	0		-
British Columbia							
09AA006 Atlin	2630	904	740	640	623	0.23	
09AA008 Pine Creek	269	41	28	20	27	0.10	
09AA015 Wann	104	26	16	10	16	0.15	
09AA014 Fantail	277	41	28	23	26	0.09	
09AA013 Tutshi	366	98	80	70	74	0.20	
09AA010 Lindeman Creek	92	19	11	6	5	0.05	
09AE003 Swift	1280	310	235	190	205	0.16	
09AE004 Gladys	737	115	96	86	83	0.11	
10BE006 Liard	23800	-	-	-	3300	0.14	
10BE001 Liard	40300	7100	5200	4500	4400	0.10	
10BE005 Liard	45800	-	-	-	6100	0.13	
10AC003 Dease	588	97	82	76	80	0.13	
10AC002 Dease	2380	525	420	370	415	0.17	
10AC005 Cottonwood	343	73	52	40	50	0.14	
10AC004 Blue	658	100	-	-	32	0.04	
10AD001 Hyland	3650	630	500	440	460	0.12	
10BB002 Kechika	4310	746	520	340	480	0.11	
10BB001 Kechika	8790	1520	900	570	895	0.10	
10BA001 Turnagain	2550	360	165	86	203	0.07	
10BC001 Coal	3550	740	600	520	530	0.14	
10BE007 Trout	461	-	-	-	152	0.32	

Table 4.

PHYSIOGRAPHIC PARAMETERS

The Physiographic Parameters on the listing are in the following order, after the station number and the card number,

<u>Parameter</u>		<u>Abbreviation</u>	<u>Units</u>
drainage area		AREA	square miles
location of center of basin	NPOS I		dimensionless
	NPOS J		
mean basin elevation	ELEV		feet
mean basin slope x 10	SLP%		
angle between the west-east direction and the horizontal projection of the line of steepest descent of the local slope	SLP AZ		degrees
distances to the sea north	DSN		kilometers
north-west	DSNW		
west	DSW		
south-west	DSSW		
relative areas	lakes	RALKE	
	forest	RAFOR	
	swamp	RASWP	
	glacier	RAGLC	
	urban	RAURB	
barrier height	north	BHN	feet
	north-west	BHNW	
	west	BHW	
	south-west	BHSW	
shield effect	north	SEN	feet
	north-west	SENW	
	west	SEW	
	south-west	SESW	
signed slope	north-east	SSNE	feet/kilometers
	east	SSE	
	south-east	SSSE	

Table 4. (Cont'd)

PHYSIOGRAPHIC PARAMETERS FOR BASINS USED IN REGRESSION STUDIES IN THE YUKON TERRITORY

08AA001	1	1519	44	150	4190	54	66	890
08AA001	2	1498	1540	226	7	46	0	0
08AA001	3	0	1830	1540	6240	4140	24500	129200
08AA001	4	106800	15500	8	9	7		
08AA003	1	3019	45	147	3910	56	163	920
08AA003	2	1541	1580	226	5	46	0	0
08AA003	3	0	2200	2080	6770	3190	27000	131100
08AA003	4	108200	13300	7	7	4		
09AA006	1	2520	64	132	3460	39	253	1110
09AA006	2	1739	630	254	12	62	1	4
09AA006	3	0	2600	2270	3950	2400	37100	134300
09AA006	4	45200	12600	0	-4	-2		
09AA007	1	591	63	138	3300	34	256	1060
09AA007	2	1710	1440	296	6	84	2	0
09AA007	3	0	2790	2060	5990	2990	35100	128800
09AA007	4	101600	18000	-4	-9	-2		
09AA008	1	267	65	131	3880	41	245	1130
09AA008	2	1767	370	254	6	51	0	0
09AA008	3	0	2220	1420	2380	1760	37600	135500
09AA008	4	27100	11500	-5	-20	-14		
09AA009	1	452	56	139	3920	41	96	1030
09AA009	2	1654	1700	254	2	52	1	0
09AA009	3	0	2180	1910	6810	3680	30000	134100
09AA009	4	116600	18000	9	15	7		
09AA010	1	93	55	132	4840	50	46	958
09AA010	2	1497	241	186	2	22	0	3
09AA010	3	0	1618	1777	1458	2052	25610	123040
09AA010	4	17160	15380	19	8	2		
09AA011	1	31	59	139	3060	38	120	1060
09AA011	2	1682	7770	282	1	95	0	0
09AA011	3	0	2900	2160	1770	4450	32000	131500
09AA011	4	124700	20100	19	8	12		
09AA012	1	337	55	138	4520	56	57	1040
09AA012	2	1682	1380	240	2	27	0	1
09AA012	3	0	1530	1670	4670	3250	28700	136500
09AA012	4	99500	18700	18	22	21		
09AA013	1	368	57	133	4296	69	16	1108
09AA013	2	1723	340	231	6	43	1	0
09AA013	3	0	1922	2194	2188	2210	33390	139140
09AA013	4	25800	16340	15	1	-9		
09AA014	1	272	57	130	5032	56	68	1106
09AA014	2	1695	294	206	2	21	1	20
09AA014	3	0	1564	1383	2145	1264	35600	138120
09AA014	4	23710	12d60	7	8	12		
09AA015	1	105	60	123	5309	78	14	1159
09AA015	2	1781	331	202	4	31	0	6
09AA015	3	0	1656	2226	3072	1468	37530	143780
09AA015	4	25990	9640	21	47	38		
09AB001	1	7190	61	135	3680	48	62	1080
09AB001	2	1710	870	254	8	57	1	5
09AB001	3	0	2370	2200	4460	2810	34100	133800
09AB001	4	51200	15400	5	8	4		
09AB008	1	597	60	144	3560	43	115	1010
09AB008	2	1640	1760	325	1	81	2	0
09AB008	3	0	2420	2110	7220	3830	30800	118900
09AB008	4	116300	19500	9	10	4		
09AB009	1	12000	57	138	3740	47	47	1030
09AB009	2	1668	1140	254	7	56	1	3
09AB009	3	0	2260	2130	5240	2660	32800	131200
09AB009	4	19200	15000	4	6	2		

Table 4. (Cont'd)

09AC001	1	2781	51	141	4270	54	30	960
09AC001	2	1626	1390	240	4	36	1	3
09AC001	3	0	1630	1820	5630	2190	35700	134800
09AC001	4	96400	13800	1	0	0		
09AC004	1	1594	51	138	4540	59	208	980
09AC004	2	1640	1190	212	5	23	0	6
09AC004	3	0	1470	1910	4640	2300	38300	137200
09AC004	4	84400	13900	0	0	-2		
09AE001	1	11700	78	138	3920	34	250	1080
09AE001	2	1753	1220	339	3	69	2	0
09AE001	3	0	2520	2250	4930	2170	31200	102400
09AE001	4	81000	17100	0	-1	0		
09AE003	1	1280	90	135	4230	36	382	1110
09AE003	2	1809	890	311	1	49	4	0
09AE003	3	0	2200	2150	3030	1270	32000	95700
09AE003	4	59500	14800	-7	-14	-7		
09AE004	1	737	68	132	4170	38	37	1140
09AE004	2	1781	420	268	5	59	0	0
09AE004	3	0	2230	1320	2430	1650	36000	132000
09AE004	4	29900	12400	6	1	3		
09AF001	1	13700	76	139	3880	35	253	1060
09AF001	2	1725	1300	339	3	70	2	0
09AF001	3	0	2510	2260	5270	2320	31200	102600
09AF001	4	86300	17500	-1	-2	0		
09AG001	1	2640	62	153	4140	41	296	920
09AG001	2	1569	1700	395	1	73	0	0
09AG001	3	0	1940	2290	4440	2220	27700	86500
09AG001	4	112400	19400	-4	-7	-4		
09AH001	1	33600	65	143	3770	40	1	1000
09AH001	2	1654	1320	311	4	67	1	1
09AH001	3	0	2370	2270	5050	2670	30700	111100
09AH001	4	88900	16800	0	1	0		
09BA001	1	2800	90	162	3590	29	279	850
09BA001	2	1484	1800	565	3	89	4	0
09BA001	3	0	2750	2420	4970	3620	21300	63200
09BA001	4	110600	27000	0	0	0		
09BC001	1	19700	75	163	3660	37	325	820
09BC001	2	1442	1720	523	2	82	1	0
09BC001	3	0	2520	2560	5000	3910	21700	68000
09BC001	4	108300	26000	0	0	0		
09BC002	1	7670	91	159	3370	30	324	880
09BC002	2	1527	1830	565	2	83	2	0
09BC002	3	0	2470	2230	4030	3130	22100	65700
09BC002	4	112900	27100	0	-1	0		
09CA002	1	1976	24	150	4390	65	149	900
09CA002	2	1456	1460	226	8	35	0	4
09CA002	3	0	1830	1410	5420	6050	26200	128600
09CA002	4	102100	23300	-2	0	0		
09CD001	1	58400	66	151	3680	39	344	920
09CD001	2	1569	1450	395	3	73	1	1
09CD001	3	0	2420	2400	5100	3370	27100	96300
09CD001	4	95200	21500	0	1	0		
09DC002	1	12100	66	178	3660	42	222	660
09DC002	2	1244	1620	622	2	73	0	0
09DC002	3	0	2340	2310	3990	6360	14700	52800
09DC002	4	102900	38700	0	-1	0		
09DD002	1	13500	71	177	3780	42	231	670
09DD002	2	1258	1650	522	2	74	0	0
09DD002	3	0	2240	2220	4150	5580	15100	52000
09DD002	4	104300	36300	-1	-2	0		

Table 4. (Cont'd)

09EA003	1	3058	33	182	3230	42	195	580
09EA003	2	1173	1390	523	0	62	0	0
09EA003	3	0	2260	3210	2860	3690	14000	67800
09EA003	4	93000	61400	-1	-2	0		
09EB001	1	106000	54	159	3590	40	339	840
09EB001	2	1456	1460	410	3	72	1	1
09EB001	3	0	2360	2390	4870	4300	24200	93100
09EB001	4	96500	30700	0	1	0		
09EB002	1	97300	57	157	3640	40	339	869
09EB002	2	1470	1470	410	3	72	1	2
09EB002	3	0	2350	2320	4920	4300	24700	94000
09EB002	4	96900	28400	0	1	0		
09FD001	1	20300	28	215	1810	18	20	260
09FD001	2	636	1090	1442	3	55	1	0
09FD001	3	0	1250	2490	1400	5390	5900	28600
09FD001	4	38200	104700	0	0	0		
10AA001	1	12500	97	145	3940	30	87	1050
10AA001	2	1693	1780	466	2	70	6	0
10AA001	3	0	2420	2360	5590	1990	26500	77600
10AA001	4	112500	18400	2	4	2		
10AB001	1	4950	100	151	4120	35	218	990
10AB001	2	1640	1960	537	3	68	4	0
10AB001	3	0	2270	1970	5050	1840	24600	69600
10AB001	4	122200	20100	0	1	0		
10AC002	1	2715	97	123	4090	43	221	1260
10AC002	2	1951	520	296	1	62	0	0
10AC002	3	0	2160	1960	3230	2890	32300	111900
10AC002	4	31700	16000	1	3	2		
10AC003	1	612	95	121	3930	39	14	1280
10AC003	2	1965	470	268	4	73	0	0
10AC003	3	0	2350	1870	2320	3120	35400	127100
10AC003	4	28800	15000	4	11	4		
10AC004	1	668	99	131	4120	29	55	1190
10AC004	2	1866	590	367	1	59	9	0
10AC004	3	0	2220	2340	2600	2660	28200	92500
10AC004	4	35700	16400	10	16	9		
10AC005	1	343	96	127	4640	43	242	1230
10AC005	2	1908	550	311	1	39	0	0
10AC005	3	0	1630	1610	3160	2190	33000	103100
10AC005	4	33700	15000	-2	-4	6		
10AD001	1	3749	105	147	4017	44	207	1059
10AD001	2	1695	2007	518	1	66	3	0
10AD001	3	0	2902	2214	5612	2169	32400	69320
10AD001	4	124560	20150	-1	-2	-1		
10BA001	1	2590	105	120	4730	50	331	1320
10BA001	2	2022	570	480	1	55	1	0
10BA001	3	0	2490	1670	2190	1980	42300	102400
10BA001	4	33100	21100	2	1	1		
10BB001	1	8778	113	120	4370	49	5	1280
10BB001	2	2022	630	537	1	62	1	0
10BB001	3	0	2970	2120	2720	2460	39900	94700
10BB001	4	36000	22500	1	2	1		
10BC002	1	4297	119	117	4650	59	336	1270
10BC002	2	2078	630	593	1	56	1	1
10BC002	3	0	2670	1910	2420	2100	38300	94100
10BC002	4	36100	23700	-2	0	-1		
10BC001	1	3681	111	143	3646	31	173	1059
10BC001	2	1757	1995	531	0	86	2	0
10BC001	3	0	4064	2585	6662	2940	33980	70450
10BC001	4	122490	20300	0	0	1		

Table 4. (Cont'd)

108E001	1	40300	106	135	3920	37	18	1140
108E001	2	1838	1270	480	2	70	3	0
108E001	3	0	2960	2420	4540	2600	32500	83800
108E001	4	78000	20200	1	1	0		
108E006	1	23200	100	140	3890	34	108	1110
108E006	2	1767	1450	438	2	69	4	0
108E006	3	0	2660	2410	4930	2440	29700	82600
108E006	4	90700	18500	2	3	1		
10MA001	1	9250	38	193	3320	33	20	460
10MA001	2	1046	1370	820	0	26	0	0
10MA001	3	0	800	2560	1520	4190	11500	51500
10MA001	4	91300	77500	2	3	2		

APPENDIX C

CHANNEL GEOMETRY OF STREAMS
IN THE YUKON TERRITORY

INLAND WATERS DIRECTORATE
PACIFIC AND YUKON REGION

P.W. Strilaeff and R.O. Lyons

Vancouver, B.C.

October, 1978

TABLE OF CONTENTS

	<u>Page</u>
ABSTRACT	1
INTRODUCTION	2
OBJECTIVE AND SCOPE	3
BASIC PRINCIPLE	3
DATA	4
DEFINITION OF BANKFULL STAGE	4
DETERMINATION OF BANKFULL STAGE	5
ANALYSIS OF DATA	6
APPLICATION OF DATA TO UNGAUGED LOCATIONS	9
FURTHER WORK	11
REFERENCES	12

LIST OF FIGURES

- Figure 1 - Sampling of Photographs for Determination of Bankfull Stage
- Figure 2 - Channel Geometry versus Discharge
- Figure 3 - Bankfull Runoff versus Drainage Area
- Figure 4 - Hydrologic Subregions
- Figure 5 - Dimensionless Rating Curves and Values of Flow Frequency for various subregions, based on flow areas
- Figure 6 - Dimensionless Rating Curves for various subregions, based on flow areas, flow depth and flow width

LIST OF TABLES

- Table 1 - Values of Hydraulic Exponents for Rivers Included in the Study
- Table 2 - Bankfull Hydrologic Data for Rivers Included in the Study
- Table 3 - Channel Characteristics for Various Discharge Events
- Table 4 - Values of Ratio of Discharge and Channel Characteristics at Selected Discharge Events for each Gauging Station used in the Study
- Table 5 - Summary of Ratio of Discharge and Channel Characteristics
- Table 6 - Summary of Data and Computations at Ungauged Locations
- Table 7 - Comparison of Values of Runoff for Selected Discharge Events for Various Subregions

CHANNEL GEOMETRY OF STREAMS
IN THE YUKON TERRITORY

ABSTRACT

Relationships between channel geometry and flow characteristics of streams along the proposed Alaska Highway Gas Pipeline route have been determined and estimates of discharge for various return periods at ungauged sites made. Because of the sparsity of the hydrometric network, data from all gauging stations operated in the Yukon Territory have been used in the study. Five separate relationships have been identified, four representing geographic subregions and the fifth, representing mountain streams.

The development of the relationships involves the survey of channel geometry, determination of bankfull discharge and the establishment of dimensionless rating curve between channel size and discharge. Their application to ungauged locations includes the obtaining of one discharge measurement, the extension of the cross-section to bankfull stage and the use of the dimensionless rating curve.

Table 6 lists flood characteristics, and summarizes channel size data and other field information used in the calculations.

INTRODUCTION

Selection of the Alaska Highway as the route in the Yukon for a natural gas pipeline system from Prudhoe Bay in Alaska to markets in southern U.S.A. has necessitated an intensive effort to assess flood magnitudes of streams along that corridor. One of the major hazards to the pipeline and its associated roads and facilities is flooding. Flooding could disrupt drainage and inundate or erode the pipeline bed, could undermine the pipeline at river crossings, or could increase erosion in areas of construction activities. Damage to the environment from flood erosion could be the degradation of water quality and the resultant detrimental effects on ecosystem.

The pipeline route in the Yukon crosses about 250 streams and to assure adequate pipeline design and construction of channel crossings, criteria regarding the magnitude and frequency of floods must be available. Very few hydrologic data exist on which to base the determination of these criteria, particularly on streams with drainage areas less than 150 square miles. There are 19 streamflow observation sites in the near vicinity of the pipeline route, but usefulness of data at about half is very limited because of large upstream storage and the large-sized streams on which most stations are located. To help alleviate this inadequacy, ten new crest-stage stations were constructed late in 1977 along the pipeline route for the recording of the 1978 snow-melt event; it was evident, however, that these data could not alone provide reasonable measures of streamflow characteristics for planning and design. This led to the investigations covered by this report, wherein channel geometry is related to flow characteristics at existing gauging stations and, thereby, provides a basis for estimation of flow characteristics at ungauged locations. Northern British Columbia gauging stations located in the headwaters of the Yukon and Teslin River basins are included in the analysis.

The relationships in this report are based on average values of hydraulic and geometric properties of rivers. For their application to practical engineering problems, caution normally applicable to computations based on average values is recommended.

OBJECTIVE AND SCOPE

The objective of this investigation has been to develop hydraulic geometry relations for gauging stations in the Yukon Territory and to extrapolate them for the ungauged river systems traversed by the proposed Alaska Highway Gas Pipeline and the Klondike-Dempster lateral. Flows computed for several return periods for a variety of hydrologic regions are presented in this report and may be used to help check the adequacy of the proponent's "design" floods along the pipeline route.

BASIC PRINCIPLE

Channel geometry relationships are based on the premise that river channels are free to adjust their dimensions, shape, pattern and gradient in response to river flow conditions. Further, it is assumed that the most distinguishable channel shape is that formed to accommodate a dominant discharge. In this study, bankfull discharge is taken to be the channel forming discharge.

Principal channel features involved in the development of hydraulic geometry relations are the width, the mean depth, and the mean velocity. (Leopold and Maddock, 1953.) When these parameters are plotted against discharge on log-log paper, the relations are generally straight lines up to the bankfull stage; thus, each parameter increases with discharge in the form of a simple power function:

$$\begin{aligned} W &= aQ^b \\ D &= cQ^f \\ V &= kQ^m \end{aligned}$$

where W = width, D = mean depth, V = mean velocity, Q = discharge, and a , c , k , b , f , m are numerical constants. Values of the three exponents b , f and m , represent the slope of the log-log plots. The constants a , c and k are the intercepts of the log-log lines at unit discharge.

The technique involves surveys of channel geometry at selected sites, and transformation and computation of data so as to provide estimates of flow characteristics at ungauged locations. River Mechanics is not an exact science. Success or rigorousness with which the relationships are applied is dependent to a very large extent on experience and judgement of individuals involved.

DATA

Data forming the basis of relationships discussed in this report are streamflow measurements made at the Water Survey of Canada gauging stations and at crest-stage gauges operated by the Department of Indian & Northern Affairs. It is important to point out that the hydraulic geometry analyses are based on the assumption that the measured cross-section is typical of the river and is composed of a bed material that has permitted the channel to develop into normal size and shape for the flow regimen. Gauging stations, however, are sometimes located in bedrock channels and/or upstream from obstructions such as outcrops or gravel bars; they therefore may not be representative of the average river cross-sections. Anomalies may also occur in plots of widths, depths and velocities versus discharge where groundwater contributions are excessively greater than at an average cross-section.

DEFINITION OF BANKFULL STAGE

Vegetative evidence is generally utilized to determine bankfull stage. River channels usually are bounded by intermittently grassy or brush-covered sloping banks and/or overbank areas covered with trees, brush or muskeg. The bankfull stage is the lower edge of the permanent vegetation.

Another distinguishing feature is the upper limit of recent deposition or erosion near the top of the channel banks. Bankfull stage is generally less than the level that is commonly referred to as "flood stage".

DETERMINATION OF BANKFULL STAGE

Bankfull stage is normally determined during a channel geometry field survey program. However, because of the reconnaissance nature of the studies covered by this report, the bankfull stage at the existing gauging stations were determined from file information, including:

1. Station Description. Example: elevation and location of a bench mark at a river bank, supplemented by a photograph.
2. Station History File. Examples: photograph of staff gauge on a river bank; cableway and recorder installation report; reconnaissance survey sketch.
3. Photograph Files. Example: photograph of a corrugated iron pipe recorder well installation at a river bank at known gauge height and with known spacing of corrugations (Figure 1).
4. Curves of Hydraulic Geometry. Plots for some rivers show a break in slope at bankfull discharge (Figure 2).
5. Current-Meter Notes. Example: discharge measurement obtained at flood stage permits calculation of the flood plain level at either/or both banks.
6. "Hydrologic and Geomorphic Characteristics of Rivers and Drainage Basins in Y.T." - Dept. of Indian Affairs and Northern Development. (Porcupine-Peel subregion only.)

Bankfull stages which ave been confirmed or revised after a field inspection are identified in Table 2 by an asterisk.

ANALYSIS OF DATA

A. At Gauging Stations

Summary data for current-meter notes including width of water surface, area of the water cross-section and the measured discharge are available on computer tape at WSC office in Vancouver. Width is the width of water surface at any given gauge height. The mean depth for a particular discharge was obtained by dividing the cross-sectional area at any given gauge height by the corresponding width of water surface. Velocity is the mean velocity of the cross-section as obtained by dividing the discharge at any given gauge height by the corresponding cross-sectional area.

In the first step of the analysis width, depth, velocity and discharge were plotted by computer on log-log paper. The straight line relations were fitted by eye to best represent the general conditions (Figure 2). Least-squares method was not considered appropriate for this purpose; when drawing channel geometry versus discharge curves, knowledge of cross-sections is an asset. These fitted lines defined the three hydraulic characteristic equations at each station:

$$W = aQ^b$$

$$D = cQ^f$$

$$V = kQ^m$$

With bankfull discharge (Q_B) known, values of bankfull width (W_B), depth (D_B), and velocity (V_B) were then determined from the above equations. The same calculation is involved in arriving at width and depth for the other discharge events shown in Table 3. As an alternative, these values may be read directly from the graphs.

The hydraulic geometry exponents b , f and m are shown in Table 1 for each gauging station. The computations of the geometric parameters

were confirmed by the application of two mathematical laws:

$$\text{since } W \times D \times V = Q$$

$$\text{then } b + f + m = 1 \text{ (deviation of 5% was considered acceptable)*}$$

$$\text{and } a \times c \times k = 1$$

These mathematical relationships are satisfied in practice when the product of the values of width, depth and velocity at any given discharge is equal to that discharge. This can be seen in Figure 2.

B. At Ungauged Locations

To enable estimation of discharge for any return period at an ungauged location, two transformations of data were made:

1. Bankfull discharges in Table 2 were plotted in cubic feet per second per square mile (R_B), versus drainage area (DA), in square miles, and curves fitted by the method of least squares (Figure 3). There are five relationships, four representing geographic subregions and the fifth representing mountain streams:

- a. Atlin - Bennett - Dezadeash

$$R_B = 238 DA^{-0.63}$$

$$\text{since } Q_B = DA \times R_B$$

$$\text{then } Q_B = 238 DA^{0.37}$$

Note:

R_B = bankfull unit runoff in
cfs/sq. mi.

Q_B = bankfull discharge in cfs

DA = Drainage Area

- b. Upper Yukon - Teslin - Takhini

$$R_B = 196 DA^{-0.47}$$

$$Q_B = 196 DA^{0.53}$$

- c. Liard - Pelly - Stewart - Lower Yukon

$$R_B = 88.7 DA^{-0.30}$$

$$Q_B = 88.7 DA^{0.70}$$

* In some cases, the fitted lines could not be made to meet this criterion

d. Porcupine - Peel

$$R_B = 52.0 DA^{-0.18}$$

$$Q_B = 52.0 DA^{0.82}$$

e. Mountain Streams

$$R_B = 35.7 DA^{-0.46}$$

$$Q_B = 35.7 DA^{0.54}$$

The relationship between channel size and flood characteristics for Mountain Streams is independent of geographic location. The reason appears to be their morphological similarity: steep channel slopes, well-defined banks, generally high or supercritical velocities and minimal overbank discharge at flood flows.

2. The cross-sectional area and discharge for various frequencies were expressed as non-dimensional ratios to corresponding bankfull values for gauging stations included in the study (Tables 1 and 2) and listed in Tables 3 and 4. Expressions for these relationships are:

$$\frac{A}{A_B} = \left(\frac{Q}{Q_B}\right)^{b+f}$$

$$\frac{D}{D_B} = \left(\frac{Q}{Q_B}\right)^f$$

$$\frac{W}{W_B} = \left(\frac{Q}{Q_B}\right)^b$$

Average values for each of the runoff regions, defined in 1. above, were then plotted in Figures 5 and 6 and equations fitted to the relationships. The equations represent average non-dimensional rating curves; their reliability can be considered to be equal to the maximum deviation of the values b and f from the average. The more nearly equal are the ratio values for a particular discharge event (Table 4), the higher the degree of homogeneity within the subregion and the more reasonable the results will be from the application of the rating curves.

3. To permit approximation of flow for any desired return period at an ungauged location, it is necessary to establish a flow frequency dimension on Figure 5. This has been done by superimposing on the figure the ratios for various discharge events shown in Tables 3 and 4. The point of coincidence at unit value represents bankfull flow and its average frequency of occurrence for a subregion can be read directly off Figure 5.

APPLICATION OF DATA TO UNGAUGED LOCATIONS

Procedure is as follows:

1. Calculate the ratio $\frac{A}{A_B}$

A is the cross-sectional area for the discharge measurement made at time of channel geometry surveys.

A_B is the cross-sectional area for bankfull stage also determined at time of channel geometry surveys.

2. Having obtained the value for $\frac{A}{A_B}$, calculate the ratio $\frac{Q}{Q_B}$ from the equation applicable for the hydrologic subregion or read it directly off the rating curve. Both the equation and the rating curve are shown in Figure 5.

3. From the ratio $\frac{Q}{Q_B}$ Calculate Q_B

Q is the discharge for the measurement made at time of channel geometry surveys referred to in 1. above.

4. With bankfull discharge known, discharge for any return period may now be calculated. For example, for 50-year flood, $\frac{Q}{Q_B}$ ratio for Atlin-Bennett-Dezadeash region is 1.81. Q_{50} then is $1.81 \times Q_B$ (Figure 5 or Table 5).

The above procedure may also be applied using ratios based on depth, $(\frac{D}{D_B})$ or on width, $(\frac{W}{W_B})$ and by substituting Figure 6 for Figure 5. However, the results will not be as consistent. Generally if the value of $(\frac{D}{D_B})$ is somewhat less than average, value of $(\frac{W}{W_B})$ is somewhat greater. Thus, the rating based on area (depth \times width) may be considered a more consistent and/or reliable average rating than that based on either depth or width alone.

The combination of Figure 5 with Figure 3 provides another method for approximating runoff for any return period. If, for example 50-year flood for a site having 300 square mile drainage area in the Atlin-Bennett-Dezadeash region is required, reference to Figure 3 will give a bankfull unit runoff of 6.4 cfs per square mile, or a discharge of 1,920 cfs. From Figure 5 or Table 5(a) $\frac{Q_{50}}{Q_B} = 1.81$; therefore, $Q_{50} = 3.480$ cfs.

Table 6 summarizes data and computations for ungauged locations.

Table 7 lists values of runoff computed for various sizes of drainage areas for mean annual flow, bankful stage and the 50-year flood using combination of Figures 3 and 5. Figure 3 indicates that for drainage areas of about 300 square miles unit runoff at bankfull stage is about the same for the three hydrologic subregions north of Atlin-Bennett-Dezadeash, or about 22.5 cfs per square mile.

FURTHER WORK REQUIREMENT

1. Operate a network of gauging stations on small streams for a minimum of five years to confirm the relationships in Figures 3 and 5. This information is required because for some streams it is not entirely clear whether the location of plots in Figure 3 are due to geographic and morphologic differences, or whether they are due to inconsistencies in bankfull discharge determination; examples are the plots for M'Clintock River and Big Creek.
2. Test the applicability of the method described in this report to the ephemeral drainages at south side of Kluane Lake. To do this it is necessary to obtain reasonably reliable hydrometric record. Records on Duke River could possibly serve the purpose, but would require two gauging stations: one at the Alaska Highway bridge and the other in the headwaters, in order to deduct glacier runoff.
3. Confirm bankfull stages at WSC gauging stations located in the Liard-Pelly-Stewart-Lower Yukon and the Porcupine-Peel subregions before applying the relationships proposed in this report for the Klondike-Dempster pipeline lateral. Bankfull stages determined from file information are considered to be reasonably reliable; therefore, a spot check may be sufficient.

For applying channel geometry technique to ungauged small streams in the above two subregions, obtain a discharge measurement at about medium stage at selected sites and extend the measured cross-section to bankfull stage.

Prepare a tabulation for ungauged streams similar to Table 6. This will assist consideration of EIS for the Klondike-Dempster pipeline lateral.

REFERENCES

- Childers, J.M. 1974. Flood Surveys Along Taps Route, Alaska. U.S. Geological Survey.
- Childers, J.M., Sloan, C.E., Meckel, J.P., and Nauman, J.W. 1977. Hydrologic Reconnaissance of the Eastern North Slope, Alaska. U.S. Geological Survey.
- Church, M. 1971. Reconnaissance of Hydrology and Fluvial Characteristics of Rivers in Northern Alaska and Northern Yukon Territory.
- Emmett, W.W. 1972. The Hydraulic Geometry of some Alaskan streams south of the Yukon River. U.S. Geological Survey.
- Jones, J.H. 1973. Small-Stream Flood Investigations in Alaska. A Compilation of Peak Data May 1963 to September 1972. U.S. Geological Survey.
- Kellerhals, R., Neill C.R., and Bray, D.I. 1972. Hydraulic and Geomorphic Characteristics of Rivers in Alberta. Research Council of Alberta, Edmonton.
- Leopold, L.B., and Maddock, T. 1953. The Hydraulic Geometry of Stream Channels and some Physiographic Implications. U.S. Geological Survey.
- Riggs, Henry C. 1978. Streamflow Characteristics from Channel Size. Journal of the Hydraulics Division.
- Stall, J.B. and Yang, C.T. Hydraulic Geometry of 12 Selected Stream Systems of the United States. University of Illinois Water Resources Center, Illinois.
- Way, J.G. and Thorne, G.A. 1977. Reconnaissance of Polar Gas Route River Crossings in Keewatin District, N.W.T. Water Survey of Canada, Winnipeg.
- Wedel, J.H. and Way, J.G. 1976. Hydrologic Regimes Freshwater Project No. 1 Water Survey of Canada, Winnipeg.
1972. Magnitude of Floods in British Columbia. Inland Waters Directorate, Water Survey of Canada, Planning and Studies Section, Pacific Region.
1974. Hydrologic and Geomorphic Characteristics of Rivers and Drainage Basins in the Yukon Territory. Northwest Hydraulic Consultants Ltd., Edmonton.
1978. Magnitude of Floods in Yukon Territory. Inland Waters Directorate, Water Survey of Canada, Planning and Studies Section, Pacific Region.


1975 & 1976. Hydrologic and Geomorphic Characteristics of Rivers and Drainage Basins in the Yukon Territory. Northern Natural Resources and Environment Branch, Dept. of Indian Affairs and Northern Development, Whitehorse.

1976. River and Drainage Basin Characteristics Firth River and Babbage River, Y.T.

1977. A Study of Selected Hydrologic Quantities of the Yukon Territory for Examination of Pipeline Proposals. Planning and Studies Section, Water Survey of Canada, Vancouver.

1973 & 1974. Hydrologic Aspects of Northern Pipeline Development. Glaciology Division, Water Resources Branch, Environment Canada, Ottawa.

1978. Haines Road - Alaska Highway Estimates of the 100-year Flood. Part One, Provisional Selected Drainage Basins Greater than 30 square miles. Inland Waters Directorate, Environment Canada, Ottawa.

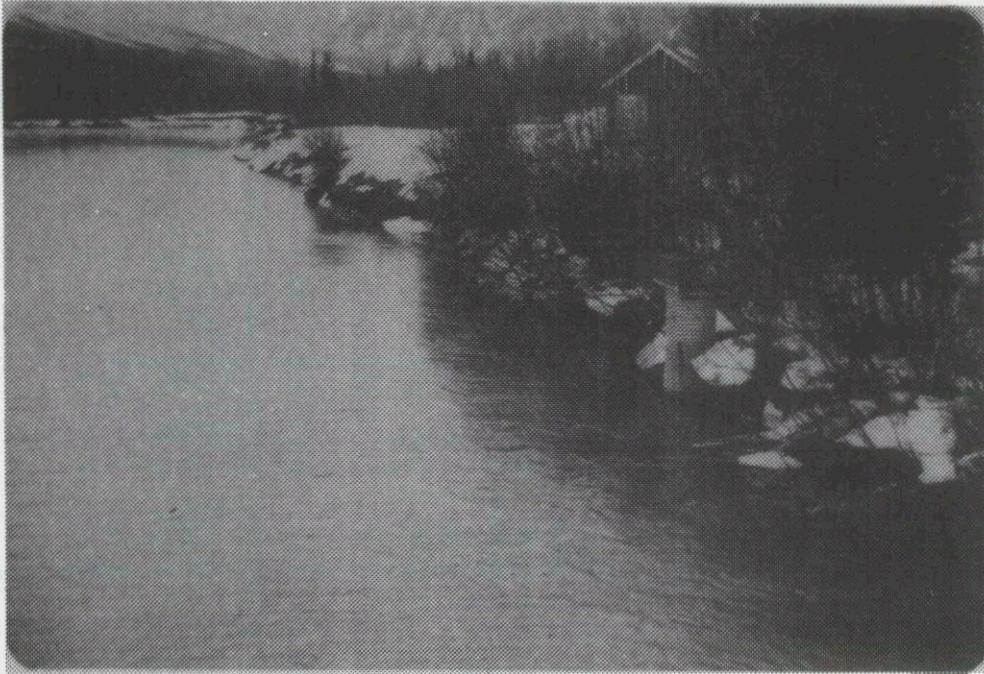


08AA003 - Dezadeash River at Haines Junction

View is upstream at gauge height of 9.04 feet on November 14, 1976. Bankfull stage is at gauge height of 12.4 feet or at 30th corrugation of the recorder well above water surface.



08AA001 - Aishihik River near Whitehorse

View is upstream at gauge height of 3.44 feet on November 13, 1976. Bankfull stage is at the lowest vegetation on right bank above the gravel bar, or gauge height of 10.6 feet. Corrugated pipe recorder well is seen at the left bank.

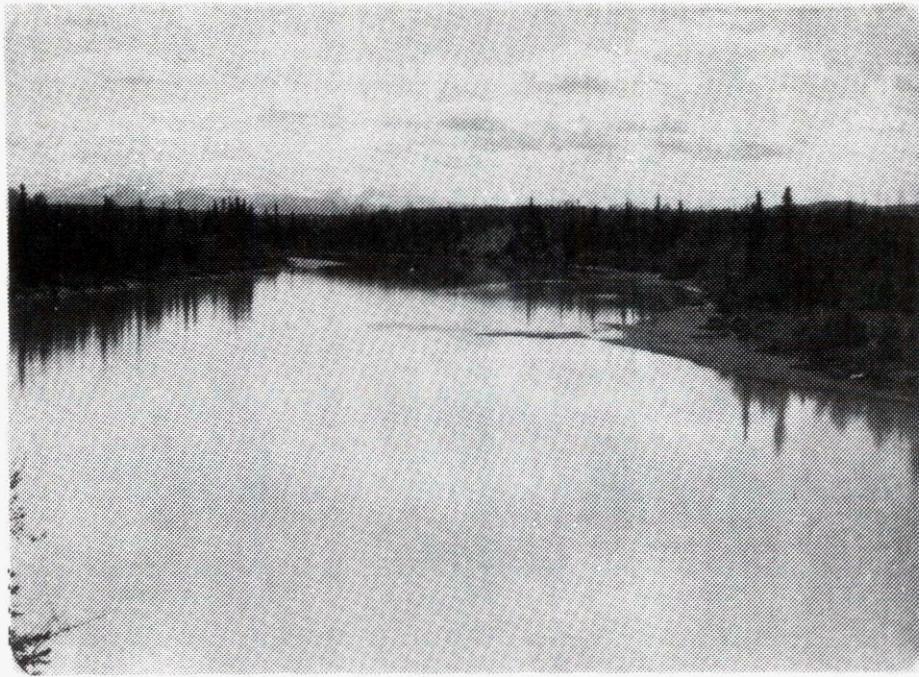


09AC001 - Takhini River near Whitehorse

View is upstream at gauge height of 9.97 feet on June 5, 1978. Bankfull stage is at lowest permanent vegetation on left bank, or gauge height of 19.0 feet.




09AE001 - Teslin River near Teslin

View is upstream taken on August 14, 1978. Bankfull stage is at bottom of level rod or gauge height of 25.0 feet.

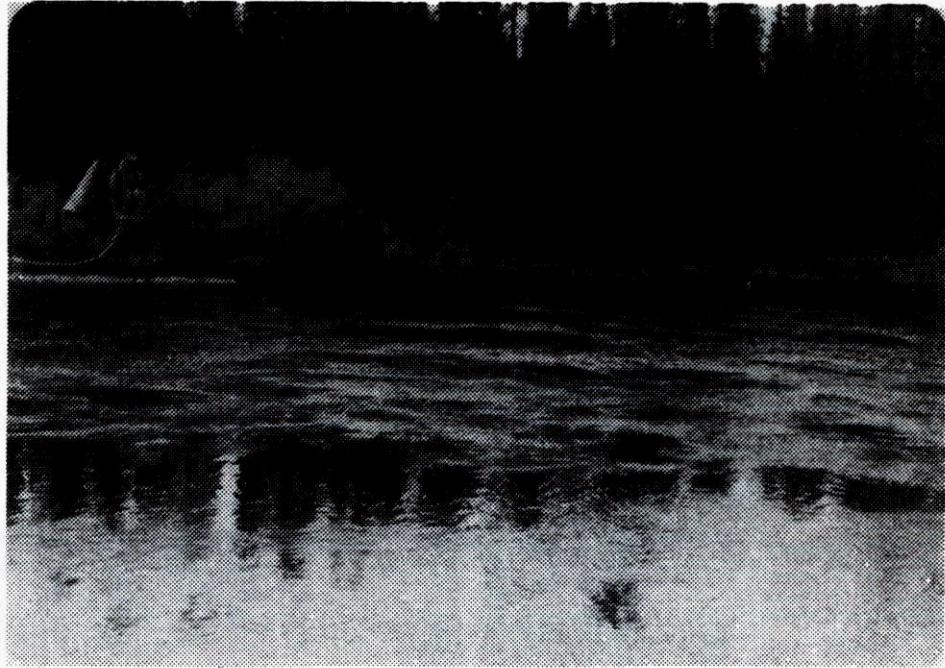

09AE003 - Swift River near Swift River

View is towards left bank at gauge height of 5.82 feet on June 9, 1978. Bankfull stage is at bottom of permanent vegetation or gauge height of 8.1 feet.

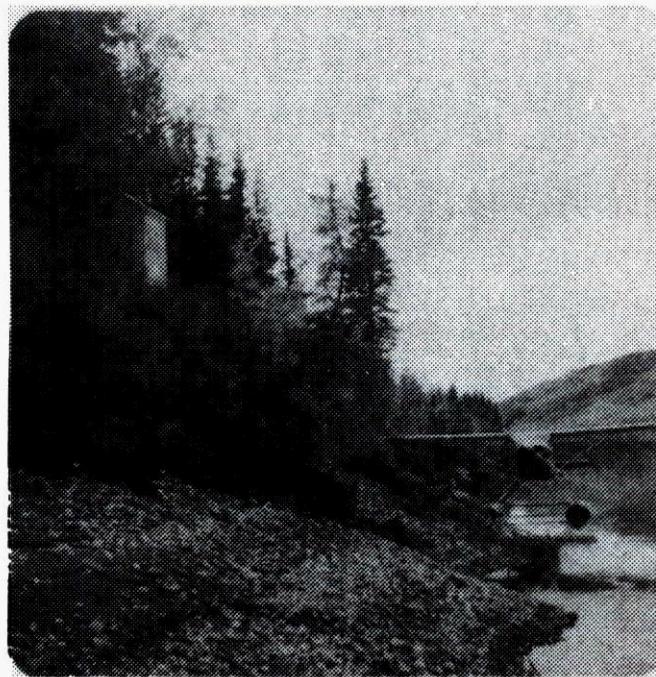

09DD003 - Stewart River at Stewart Crossing

View is downstream at gauge height of 85.33 feet on September 9, 1968. Bankfull stage is approximately level with the wing tip of Cessna 180 or gauge height of 95.3 feet.

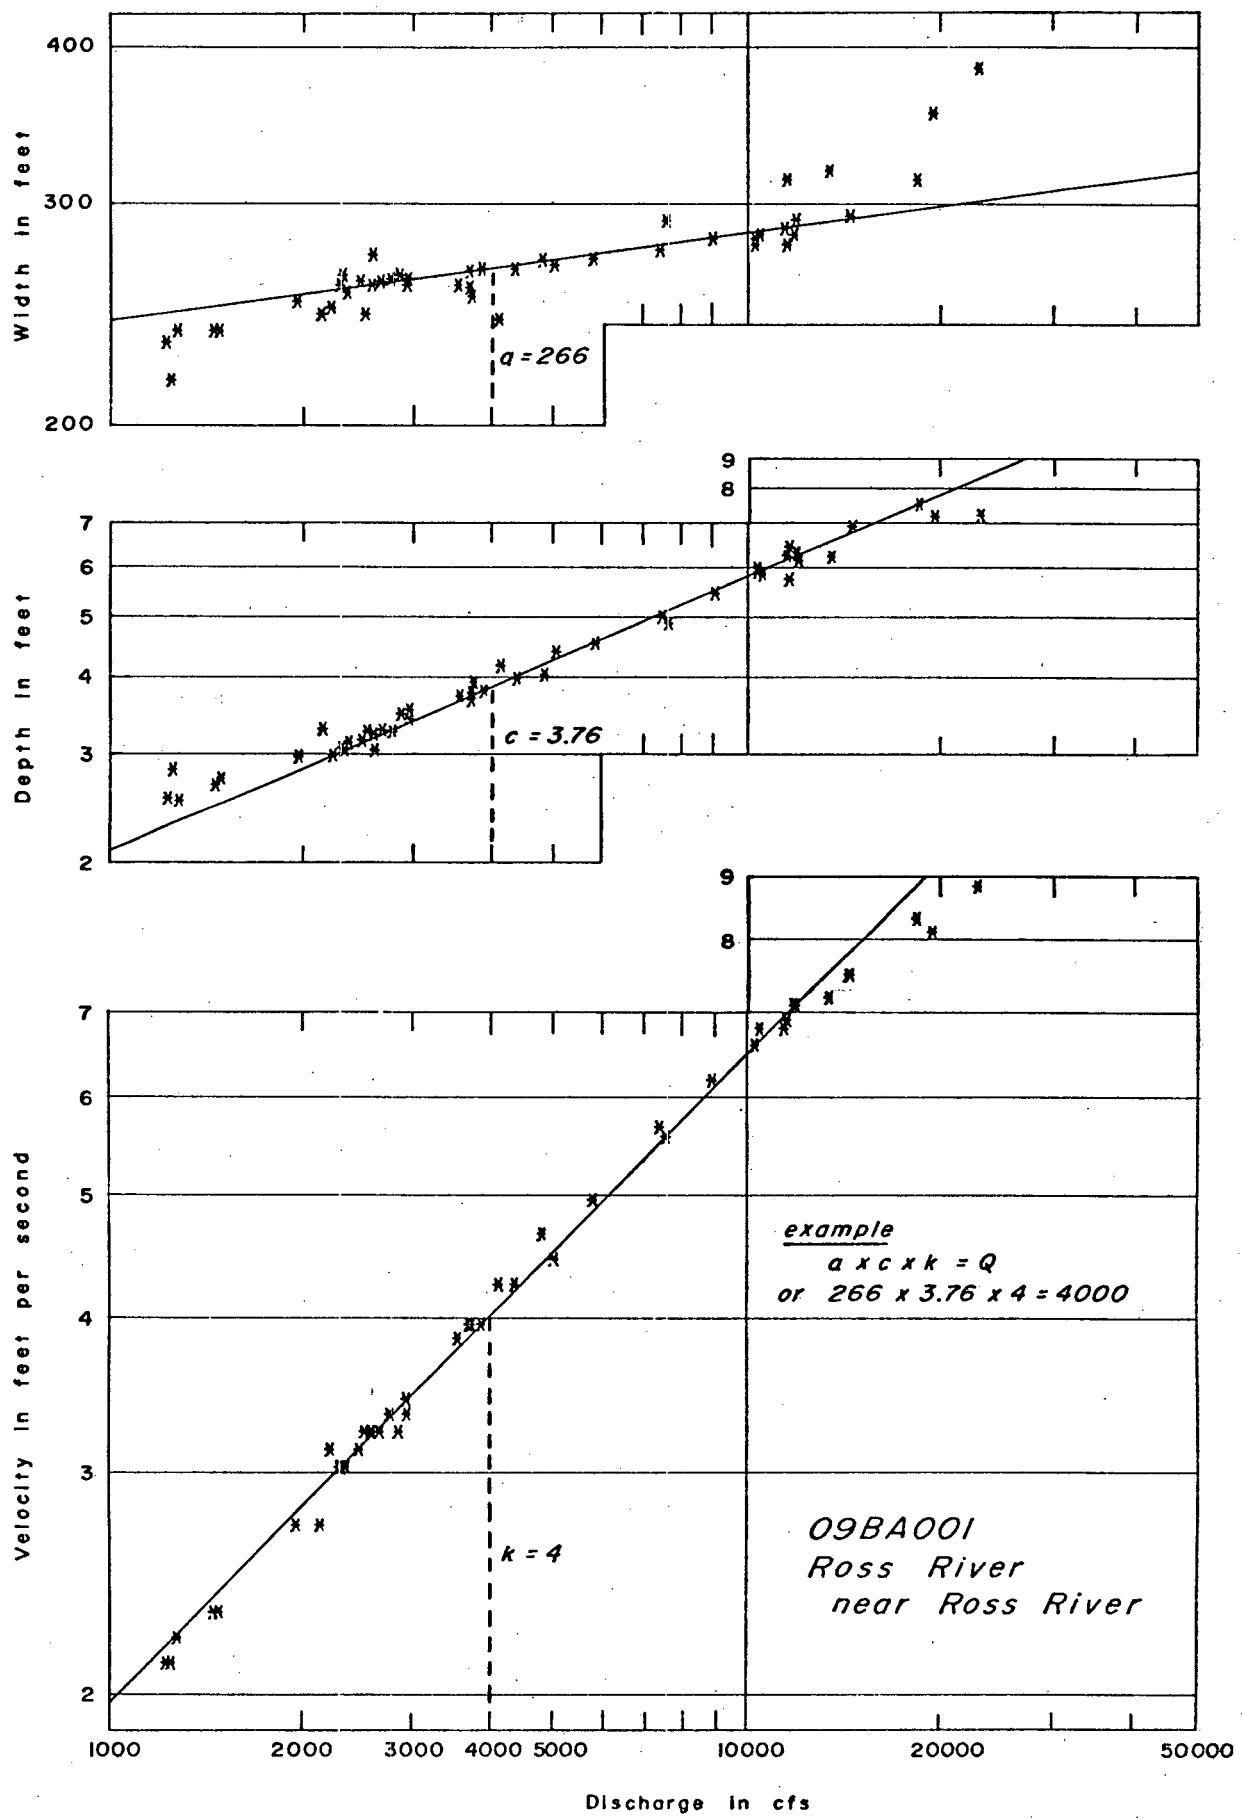
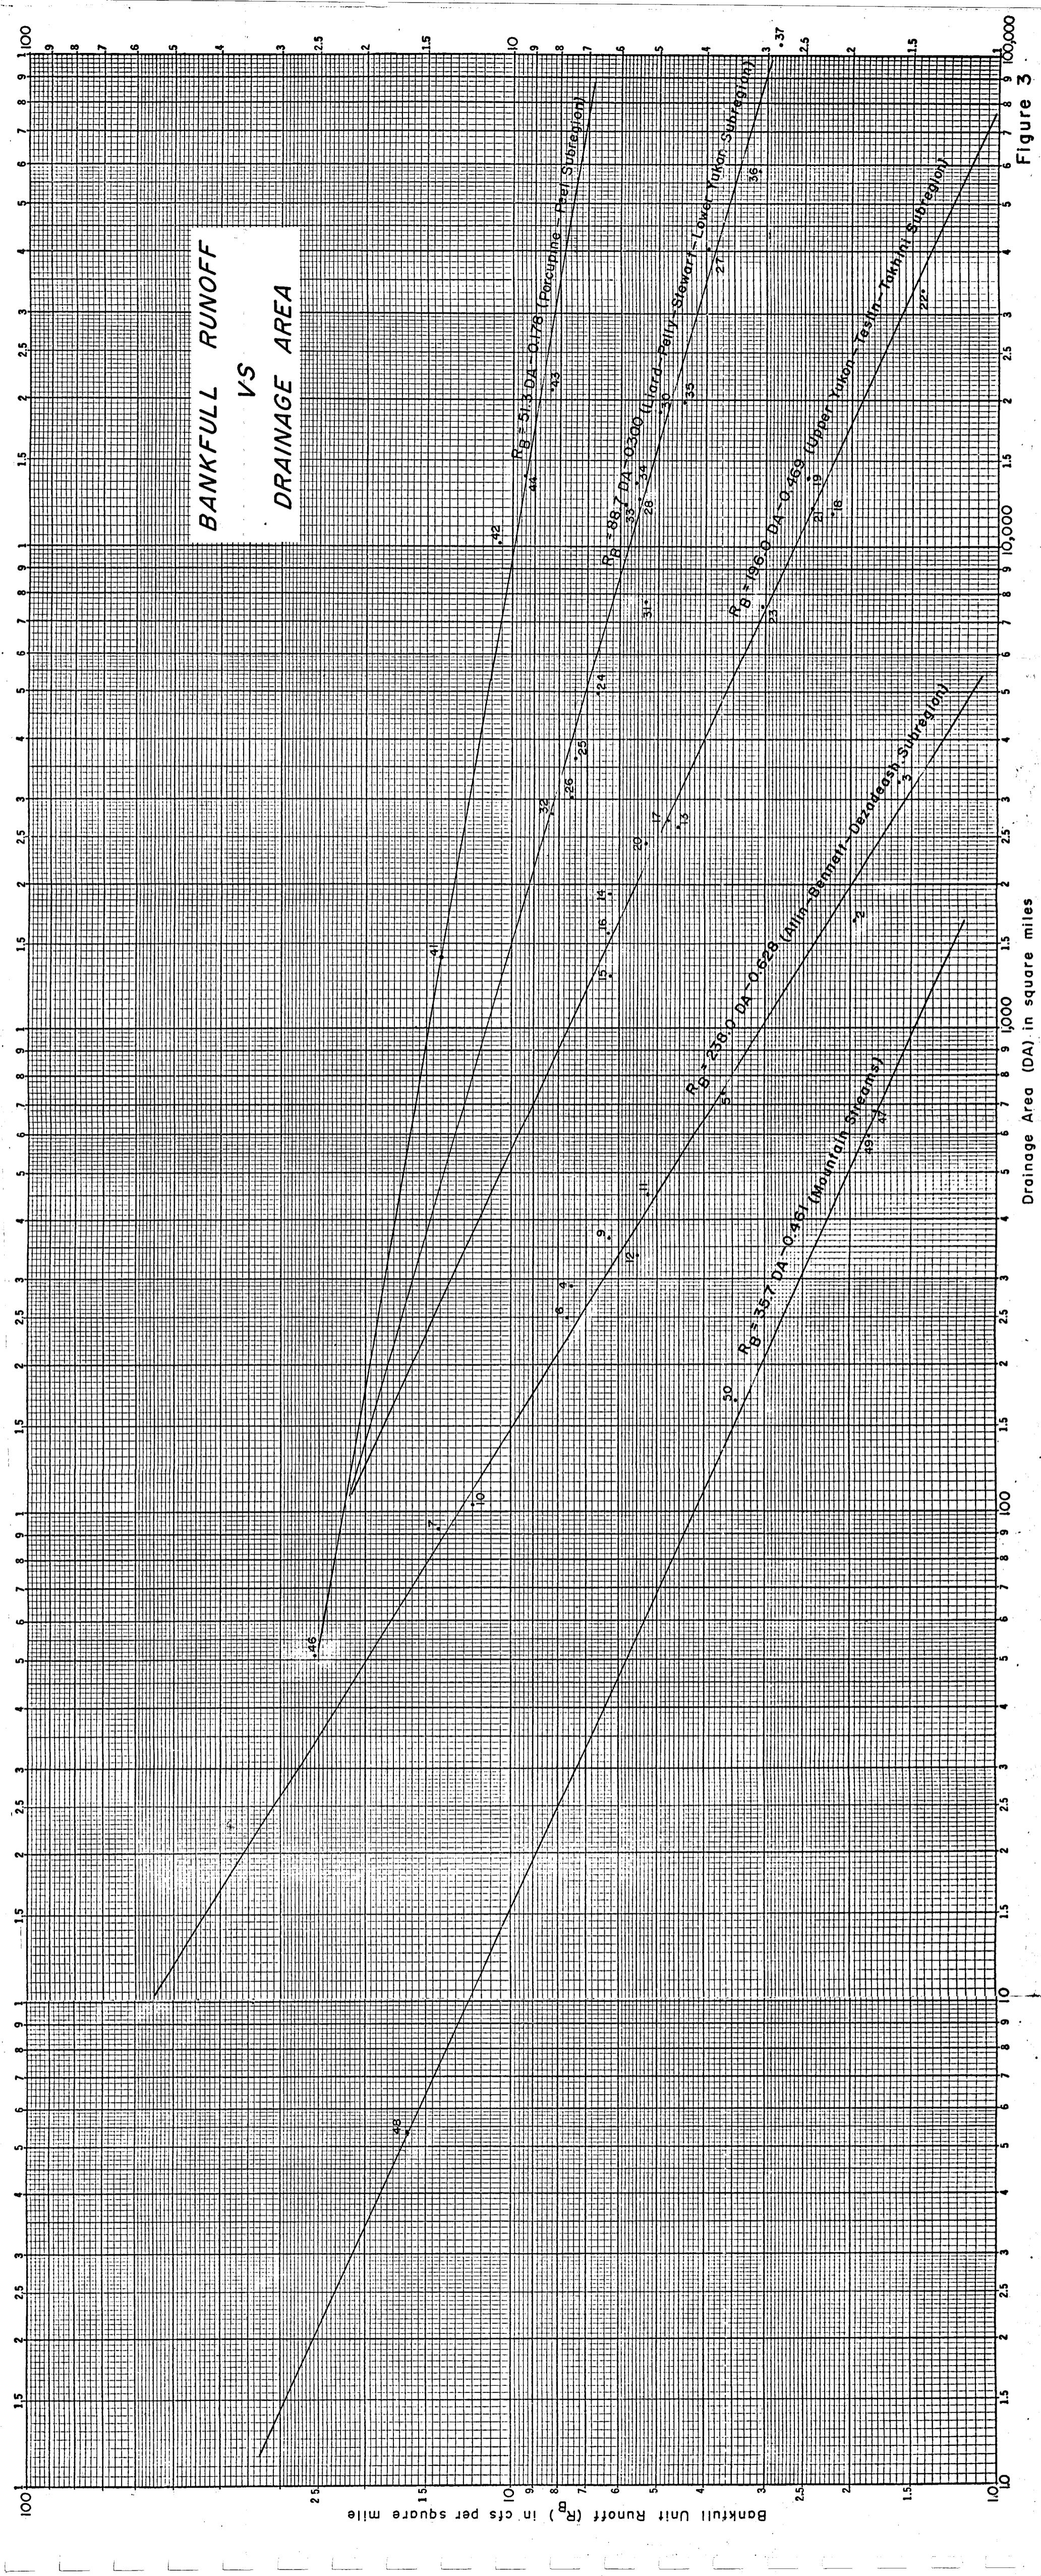


FIGURE 2 - CHANNEL GEOMETRY vs. DISCHARGE

Figure 3



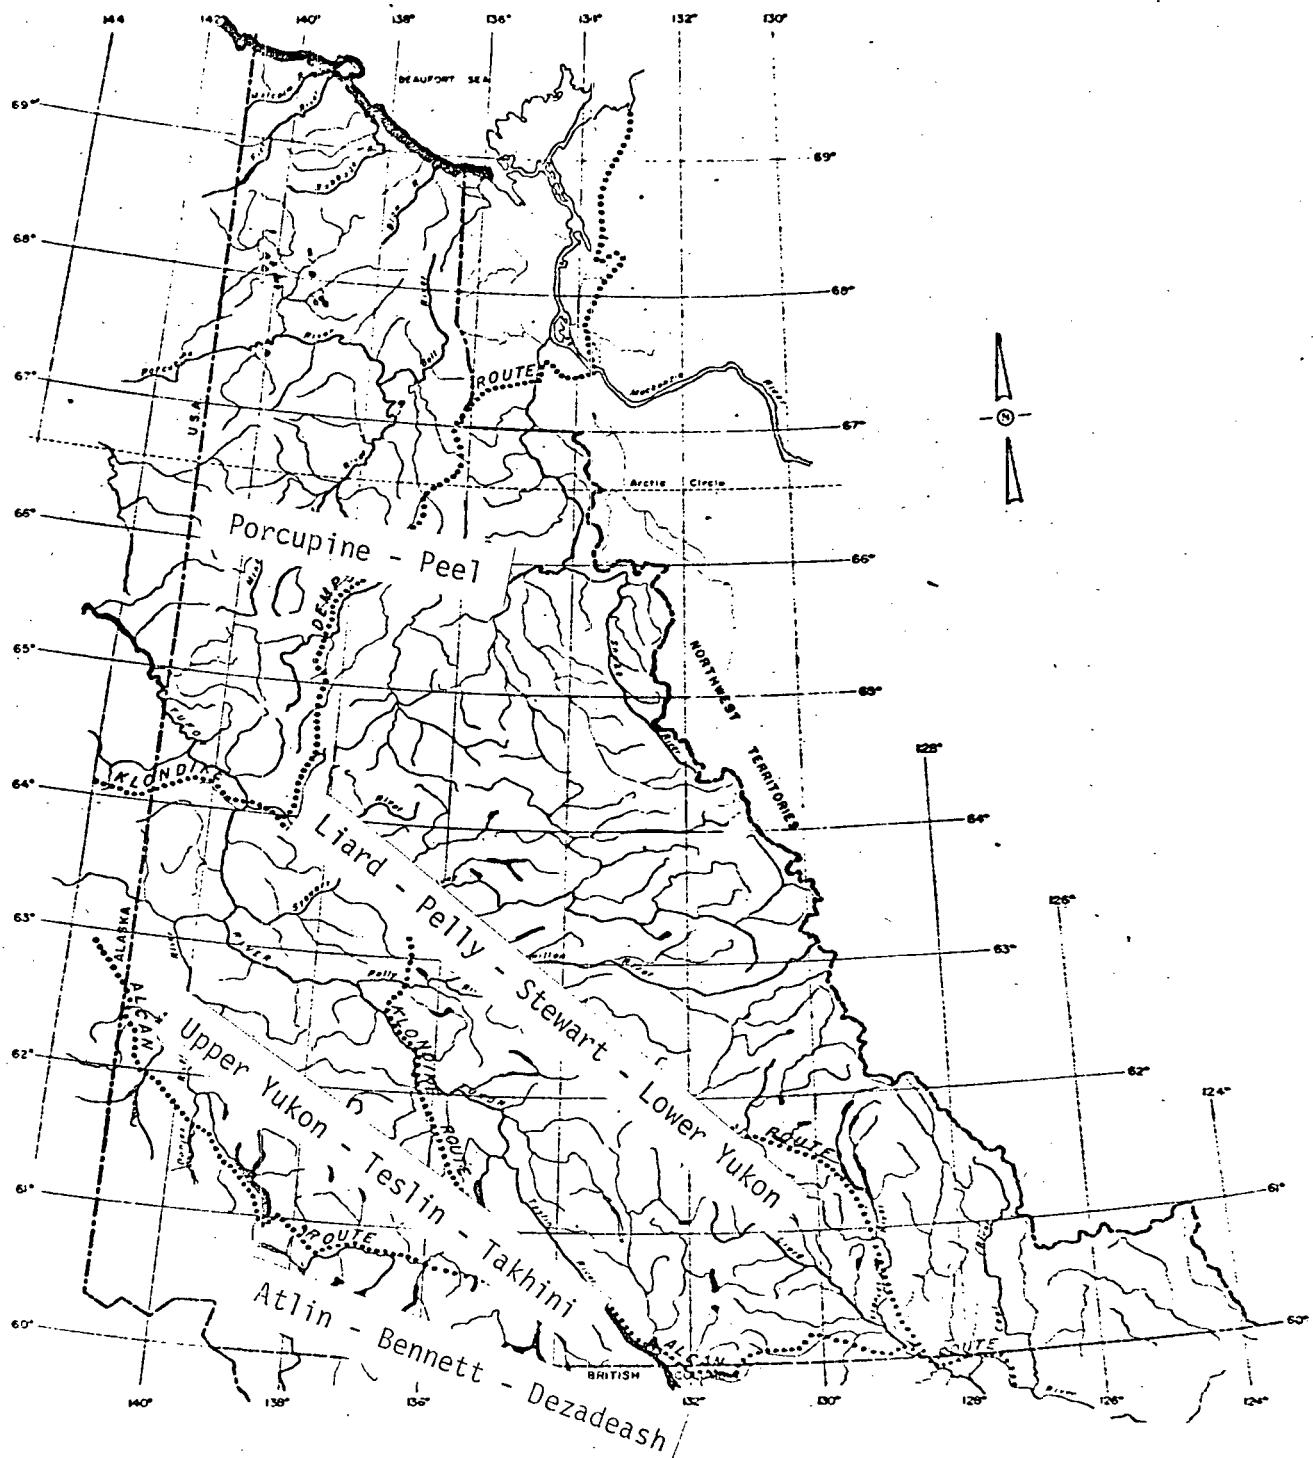


Figure 4 - HYDROLOGIC SUBREGIONS


*Dimensionless Rating Curves and
Values of Flow Frequency for
Various Subregions, based on
Flow Areas.*

LEGEND

- Average – Atlin - Bennett - Dezadeash
- Average – Upper Yukon-Teslin-Takhini
- Liard-Pelly-Stewart-Lower Yukon
- × Porcupine-Peel (line not shown)

▲ Mountain Stream Category

Frequency of Discharge Event

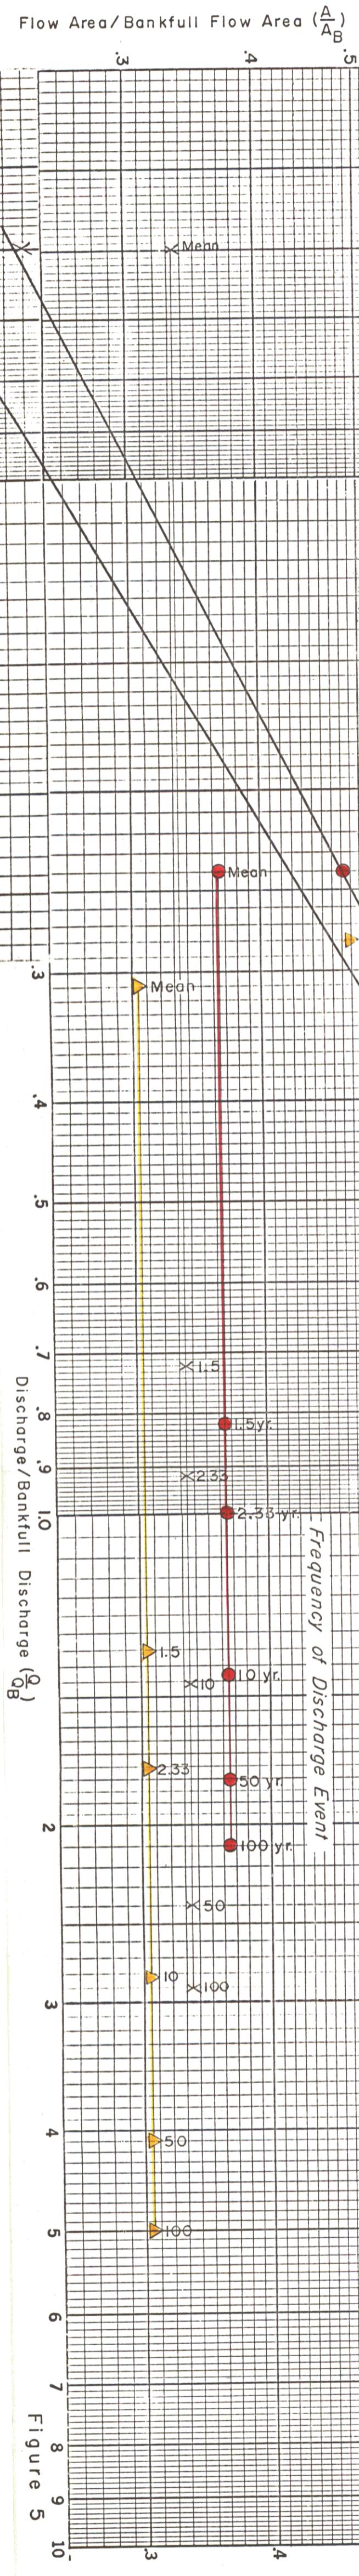

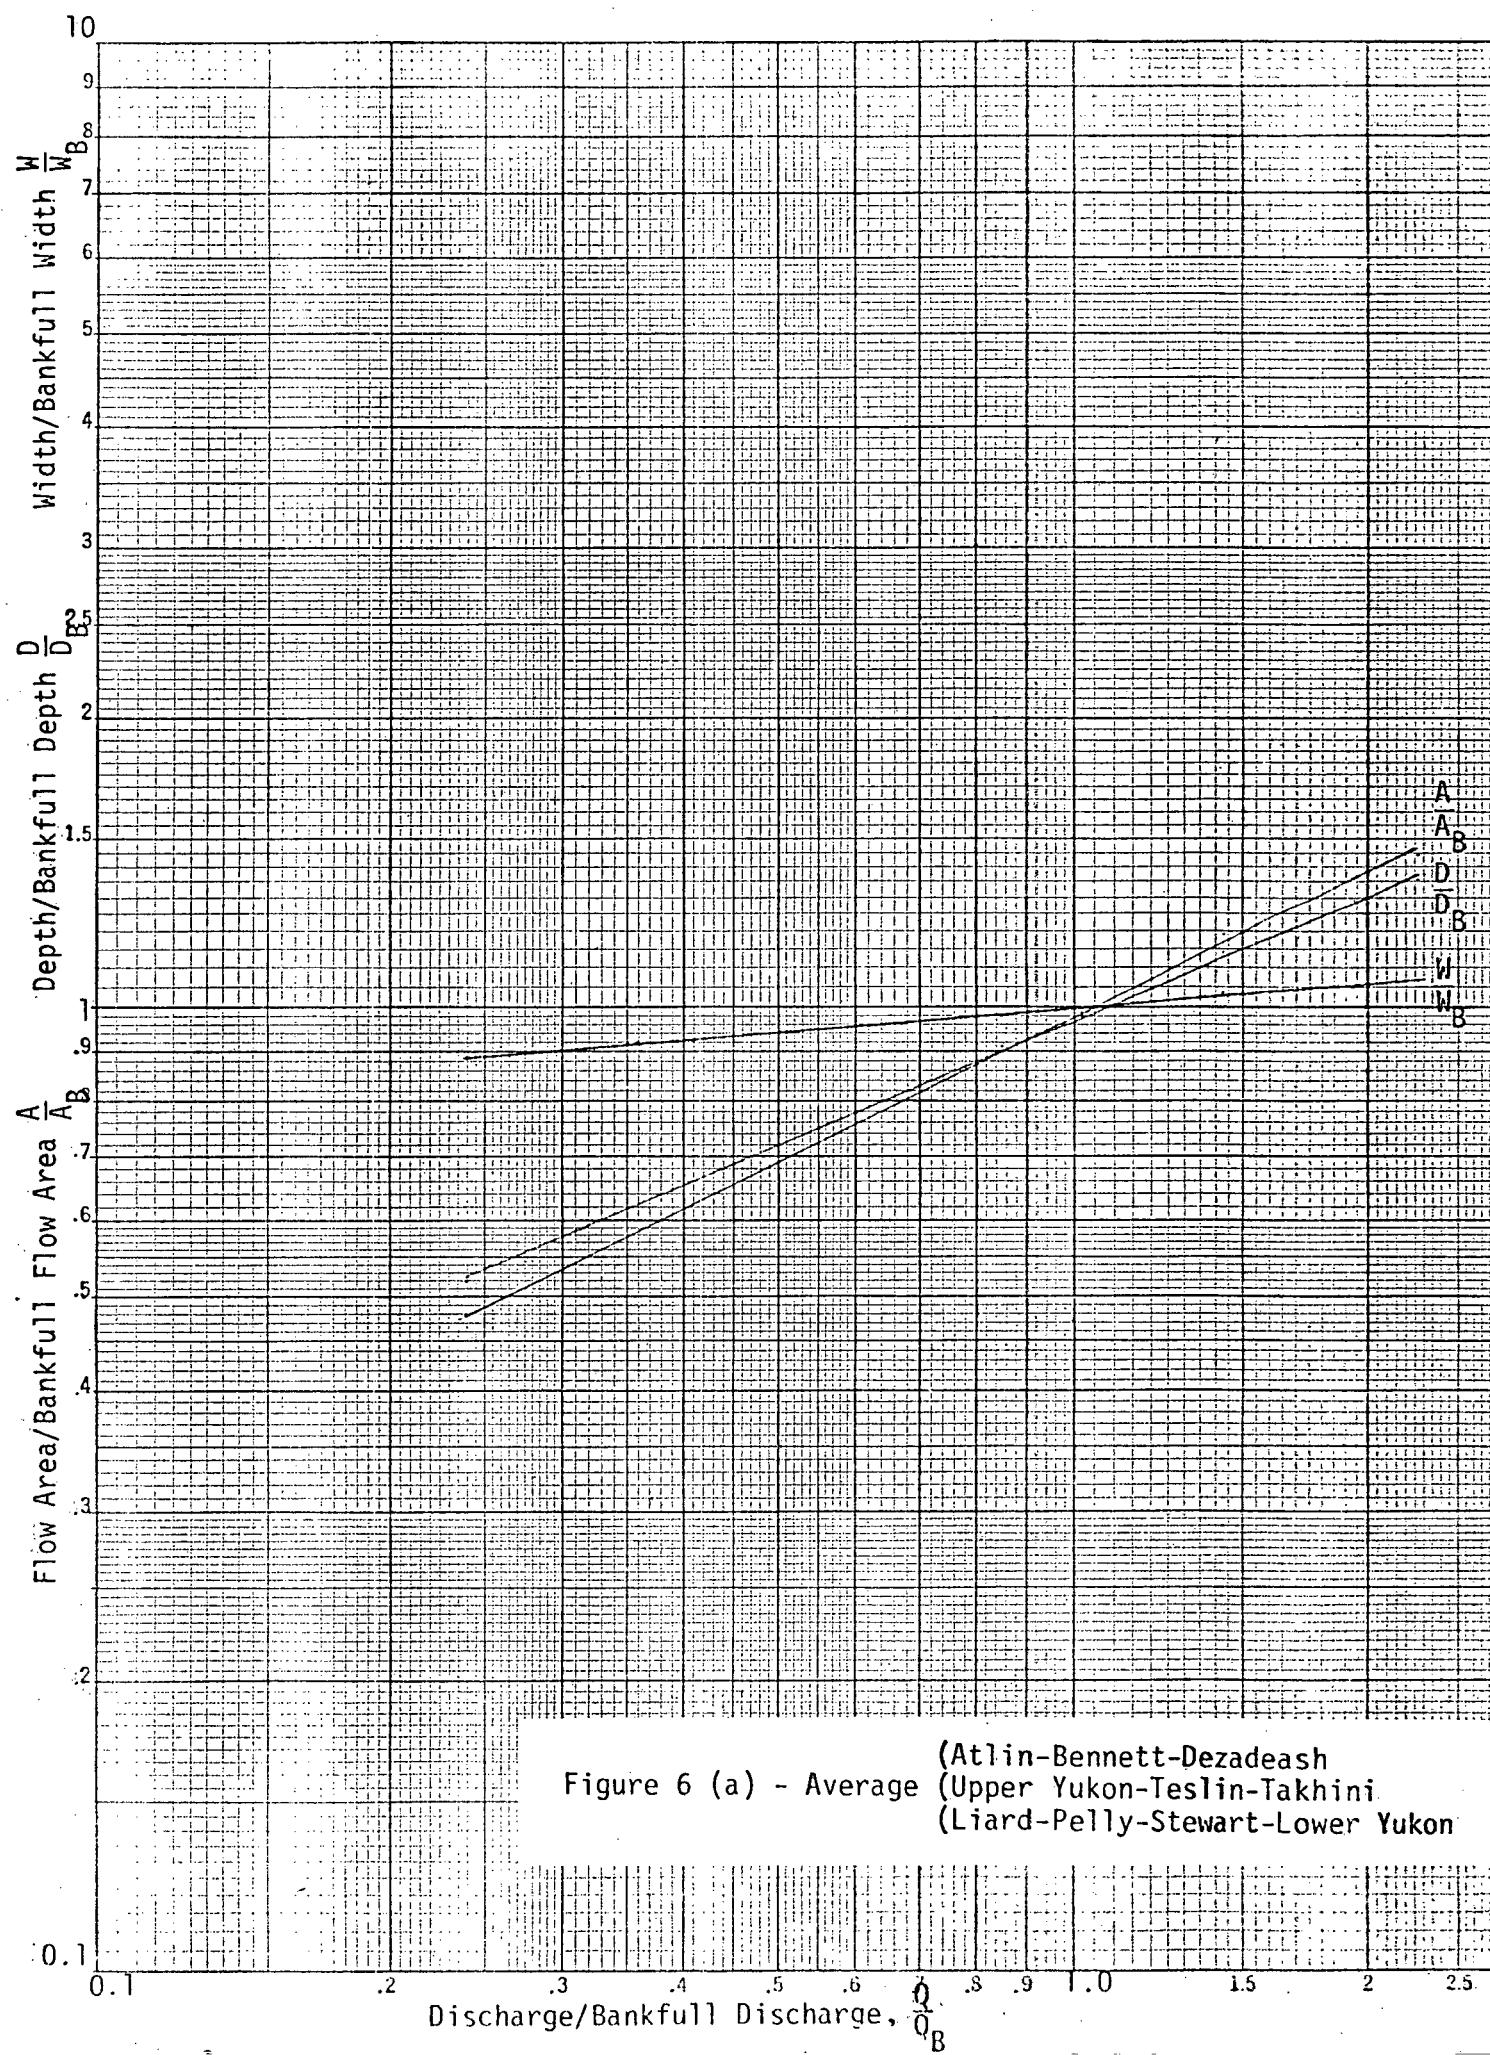


Figure 6 (a) - Average (Atlin-Bennett-Dezadeash
(Upper Yukon-Teslin-Takhini
(Liard-Pelly-Stewart-Lower Yukon

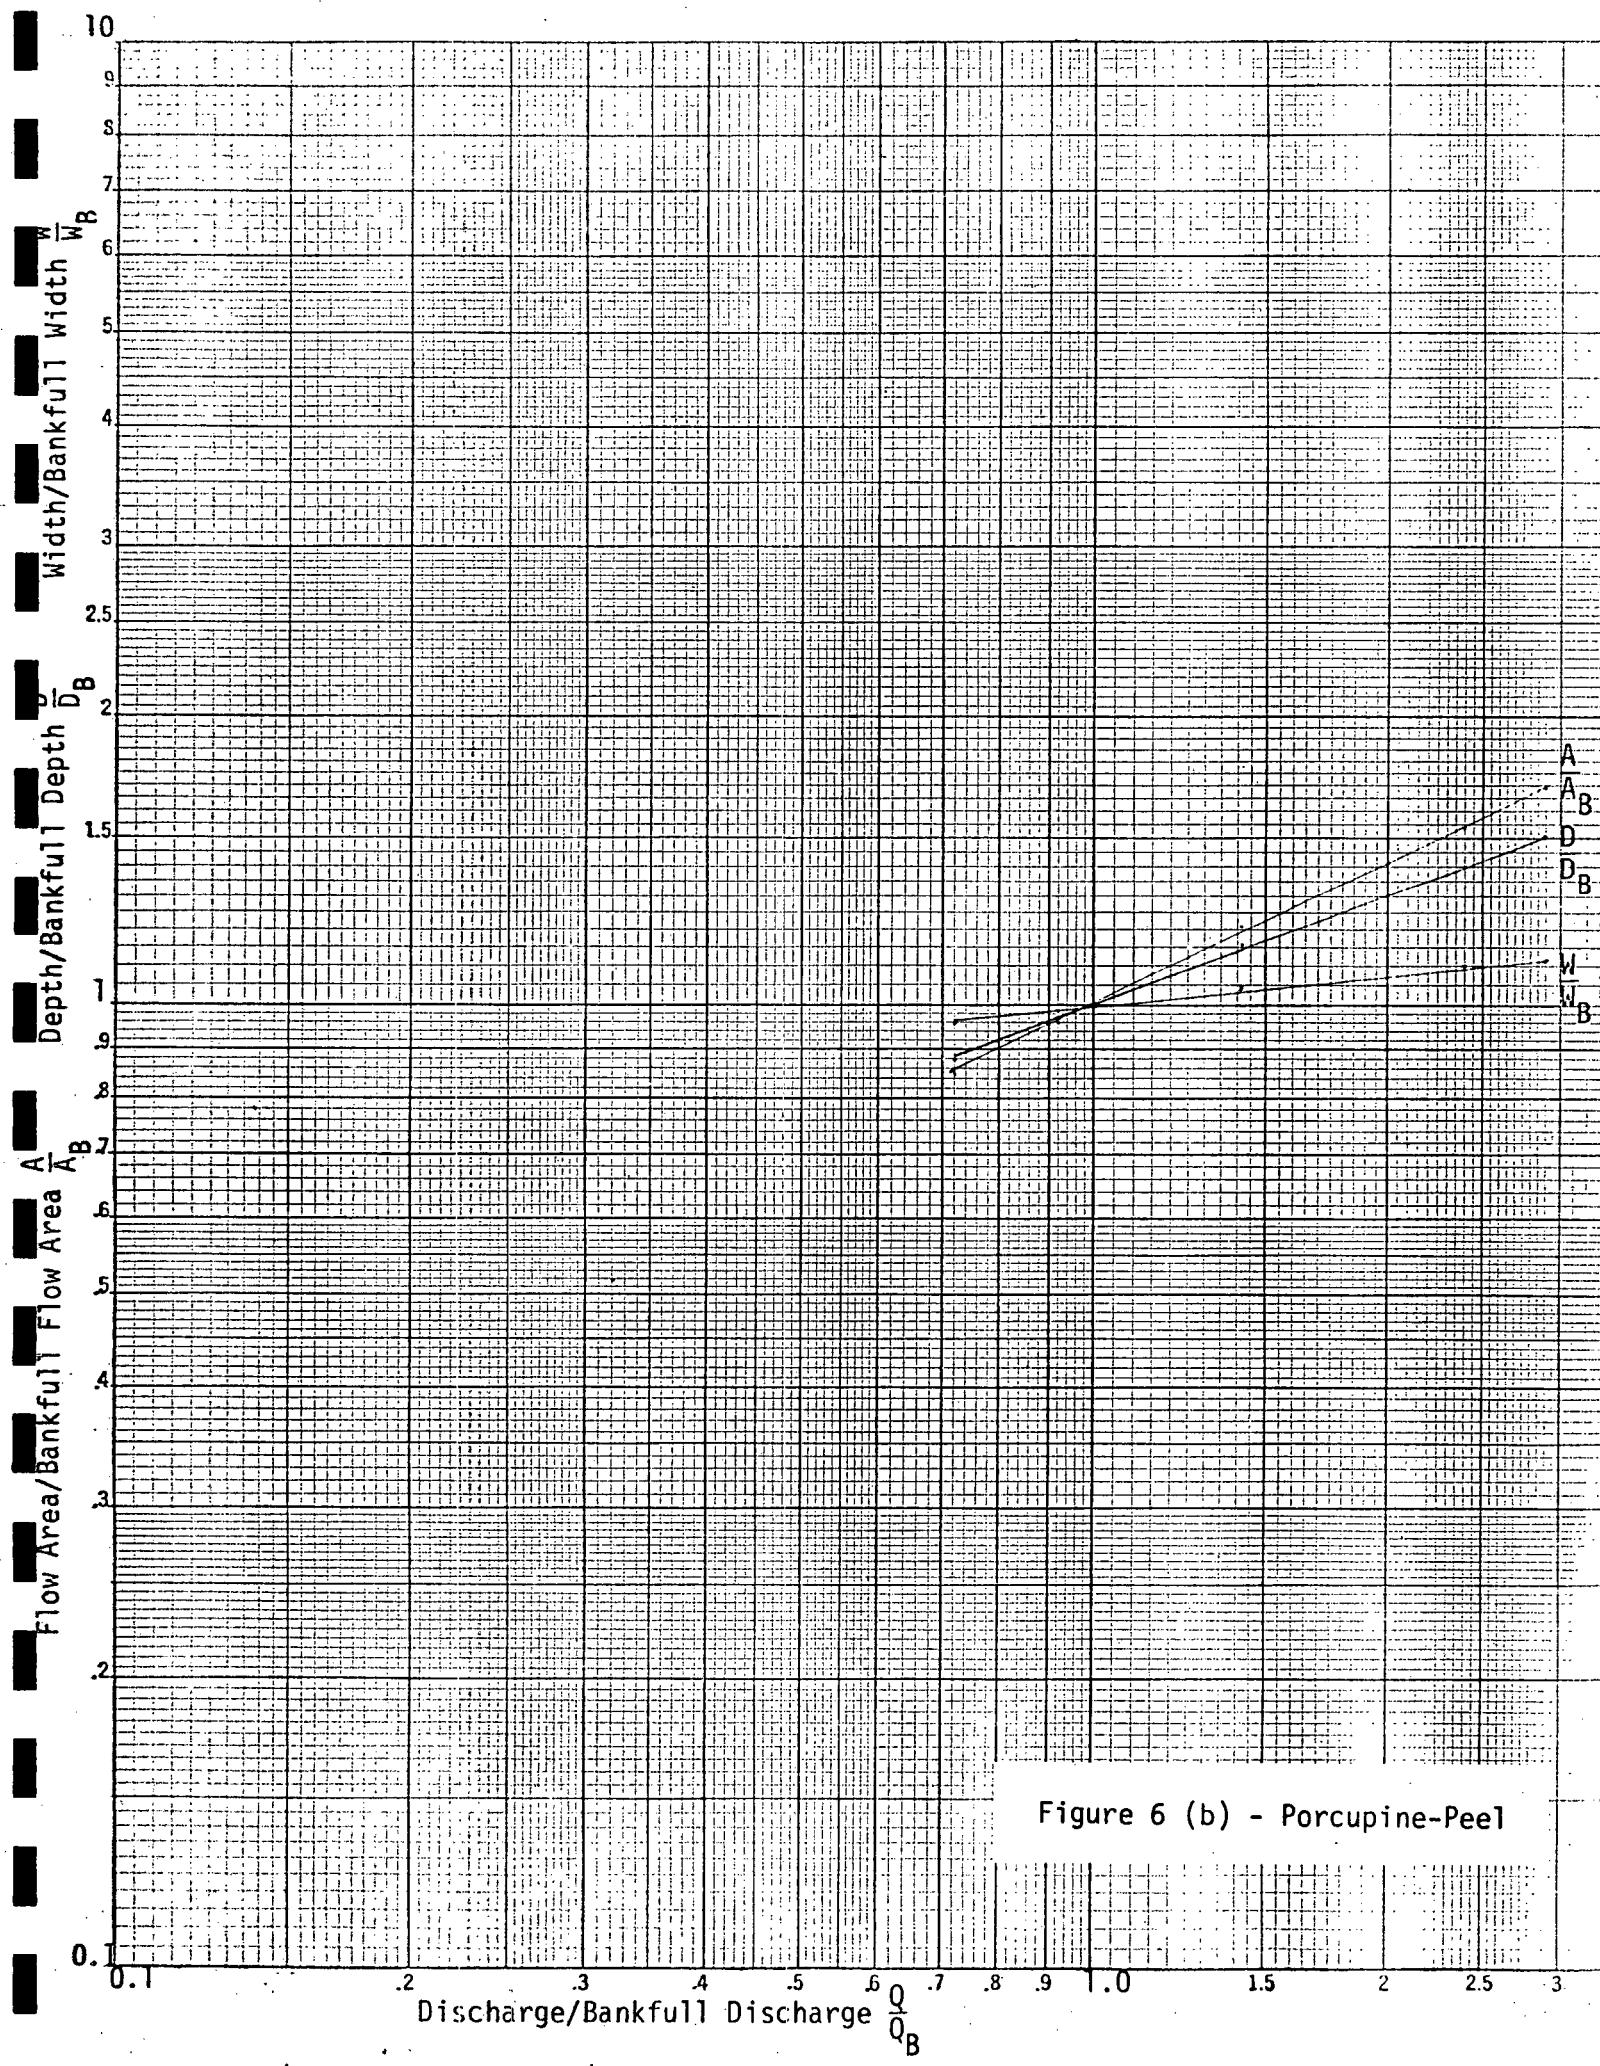


Figure 6 (b) - Porcupine-Peel

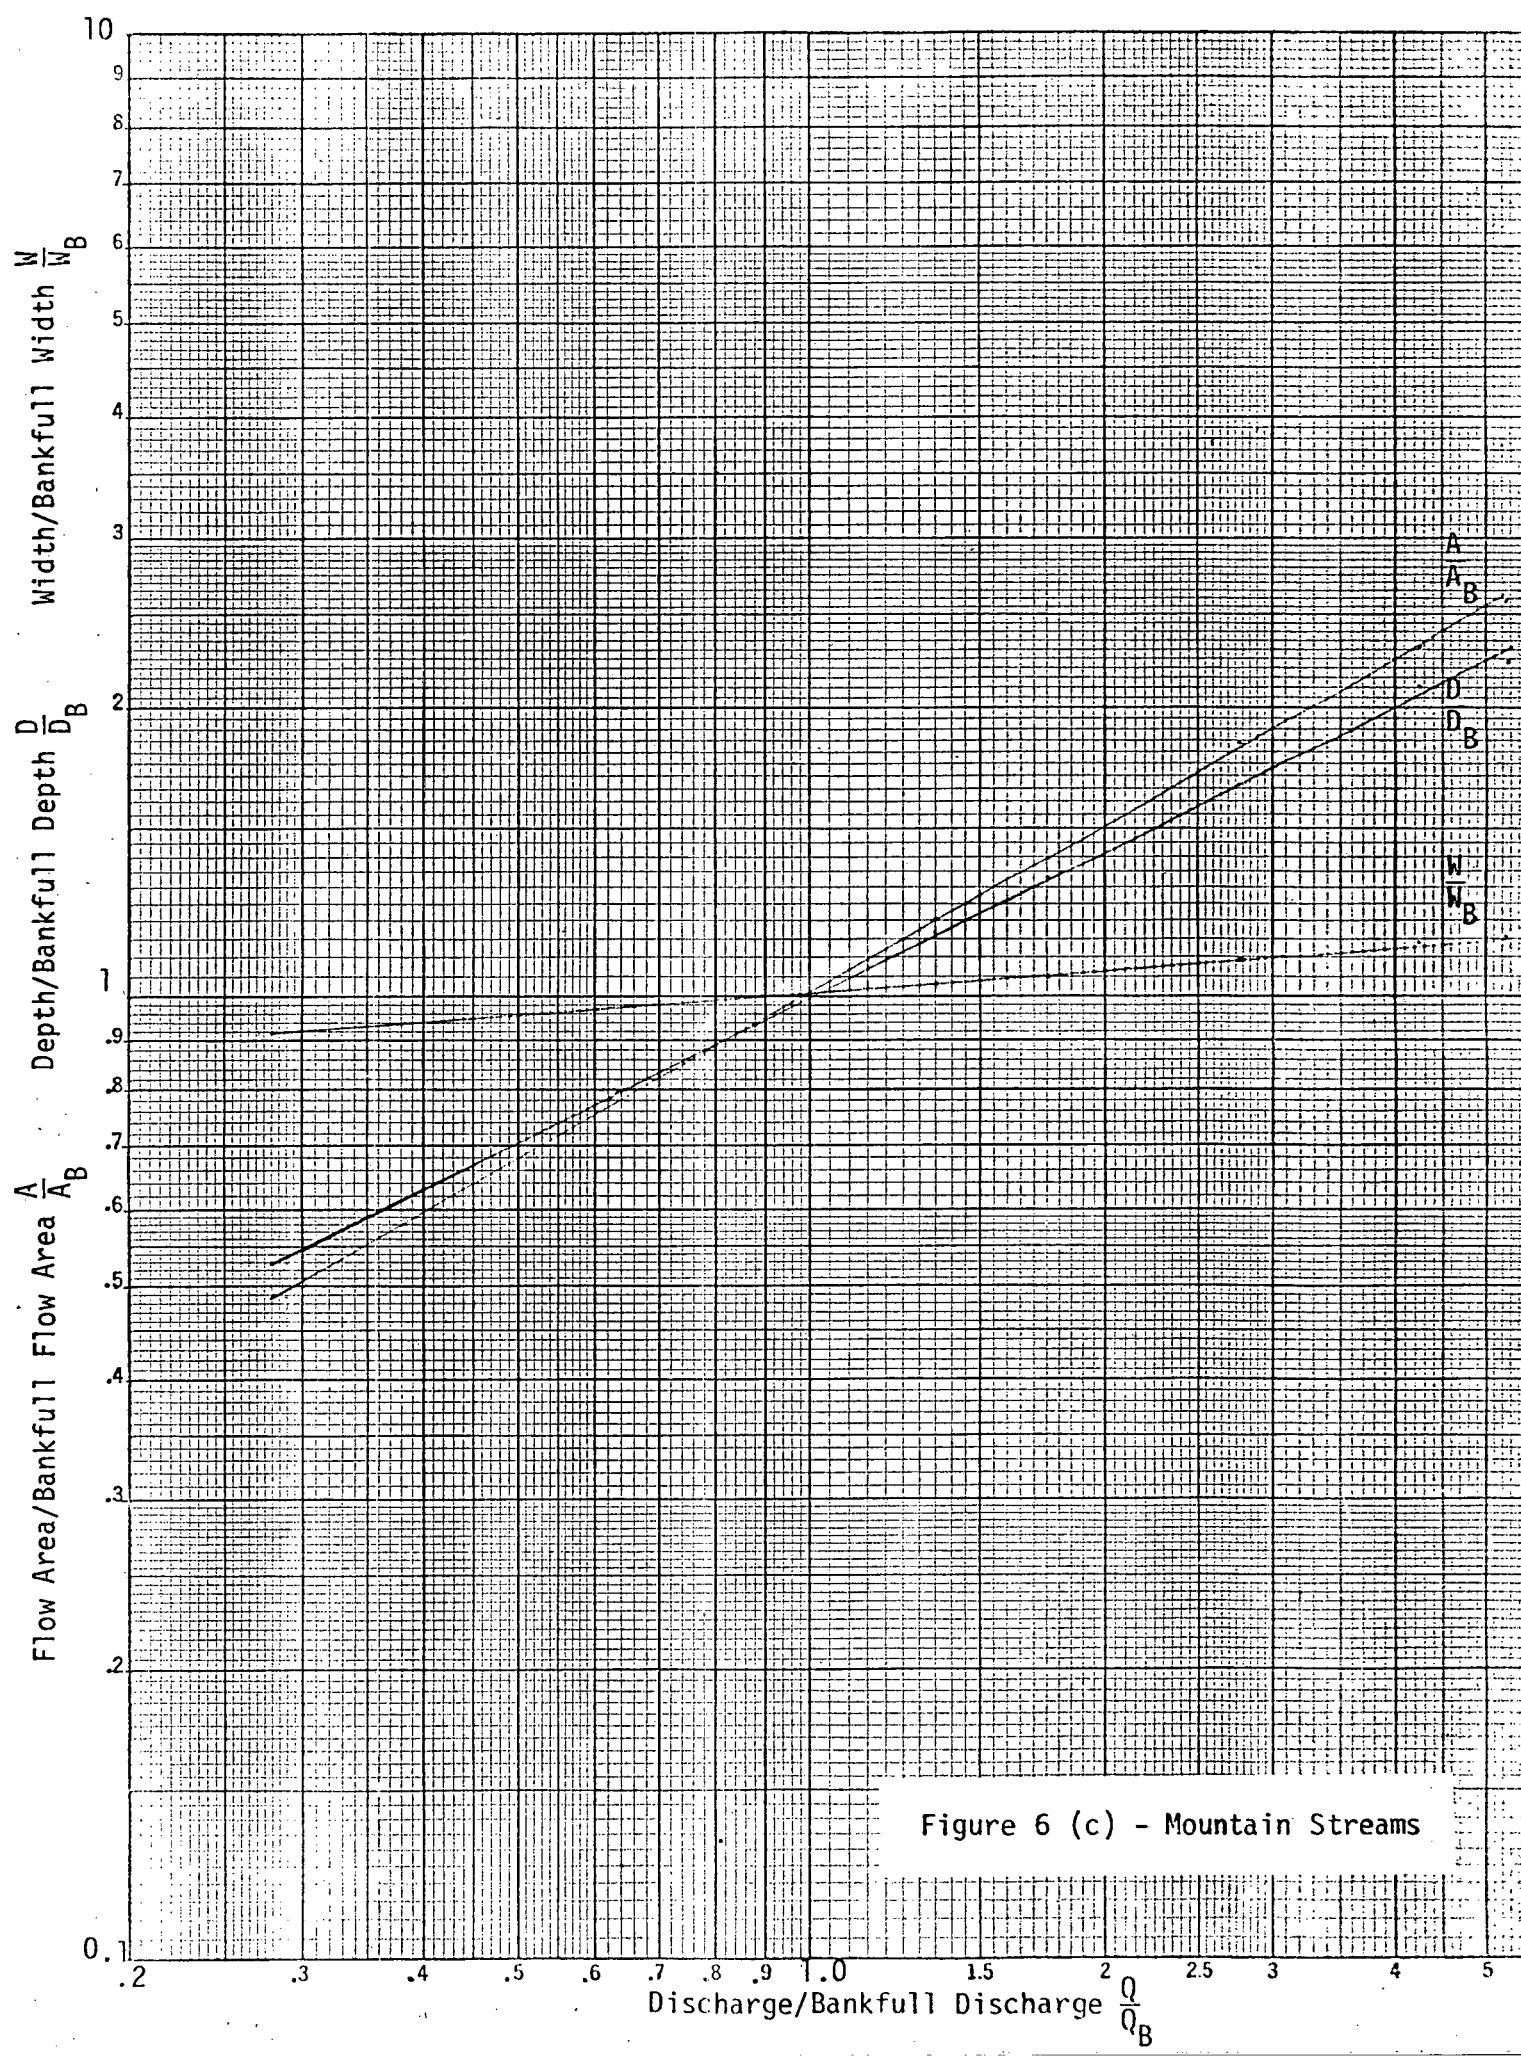


Figure 6 (c) - Mountain Streams

TABLE 1. - VALUES OF CHANNEL GEOMETRY EXPONENTS FOR RIVERS INCLUDED IN THE STUDY

Station No.	WSC No.	Station Name	Width b	Depth f	Velocity m
1	09AA006	Atlin River near Atlin	0.14	0.33	0.54
2	08AA001	Aishihik River near Witehorse	0.21	0.75	0.04
3	08AA003	Dezadeash River at Haines Junction	0.37	0.38	0.27
4	09AA014	Fantail River at outlet of Fantail Lake	0.32	0.41	0.19
5	09AE004	Gladys River at outlet of Gladys Lake			
6	08AA004	Kathleen River near Haines Junction	0.08	0.45	0.47
7	09AA010	Lindeman River near Bennett			
8	09AA007	Lubbock River near Atlin	0.24	0.49	0.25
9	09AA013	Tutshi River at outlet of Tutshi Lake			
10	09AA015	Wann River near Atlin			
11	09AA009	Watson River near Carcross	0.06	0.66	0.14
12	09AA012	Wheaton River near Carcross	0.01	0.68	0.31
13	09AG001	Big Salmon River near Carmacks	0.07	0.53	0.40
14	09CA002	Kluane River at outlet of Kluane Lake	0.16	0.29	0.13
15	09AE003	Swift River near Swift River	0.16	0.17	0.67
16	09AC004	Takhini River at outlet of Kusawa Lake	0.21	0.24	0.15
17	09AC001	Takhini River near Whitehorse	0.20	0.43	0.38
18	09AE001	Teslin River near Teslin	0.11	0.30	0.17
19	09AF001	Teslin River near Whitehorse	0.03	0.40	0.59
20	09CB001	White River at 1169.2 Alaska Highway	0.40	0.26	0.39
21	09AB009	Yukon River above Frank Creek	0.31	0.24	0.45
22	09AH001	Yukon River at Carmacks	0.16	0.52	0.32
23	09AB001	Yukon River at Whitehorse	0.12	0.50	0.24
24	10AB001	Frances River near Watson Lake	0.04	0.44	0.53
25	10AD001	Hyland River near Lower Post	0.10	0.51	0.39
26	09EA003	Klondike River above Bonanza Creek	0.07	0.44	0.48
27	10BE001	Liard River at Lower Crossing	0.04	0.46	0.49
28	10AA001	Liard River at Upper Crossing	0.07	0.35	0.61
29	09EA004	North Klondike River near Mouth			
30	09BC001	Pelly River at Pelly Crossing	0.05	0.40	0.54
31	09BC002	Pelly River at Ross River	0.03	0.56	0.43
32	09BA001	Ross River at Ross River	0.07	0.43	0.51

TABLE 1. (Cont'd)

Station No.	WSC No.	Station Name	Width b	Depth f	Velocity m
33	09DC002	Stewart River at Mayo	0.19	0.28	0.53
34	09DD002	Stewart River at Stewart Crossing	0.05	0.37	0.60
35	09DD003	Stewart River at the Mouth	0.04	0.37	0.60
36	09CD001	Yukon River above White River	0.07	0.29	0.65
37	09EB001	Yukon River at Dawson	0.03	0.36	0.63
38	USGS	Yukon River at Rampart	0.30	0.27	0.43
39	10MD002	Babbage River below Cariboo Creek			
40	10MD001	Firth River near Mouth			
41	10MA002	Ogilvie River at Mile 123 Dempster	0.10	0.47	0.46
42	10MA001	Peel River ab. Canyon Cr.	0.09	0.41	0.54
43	09FD001	Porcupine River at Old Crow	0.14	0.35	0.13
44	09FB001	Porcupine River below Bell River	0.09	0.46	0.46
45	10MB003	Snake River near Mouth	0.20	0.27	0.55
46	USGS	Turner River $69^{\circ}35'56''$, $141^{\circ}24'10''$			
47	09AH003	Big Creek near Mouth			
48	10AB003	King Creek at Mile 13 Nahanni Rge. Rd.			
49	09AB008	M'Clintock River near Whitehorse	0.16	0.56	0.29
50	10AA002	Tom Creek at Robt. Campbell Hwy. Mi. 21.7	0.00	0.44	0.55
Average			0.13	0.42	0.41
Alaskan Streams South of Yukon River (W.W. Emmett, 1972)			0.19	0.39	0.42

TABLE 2 - BANKFULL HYDROLOGIC DATA FOR RIVERS INCLUDED IN THE STUDY

Station	WSC No.	Station Name	Drainage Area DA (sq.mi.)	Gauge Height (feet)	Bankfull Discharge Q_B (cfs)	Bankfull Unit Runoff Q_B/DA (cfs/sq.mi.)	Return Period (years)
<u>ATLIN-BENNETT-DEZADEASH</u>							
1	09AA006	Atlin River near Atlin	2630	-	-	-	-
2	08AA001	Aishihik River near Whitehorse	1660	10.6 *	3,260	1.96	5.6
3	08AA003	Dezadeash River at Haines Junction	3280	12.4 *	5,250	1.60	1.6
4	09AA014	Fantail River at outlet of Fantail Lake	289	5.1	2,170	7.50	-
5	09AE004	Gladys River at outlet of Gladys Lake	737	4.0	2,700	3.66	5.6
6	08AA004	Kathleen River near Haines Junction	249	6.5	1,900	7.63	3.2
7	09AA010	Lindeman River near Bennett	92	6.0	1,300	14.13	1.0
8	09AA007	Lubbock River near Atlin	684	-	-	-	-
9	09AA013	Tutshi River at outlet of Tutshi Lake	366	5.0	2,300	6.28	2.3
10	09AA015	Wann River near Atlin	104	5.7	1,250	12.00	1.9
11	09AA009	Watson River near Carcross	452	12.0	2,360	5.22	27.0
12	09AA012	Wheaton River near Carcross	337	6.2	1,850	5.50	2.2
<u>UPPER YUKON-TESLIN-TAKHINI</u>							
13	09AG001	Big Salmon River near Carmacks	2610	6.9	11,900	4.56	2.3
14	09CA002	Kluane River at outlet of Kluane Lake	1910	14.4 *	12,000	6.28	9.0
15	09AE003	Swift River near Swift River	1280	8.1 *	8,000	6.25	1.6
16	09AC004	Takhini River at outlet of Kusawa Lake	1570	11.0	9,900	6.30	11.0
17	09AC001	Takhini River near Whitehorse	2700	19.0 *	12,900	4.78	20.0
18	09AE001	Teslin River near Teslin	11700	25.0 *	25,700	2.20	1.1
19	09AF001	Teslin River near Whitehorse	13700	10.4	34,000	2.48	1.4
20	09CB001	White River at Alaska Hwy. Mi. 1169.2	2410	82.8 *	12,800	5.31	-

* Confirmed or revised on basis of field inspection

TABLE 2 (cont'd)

Station No.	WSC No.	Station Name	Drainage Area, DA (sq.mi.)	Bankfull Gauge Height (feet)	Discharge, Q _B (cfs)	Bankfull Unit Runoff, Q _B /DA (cfs/sq.mi.)	Return Period (years)
<u>UPPER YUKON-TESLIN-TAKHINI (Cont'd)</u>							
21	09AB009	Yukon River above Frank Creek	12000	11.7	29,100	2.42	12.0
22	09AH001	Yukon River at Carmacks	33600	12.7	48,000	1.43	1.1
23	09AB001	Yukon River at Whitehorse	7500	6.8 *	22,800	3.04	7.5
<u>LIARD-PELLY-STEWART-LOWER YUKON</u>							
24	10AB001	Frances River near Watson Lake	4950	11.3	33,000	6.67	6.7
25	10AD001	Hyland River near Lower Post	3650	9.4	27,000	7.40	1.5
26	09EA003	Klondike River above Bonanza Creek	3010	10.5	22,800	7.57	19.0
27	10BE001	Liard River at Lower Crossing	40300	42.4	160,000	3.97	1.6
28	10AA001	Liard River at Upper Crossing	12500	18.4 *	68,800	5.50	2.0
29	09EA004	North Klondike River near Mouth	423	-	-	-	-
30	09BC001	Pelly River at Pelly Crossing	18900	16.5	94,600	5.00	4.2
31	09BC002	Pelly River at Ross River	7670	11.2	40,700	5.31	3.2
32	09BA001	Ross River at Ross River	2800	12.4	23,000	8.21	12.0
33	09DC002	Stewart River at Mayo	12100	23.7	71,000	5.86	1.6
34	09DD002	Stewart River at Stewart Crossing	13500	20.4	75,000	5.55	1.4
35	09DD003	Stewart River at the Mouth	19700	95.2	88,000	4.47	2.0
36	09CD001	Yukon River above White River	58400	13.5	182,000	3.11	5.0
37	09EB001	Yukon River at Dawson	106000	15.6	300,000	2.83	4.1
38	USGS	Yukon River at Rampart	199400	-	408,000	2.05	1.5

* Confirmed or revised on basis of field inspection

TABLE 2 (Cont'd)

Station No.	WSC No.	Station Name	Drainage Area DA (sq.mi.)	Gauge Height (feet)	Bankfull Discharge Q_B (cfs)	Bankfull Unit Runoff Q_B/DA (cfs/sq.mi.)	Return Period (years)
PORCUPINE-PEEL							
39	10MD002	Babbage River below Cariboo Creek	521	-	-	-	-
40	10MD001	Firth River near Mouth	2240	24.0 *	-	-	-
41	10MA002	Ogilvie River at Mile 123 Dempster	1400	28.73 *	19,600	14.00	2.4
42	10MA001	Peel River above Canyon Creek	10200	15.75	108,000	10.59	4.0
43	09FD001	Porcupine River at Old Crow	20900	34.56	175,000	8.37	2.6
44	09FB001	Porcupine River below Bell River	13900	96.0 *	131,000	9.42	1.4
45	10MB003	Snake River near Mouth	3440	-	-	-	-
46	USGS	Turner River 69°35'56", 141°24'10"	51	-	1,300	25.49	-
MOUNTAIN STREAMS							
47	09AH003	Big Creek near Mouth	674	21.2	1,200	1.78	-
48	10AB003	King Creek at Mile 13 Nahanni Rge. Rd.	5.3	2.7 *	87	16.42	-
49	09AB008	M'Clintock River near Whitehorse	597	6.0 *	1,090	1.83	1.2
50	10AA002	Tom Creek at Robt. Campbell Hwy. Mile 21.7	168	3.1 *	580	3.45	1.1

* Confirmed or revised on basis of field inspection

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq.ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
Atlin-Bennett-Dezadeash	2. Aishihik River near Whitehorse 08AA001	Bankfull Q_B	3,260	6.01	114.91	690.61	1.000	1.000	1.000	1.000
		Mean	514	1.50	78.14	117.21	0.158	0.170	0.250	0.680
		1.5 yr.	2,080	4.31	104.48	450.31	0.638	0.652	0.717	0.909
		2.33 yr.	2,570	5.03	109.36	550.08	0.788	0.797	0.837	0.952
		10 yr.	3,900	6.88	119.27	820.58	1.196	1.188	1.145	1.038
		50 yr.	5,080	8.40	126.02	1,058.57	1.558	1.533	1.398	1.097
		100 yr.	5,560	8.99	128.40	1,154.32	1.706	1.671	1.496	1.117
		Bankfull Q_B	5,250	4.61	276.89	1,276.46	1.000	1.000	1.000	1.000
		Mean	1,520	2.89	175.04	505.87	0.290	0.396	0.627	0.632
		1.5 yr.	4,800	4.46	267.93	1,194.97	0.914	0.936	0.968	0.968
3. Dezadeash River at Haines Junction 08AA003		2.33 yr.	5,880	4.81	288.65	1,388.41	1.120	1.088	1.043	1.042
		10 yr.	8,500	5.52	330.35	1,824.08	1.619	1.429	1.197	1.193
		50 yr.	10,900	6.07	362.03	2,197.52	2.076	1.722	1.317	1.308
		100 yr.	11,800	6.25	372.72	2,329.50	2.248	1.825	1.356	1.346
		Bankfull Q_B	2,170	3.45	248.57	858.56	1.000	1.000	1.000	1.000
		Mean	741	2.23	175.62	391.98	0.342	0.457	0.646	0.707
		1.5 yr.	3,400	4.15	287.42	1,191.64	1.567	1.388	1.200	1.156
4. Fantail River at outlet of Fantail L 09AA014		2.33 yr.	4,220	4.53	308.21	1,394.96	1.945	1.625	1.310	1.240
		10 yr.	5,650	5.10	338.71	1,997.68	2.604	2.327	1.476	1.363
		50 yr.	7,850	5.83	376.71	2,194.34	3.618	2.556	1.687	1.516
		100 yr.	9,000	6.58	393.74	2,424.65	4.148	2.824	1.783	1.584

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq. ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
Atlin-Bennett- Bezadeash (cont'd)	5. Gladys River at outlet Gladys L. 09AE004	Bankfull Q_B	2,700	2.13	174.16	370.44	1.000	1.000	1.000	1.000
		Mean	531	1.21	199.31	241.56	0.197	0.649	0.570	1.144
		1.5 yr.	1,780	1.84	180.32	332.15	0.659	0.897	0.866	1.035
		2.33 yr.	2,120	1.96	177.69	347.56	0.785	0.938	0.920	1.020
		10 yr.	3,200	2.26	171.73	387.42	1.185	1.046	1.061	0.986
		50 yr.	4,700	2.57	166.32	428.11	1.741	1.156	1.210	0.955
		100 yr.	5,400	2.70	164.43	444.45	2.000	1.120	1.271	0.944
		Bankfull Q_B	1,900	3.74	115.67	432.61	1.000	1.000	1.000	1.000
		Mean	387	1.83	101.63	185.98	0.204	0.430	0.489	0.879
		1.5 yr.	1,350	3.21	112.50	361.12	0.710	0.835	0.858	0.973
		2.33 yr.	1,770	3.62	115.00	416.30	0.932	0.962	0.968	0.994
		10 yr.	2,500	4.23	118.28	500.32	1.316	1.157	1.131	1.023
		50 yr.	3,400	4.85	121.27	588.16	1.789	1.360	1.297	1.048
		100 yr.	4,000	5.22	122.88	641.43	2.105	1.483	1.396	1.062
		Bankfull Q_B	1,300	2.08	76.16	158.18	1.000	1.000	1.000	1.000
		Mean	348	1.37	82.63	113.29	0.268	0.716	0.660	1.085
		1.5 yr.	1,800	2.30	74.64	171.97	1.385	1.087	1.109	0.980
		2.33 yr.	2,280	2.48	73.56	182.43	1.754	1.153	1.194	0.966
		10 yr.	3,500	2.40	71.63	203.36	2.692	1.286	1.367	0.941
		50 yr.	5,700	3.31	69.48	229.93	4.385	1.454	1.594	0.912
		100 yr.	7,600	3.63	68.28	247.58	5.846	1.565	1.746	0.897

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq. ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
Atlin-Bennett-Dezadeash (cont'd)	9. Tutshi River at outlet of Tutshi L. 09AA013	Bankfull Q_B	2,300	7.05	56.78	400.41	1.000	1.000	1.000	1.000
		Mean	562	2.64	81.97	216.56	0.244	0.541	0.375	1.444
		1.5 yr.	2,000	6.40	58.86	376.70	0.870	0.941	0.908	1.037
		2.33 yr.	2,370	7.20	56.34	405.70	1.030	1.013	1.021	0.992
		10 yr.	3,300	9.07	51.68	468.69	1.435	1.171	1.286	0.910
		50 yr.	4,750	11.70	47.00	549.90	2.065	1.373	1.659	0.828
		100 yr.	5,400	12.78	45.45	580.85	2.348	1.451	1.812	0.801
		Bankfull Q_B	1,250	2.38	56.82	135.46	1.000	1.000	1.000	1.000
		Mean	235	1.25	65.24	81.62	0.188	0.603	0.525	1.148
		1.5 yr.	1,160	2.32	56.98	132.19	0.928	0.976	0.973	1.003
		2.33 yr.	1,380	2.48	56.18	139.27	1.104	1.028	1.040	0.989
		10 yr.	1,950	2.83	54.57	154.60	1.560	1.141	1.188	0.960
		50 yr.	2,850	3.28	52.81	173.22	2.280	1.279	1.376	0.929
		100 yr.	4,100	3.78	51.25	193.47	3.280	1.428	1.583	0.902
		Bankfull Q_B	2,360	11.77	56.93	669.90	1.000	1.000	1.000	1.000
		Mean	452	3.93	51.65	202.78	0.192	0.303	0.333	0.907
		1.5 yr.	720	5.35	53.08	283.71	0.305	0.424	0.455	0.932
		2.33 yr.	893	6.18	53.78	332.36	0.378	0.496	0.525	0.945
		10 yr.	1,400	8.32	55.22	459.60	0.593	0.686	0.707	0.970
		50 yr.	1,840	9.98	56.11	559.81	0.780	0.836	0.848	0.986
		100 yr.	2,010	10.58	56.40	596.66	0.852	0.891	0.899	0.991

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq. ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
Upper Yukon-Teslin-Takhini	13. Big Salmon River near Carmacks 09AG001	Bankfull Q_B	11,900	6.54	287.52	1,878.94	1.000	1.000	1.000	1.000
		Mean	2,440	2.21	260.63	575.47	0.205	0.306	0.338	0.906
		1.5 yr.	10,100	5.99	284.62	1,703.45	0.849	0.907	0.916	0.990
		2.33 yr.	12,000	6.57	287.67	1,891.14	1.008	1.006	1.006	1.001
		10 yr.	17,300	8.50	294.27	2,501.00	1.454	1.331	1.301	1.023
		50 yr.	23,500	10.54	299.91	3,160.15	1.975	1.682	1.612	1.043
		100 yr.	26,400	11.43	302.08	3,453.98	2.218	1.838	1.750	1.051
		Bankfull Q_B	12,000	8.26	203.97	1,685.20	1.000	1.000	1.000	1.000
		Mean	2,520	5.24	160.22	838.91	0.210	0.498	0.634	0.786
		1.5 yr.	8,200	7.39	192.30	1,421.48	0.683	0.844	0.895	0.943
14. Kluane River at outlet Kluane L. 09CA002		2.33 yr.	9,270	7.66	194.98	1,501.60	0.772	0.891	0.927	0.961
		10 yr.	12,100	8.26	204.83	1,692.92	1.008	1.005	1.000	1.004
		50 yr.	13,000	8.44	207.12	1,748.09	1.083	1.037	1.022	1.015
		100 yr.	13,400	8.52	208.09	1,771.89	1.117	1.051	1.032	1.020
		Bankfull Q_B	8,000	4.17	118.91	495.38	1.000	1.000	1.000	1.000
		Mean	1,740	3.21	93.54	300.16	0.218	0.606	0.770	0.787
		1.5 yr.	7,800	4.14	118.58	491.04	0.975	0.991	0.994	0.997
15. Swift River near Swift River 09AE003		2.33 yr.	9,300	4.27	121.93	520.14	1.163	1.050	1.024	1.025
		10 yr.	14,000	4.57	130.07	594.69	1.750	1.200	1.097	1.094
		50 yr.	21,000	4.90	138.69	679.16	2.625	1.371	1.175	1.166
		100 yr.	35,500	5.36	150.69	806.96	4.438	1.628	1.285	1.267

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq.ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
<u>Upper Yukon-Takhini</u> <u>Takhini</u> (cont'd)	16. Takhini River at outlet Kusawa L. 09AC004	Bankfull Q_B	9,900	7.98	298.63	2,383.07	1.000	1.000	1.000	1.000
		Mean	1,800	5.27	209.46	1,103.85	0.182	0.463	0.660	0.701
		1.5 yr.	6,200	7.12	270.91	1,928.88	0.626	0.809	0.892	0.907
		2.33 yr.	7,240	7.39	279.81	2,067.80	0.731	0.868	0.926	0.937
		10 yr.	9,500	7.90	296.08	2,339.03	0.960	0.982	0.990	0.992
		50 yr.	10,900	8.17	304.67	2,489.15	1.101	1.045	1.024	1.020
		100 yr.	11,400	8.27	307.53	2,543.27	1.152	1.067	1.036	1.030
		Bankfull Q_B	12,900	11.60	245.77	2,850.93	1.000	1.000	1.000	1.000
		Mean	2,170	5.40	172.55	932.31	0.168	0.327	0.466	0.702
		1.5 yr.	6,900	8.88	217.46	1,931.04	0.535	0.677	0.766	0.885
		2.33 yr.	8,370	9.68	225.50	2,183.74	0.649	0.766	0.835	0.918
		10 yr.	11,400	11.06	239.80	2,651.12	0.884	0.930	0.953	0.976
		50 yr.	14,500	12.26	251.56	3,083.62	1.124	1.082	1.057	1.024
		100 yr.	15,800	12.72	255.89	3,254.41	1,225	1.142	1.097	1.041
		Bankfull Q_B	25,700	19.11	466.97	8,923.80	1.000	1.000	1.000	1.000
		Mean	10,900	14.83	425.64	6,312.24	0.424	0.707	0.776	0.912
		1.5 yr.	33,000	20.58	479.73	9,872.84	1.284	1.106	1.077	1.027
		2.33 yr.	39,500	21.71	489.14	10,619.23	1.537	1.190	1.136	1.048
		10 yr.	53,000	23.67	504.93	11,951.69	2.062	1.339	1.239	1.081
		50 yr.	64,800	25.13	516.02	12,967.58	2.521	1.453	1.315	1.105
		100 yr.	69,300	25.63	519.77	13,321.71	2.696	1.493	1.341	1.113

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq. ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
Upper Yukon-Teslin-Takhini (cont'd)	19. Teslin River near Whitehorse 09AF001	Bankfull Q _B	34,000	11.42	645.13	7,367.38	1.000	1.000	1.000	1.000
		Mean	11,700	7.45	625.81	4,664.16	0.344	0.633	0.652	0.970
		1.5 yr.	36,000	11.70	646.18	7,558.37	1.059	1.026	1.024	1.002
		2.33 yr.	42,400	12.49	649.20	8,108.51	1.247	1.101	1.094	1.006
		10 yr.	59,000	14.24	655.34	9,335.32	1.735	1.267	1.247	1.016
		50 yr.	74,800	15.67	659.79	10,336.93	2.200	1.403	1.372	1.023
		100 yr.	81,700	16.23	661.45	10,735.99	2.403	1.457	1.421	1.025
		Bankfull Q _B	29,100	16.03	435.00	6,973.05	1.000	1.000	1.000	1.000
		Mean	11,300	12.76	327.17	4,174.69	0.388	0.599	0.796	0.752
		1.5 yr.	17,400	14.13	373.45	5,276.85	0.598	0.757	0.882	0.869
21. Yukon River above Frank Creek 09AB009		2.33 yr.	24,500	15.39	412.69	6,351.30	0.842	0.911	0.960	0.949
		10 yr.	28,500	15.87	434.42	6,894.25	0.979	0.989	0.990	0.999
		50 yr.	31,700	16.35	446.54	7,300.93	1.089	1.047	1.020	1.027
		100 yr.	32,800	16.49	451.23	7,440.78	1.127	1.067	1.029	1.037
		Bankfull Q _B	48,000	12.24	721.69	8,833.49	1.000	1.000	1.000	1.000
		Mean	26,200	8.95	654.28	5,855.81	0.546	0.663	0.731	0.907
		1.5 yr.	59,500	13.67	747.26	10,215.04	1.240	1.156	1.117	1.035
22. Yukon River at Carmacks 09AH001		2.33 yr.	70,600	14.93	768.26	11,470.12	1.471	1.298	1.220	1.064
		10 yr.	95,400	17.44	806.64	14,067.80	1.988	1.593	1.425	1.118
		50 yr.	119,000	19.55	836.04	16,344.58	2.479	1.850	1.597	1.158
		100 yr.	129,000	29.38	847.05	17,262.88	2.688	1.954	1.665	1.174

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq.ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
<u>Liard-Pelly-Stewart- Lower Yukon</u>	24. Frances River near Watson Lake 10AD001	Bankfull Q_B	33,000	10.68	358.34	3,828.15	1.000	1.000	1.000	1.000
		Mean	5,880	4.97	332.72	1,655.28	0.178	0.432	0.466	0.929
		1.5 yr.	22,800	9.07	352.69	3,198.55	0.691	0.836	0.849	0.984
		2.33 yr.	26,500	9.69	354.98	3,441.18	0.803	0.899	0.907	0.991
		10 yr.	39,000	11.50	360.92	4,152.02	1.182	1.085	1.077	1.007
		50 yr.	43,600	12.09	362.66	4,383.11	1.321	1.145	1.131	1.012
		100 yr.	46,800	12.47	363.77	4,536.94	1.418	1.185	1.167	1.015
		Bankfull Q_B	27,000	8.65	417.87	3,613.74	1.000	1.000	1.000	1.000
		Mean	5,010	3.72	353.85	1,314.91	0.186	0.364	0.430	0.847
		1.5 yr.	27,000	8.72	419.45	3,657.60	1.000	1.012	1.008	1.004
25. Hyland River near Lower Post 10AD001		2.33 yr.	30,300	9.26	424.73	3,933.00	1.122	1.088	1.071	1.016
		10 yr.	39,800	10.53	434.58	4,575.26	1.474	1.266	1.217	1.040
		50 yr.	52,900	12.16	447.25	5,439.46	1.959	1.505	1.406	1.070
		100 yr.	59,200	12.87	452.36	5,824.14	2.193	1.612	1.489	1.082
		Bankfull Q_B	25,000	10.33	206.47	2,132.42	1.000	1.000	1.000	1.000
		Mean	2,180	3.54	175.48	620.50	0.087	0.291	0.342	0.350
		1.5 yr.	12,000	7.48	196.61	1,470.84	0.480	0.690	0.724	0.952
		2.33 yr.	14,700	8.18	199.29	1,629.99	0.538	0.764	0.792	0.965
		10 yr.	21,500	9.67	204.41	1,975.83	0.860	0.927	0.936	0.990
		50 yr.	25,900	10.49	206.96	2,171.01	1.036	1.018	1.016	1.002
		100 yr.	28,700	10.97	208.38	2,286.76	1.148	1.072	1.063	1.009
26. Klondike River above Bonanza Creek 09EA003		Bankfull Q_B	25,000	10.33	206.47	2,132.42	1.000	1.000	1.000	1.000
		Mean	2,180	3.54	175.48	620.50	0.087	0.291	0.342	0.350
		1.5 yr.	12,000	7.48	196.61	1,470.84	0.480	0.690	0.724	0.952
		2.33 yr.	14,700	8.18	199.29	1,629.99	0.538	0.764	0.792	0.965
		10 yr.	21,500	9.67	204.41	1,975.83	0.860	0.927	0.936	0.990
		50 yr.	25,900	10.49	206.96	2,171.01	1.036	1.018	1.016	1.002
		100 yr.	28,700	10.97	208.38	2,286.76	1.148	1.072	1.063	1.009

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq.ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
<u>Liard-Pelly-Stewart-Lower Yukon</u> <u>(cont'd)</u>	27. Liard River at Lower Crossing 10BE001	Bankfull Q_B	160,000	22.71	832.08	18,896.54	1.000	1.000	1.000	1.000
		Mean	40,800	12.09	787.82	9,524.74	0.254	0.504	0.532	0.946
		1.5 yr.	159,000	22.64	831.87	18,833.54	0.994	0.997	0.997	1.000
		2.33 yr.	187,000	24.40	837.29	20,429.88	1.169	1.081	1.074	1.006
		10 yr.	240,000	27.29	845.69	23,078.88	1.500	1.221	1.202	1.016
		50 yr.	305,000	30.48	853.83	26,024.74	1.906	1.377	1.342	1.026
		100 yr.	334,000	31.78	856.94	27,233.55	2.088	1.441	1.399	1.030
		Bankfull Q_B	68,800	18.98	456.78	8,669.68	1.000	1.000	1.000	1.000
		Mean	14,000	10.89	408.94	4,453.36	0.203	0.514	0.574	0.895
		1.5 yr.	59,800	18.08	452.36	8,178.67	0.869	0.943	0.953	0.990
28. Liard River at Upper Crossing 10AA001		2.33 yr.	72,700	19.35	458.54	8,872.75	1.057	1.023	1.020	1.004
		10 yr.	104,000	21.92	470.09	10,304.37	1.512	1.189	1.154	1.029
		50 yr.	168,000	25.92	486.02	12,597.64	2.442	1.453	1.366	1.064
		100 yr.	205,000	27.78	492.80	13,689.98	2.980	1.579	1.464	1.079
		Bankfull Q_B	94,600	15.55	732.90	11,393.66	1.000	1.000	1.000	1.000
		Mean	13,900	6.32	653.07	4,127.40	0.147	0.362	0.407	0.891
		1.5 yr.	61,000	12.65	714.03	9,032.48	0.645	0.793	0.814	0.974
		2.33 yr.	78,300	14.22	724.86	10,307.51	0.828	0.905	0.915	0.989
		10 yr.	118,000	17.24	742.73	12,807.64	1.247	1.124	1.109	1.013
		50 yr.	173,000	20.63	760.07	15,683.28	1.829	1.376	1.327	1.037
		100 yr.	200,000	22.09	766.74	16,934.22	2.114	1.486	1.421	1.046
30. Pelly River at Pelly Crossing 098C001		Bankfull Q_B	94,600	15.55	732.90	11,393.66	1.000	1.000	1.000	1.000
		Mean	13,900	6.32	653.07	4,127.40	0.147	0.362	0.407	0.891
		1.5 yr.	61,000	12.65	714.03	9,032.48	0.645	0.793	0.814	0.974
		2.33 yr.	78,300	14.22	724.86	10,307.51	0.828	0.905	0.915	0.989
		10 yr.	118,000	17.24	742.73	12,807.64	1.247	1.124	1.109	1.013
		50 yr.	173,000	20.63	760.07	15,683.28	1.829	1.376	1.327	1.037
		100 yr.	200,000	22.09	766.74	16,934.22	2.114	1.486	1.421	1.046

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq. ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
<u>Liard-Pelly-Stewart-Lower Yukon</u> <u>(cont'd)</u>	31. Pelly River at Ross River 09BC002	Bankfull Q_B	40,700	12.46	560.38	6,979.53	1.000	1.000	1.000	1.000
		Mean	6,600	4.47	531.10	2,373.49	0.162	0.340	0.359	0.948
		1.5 yr.	33,600	11.19	557.22	6,235.85	0.826	0.893	0.899	0.994
		2.33 yr.	40,000	12.35	560.09	6,915.43	0.983	0.991	0.991	0.999
		10 yr.	87,400	15.12	566.09	8,559.85	1.410	1.226	1.214	1.010
		50 yr.	76,300	17.75	570.86	10,135.05	1.875	1.452	1.425	1.019
		100 yr.	84,700	18.83	572.62	10,783.01	2.081	1.545	1.512	1.022
		Bankfull Q_B	23,000	8.12	300.84	2,444.33	1.000	1.000	1.000	1.000
		Mean	2,340	3.03	256.37	777.57	0.102	0.318	0.373	0.852
		1.5 yr.	13,600	6.50	289.97	1,884.52	0.591	0.771	0.800	0.964
32. Ross River at Ross River 09BA001		2.33 yr.	16,100	6.99	293.41	2,051.23	0.700	0.839	0.860	0.975
		10 yr.	22,000	7.97	299.90	2,390.20	0.957	0.978	0.981	0.997
		50 yr.	29,200	9.01	305.91	2,755.94	1.270	1.127	1.109	1.017
		100 yr.	32,500	9.44	308.21	2,908.58	1.413	1.190	1.161	1.024
		Bankfull Q_B	71,000	16.49	738.04	12,170.28	1.000	1.000	1.000	1.000
		Mean	13,100	10.27	536.83	5,513.24	0.185	0.453	0.622	0.727
		1.5 yr.	74,000	16.67	744.68	12,413.82	1.042	1.020	1.011	1.009
		2.33 yr.	85,400	17.36	765.27	13,285.09	1.203	1.092	1.053	1.037
		10 yr.	115,000	18.87	808.47	15,255.83	1.620	1.254	1.144	1.095
		50 yr.	143,000	20.05	842.46	16,891.32	2.014	1.388	1.216	1.142
		100 yr.	154,000	20.47	854.35	17,488.55	2.169	1.437	1.241	1.158
33. Stewart River at Mayo 09DC002		Bankfull Q_B	71,000	16.49	738.04	12,170.28	1.000	1.000	1.000	1.000
		Mean	13,100	10.27	536.83	5,513.24	0.185	0.453	0.622	0.727
		1.5 yr.	74,000	16.67	744.68	12,413.82	1.042	1.020	1.011	1.009
		2.33 yr.	85,400	17.36	765.27	13,285.09	1.203	1.092	1.053	1.037
		10 yr.	115,000	18.87	808.47	15,255.83	1.620	1.254	1.144	1.095
		50 yr.	143,000	20.05	842.46	16,891.32	2.014	1.388	1.216	1.142
		100 yr.	154,000	20.47	854.35	17,488.55	2.169	1.437	1.241	1.158

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq. ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
Liard-Pelly-Stewart-Lower Yukon (cont'd)	34. Stewart River at Stewart Crossing 09DD002	Bankfull Q_B	75,000	21.91	545.29	11,945.12	1.000	1.000	1.000	1.000
		Mean	14,700	12.03	501.80	6,037.65	0.196	0.505	0.549	0.920
		1.5 yr.	78,000	22.20	546.38	12,128.00	1.040	1.015	1.013	1.002
		2.33 yr.	92,100	23.60	551.03	13,002.10	1.228	1.088	1.077	1.011
		10 yr.	132,000	26.97	561.24	15,137.77	1.760	1.267	1.231	1.029
		50 yr.	192,000	30.96	572.07	17,711.29	2.560	1.483	1.413	1.049
		100 yr.	223,000	32.71	576.45	18,857.41	2.973	1.579	1.493	1.057
		Bankfull Q_B	88,000	18.09	619.44	11,205.67	1.000	1.000	1.000	1.000
		Mean	16,400	9.75	583.09	5,685.13	0.186	0.507	0.539	0.941
		1.5 yr.	78,000	17.31	616.76	10,676.12	0.886	0.953	0.957	0.996
35. Stewart River at the Mouth 09DD003		2.33 yr.	98,100	18.83	621.87	11,709.81	1.115	1.044	1.041	1.004
		10 yr.	159,000	22.48	632.78	14,224.89	1.807	1.269	1.243	1.022
		50 yr.	313,000	28.85	648.40	18,706.34	3.557	1.669	1.595	1.047
		100 yr.	411,000	31.89	654.79	20,881.25	4.670	1.863	1.763	1.057
		Bankfull Q_B	182,000	21.79	910.65	19,843.06	1.000	1.000	1.000	1.000
		Mean	41,700	14.21	818.39	11,629.32	0.229	0.586	0.652	0.899
		1.5 yr.	127,000	19.55	887.21	17,344.96	0.698	0.874	0.897	0.974
		2.33 yr.	153,000	20.62	899.27	18,542.95	0.841	0.934	0.946	0.988
		10 yr.	215,000	22.86	921.72	21,070.52	1.181	1.062	1.049	1.012
		50 yr.	307,000	25.32	945.83	23,948.42	1.687	1.207	1.162	1.039
		100 yr.	352,000	26.33	955.26	25,152.00	1.934	1.268	1.208	1.049
36. Yukon River above White River 09CD001		Bankfull Q_B	182,000	21.79	910.65	19,843.06	1.000	1.000	1.000	1.000
		Mean	41,700	14.21	818.39	11,629.32	0.229	0.586	0.652	0.899
		1.5 yr.	127,000	19.55	887.21	17,344.96	0.698	0.874	0.897	0.974
		2.33 yr.	153,000	20.62	899.27	18,542.95	0.841	0.934	0.946	0.988
		10 yr.	215,000	22.86	921.72	21,070.52	1.181	1.062	1.049	1.012
		50 yr.	307,000	25.32	945.83	23,948.42	1.687	1.207	1.162	1.039
		100 yr.	352,000	26.33	955.26	25,152.00	1.934	1.268	1.208	1.049

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

REGION	GAUGING STATION NAME & NUMBER	DISCHARGE EVENT	DISCHARGE Q (cfs)	DEPTH D (ft.)	WIDTH W (ft.)	AREA A (sq. ft.)	$\frac{Q}{Q_B}$	$\frac{A}{A_B}$	$\frac{D}{D_B}$	$\frac{W}{W_B}$
<u>Porcupine-Peel</u>	41. Ogilvie River at Mi. 123 Dempster 10MA002	Bankfull Q_B Mean 1.5 yr. 2.33 yr. 10 yr. 50 yr. 100 yr.	19,600 1,100	6.992 1.825	314.56 238.23	2,199.40 434.77	1.000 0.056	1.000 0.197	1.000 0.261	1.000 0.757
	42. Peel River above Canyon Creek 10MA001	Bankfull Q_B Mean 1.5 yr. 2.33 yr. 10 yr. 50 yr. 100 yr.	108,000 6,450 70,700 101,000 162,000 315,000 402,000	14.45 4.51 12.13 14.05 17.08 22.48 24.86	687.05 533.89 661.49 682.95 712.44 756.13 772.82	9,926.50 2,408.91 8,023.21 9,598.18 12,169.19 16,997.80 19,213.85	1.000 0.060 0.655 0.935 1.500 2.917 3.722	1.000 0.243 0.808 0.967 1.226 1.712 1.936	1.000 0.312 0.840 0.973 1.182 1.556 1.721	1.000 0.777 0.963 0.994 1.037 1.101 1.125
	45. Porcupine River at Old Crow 09FD001	Bankfull Q_B Mean 1.5 yr. 2.33 yr. 10 yr. 50 yr. 100 yr.	175,000 13,100 135,000 157,000 246,000 328,000 363,000	27.69 11.30 25.32 26.67 31.31 34.59 35.82	807.79 566.33 779.57 795.86 846.39 880.42 892.73	22,367.71 6,399.53 19,738.71 21,225.59 26,500.47 30,453.73 31,977.59	1.000 0.075 0.771 0.897 1.406 1.874 2.074	1.000 0.286 0.883 0.949 1.185 1.362 1.430	1.000 0.408 0.914 0.963 1.131 1.249 1.294	1.000 0.701 0.965 0.985 1.048 1.090 1.105

Table 3 - CHANNEL CHARACTERISTICS FOR VARIOUS DISCHARGE EVENTS

TABLE 4(a) - VALUES OF RATIO OF DISCHARGE AND CHANNEL CHARACTERISTICS AT SELECTED DISCHARGE EVENTS;

ATLIN-BENNETT-MIZADYASHI SUBREGION

A. Ratio of Discharge to Bankfull Discharge ($\frac{Q}{Q_B}$)

Discharge Event	Station Number												Average
	1	2	3	4	5	6	7	8	9	10	11	12	
Mean	0.16	0.29	0.34	0.20	0.20	0.27	-	0.24	0.19	0.14	0.14	0.22	
1.5 yr. flood	0.64	0.91	1.57	0.66	0.71	1.39	-	0.87	0.93	0.50	0.77	0.88	
2.33	0.79	1.12	1.95	0.79	0.93	1.75	-	1.03	1.10	0.38	0.94	1.08	
10	1.20	1.62	2.60	1.19	1.32	2.69	-	1.44	1.56	0.59	1.27	1.55	
50	1.56	2.08	3.62	1.74	1.79	4.38	-	2.06	2.28	0.78	1.32	2.16	
100	1.71	2.25	4.15	2.00	2.10	5.85	-	2.35	3.28	0.85	1.35	2.59	

B. Ratio of Discharge Area to Bankfull Area ($\frac{A}{A_B}$)

Discharge Event	Station Number												Average
	1	2	3	4	5	6	7	8	9	10	11	12	
Mean	0.17	0.40	0.46	0.65	0.43	0.72	-	0.54	0.57	0.30	0.26	0.45	
1.5 yr. flood	0.65	0.94	1.39	0.90	0.84	1.09	-	0.94	0.93	0.42	0.84	0.89	
2.33	0.80	1.09	1.63	0.94	0.96	1.15	-	1.01	0.98	0.50	0.96	1.00	
10	1.19	1.43	2.33	1.05	1.16	1.29	-	1.17	1.08	0.69	1.18	1.26	
50	1.53	1.72	2.56	1.16	1.36	1.45	-	1.37	1.21	0.84	1.22	1.44	
100	1.67	1.82	2.82	1.12	1.48	1.56	-	1.45	1.36	0.89	1.23	1.54	

C. Ratio of Discharge Depth to Bankfull Depth ($\frac{D}{D_B}$)

Discharge Event	Station Number												Average
	1	2	3	4	5	6	7	8	9	10	11	12	
Mean	0.25	0.63	0.65	0.57	0.49	0.66	-	0.38	0.49	0.33	0.27	0.47	
1.5 yr. flood	0.72	0.97	1.20	0.87	0.86	1.11	-	0.91	0.91	0.45	0.84	0.88	
2.33	0.84	1.04	1.31	0.92	0.97	1.19	-	1.02	0.97	0.52	0.96	0.97	
10	1.14	1.20	1.48	1.06	1.13	1.37	-	1.29	1.11	0.71	1.18	1.17	
50	1.40	1.32	1.69	1.21	1.30	1.59	-	1.66	1.28	0.85	1.21	1.55	
100	1.50	1.36	1.78	1.27	1.40	1.75	-	1.81	1.48	0.90	1.25	1.45	

D. Ratio of Discharge Width to Bankfull Width ($\frac{W}{W_B}$)

Discharge Event	Station Number												Average
	1	2	3	4	5	6	7	8	9	10	11	12	
Mean	0.68	0.63	0.71	1.14	0.88	1.09	-	1.44	1.17	0.91	0.98	0.96	
1.5 yr. flood	0.91	0.97	1.16	1.04	0.97	0.98	-	1.04	1.02	0.95	1.00	1.00	
2.33	0.95	1.04	1.24	1.02	0.99	0.97	-	0.99	1.01	0.94	1.00	1.02	
10	1.04	1.19	1.36	0.99	1.02	0.94	-	0.91	0.98	0.97	1.00	1.04	
50	1.10	1.31	1.52	0.96	1.05	0.91	-	0.83	0.95	0.99	1.00	1.06	
100	1.12	1.35	1.58	0.94	1.06	0.90	-	0.80	0.92	0.99	1.00	1.07	

TABLE 4(b) - VALUES OF RATIO OF DISCHARGE AND CHANNEL CHARACTERISTICS AT SELECTED DISCHARGE EVENTS;

UPPER YUKON-TESLIN-TAKHINI SUBREGION

A. Ratio of Discharge to Bankfull Discharge ($\frac{Q}{Q_B}$)		Station Number											
Discharge Event		13	14	15	16	17	18	19	20	21	22	23	Average
Mean	0.21	0.21	0.22	0.18	0.17	0.42	0.34	-	0.39	0.55	0.37	0.31	
1.5 yr. flood	0.85	0.68	0.98	0.63	0.54	1.28	1.06	-	0.60	1.24	0.76	0.86	
2.53	1.01	0.77	1.16	0.73	0.65	1.54	1.25	-	0.84	1.47	0.81	1.02	
10	1.45	1.01	1.75	0.96	0.88	2.06	1.74	-	0.98	1.99	0.94	1.38	
50	1.98	1.08	2.63	1.10	1.12	2.52	2.20	-	1.09	2.48	1.02	1.72	
100	2.22	1.12	4.44	1.15	1.23	2.70	2.40	-	1.13	2.69	1.05	2.01	
B. Ratio of Discharge Area to Bankfull Area ($\frac{A}{A_B}$)													
Mean	0.31	0.50	0.61	0.46	0.33	0.71	0.63	-	0.60	0.66	0.54	0.54	
1.5 yr. flood	0.91	0.84	0.99	0.81	0.68	1.11	1.03	-	0.76	1.16	0.84	0.91	
2.53	1.01	0.89	1.05	0.87	0.77	1.19	1.10	-	0.91	1.30	0.88	1.00	
10	1.33	1.01	1.20	0.98	0.93	1.34	1.27	-	0.99	1.59	0.96	1.16	
50	1.85	1.04	1.37	1.05	1.08	1.45	1.40	-	1.05	1.85	1.01	1.30	
100	1.84	1.05	1.63	1.07	1.14	1.49	1.46	-	1.07	1.95	1.03	1.37	
C. Ratio of Discharge Depth to Bankfull Depth ($\frac{D}{D_B}$)													
Mean	0.34	0.63	0.77	0.66	0.47	0.78	0.65	-	0.80	0.73	0.61	0.64	
1.5 yr. flood	0.92	0.90	0.99	0.89	0.77	1.08	1.02	-	0.88	1.12	0.87	0.94	
2.53	1.01	0.93	1.02	0.93	0.84	1.14	1.09	-	0.96	1.22	0.90	1.00	
10	1.30	1.00	1.10	0.99	0.95	1.24	1.25	-	0.99	1.43	0.97	1.12	
50	1.61	1.02	1.18	1.02	1.06	1.32	1.37	-	1.02	1.60	1.01	1.22	
100	1.75	1.03	1.29	1.04	1.10	1.34	1.42	-	1.03	1.67	1.03	1.27	
D. Ratio of Discharge Width to Bankfull Width ($\frac{W}{W_B}$)													
Mean	0.91	0.79	0.79	0.70	0.70	0.91	0.97	-	0.75	0.91	0.89	0.83	
1.5 yr. flood	0.99	0.94	1.00	0.91	0.89	1.03	1.00	-	0.86	1.04	0.97	0.96	
2.53	1.00	0.96	1.03	0.94	0.92	1.05	1.01	-	0.95	1.07	0.98	0.99	
10	1.02	1.00	1.09	0.99	0.98	1.08	1.02	-	1.00	1.12	0.99	1.03	
50	1.04	1.02	1.17	1.02	1.02	1.10	1.02	-	1.03	1.16	1.00	1.06	
100	1.05	1.02	1.27	1.03	1.04	1.11	1.03	-	1.04	1.17	1.00	1.08	

TABLE 4(c) - VALUES OF RATIO OF DISCHARGE AND CHANNEL CHARACTERISTICS AT SELECTED DISCHARGE EVENTS;

LIARD-PELLY-STEWART-LOWER YUKON SUBREGION

A. Ratio of Discharge to Bankfull Discharge ($\frac{Q}{Q_B}$)		Station Number															
		24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	Average
Mean		0.18	0.19	0.09	0.25	0.20	-	0.15	0.16	0.10	0.18	0.20	0.19	0.23	0.26	-	0.18
1.5 yr. flood		0.69	1.00	0.48	0.99	0.87	-	0.64	0.83	0.59	1.04	0.89	0.70	0.77	-	0.81	-
2.33		0.80	1.12	0.59	1.17	1.06	-	0.83	0.98	0.70	1.20	1.23	1.12	0.84	0.93	-	0.97
10		1.18	1.47	0.86	1.50	1.51	-	1.25	1.41	1.96	1.62	1.76	1.81	1.18	1.24	-	1.37
50		1.32	1.96	1.04	1.91	2.44	-	1.83	1.88	1.27	2.01	2.56	3.56	1.69	1.59	-	1.93
100		1.42	2.19	1.15	2.09	2.98	-	2.11	2.08	1.41	2.17	2.97	4.67	1.93	1.75	-	2.22
B. Ratio of Discharge Area to Bankfull Area ($\frac{A}{A_B}$)																	
Mean		0.43	0.36	0.29	0.50	0.51	-	0.36	0.34	0.32	0.45	0.50	0.50	0.51	0.59	-	0.44
1.5 yr. flood		0.84	1.01	0.69	1.00	0.94	-	0.79	0.89	0.77	1.02	1.02	0.95	0.87	0.90	-	0.90
2.33		0.90	1.09	0.76	1.08	1.02	-	0.91	0.99	0.84	1.09	1.09	1.04	0.95	0.96	-	0.98
10		1.09	1.27	0.93	1.22	1.19	-	1.12	1.23	0.98	1.25	1.27	1.27	1.06	1.09	-	1.15
50		1.15	1.51	1.02	1.38	1.45	-	1.38	1.45	1.13	1.39	1.48	1.67	1.21	1.20	-	1.34
100		1.19	1.61	1.07	1.44	1.58	-	1.49	1.55	1.19	1.44	1.44	1.58	1.86	1.27	-	1.42
C. Ratio of Discharge Depth to Bankfull Depth ($\frac{D}{D_B}$)																	
Mean		0.47	0.43	0.34	0.53	0.57	-	0.41	0.36	0.37	0.62	0.55	0.54	0.65	0.61	-	0.50
1.5 yr. flood		0.85	1.01	0.72	1.00	0.95	-	0.81	0.90	0.80	1.01	1.01	0.96	0.90	0.90	-	0.91
2.33		0.91	1.07	0.79	1.07	1.02	-	0.92	0.99	0.86	1.05	1.08	1.04	0.95	0.97	-	0.98
10		1.08	1.22	0.94	1.20	1.16	-	1.11	1.21	0.98	1.14	1.23	1.24	1.05	1.08	-	1.15
50		1.13	1.41	1.02	1.34	1.37	-	1.33	1.43	1.11	1.22	1.41	1.60	1.16	1.18	-	1.29
100		1.17	1.49	1.06	1.40	1.46	-	1.42	1.51	1.16	1.24	1.49	1.76	1.21	1.22	-	1.35
D. Ratio of Discharge Width to Bankfull Width ($\frac{W}{W_B}$)																	
Mean		0.93	0.85	0.85	0.95	0.90	-	0.89	0.95	0.85	0.73	0.92	0.94	0.90	0.96	-	0.89
1.5 yr. flood		0.98	1.00	0.95	1.00	0.99	-	0.97	0.99	0.96	1.01	1.00	1.00	0.97	0.99	-	0.99
2.33		0.99	1.02	0.97	1.01	1.00	-	0.99	1.00	0.98	1.04	1.01	1.00	0.99	1.00	-	1.00
10		1.01	1.04	0.99	1.02	1.03	-	1.01	1.01	1.00	1.10	1.03	1.02	1.01	1.01	-	1.02
50		1.01	1.07	1.00	1.03	1.06	-	1.04	1.02	1.02	1.14	1.05	1.05	1.04	1.02	-	1.04
100		1.02	1.08	1.01	1.03	1.08	-	1.05	1.02	1.02	1.16	1.06	1.06	1.05	1.02	-	1.05

TABLE 4(d) - VALUES OF RATIO OF DISCHARGE AND CHANNEL CHARACTERISTICS AT SELECTED DISCHARGE EVENTS;
PORCUPINE-PEEL SUBREGION

A. Ratio of Discharge to Bankfull Discharge ($\frac{Q}{Q_B}$)		Station Number								
Discharge Event		39	40	41	42	43	44	45	46	Average
Mean		-	-	0.06	0.06	0.07	-	-	-	0.06
1.5 yr. flood		-	-	-	0.66	0.77	-	-	-	0.72
2.33		-	-	-	0.94	0.90	-	-	-	0.92
10		-	-	-	1.50	1.41	-	-	-	1.46
50		-	-	-	2.92	1.87	-	-	-	2.40
100		-	-	-	3.72	2.07	-	-	-	2.90
B. Ratio of Discharge Area to Bankfull Area ($\frac{A}{A_B}$)										
Mean		-	-	0.20	0.24	0.29	-	-	-	0.24
1.5 yr. flood		-	-	-	0.81	0.88	-	-	-	0.85
2.33		-	-	-	0.97	0.95	-	-	-	0.96
10		-	-	-	1.23	1.19	-	-	-	1.21
50		-	-	-	1.71	1.36	-	-	-	1.54
100		-	-	-	1.94	1.43	-	-	-	1.69
C. Ratio of Discharge Depth to Bankfull Depth ($\frac{D}{D_B}$)										
Mean		-	-	0.26	0.31	0.41	-	-	-	0.33
1.5 yr. flood		-	-	-	0.84	0.91	-	-	-	0.88
2.33		-	-	-	0.97	0.96	-	-	-	0.97
10		-	-	-	1.18	1.13	-	-	-	1.16
50		-	-	-	1.56	1.25	-	-	-	1.41
100		-	-	-	1.72	1.29	-	-	-	1.51
D. Ratio of Discharge Width to Bankfull Width ($\frac{W}{W_B}$)										
Mean		-	-	0.76	0.78	0.70	-	-	-	0.75
1.5 yr. flood		-	-	-	0.96	0.96	-	-	-	0.96
2.33		-	-	-	0.99	0.98	-	-	-	0.99
10		-	-	-	1.04	1.05	-	-	-	1.05
50		-	-	-	1.10	1.09	-	-	-	1.10
100		-	-	-	1.13	1.11	-	-	-	1.12

TABLE 4(e) - VALUES OF RATIO OF DISCHARGE AND CHANNEL CHARACTERISTICS AT SELECTED DISCHARGE EVENTS,

MOUNTAIN STREAMS

A. Ratio of Discharge to Bankfull Discharge ($\frac{Q}{Q_B}$)

Discharge Event	47	48	49	50	Station Number	Average
Mean	-	-	0.32	0.24	0.28	
1.5 yr. flood	-	-	1.50	1.21	1.35	
2.33	-	-	1.86	1.64	1.75	
10	-	-	2.94	2.59	2.76	
50	-	-	5.05	4.48	4.76	
100	-	-	5.96	6.03	6.00	

B. Ratio of Discharge Area to Bankfull Area ($\frac{A}{A_B}$)

Discharge Event	47	48	49	50	Station Number	Average
Mean	-	-	0.45	0.53	0.49	
1.5 yr. flood	-	-	1.33	1.09	1.21	
2.33	-	-	1.56	1.25	1.40	
10	-	-	2.15	1.53	1.84	
50	-	-	3.17	1.95	2.56	
100	-	-	3.57	2.22	2.90	

C. Ratio of Discharge Depth to Bankfull Depth ($\frac{D}{D_B}$)

Discharge Event	47	48	49	50	Station Number	Average
Mean	-	-	0.54	0.53	0.53	
1.5 yr. flood	-	-	1.25	1.09	1.17	
2.33	-	-	1.41	1.25	1.35	
10	-	-	1.82	1.53	1.67	
50	-	-	2.46	1.95	2.21	
100	-	-	2.70	2.22	2.46	

D. Ratio of Discharge Width to Bankfull Width ($\frac{W}{W_B}$)

Discharge Event	47	48	49	50	Station Number	Average
Mean	-	-	0.84	1.00	0.92	
1.5 yr. flood	-	-	1.06	1.00	1.03	
2.33	-	-	1.10	1.00	1.05	
10	-	-	1.18	1.00	1.09	
50	-	-	1.29	1.00	1.14	
100	-	-	1.32	1.00	1.16	

TABLE 5 - SUMMARY OF RATIO OF DISCHARGE AND CHANNEL CHARACTERISTICS

A. Ratio of Discharge to Bankfull Discharge ($\frac{Q}{Q_B}$)

Subregion	Mean	Discharge Event				
		$Q_{1.5}$	$Q_{2.33}$	Q_{10}	Q_{50}	Q_{100}
Atlin-Bennett-Dezadeash	0.22	0.88	1.08	1.55	2.16	2.59
Upper Yukon-Teslin-Takhini	0.31	0.86	1.02	1.38	1.72	2.01
Liard-Pelly-Stewart-Lower Yukon	0.18	0.81	0.97	1.37	1.93	2.22
Average	0.24	0.85	1.02	1.43	1.94	2.27
From Figure 5	0.24	0.82	1.00	1.43	1.81	2.10
Porcupine-Peel	0.06	0.72	0.92	1.46	2.40	2.90
Mountain Streams	0.28	1.35	1.75	2.76	4.24	5.25
From Figure 5	0.31	1.36	1.76	2.82	4.10	5.00

B. Ratio of Discharge Area to Bankfull Area ($\frac{A}{A_B}$)

Atlin-Bennett-Dezadeash	0.45	0.89	1.00	1.26	1.44	1.54
Upper Yukon-Teslin-Takhini	0.54	0.91	1.00	1.16	1.30	1.37
Liard-Pelly-Stewart-Lower Yukon	0.44	0.90	0.98	1.15	1.34	1.42
Average	0.48	0.90	0.99	1.19	1.36	1.44
Porcupine-Peel	0.24	0.85	0.96	1.21	1.54	1.69
Mountain Streams	0.49	1.21	1.40	1.84	2.32	2.58

C. Ratio of Discharge Depth to Bankfull Depth ($\frac{D}{D_B}$)

Atlin-Bennett-Dezadeash	0.47	0.88	0.97	1.17	1.35	1.45
Upper Yukon-Teslin-Takhini	0.64	0.94	1.00	1.12	1.22	1.27
Liard-Pelly-Stewart-Lower Yukon	0.50	0.91	0.98	1.13	1.29	1.35
Average	0.54	0.91	0.98	1.14	1.29	1.36
Porcupine-Peel	0.33	0.88	0.97	1.16	1.41	1.51
Mountain Streams	0.53	1.17	1.33	1.67	2.21	2.46

D. Ratio of Discharge Width to Bankfull Width ($\frac{W}{W_B}$)

Atlin-Bennett-Dezadeash	0.96	1.00	1.02	1.04	1.06	1.07
Upper Yukon-Teslin-Takhini	0.83	0.96	0.99	1.03	1.06	1.08
Liard-Pelly-Stewart-Lower Yukon	0.89	0.99	1.00	1.02	1.04	1.05
Average	0.89	0.98	1.00	1.03	1.05	1.07
Porcupine-Peel	0.75	0.96	0.99	1.05	1.10	1.12
Mountain Streams	0.92	1.03	1.05	1.09	1.14	1.16

TABLE 6 - SUMMARY OF DATA AND COMPUTATIONS AT UNGAUGED LOCATIONS

Stream Draining Area	Milepost Miles from Alaska Border	Streambed Material Classification (see Figure 5)	Date	DISCHARGE MEASUREMENT CHANNEL			BANKFULL CHANNEL						FLOOD CHARACTERISTICS										
				Discharge Q	Flow Area A	Surface Width W	Depth H	Velocity K	Flow Area A_B	Surface Width W_B	Depth H_B	$\frac{A}{A_B}$	$\frac{W}{W_B}$	Discharge Q_B	Runoff R_B ($Q_B/\text{sq.mi.}$)	Mean	$Q_{1.5}$	$Q_{2.33}$	Q_{10}	Q_{50}	Q_{100}		
Snug	1208	8.5	511t - Sand	May 18	.427	162	54.1	3.0	2.63	473	73.0	6.5	0.34	0.16	2,670	7.0	641	2,270	2,670	3,820	4,830	5,610	
Beaver	1200.7	15.8	Sand - Cobble- stones Average	Aug. 7	1,330	304	128	2.8	4.38	522	129	4.0	0.58	0.35	3,800	5.2	1,140	3,900	4,750	6,790	8,600	9,980	
Dry	52	1184	511t - Sand	May 18	18.0	29.8	1.4	0.72	87.6	29.0	3.0	0.34	0.12	150	2.9	36	123	150	215	272	315		
Tong's	1156	511t - Cobble- stones Average	May 19	127	77.7	34.0	2.3	1.63	256	48.9	5.2	0.30	0.10	1,270	28.9	305	1,040	1,270	1,820	2,300	2,670		
Koldern	260	62.5	Sand - Gravel	May 18	83.4	69.9	52.0	1.4	1.14	316	76.0	5.2	0.22	0.05	1,670	6.4	400	1,370	1,670	2,390	3,020	3,510	
Burnath	63.8	1103.9	Boulders Mountain	May 20	97.7	64.1	29.2	1.0	3.31	64.1	31.0	2.2	0.46	0.27	363	5.6	112	494	639	1,020	1,490	1,820	
Dutte	255	1098.5	Boulders Average	Aug. 9	879	186	128	1.4	5.63	504	265	1.9	0.43	0.20	4,400	17.2	1,060	3,610	4,400	6,290	7,960	9,240	
Hallbreed	26.7	1089.1	Cobblestones Mountain	Aug. 9	28.5	8.9	13.5	0.8	3.19	43.0	27.0	0.8	0.20	0.07	407	15.2	126	554	716	1,150	1,570	2,040	
Sullivan	38	1053.8	Boulders Average	Aug. 10	80.2	17.2	24	0.7	4.66	63.7	26.0	2.4	0.27	0.11	729	19.1	175	598	729	1,040	1,320	1,530	
Christmas	39.8	1048.8	Sand - Gravel	May 15	67.7	24.4	22.5	1.0	0.95	69.2	27.0	2.6	0.35	0.13	521	13.1	125	427	521	1,470	2,140	2,610	
Jervis	288	1034.6	Sand - Cobble- stones Average	May 17	279	124	70.0	1.8	2.25	272	75.0	3.7	0.46	0.22	1,270	4.4	305	1,040	1,270	1,820	2,300	2,670	
Bear	30	1022.1	Gravel - Cobble- stones Average	May 21	86.9	24.2	23.0	1.0	3.59	78.0	26.0	3.0	0.31	0.10	869	29.0	209	713	869	1,240	1,570	1,820	
Marshall	82.8	1005.6	Gravel Average	May 16	93.3	34.2	29.5	1.1	2.36	104	56.0	1.9	0.33	0.11	848	10.2	204	695	848	1,210	1,530	1,780	
Henderson	293	968.0	Sand Average	May 22	148	85.9	25.7	3.1	1.73	279	34.0	8.2	0.31	0.10	1,480	5.1	355	1,210	1,480	2,120	2,580	3,110	
Stoney	19	956.0	Gravel - Boulders Mountain	May 22	17.4	8.4	10.5	0.8	2.08	20.2	21.0	1.5	0.20	0.07	249	13.1	77	339	438	702	1,020	1,240	
McIntyre	16	919.2	Sand - Gravel	May 22	36.0	12.9	25.5	0.6	2.79	55.7	32.0	2.1	0.23	0.06	600	37.5	144	492	600	876	1,090	1,260	
Deidmans	24.2	822.4	Sand - Gravel	June 6	166	50.1	46.9	1.1	3.30	167	50.0	3.3	0.30	0.10	1,660	19.8	398	1,360	1,660	2,370	3,000	3,490	
Horley	602	778	350.8	Sand - Gravel	Aug. 12	251	224	75.0	3.0	1.12	687	90.0	7.6	0.37	0.14	2,510	4.1	602	2,060	2,510	3,590	4,540	5,270
Smart	277	-	Sand Average	Aug. 13	207	201	83.0	2.4	1.03	608	86.0	7.1	0.33	0.11	1,880	6.8	451	1,540	1,880	2,690	3,400	3,950	
Logan	33.5	751.7	Cobblestones Mountain	June 6	133	34.0	29.5	1.2	3.90	62.3	31.9	2.0	0.55	0.37	359	10.9	111	468	632	1,010	1,470	1,800	
Screen	29	742.1	Gravel - Cobble- stones Mountain	Aug. 13	25.2	18.3	23.0	0.8	1.38	70.7	33.0	2.1	0.25	0.10	252	8.7	78	343	444	710	1,030	1,260	
Perridge	24	736.4	Gravel - Cobble- stones Mountain	June 22	167.5	45.6	32.5	1.4	3.69	68.1	35.0	2.0	0.66	0.50	315	13.9	104	456	590	945	1,370	1,680	
Seagull	31.5	-	Gravel - Boulders Mountain	Aug. 12	27.6	37.5	38.0	1.0	0.74	139	50.0	2.8	0.27	0.11	251	7.8	341	442	708	1,030	1,260	1,680	
Spencer	61.6	695.3	Gravel - Cobble- stones Mountain	June 7	244	38.5	32.8	1.2	2.44	54.9	35.8	1.5	0.70	0.55	444	7.2	138	604	781	1,250	1,820	2,220	
E19	405	674.1	Sand - Gravel	June 177	1,340	266	85.0	3.1	5.04	466	115	4.1	0.57	0.33	4,060	10.0	974	1,130	4,060	5,810	7,350	8,530	
L.Kencher	612	670.3	Sand - Gravel	June 177	2,590	489	118	4.1	5.30	672	125	5.4	0.73	0.54	4,000	7.8	1,150	1,340	4,000	4,800	6,860	8,690	10,100

TABLE 7 - COMPARISON OF VALUES OF RUNOFF FOR SELECTED DISCHARGE EVENTS
 FOR VARIOUS SUBREGIONS

Drainage Area (sq. mi.)	Mean Annual (Q)					Bankfull (Q _B)					50 Year (Q)				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
100	3.07	5.40	5.40	1.35	1.30	12.8	22.5	22.5	4.2	23.2	40.7	40.7	54.4	17.2	
500	1.13	2.64	3.31	1.00	0.62	4.7	11.0	13.8	16.7	2.0	8.5	19.9	25.0	40.1	8.2
1,000	0.72	1.82	3.00	0.89	0.46	3.0	7.6	12.5	14.9	1.5	5.4	13.8	22.6	35.8	6.2
10,000	-	0.62	1.39	2.38	-	-	2.6	5.8	9.9	-	-	4.7	10.5	23.8	-
50,000	-	0.29	0.86	0.45	-	-	1.2	3.6	7.5	-	-	2.2	6.5	18.0	-
<hr/>															
$* Q/Q_B =$		0.24	0.24	0.24	0.06	0.31	1.00	1.00	1.00	1.00	1.81	1.81	1.81	2.40	4.10

1. Atlin - Bennett - Dezadeash
2. Upper Yukon - Teslin - Takhini
3. Liard - Pelly - Stewart - Lower Yukon
4. Porcupine-Peel
5. Mountain Streams

* From Figure 5 or Table 5

APPENDIX D

KINEMATIC WAVE MODEL

Prepared by: R.O. Lyons
INLAND WATERS DIRECTORATE
PACIFIC AND YUKON REGION

Vancouver, B.C.
October, 1978

TABLE OF CONTENTS

	<u>Page</u>
DESCRIPTION OF MODEL	1
a) Rainfall Duration and Intensity	2
b) Rainfall to Discharge	3
c) Basin Time-of-Concentration	4
d) The Frequency Equation	6
e) Combined Rain and Snow Frequencies	9
CALIBRATION OF THE MODEL	9
RECOMMENDATIONS FOR FURTHER WORK	11
REFERENCES	13

TABLE 1 - Sensitivity of Parameters

TABLE 2 - Topographic Parameter Values

TABLE 3 - Computation of Parameter R

KINEMATIC WAVE MODEL

The Kinematic Wave Model has been used to estimate streamflow along the Alaska Highway for three return periods; 2.33 year, 50 year, and 100 year. This appendix briefly describes the basic equations forming the model and discusses the way the model was calibrated with the objective of giving the reader an understanding of the procedures involved. Recommendations for further work are also provided.

Acknowledgement is given to the Department of Indian Affairs and Northern Development, Water Resources, Whitehorse Y.T. (DIAND), who provided the computer program and much of the required data, and to Charles Howard & Assoc. Ltd., who adapted the Kinematic Wave theory to the Canadian situation and who developed the computer program for DIAND.

Description of the Model

The model is based on the premise that probability of occurrence of a precipitation event varies inversely with its duration and intensity, regardless of geographic location. Rates of variation are defined by the average of measured precipitation durations and intensities in the area. The mathematics involved relate the precipitation events to catchment discharges using various catchment and channel parameters, such as drainage areas and slopes. The model was originally derived for rainstorms, however, it has been adapted to also simulate flood events for snowmelt-generated runoff.

The basic equation is:

$$\text{Prob} [Q_p \geq Q_0] = \int_{\beta e}^{\infty} -\beta i - \lambda \left(\frac{a}{i^{1/2}} + \frac{b}{i^{1/3}} \right) di$$
$$i = \frac{Q_0}{645 AR}$$

(Definitions of symbols are given in sections following)

Much theory and mathematics are involved in its derivation. Basically, however, it computes the probability that a flood exceeding a given level Q_0 will result from any storm. This is done by integrating the probabilities of all storms large enough to produce a flood of Q_0 . The complete mathematical procedure is known as the Kinematic Wave Frequency Model.

Solution of the equation is easily handled by numerical methods in an electronic computer. The parameters involved are described in the following sections (a) through (f).

a) Rainfall Duration and Intensity

An important step in this model is determining the probability of various durations and intensities of rainfall. Equations (1) and (2) below are the basis for the probability function of the model. They simply define, for any storm, the probability of a given duration of rainfall and the probability of a given intensity of rainfall. These are combined in the basic equation above, to provide the probability that any given storm will produce a flood equalling or exceeding a given discharge.

The probability that any storm will last a duration " t_{re} " is given by the equation:

$$f_T(t_{re}) = \lambda e^{-\lambda t_{re}} \quad (1)$$

where;

$f_T(t_{re})$ is the probability density function (i.e. probability of occurrence) of a storm duration t_{re} . If a storm occurs, it has a probability $f(t_{re})$ of a duration t_{re} .

λ is the inverse of the area's average storm duration (1/hr.)

t_{re} is the storm's duration (hrs.)

e is Napiers e (or 2.71828)

Likewise the probability that any storm will have an average intensity of rainfall "i" is given by:

$$f_I(i) = \beta e^{-\beta i} \quad (2)$$

where;

$f_I(i)$ is the probability that if a storm occurs it will have an average intensity of i .

β is the inverse of the area's average rainfall intensity (hrs./in.)

i is the storm's average rainfall intensity (in./hr.)

By combining equations (1) and (2) we can compute the probability that if a storm occurs it will have an average intensity of i and a duration of t_{re} .

b) Rainfall to Discharge

To compute the probabilities of floods, it is necessary to convert rainfall to discharge. This is accomplished by equation (3).

For any known rainfall excess (the amount of rain that runs directly off the basin) it is a simple matter to compute the equivalent basin discharge if we assume that the rain has lasted long enough and was extensive enough for the discharge to have reached a steady state. In this condition runoff from all points in the basin has had time to reach the project site before the rain has stopped. The time required for this is termed the "time of concentration" of the basin or " t_* ". Assuming that the storm duration is longer than t_* the rational formula for discharge applies as follows:

$$Q_p = 645 AR i_e \quad (3)$$

where;

- Q_p is the basin discharge (cfs)
- A is the total basin area (sq. mi.)
- R is theoretically the ratio between area contributing to direct runoff and total basin area
- i_e is the rainfall excess (in./hr.); or rainfall available for runoff after seepage, interception, etc.

c) Basin Time-of-Concentration

Equation (3), which converts rainfall to discharge, is applicable only when the storm duration exceeds the time of concentration of the basin (t_*). Therefore the "t" values used in equation (1) must equal or exceed t_* .

The equation for t_* is defined as;

$$t_* = t_c + t_s \quad (4)$$

where;

- t_c is the time of concentration of the catchment; time required for the overland flow to reach a steady state under a constant rainfall,
- t_s is the time of concentration of the stream; the time required for the stream discharge to reach a steady state after the basin's input to the stream has reached a steady state.
- t_* is the basin time of concentration.

To relate t_c to various parameters of the catchment and river channel, and to rainfall intensities, the values of t_c and t_s are computed as follows:

$$t_c = 0.913978 \left[\frac{N_c A R}{\sqrt{S_c L_s i_e}} \right]^{1/2} \quad (5)$$

$$t_s = 0.130104 \left[\frac{P_s N_s^2}{S_s A R i_e} \right]^{1/3} \quad (6)$$

where;

- i_e is the average rainfall intensity during a given storm (in/hr)
- N_c is Manning's n-value for the catchment (normally 0.30)
- A is the total drainage area (sq. mi)
- R is the ratio of area contributing to direct runoff to total area (see equation 3)
- S_c is the average slope of the catchment
- L_s is the stream length (mi)
- P_s is the wetted perimeter (normally substituted by width) of the stream at the project location (ft)
- N_s is Manning's n-value for the stream at the project location
- S_s is the average slope of the stream.

For simplicity these equations are written as;

$$t_c = a \bar{i}_e^{-1/2} \quad (7)$$

$$t_s = b \bar{i}_e^{-1/3} \quad (8)$$

where;

"a" and "b" are the appropriate basin and river constants respectively, computed from the basin parameters in equations (5) and (6)

d) The Frequency Equation

By putting together the relationships described in sections (a), (b) and (c) we can formulate an equation relating rainfall probabilities and basin responses for calculation of the probability that any storm will exceed a given flood level.

The equation is:

$$\text{Prob} [Q_p \geq Q_0] = \int_{\bar{i}_e = \frac{Q_p}{645 AR}}^{\infty} \int_{t_{re} = t_*}^{\infty} f(\bar{i}_e, t_{re}) dt_{re} d\bar{i}_e \quad (9)$$

where;

$f(\bar{i}_e, t_{re})$ is the probability that when a storm occurs, it has an average intensity of \bar{i}_e and a duration of t_{re} .

This equation simply gives the probability that streamflow discharge due to any storm will equal or exceed Q_p . It is the summation of all the joint probabilities of rainfall intensities greater than " \bar{i}_e " and duration " t_{re} ". It is important to note that the storm intensity and duration in each case is sufficient to cause a flood of Q_p .

The function $f(\bar{i}_e, t_{re})$ is equations (1) and (2) multiplied, giving the probability of both a rainfall intensity \bar{i}_e and a duration t_{re} . In mathematical terms, $f(\bar{i}_e, t_{re})$ is;

$$\text{Prob} [\bar{i} = \bar{i}_e \text{ and } t = t_{re}] = \lambda \beta e^{-\beta \bar{i}_e} - \lambda t_{re} \quad (10)$$

Replacing $f(\bar{i}_e, t_{re})$ in equation (9) gives the equation:

$$\text{Prob} [Q_p \geq Q_0] = \int_{\bar{i}_e = \frac{Q_0}{645 \text{ AR}}}^{\infty} \int_{t_{re} = t_*}^{\infty} \lambda \beta e^{-\beta \bar{i}_e} - \lambda t_{re} dt_{re} d\bar{i}_e \quad (11)$$

where;

λ is the inverse of average storm duration (1/hr.)

β is the inverse of average rainfall intensity (hrs./in.)

\bar{i}_e is the intensity of rainfall (in./hr.)

t_{re} is the duration of rainfall (hrs.)

Q_0 is a given flood related to \bar{i}_e

Integrating this with respect to "t" (assuming t is constant) then substituting equations (7) and (8) for t_* gives:

$$\text{Prob} [Q_p \geq Q_0] = \int_{\bar{i}_e}^{\infty} \beta e^{-\beta \bar{i}_e} - \lambda \left(\frac{a}{i^{1/2}} + \frac{b}{i^{1/3}} \right) di_e \quad (12)$$

$$\bar{i}_e = \frac{Q_0}{645 \text{ AR}}$$

From definitions for equations (7) and (8);

$$a = 0.913978 \left[\frac{N_c \text{ AR}}{\sqrt{S_c L_s}} \right]^{1/2} \quad (13)$$

$$b = 0.130104 \left[\frac{P_s N_s^2}{S_s \text{ AR}} \right]^{1/3} \quad (14)$$

This is the basic equation of the Kinematic Wave Frequency Model. (see also page 1). The equation is computed using numerical integration, by an electronic computer. To define the flood-frequency curve at a stream, probabilities for several different floods (Q_0) are computed and are converted to return periods (T) by the following equation:

$$T [Q_{\max} \geq Q_0] = \frac{1}{\text{Prob}[Q_p \geq Q_0] \theta \phi_{12}} \quad (15)$$

where;

$T [Q_{\max} \geq Q_0]$ is the return period for an annual maximum flood equal to or greater than Q_0 ,

$\text{Prob} [Q_p \geq Q_0]$ is the probability that any storm will produce a flood equal to or greater than Q_0 (from equation 11),

θ is the average number of storms per year,

ϕ_{12} is the ratio of total precipitation to water running off the basin (i.e. precip. minus interception and groundwater recharge)

Equation (15) gives the return period of the flood Q_o in terms of an annual maximum flood. In other words, the flood Q_o will be equalled or exceeded on the average only once every T years.

e) Combined Rain and Snow Frequencies

Equations (12 through 15) have been derived for rainfall events. However, with the appropriate empirical values for the precipitation parameters (λ , β and θ) snowmelt runoff can also be simulated and the return periods for snowmelt-generated floods can be computed likewise.

The flood estimates included in "Hydrologic Reconnaissance of the Alaska Highway Pipeline Route" have been computed by combining the rainfall-generated floods and the snowmelt-generated floods. A flood-frequency curve was first generated for each of the two types of flood events, and subsequently combined using the following equation:

$$T_c = \frac{1}{T_r + T_s - T} \quad (16)$$

where;

T_c is the composite return period for a flood Q_p

T_r is the return period for a rainfall generated flood Q_p

T_s is the return period for a snowmelt generated flood Q_p

This equation is the final step in the model process. The resulting composite flood-frequency curve is very similar to the flood frequency curve produced from streamflow records, particularly at the higher return periods.

Calibration of the Model

Equations (11 through 14) contain twelve parameters defining meteorological, topographic and hydrologic conditions of a basin. These parameters are listed in Table 1 according to the three categories,

together with results of sensitivity tests showing variation in discharge with a 100% change in a parameter value.

It is evident from this tabulation that the greatest opportunity for calibration lies in the average storm intensity (meteorologic parameter β) and in the effective drainage area (topographic parameter R). The meteorologic parameter values were provided by the Department of Indian Affairs and Northern Development (DIAND), Water Resources in Whitehorse. It was assumed that these are reasonably accurate and no attempt was made to refine them. However, in the conversion of the parameters from mean daily to hourly values for the purpose of this analysis, there may have resulted an underestimate of the storm intensities and durations.

The ratio of effective drainage area to total area (parameter R) was, therefore, the main calibrating parameter. The procedure was to vary the ratios until a best fit was attained between modelled flood frequency curves and frequency curves computed from gauging station data. One alternative to this approach would be to determine the ratios by hydrograph analysis, but this was not attempted because of shortage of time.

As a second step, frequency curves were generated based on an identical ratio for all streams. The value chosen was 0.25, a value that produced reasonable results for gauged streams. The results of this test were carefully examined before further runs were made. The test showed a need to vary the ratio with drainage area. Also it was obvious that a better fit at gauged basins could be obtained if the ratios were regionalized. Relationships of the ratios versus drainage area gave good results when the regions were as follows;

- Liard-Rancheria-Swift
- Teslin Lake
- M'Clintock-Yukon-Dezadeash

In addition a ratio was developed for Kluane Lake-Beaver Creek area by hydrologic judgement based on the above three relationships. Table 3 shows equations for computing the ratio of effective drainage area to total area (parameter R) for each of these four regions. For glacier-fed streams such as the White and Donjek rivers, a fifth relationship would be required.

Since all gauged basins with sufficient data for calculating frequency curves have drainage areas greater than 200 square miles, it was not possible to develop parameter R versus drainage area relationships that could be proven valid for the many small basins along the pipeline route. From other correlation studies for the area, however, it has been shown that floods with a 100-year return period have straight line log-log relationships with drainage area, and slopes ranging between 0.82 and 0.96. The tests using a constant R-value produced results which plot roughly on a similar relationship, but with a 1.0 slope indicating very little variation of unit runoff with drainage area. It was felt that this lack of variation of unit runoff was a major fault of the model that must be corrected. Pending further studies, the relationship between parameter R and drainage area was based on a slope of 0.8.

The ratio of total runoff to precipitation (parameter ϕ_{12}) is the second most effective hydrologic calibration parameter; it represents the product of two ratios: the ratio of precipitation that reaches the ground to the total precipitation, and the ratio of direct runoff to water input that reaches the ground. The combined ratios (parameter ϕ_{12}) can be determined by matching rainfall records with streamflow data where such information is available. In the computations reported here, the values for ϕ_{12} were obtained for six gauged basins in the southern Yukon area from Reference 1. Using these six basins as a base, and with knowledge of the hydrology, topography and geology of the area, estimates of ϕ_{12} were made for each stream along the pipeline route. The values chosen ranged from 0.28 to 0.65.

Relationships discussed above provided results that fitted the gauged basins well. Also, their extrapolation to ungauged basins appear reasonable.

Recommendations for Further Work

The Kinematic Wave frequency model is a useful tool for estimating peak discharges at ungauged sites. The model has been used as one of several methods of estimating ungauged streamflows which can be compared in assessing environmental impacts of the pipeline. However, if this technique were to be used to compute design floods, additional more detailed calibration tests

would be required, particularly with respect to the northern end of the pipeline route. Some recommended steps are outlined below:

- i) re-compute values of λ , β and ϕ based on hourly precipitation data,
- ii) compute R and ϕ values at gauged basins using hydrograph analysis,
- iii) using short-term records and crest-gauge results, check the relationship of discharge to drainage area for small basins. Ensure that this is reflected by the model; adjust R-values to accomplish this if necessary,
- iv) develop calibration procedures for mountainous areas such as the ephemeral drainages on south shore of Kluane Lake and for glacier-fed streams such as the Donjek or White Rivers.

The results computed by the Kinematic Wave Model, those presented in the report "Hydrologic Reconnaissance of the Alaska Highway Pipeline Route", of which this is an Appendix, are based on a preliminary calibration procedure. Nevertheless, they are considered to be fairly accurate for all areas east of Haines Junction. For areas west of Haines Junction, most parameters are less accurately defined because of unknown effects of mountains in that area.

REFERENCES

- 1) Unies Ltd.,
"A Study of Hydrologic Phenomena in the Yukon Territory"
A report for Controller of Water Rights, Yukon Territory,
Department of Indian Affairs and Northern Development,
March 1975.
- 2) P. S. Eagleson,
"Dynamics of Flood Frequency"
Water Resources Research, Vol. 8, No. 4, August 1972.
- 3) C. D. D. Howard and D. I. Smith,
"Floods on Ungauged Watersheds"
Canadian Hydrology Symposium 78, Edmonton.
- 4) R. A. Wooding,
"A Hydraulic Model for the Catchment Stream Problem"
Journal of Hydrology #3, 1965
part 1, p.254-267
part 2, p.268-282
part 3, p.21-37
- 5) P. S. Eagleson,
"Dynamic Hydrology"
Chapter 15, McGraw Hill, 1970.
- 6) C. D. D. Howard,
"Wilson Creek Experimental Watershed"
A report to the Manitoba Water Resources Service,
July 1977.
- 7) Water Survey of Canada,
"Magnitude of Floods - Yukon Territory"
May, 1978.
- 8) Inland Waters Directorate,
"Haines Road-Alaska Highway Estimates of the 100-Year Flood.
Part One, Provisional, Selected Drainage Basins Greater Than
30 Square Miles"
A provisional report to Department of Public Works, Ottawa,
January, 1978.
- 9) Water Survey of Canada,
"A Study of Selected Hydrologic Quantities of the Yukon Territory
for Examination of Pipeline Proposals"
Vancouver, July 1977, Revised August 1978.

Table 1

SENSITIVITY OF PARAMETERS

Parameter	% Change in Q_{100} for +100% change in parameter	Parameter Description
a) Meteorological Category		
β	-52%	inverse of average storm intensity (hrs/in)
λ	-13%	inverse of average storm duration (1/hrs)
θ	+11%	no. of storms per year
b) Hydrologic Category		
ϕ	+11%	ratio of total runoff to precipitation input
R	+95%	ratio of effective drainage area to total drainage area
N_c	-2.1%	roughness coefficient for average basin surface
N_s	-2.0%	roughness coefficient of streambed at project site
c) Topographic Category		
A	not tested (see R)	total drainage basin area (sq. mi)
S_c	+1.3%	average slope of catchment
L_s	-1.4%	length of stream (mi)
P_s	-1.0%	width of stream at project site (ft.)
S_s	+0.8%	average stream slope

Table 2

TOPOGRAPHIC PARAMETER VALUES

See equations (5) and (6) for description of the parameters

Stream	Drainage Area A (sq.mi.)	Catchment Slope s_c	Stream Length L_s (mi.)	Stream Width $P_s^{1/}$ (ft.)	Stream Slope s_s
Snag Cr.	380	0.0164	39.5	73.0	0.0116
Beaver Cr.	737	0.0134	45.0	148	0.0138
Enger Cr.	52.4	0.0241	9.08	20 ^{2/}	0.0164
Dry Cr.	52.2	0.0192	11.0	29	0.0217
Sanpete Cr.	29.4	0.0344	15.7	30	0.0362
White R.	2410	0.0126	73.9	270	0.0146
Koidern R. (mi. 1164)	428	0.0146	34.8	100	0.0136
Longs Cr.	44.1	0.0262	15.3	49	0.0150
Koidern R. (mi. 1152)	260	0.0222	22.5	76	0.0272
Donjek R.	1687	0.0126	65.6	1000	0.0142
Swede Johnson Cr.	36.0	0.0359	8.3	20 ^{2/}	0.0484
Quill Cr.	26.4	0.0586	9.1	15 ^{2/}	0.357
Burwash Cr.	64.8	0.0370	17.2	31	0.0330
Duke R.	255	0.0238	35.6	265	0.0150
Kluane R.	1910	0.007	95.5	200	0.013
Halfbreed Cr.	26.7	0.0557	11.7	27	0.0461
Lewis Cr.	15.7	0.106	8.2	25	0.0915
Bock's Cr.	13.5	0.116	6.8	25 ^{2/}	0.096
Nines Cr.	23.5	0.0818	9.6	30 ^{2/}	0.0758
Congdon Cr.	19.5	0.0923	8.3	75	0.0599
Williscroft Cr.	4.9	0.198	3.7	15	0.197
Slims R.	927	0.0197	58.5	200	0.0231
Topham Cr.	1.97	0.0911	2.1	5 ^{2/}	0.0635
Silver Cr.	37.6	0.0641	12.6	26	0.0342
Christmas Cr.	39.8	0.0597	6.2	27	0.0659
Jarvis R.	288	0.0132	40.3	78	0.0040

Notes: 1/ P_s values were often estimated from photographs or from memory of field visits.

2/ An estimate made by comparison to other streams.

Table 2

TOPOGRAPHIC PARAMETER VALUES (Cont'd)

Stream	Drainage Area A (sq.mi.)	Catchment Slope S _c	Stream Length L _s (mi.)	Stream Width P _s l/ (ft.)	Stream Slope S _s
Bear Cr.	29.9	0.0303	11.9	26	0.0337
Pine Cr.	63.1	0.0232	21.1	30 ^{2/}	0.0147
Dezadeash R. (at Haines Jctn.)	3280	0.006	102	50	0.003
Marshall Cr.	82.8	0.0381	16.6	54	0.0318
Aishihik R.	1660	0.0066	88.4	70	0.0037
Cracker Cr.	50.2	0.0404	12.7	30 ^{2/}	0.0404
Mendenhall R.	294	0.0127	34.5	34	0.0056
Stoney Cr.	19.4	0.0618	8.1	21	0.0435
Takhini R.	2700	0.0067	94.8	200	0.0037
McIntyre Cr.	16.2	0.0321	8.7	32	0.0162
Wolf Cr.	69.5	0.0195	21.5	20 ^{2/}	0.0185
Cowley Cr.	76.7	0.0254	11.4	20 ^{2/}	0.00792
Yukon R. (nr. Whitehorse)	7500	0.0032	140	350	0.0001
M'Clintock R. (at highway)	689	0.0140	35.6	70	0.0023
Teslin R. (at Johnsons Crossing)	11700	0.0047	94.7	450	0.0037
Brooks Brook	27.4	0.0424	8.9	20	0.0424
Deadmans Cr.	84.2	0.0337	14.6	50	0.0204
Lone Tree Cr.	18.0	0.0480	9.0	12	0.0420
Tenmile Cr.	16.8	0.0605	6.9	15	0.0506
Fox Cr.	13.7	0.0440	7.6	10	0.0243
Hays Cr.	26.7	0.0335	11.1	10	0.0216
Strawberry Cr.	24.3	0.0335	9.2	15	0.0258
Morley R.	608	0.0109	44.2	90	0.0073
Hazel Cr.	21.7	0.0429	6.5	20	0.0497
Swift R. (WSC gauge)	1280	0.01	50.2	250	0.005
Smart R.	277	0.0144	35.2	86	0.0073
Logjam Cr.	33.5	0.0443	10.0	32	0.0291
Screw Cr.	29.6	0.0273	12.2	33	0.0169

Notes: 1/ P_s values were often estimated from photographs or from memory of field visits.

2/ An estimate made by comparison to other streams.

Table 2

TOPOGRAPHIC PARAMETER VALUES (Cont'd)

Stream	Drainage Area A (sq.mi.)	Catchment Slope s_c	Stream Length L_s (mi.)	Stream Width $p_s^{1/2}$ (ft.)	Stream Slope s_s
Partridge Cr.	23.9	0.0436	10.8	35	0.0174
Seagull Cr.	31.5	0.0535	9.3	50	0.0298
Swift R. (at hwy. bridge)	105	0.0181	17.8	60	0.0129
Rancheria R. (at mi. 722)	261	0.0126	30.8	50	0.0112
Rancheria R. (at pipeline)	382	0.0090	46.0	100 ^{2/}	0.0077
Boulder Cr.	23.9	0.0408	8.5	30	0.0254
Spencer Cr.	61.6	0.0276	13.9	36	0.0229
Rancheria R. (at mi. 687)	837	0.0204	65.2	200	0.0054
Big Cr.	405	0.0060	58.8	115	0.0076
Little Rancheria R.	612	0.0059	77.0	125	0.0046
Albert Cr.	255	0.0082	31.6	50	0.0101
Liard R. (at Upper Crossing)	12900	0.0041	120	430	0.0003

Notes: 1/ P_s values were often estimated from photographs or from memory of field visits.
 2/ An estimate made by comparison to other streams.

Table 3

COMPUTATION OF PARAMETER R

(Ratio effective drainage area to total area)

$$R = k A^a$$

where A = basin drainage area (sq. mi.)

<u>Area</u>	<u>k</u>	<u>a</u>
Liard-Rancheria-Swift	1.46	-0.124
Teslin	1.22	-0.202
M'Clintock-Yukon-Dezadeash	0.914	-0.221
Kluane-Beaver Creek	1.197	-0.221