



Natural Resources
Canada

Ressources naturelles
Canada

**GEOLOGICAL SURVEY OF CANADA
OPEN FILE 8821**

**A multikinetic approach to apatite fission-track thermal
modelling using elemental data: data and model results for a
Permian and Devonian sample from northern Yukon**

D.R. Issler, K.T. McDannell, L.S. Lane, P.B. O’Sullivan, and O.K. Neill

2021

Canada



GEOLOGICAL SURVEY OF CANADA OPEN FILE 8821

A multikinetic approach to apatite fission-track thermal modelling using elemental data: data and model results for a Permian and Devonian sample from northern Yukon

D.R. Issler¹, K.T. McDannell², L.S. Lane¹, P.B. O'Sullivan³, and O.K. Neill⁴

¹Geological Survey of Canada, 3303-33rd Street Northwest, Calgary, Alberta

²Department of Earth Sciences, Dartmouth College, 6105 Fairchild Hall, Hanover, New Hampshire, U.S.A.

³GeoSep Services, 1521 Pine Cone Road, Moscow, Idaho, U.S.A.

⁴Department of Earth and Environmental Sciences, University of Michigan, 1100 North University Avenue, Ann Arbor, Michigan, U.S.A.

2021

© Her Majesty the Queen in Right of Canada, as represented by the Minister of Natural Resources, 2021

Information contained in this publication or product may be reproduced, in part or in whole, and by any means, for personal or public non-commercial purposes, without charge or further permission, unless otherwise specified.

You are asked to:

- exercise due diligence in ensuring the accuracy of the materials reproduced;
- indicate the complete title of the materials reproduced, and the name of the author organization; and
- indicate that the reproduction is a copy of an official work that is published by Natural Resources Canada (NRCan) and that the reproduction has not been produced in affiliation with, or with the endorsement of, NRCan.

Commercial reproduction and distribution is prohibited except with written permission from NRCan. For more information, contact NRCan at copyright-droitdauteur@nrcan-rncan.gc.ca.

Permanent link: <https://doi.org/10.4095/328844>

This publication is available for free download through GEOSCAN (<https://geoscan.nrcan.gc.ca/>).

Recommended citation

Issler, D.R., McDannell, K.T., Lane, L.S., O'Sullivan, P.B., and Neill, O.K., 2021. A multikinetic approach to apatite fission-track thermal modelling using elemental data: data and model results for a Permian and Devonian sample from northern Yukon; Geological Survey of Canada, Open File 8821, 1 .zip file. <https://doi.org/10.4095/328844>

Publications in this series have not been edited; they are released as submitted by the author.

TABLE OF CONTENTS

ABSTRACT	1
INTRODUCTION.....	1
SAMPLE LOCATIONS	1
AFT KINETIC POPULATIONS DEFINED USING ELEMENTAL DATA	3
AFTINV THERMAL HISTORY RESULTS	5
DISCUSSION	7
ACKNOWLEDGEMENTS.....	8
REFERENCES.....	9
APPENDIX A: Apatite fission track and U-Pb age data acquisition.....	12
APPENDIX B: Apatite fission track age and U-Pb age data.....	14
APPENDIX C: Apatite fission track length data.....	19
APPENDIX D: Apatite elemental data in atoms per formula unit (apfu).....	28
APPENDIX E: AFTINV parameters and thermal history results.....	33

ABSTRACT

Apatite fission track (AFT) and elemental data are presented for a Permian and Devonian sample from northern Yukon in support of a journal paper (submitted to *Geochronology*) that discusses multikinetic AFT data interpretation and modelling techniques. The Permian sample is from an exploration well in Eagle Plain and the Devonian sample is from an outcrop to the northeast along the Dempster highway on the western flank of the Richardson Anticlinorium. Both detrital samples contain apatite with overdispersed ages that fail the χ^2 test which suggests each sample has more than one AFT age population. Age mixture modelling software was used to identify multiple AFT age populations that correlate with apatite composition determined using electron microprobe analysis. Single-grain age and length data were sorted into different kinetic populations for each sample using eCl values (effective Cl; derived from the multi-element based r_{mr0} parameter). Each kinetic population is treated as a separate thermochronometer with its own composition-dependent annealing characteristics that enhances model thermal-history resolution. The multikinetic AFT thermal model, AFTINV, was used to obtain multicycle heating and cooling histories for these samples. Paleozoic and Late Cretaceous-Cenozoic burial/exhumation events are well documented in the study area, but model results suggest that the region experienced an additional phase of Triassic to Early Cretaceous heating and cooling.

INTRODUCTION

This report is meant to describe interpretation and modelling methods for multikinetic AFT data and accompany a paper (submitted to *Geochronology*): Issler, D.R., McDannell, K.T., O'Sullivan, P.B., Lane, L.S., 2021, Simulating sedimentary burial cycles – Part 2: Elemental-based multikinetic apatite fission-track interpretation and modelling techniques illustrated using examples from northern Yukon. This Open File contains the AFT and corresponding elemental data that are used to illustrate the methods in the paper. Detailed thermal history results obtained using AFTINV (Issler, 1996; Issler et al., 2005; McDannell and Issler, 2021) thermal modelling software are included in Appendix E. Discussions of data acquisition, interpretations, thermal modelling methods, and results are in Issler et al. (in review). The regional geological implications of the model results will be discussed in a more comprehensive future paper that includes more samples. This is the first in a series of planned data reports for a larger multikinetic AFT thermochronological study of the northern Yukon being undertaken by the Geological Survey of Canada (Issler and Lane, 2016).

SAMPLE LOCATIONS

Figure 1 shows the location of the two AFT samples. Sample P013-12 is a sandstone cuttings sample from the Permian Jungle Creek Formation at a depth of 1050-1100 m in a well in Eagle Plain. Permian strata are separated from 1 km of overlying Cretaceous by an unconformity that represents a 175 million-year hiatus. Borehole well cavings contamination does not appear to be an issue for this sample because it is below a shale section and samples from the shallower Cretaceous units (not shown) have distinctly different AFT characteristics. Sample 2009LHA003 (shortened to LHA003 for convenience) is an Upper Devonian Imperial Formation sandstone obtained from a quarry along the Dempster highway southwest of the Arctic Circle monument at the western margin of the Richardson Anticlinorium. Thin erosional remnants of Upper Triassic strata overlie Devonian rocks within the region (Norris, 1981) and Albian to Campanian strata

are preserved to the west in Eagle Plain Basin. Measured vitrinite reflectance (Appendix B) indicates that the samples experienced paleotemperatures high enough to cause significant AFT annealing.

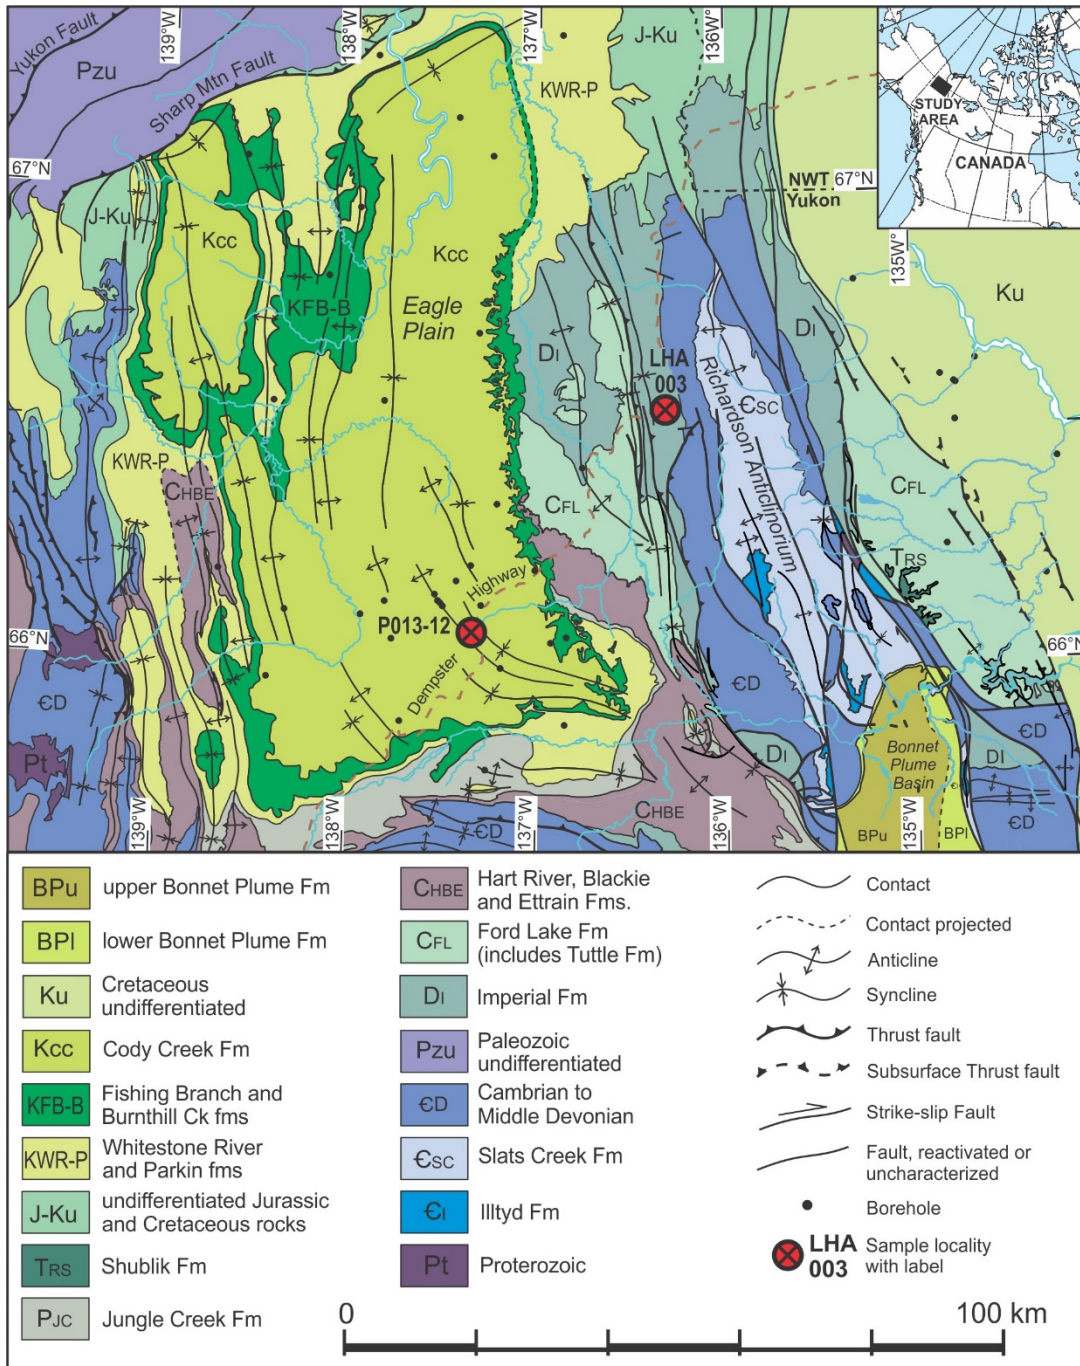


Figure 1. Regional geological setting and sample locations. Geology is simplified from Norris (1982a, 1982b, 1985) with modifications from Rohr et al. (2011), Lane (2012, 2013a, 2013b, 2017, 2020), Lane and Cecile (2021), and unpublished compilations.

AFT KINETIC POPULATIONS DEFINED USING ELEMENTAL DATA

Appendix A summarizes lab procedures for AFT data acquisition. Appendix B, C and D contain AFT age data, track length measurements, and apatite elemental data (apfu; atoms per formula unit) from electron probe microanalysis (EPMA), respectively, along with descriptive information for the P013-12 and LHA003 samples. Raw elemental weight % oxide data for both samples are included in two separate Excel files as a supplement with this report. AFT age data were acquired using the LA-ICP-MS method (Hasebe et al., 2004; Donelick et al., 2005; Chew and Donelick, 2012; Cogné et al., 2020) which allows for the direct measurement of U concentration and avoids the requirement for sample irradiation using the traditional external detector method (e.g., Hurford and Green, 1982). AFT data for sample LHA003 were acquired at AtoZ Inc. in 2011. AFT analyses for sample P013-12 were done for two separate aliquots by GeoSep Services in 2015.

D_{par} is the mean maximum length of AFT etch figures on the polished mineral surface parallel to the crystallographic *c*-axis (Donelick, 1993; Burtner et al., 1994) and it is a commonly used kinetic parameter that is a proxy for chemical composition. D_{par} data were obtained while collecting AFT age and length measurements as part of the routine AFT analysis. Elemental data were obtained for apatite grains that have age and length measurements in order to constrain the composition-dependent, multi-kinetic AFT annealing behavior that appears to be the main cause of age dispersion for these detrital samples. The elemental data were used to calculate the empirical $r_{\text{mr}0}$ kinetic parameter (Carlson et al., 1999) which was then converted to an effective Cl (eCl) value using the $r_{\text{mr}0}$ -Cl correlation in Ketcham et al. (1999) as described in McDannell and Issler (2021) and Issler et al. (in review). More details of data acquisition steps are in Appendix A and Issler et al. (in review).

Figures 2a and 2b show single-grain AFT ages displayed on radial plots for samples P013-12 and LHA003, respectively, generated using the DensityPlotter program (v. 8.4) of Vermeesch (2012). Both AFT samples have significant age dispersion (48% and 25%) and fail the χ^2 test. Age mixture modelling suggests that each sample has more than one age population as shown by the radial arms that correspond to the peak ages (Fig. 2a and b) and this is consistent with their detrital nature. The numbers in brackets beside the peak ages represent the approximate proportion of grains assigned to each population. The points on the radial plots are coloured-coded according to the kinetic populations defined using eCl values in the panels below (figs. 2c-f). Figures 2c and 2d show single grain ages and length measurements sorted into three kinetic populations with respect to eCl (the corresponding nonlinear $r_{\text{mr}0}$ axis is shown at the top of each plot) for sample P013-12. Not all the grains were suitable for probing (Appendix D) but there is enough data to define the populations. Grains lacking elemental data were sorted based on their age; lengths that could not be linked to an age grain were sorted using D_{par} (Appendix B and C). Inclusion of the unprobed grains increases the amount of data for modelling without significantly changing population ages and mean lengths. Sample LHA003 is a high-quality sample with two well-resolved kinetic populations (Fig. 2e and f). Overall, there is good agreement between the ages obtained from kinetic population interpretations and age mixture modelling which supports the notion that differential annealing is controlling the AFT parameters.

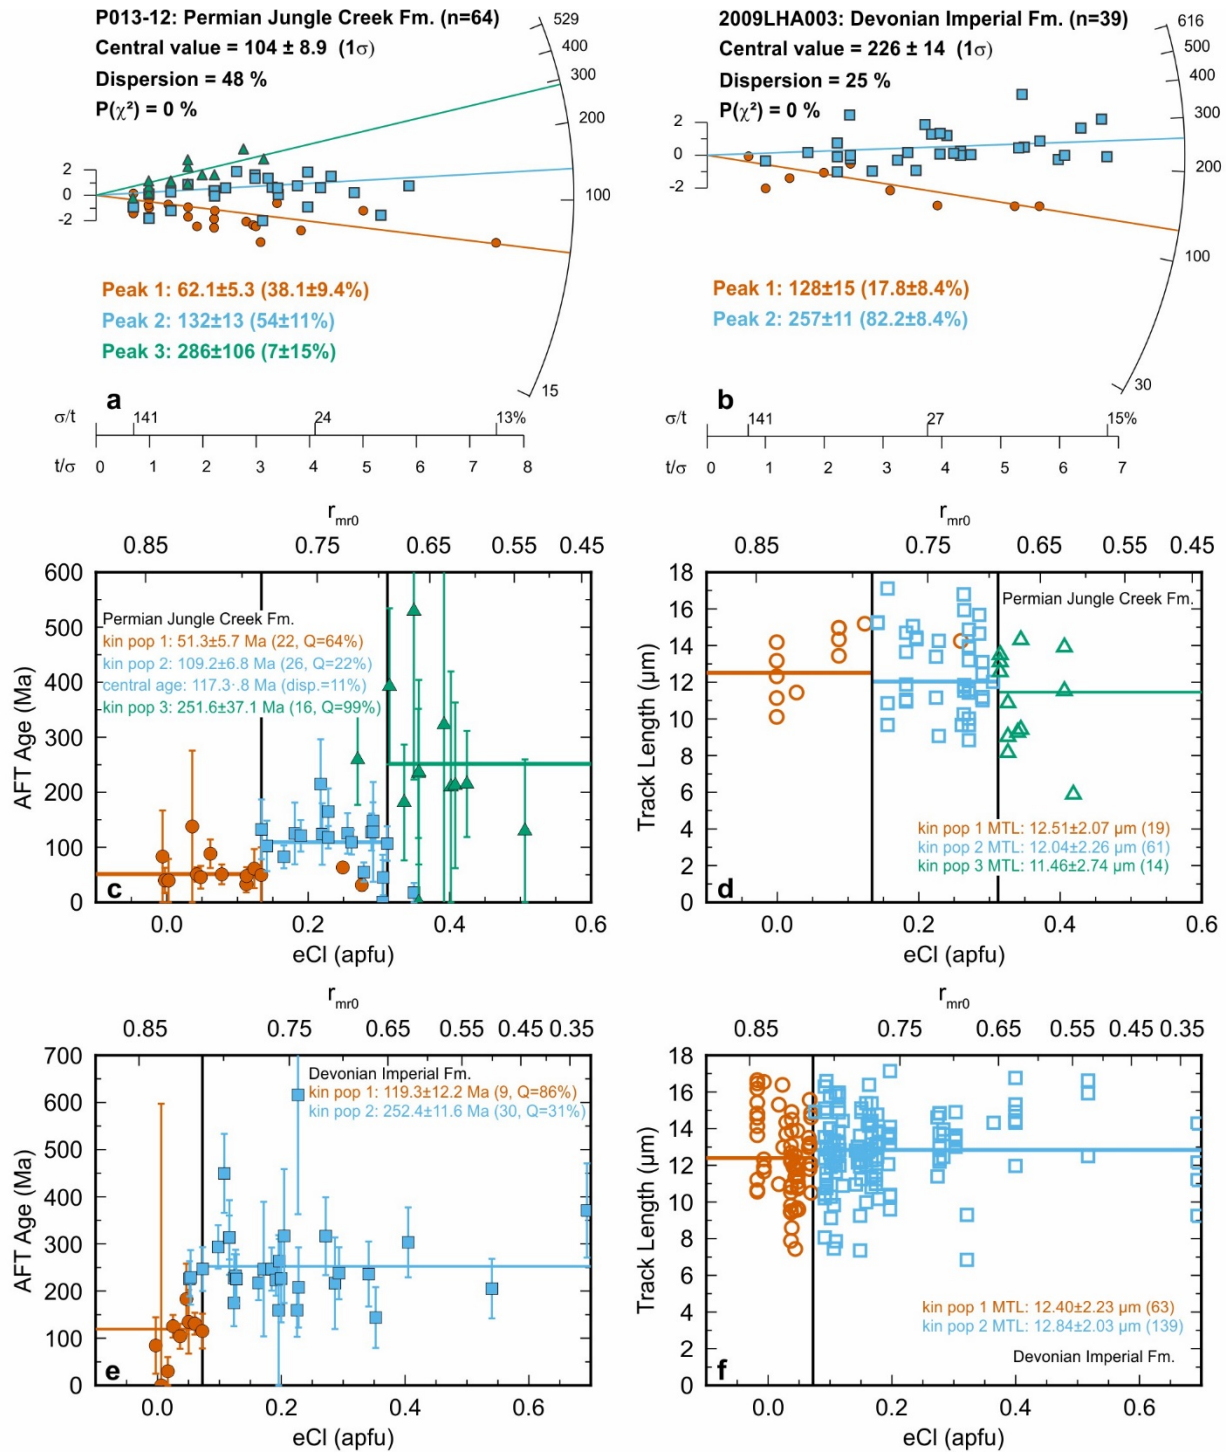


Figure 2. Radial plots of single grain ages for the Permian (a) and Devonian (b) multikinetic AFT samples. Each point has unit standard error (y-axis) and is plotted with respect to its relative precision (x-axis) with highest precision ages closest to the age scale. Points are colour-coded according to the kinetic populations defined by sorting the age and length data using eCl values for the Permian (c and d) and Devonian (e and f) samples. Peaks ages on the radial plots from age mixture modelling show good agreement with kinetic population ages. Vertical black lines are boundaries between kinetic populations. A few grains in both samples are inferred to cross population boundaries and are assigned to kinetic populations based on their age.

AFTINV THERMAL HISTORY RESULTS

Appendix E contains AFTINV thermal history results for c-axis projected length models for the two samples. Details of the modelling method and boundary conditions are in Issler et al. (in review) and Appendix E. Figure 3 summarizes the final thermal history results for the two samples (see Appendix E for other plots). AFTINV can handle up to four AFT kinetic populations including combinations of detrital, volcanic, and diagenetic apatite. The initial search space (yellow shaded region in Fig. 3) can be defined with broad temperature limits over time intervals of variable step size. Temperature limits can be estimated based on available geological constraints and AFT sample attributes such as population ages, degrees of annealing and thermal maturity. Generally, it is necessary to refine boundary conditions and the style of thermal history through iterative modelling in order to discover what is required to obtain solutions that satisfy the data. Users can choose different thermal history styles (e.g., heating, cooling, single heating-cooling event, etc.) and impose rate limits over different time ranges to construct thermal histories in a piecewise manner. The model randomly selects temperature inflection points within user specified time intervals to simulate times for maximum temperature, deposition and/or onset of reheating. Thermal histories are built forward and backward from a randomly selected point by randomly choosing the rate of temperature change (projection angle to the next temperature point) within specified limits. The model is run in two stages. In the first stage, thermal histories are generated using a nondirected Monte Carlo scheme and the model converges after 300 statistically significant (> 0.05 significance level) solutions have accumulated. This is followed by using a controlled random search algorithm (CRS; Price, 1977; Willett, 1997) to update the initial solution set to obtain up to a maximum of 300 solutions at the 0.5 significance level. The preferred solution for both cases is calculated as the exponential mean of the set of 300 thermal solutions. Although this may not be the “best fit” solution, it provides a smoothed, representative solution that generally is a good fit to the data.

The high-quality Devonian sample LHA003 retains a longer record of the thermal history than sample P013-12 and requires three cycles of post-depositional heating and cooling to obtain solutions that closely fit the AFT data (lower panel, Fig. 3). A two-cycle heating and cooling model was tried but was unsuccessful in obtaining solutions. Paleozoic and Cretaceous burial and erosion cycles are known from preserved stratigraphy in the region, but Triassic and Jurassic rocks are almost entirely absent. There are thin (20-30 m) remnants of Upper Triassic rocks in the northern part of the study area (Norris, 1981) and this was used as a constraint for a possible burial heating event that initiated during the Late Triassic. The model was structured to allow for an extra event without forcing it to occur at any particular temperature. The model solutions show rapid heating during Devonian-Carboniferous burial followed by substantial cooling (> 100 °C) prior to reheating in the Triassic with the second temperature peak occurring during Jurassic-Early Cretaceous time. These results are supported by the newer Permian sample P013-12 in Eagle Plain to the west that shows a similar cycle of Triassic-Early Cretaceous heating and cooling but with temperatures that were hotter by approximately 30 °C (upper panel, Fig. 3) which results in a higher degree of AFT annealing.

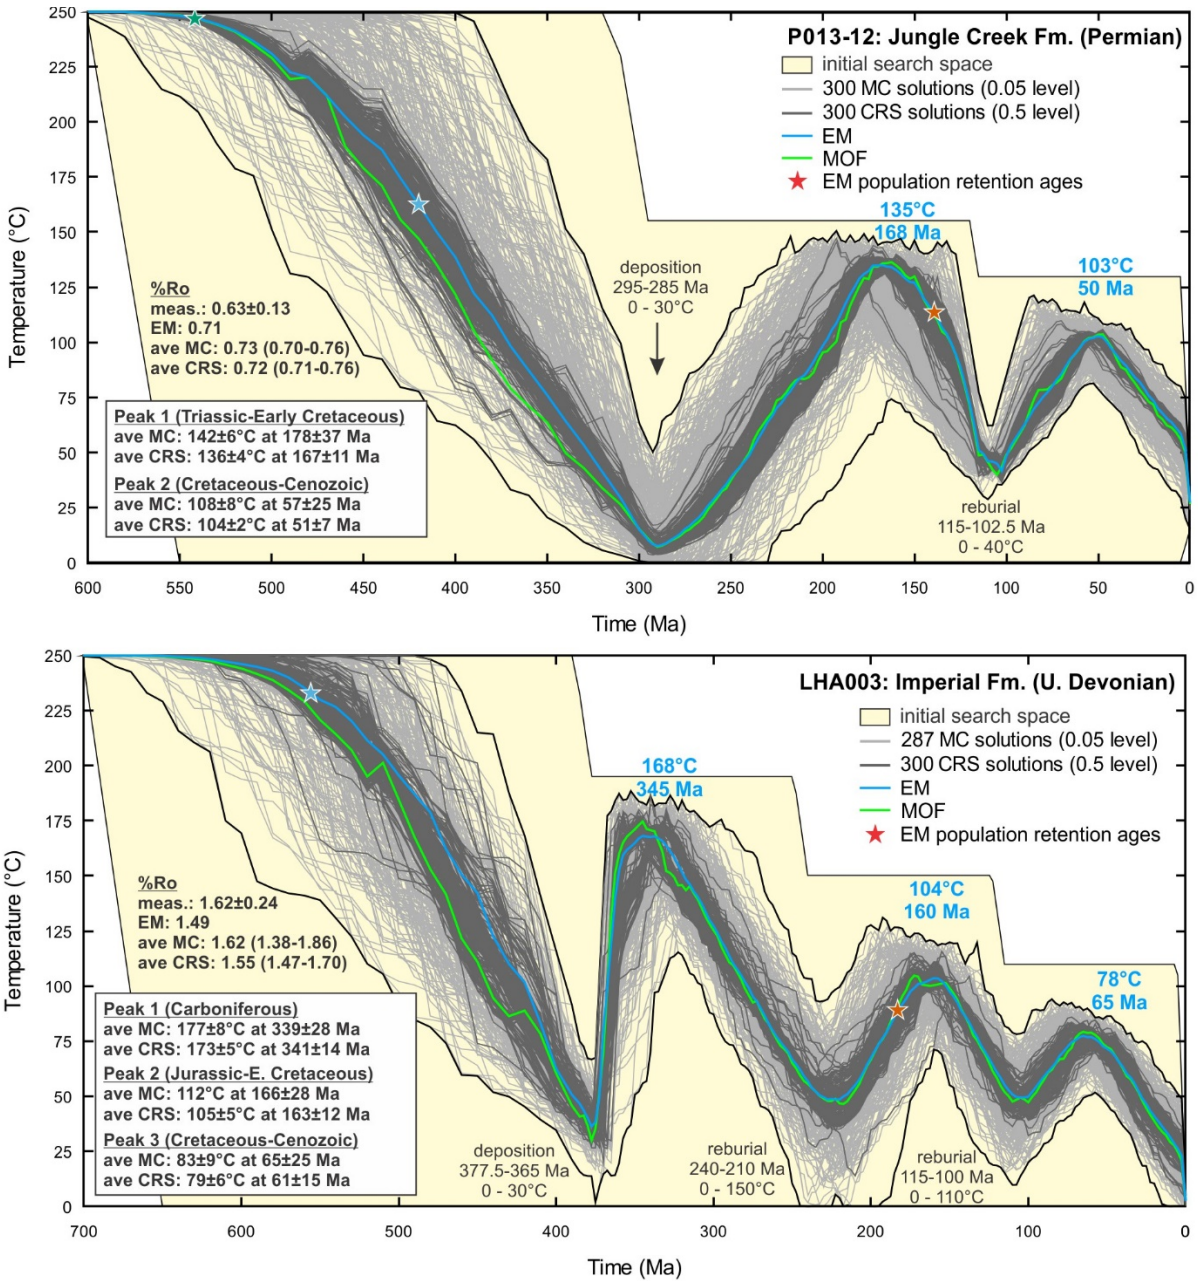


Figure 3. AFTINV thermal history results for Permian well sample, P013-12 (upper panel), and Devonian quarry sample, LHA003 (lower panel). Plots were produced by combining the thermal history solutions obtained by the Monte Carlo (MC) and the CRS calculations (see Appendix E). The light grey (0.05 significance level) and dark grey (0.5 significance level) curves define statistically acceptable solution space. The solution bounds (black curves) are not valid solutions. The yellow regions are the initial model search space. The blue curves represent the exponential mean (EM) of 300 solutions at the 0.5 level. The green curves are the closest fitting minimum objective function (MOF) solutions. Both solutions give excellent fits to the AFT data. Model retention ages correspond to the age of the oldest and shortest fission track ($\sim 2 \mu\text{m}$ in length) and give an estimate of the portion of the thermal history retained by each kinetic population, with retention age increasing with track retentivity. Retention age symbol colour: population 1 (orange star), population 2 (blue star) and population 3 (green star). Uncertainties on average peak temperature and time of peak temperature are two standard deviations. Both samples show the same Jurassic thermal event.

DISCUSSION

The data and thermal histories presented here and in Issler et al. (in review) are meant to show the benefits of acquiring elemental data to properly interpret and model AFT samples with significant age dispersion. Although age dispersion is common for sedimentary rocks it can occur with any rocks containing compositionally variable apatite. Our results demonstrate that complicated thermal histories with multiple cycles of heating can be recovered from quality multikinetic AFT samples by exploiting the different annealing characteristics of each kinetic population. Our Devonian sample illustrates how unexpected detail can be recovered from a multikinetic sample with abundant age and track length data. It appears that extensive erosion has removed much of the stratigraphic evidence for a Late Triassic-Early Cretaceous burial-exhumation cycle but its associated thermal effects on AFT annealing are retained in the multikinetic sample. These results and their geologic implications will be discussed as part of a larger study in a future paper.

ACKNOWLEDGEMENTS

This study was undertaken through the Natural Resources Canada Geo-Mapping for Energy and Minerals Program Yukon Basins and Mackenzie projects. We thank Chance Oil and Gas Limited (formerly Northern Cross (Yukon) Limited) for providing the well sample. In particular, we appreciate the support of Don Stachiw and Peter Moignard who organized workshops, provided geological data, and helped us to acquire well samples. The authors acknowledge the support of NSF EAR-0619165 to F. Foit for the purchase of the electron microprobe at Washington State University. We also thank Dr. Ken Severin of the University of Alaska, Fairbanks, Advanced Instrumentation Laboratory for retrieving and organizing elemental data files for the LHA003 AFT sample that was analyzed by AtoZ Inc. in 2011.

REFERENCES

- Burtner, R.L., Nigrini, A., and Donelick, R.A. 1994. Thermochronology of Lower Cretaceous source rocks in the Idaho-Wyoming thrust belt. *American Association of Petroleum Geologists Bulletin*, v. 78, p. 1613-1636.
- Carlson, W.D., Donelick, R.A., and Ketcham, R.A. 1999. Variability of apatite fission-track annealing kinetics: I. Experimental results. *American Mineralogist*, v. 84, p. 1213-1223.
- Chew, D.M., and Donelick, R.A. 2012. Combined apatite fission track and U-Pb dating by LA-ICP-MS and its application in apatite provenance analysis. In *Quantitative mineralogy and microanalysis of sediments and sedimentary rocks*. Edited by P. Sylvester. Mineralogical Association of Canada Short Course, v. 42, p. 219–247.
- Cogné, N., Chew, D.M., Donelick, R.A. and Ansberque, C. 2020. LA-ICP-MS apatite fission track dating: A practical zeta-based approach. *Chemical Geology*, v. 531. <https://doi.org/10.1016/j.chemgeo.2019.119302>
- Donelick, R.A. 1993. A method of fission track analysis utilizing bulk chemical etching of apatite. U.S. Patent Number 6,267,274.
- Donelick, R.A., Ketcham, R.A., and Carlson, W.D. 1999. Variability of apatite fission-track annealing kinetics: II. Crystallographic orientation effects. *American Mineralogist*, v. 84, p. 1224-1234.
- Donelick, R.A., O’Sullivan P.B., and Ketcham, R.A. 2005. Apatite fission track analysis. In *Low-temperature thermochronology: Techniques, interpretations, and applications*. Edited by P.W. Reiners and T.A. Elhers. *Reviews in Mineralogy and Geochemistry*, v. 58, p. 49-94.
- Galbraith, R.F. 2005. *Statistics for fission track analysis*. Chapman & Hall/CRC, Boca Raton, FL, 219 p.
- Hasebe, N., Barbarand, J., Jarvis, K., Carter, A., and Hurford, A.J. 2004. Apatite fission-track chronometry using laser ablation ICP-MS. *Chemical Geology*, v. 207, p. 135-145.
- Hurford, A.J., and Green, P.F. 1982. A user’s guide to fission track dating calibration. *Earth and Planetary Science Letters*, v. 59, p. 343– 354.
- Issler, D.R. 1996. An inverse model for extracting thermal histories from apatite fission track data: Instructions and software for the Windows 95 environment. Geological Survey of Canada, Open File 2325, 84 p.
- Issler, D.R., Grist A.M., and Stasiuk, L.D. 2005. Post-Early Devonian thermal constraints on hydrocarbon source rock maturation in the Keele Tectonic Zone, Tulita area, NWT, Canada,

from multi-kinetic apatite fission track thermochronology, vitrinite reflectance and shale compaction. *Bulletin of Canadian Petroleum Geology*, v. 53, p. 405-431.

Issler, D.R., and Lane, L.S. 2016. Report of activities for the GEM-2 multi-kinetic apatite fission track (MK-AFT) modelling and method development. Geological Survey of Canada, Open File 8147, 12 p. doi:10.4095/299247

Issler, D.R., Lane, L.S., and O'Sullivan, P.B. 2018. Characterisation, interpretation and modelling of multikinetic apatite fission track data using elemental data. Geological Survey of Canada, Scientific Presentation 94, 1 sheet. <https://doi.org/10.4095/311302>

Issler, D.R., McDannell, K.T., O'Sullivan, P.B. and Lane, L.S. in review. Simulating sedimentary burial cycles – Part II: Elemental-based multikinetic apatite fission-track interpretation and modelling techniques illustrated using examples from northern Yukon. *Geochronology*.

Ketcham, R.A. 2015. Calculation of stoichiometry from EMP data for apatite and other phases with mixing on monovalent anion sites. *American Mineralogist*, v. 100, p. 1620-1623.

Ketcham R.A., Donelick, R.A., and Carlson, W.D. 1999. Variability of apatite fission-track annealing kinetics: III. Extrapolation to geological time scales. *American Mineralogist*, v. 84, p. 1235-1255.

Lane, L.S., 2012. Geology, Porcupine River, NTS 116J-SE; Canadian Geoscience Map GM-P69, Scale 1:100,000, CD-ROM, <http://dx.doi.org/10.495/290064>.

Lane, L.S., 2013a. Geology, Corbett Hill, NTS 116I-07; Canadian Geoscience Map CGM-0070 (preliminary), scale 1:50,000, <https://doi.org/10.4095/290065>.

Lane, L.S., 2013b. Geology, Mount Joyal, NTS 116I-10; Canadian Geoscience Map CGM-0073 (2nd edition, preliminary), scale 1:50000. <http://dx.doi.org/10.4095/29273>

Lane, L.S., 2017. Geology, Polly Hill, NTS 116I-15; Canadian Geoscience Map CGM-0129, Scale 1:50,000, <https://doi.org/10.4095/299804>

Lane, L.S., 2020. Bedrock geology, Mount Raymond, Yukon, NTS 116-I/8; Geological Survey of Canada, Canadian Geoscience Map 71, scale 1:50 000. <https://doi.org/10.4095/290066>.

Lane, L.S., and Cecile, M.P., 2021. Bedrock geology, Mount Hare, Yukon, NTS 116-I/9; Geological Survey of Canada, Canadian Geoscience Map CGM-0072, scale 1:50,000, <https://doi.org/10.4095/290067>.

McDannell, K.T. and Issler, D.R. 2021. Simulating sedimentary burial cycles – Part I: Investigating the role of apatite fission track annealing kinetics using synthetic data. *Geochronology*, v. 3, p. 321-335. doi: 10.5194/gchron-3-321-2021

- Nielsen, S.B., Clausen, O.R., and McGregor, E. 2017. basin% R_0 : A vitrinite reflectance model derived from basin and laboratory data. *Basin Research*, v. 29 (Suppl. 1), p. 515-536, doi:10.1111/bre.12160
- Norris, D.K. 1981. Geology, Eagle River, Yukon Territory, Geological Survey of Canada Map 1523A, 1:250,000 scale.
- Norris, D.K. 1982a. Geology, Wind River, Yukon Territory, Geological Survey of Canada Map 1528A, 1:250,000 scale.
- Norris, D.K. 1982b. Geology, Hart River, Yukon Territory, Geological Survey of Canada Map 1527A, 1:250,000 scale.
- Norris, D.K. 1985. Geology of the northern Yukon and northwestern District of Mackenzie; Geological Survey of Canada Map 1581A, 1:500,000 scale.
- Price, W.L. 1977. A controlled random search procedure for global optimization. *The Computer Journal*, v. 20, no. 4, p. 367-370.
- Rohr, K.R.R., Lane, L.S., and Maclean, B.C. 2011. Subsurface compressional structures and facies transitions imaged by seismic reflection data, eastern margin of Richardson Trough, Peel Plateau, Yukon. *Bulletin of Canadian Petroleum Geology*, v. 59, No. 2, p. 131-146. <https://doi.org/10.2113/gscpgbull.59.2.131>
- Vermeesch, P. 2012. On the visualization of detrital age distributions. *Chemical Geology*, v. 312-313, p. 190-194. doi:10.1016/j.chemgeo.2012.04.021
- Vermeesch, P. 2017. Statistics for LA-ICP-MS based fission track dating. *Chemical Geology*, v. 456, p. 19-27.
- Willett, S.D. 1997. Inverse modeling of annealing of fission tracks in apatite 1: A controlled random search method. *American Journal of Science*, v. 297, p. 939-969.

APPENDIX A: Apatite fission track and U-Pb age data acquisition

AFT data were acquired for LHA003 at AtoZ Inc. in 2011 and for P013-12 in 2015 at GeoSep Services (GSS) under similar conditions. All laboratory procedures for each sample, including mineral separation and grain mounting were performed under identical conditions by both AtoZ and GSS. Paul O’Sullivan performed all analytical procedures, including individual grain selection, parameter measurement, data processing, and data interpretation. Laser ablation of all samples for age analyses were performed using the equipment at the Washington State University School of Earth and Environmental Sciences GeoAnalytical Laboratory in Pullman, Washington.

Spontaneous tracks (NS) were first counted for each AFT+UPb analysis in unpolarized light at 2000x magnification using a Zeiss Axioplan microscope. If possible, NS values were determined from 40 grains for each AFT+UPb analysis. Following this, the apatite mounts were irradiated using fission fragments from a ^{252}Cf source in a vacuum chamber in order to enhance the number of confined fission tracks (CFT) available for measurement (e.g. Donelick et al., 2005). The irradiated apatite grain mounts were then re-etched using the same procedure as before in order to reveal a new set of horizontal CFT within the exposed apatite grains. These confined tracks were viewed and measured in both unpolarized and polarized light at 2000x magnification using a Zeiss Axioplan microscope. Only natural, horizontal, fully confined fission tracks in apatite with clearly visible ends were considered candidates for length measurement. The length and crystallographic orientation of each fission track was determined using a digitizing tablet interfaced with a personal computer. The precision of each track length is estimated to be ± 0.20 μm ; the precision of each track angle to the crystallographic c-axis is estimated to be ± 2 degrees.

Once analytical measurements were completed for all AFT+UPb (NS counts and CFT measurements), a Finnigan Element II Magnetic 177 Sector inductively coupled plasma-mass spectrometer equipped with a New Wave Nd-YAG 213nm laser ablation system (LA-ICPMS) was used to measure isotopic data necessary for all apatite FT and UPb grain age calculations. The data acquisition parameters for the laser ablation system and mass spectrometer are listed in Table A1.

Table A1. FT - ICPMS/laser operating conditions and data acquisition parameters.

<i>ICPMS: operating conditions</i>	
Instrument	Finnigan Element II Magnetic Sector ICP-MS
Forward power	1.25 kW
Reflected power	<5 W
Plasma gas	Ar
Coolant flow	15 l/min
Carrier flow	1.0 l/min (Ar) 0.8 l/min (He) – optimized daily
Auxiliary flow	0.9 l/min
<i>ICPMS: acquisition parameters</i>	
Dwell time	18 milliseconds per peak point
Points per peak	4
Mass window	5%
Scans	30
Data acquisition time	22 sec
Data acquisition mode	electronic scanning
Isotopes measured	⁴³ Ca (apatite) or ²⁹ Si (zircon), ²³⁸ U, ²³² Th, and ¹⁴⁷ Sm
<i>Laser: operating conditions</i>	
Laser type	New Wave UP213 (Nd: YAG)
Wavelength	213 nm
Laser mode	Q switched
Laser output power	8 J/cm
Laser warm up time	6 sec
Shot repetition rate	5 Hz
Sampling scheme	spot (16 μm AFT, 20 μm ZrnUPb)

Data were collected for the following isotopic masses: ⁴³Ca, ¹⁴⁷Sm, ²⁰⁴Pb, ²⁰⁶Pb, ²⁰⁷Pb, ²³²Th, and ²³⁸U (30 scans over 22 sec). Each analysis consisted of a 6-second integration on peaks with the laser shutter closed (for background measurements) followed by the shutter opening and the laser ablating apatite material for the remainder of the analysis. A 20-second delay occurred between analyses. The beam diameter was 16 μm and the frequency was set at 5 Hz, yielding ablation pits ~16-18 μm deep. He and Ar gas were used to deliver the ablated material into the plasma source.

APPENDIX B: Apatite fission track and U-Pb age data

Tables B1 and B2 list the data required for calculating single grain and pooled AFT ages for samples P013-012 and LHA003 using the LA-ICP-MS zeta calibration method (Cogné et al., 2020) and the age equations in Donelick et al. (2005) and Vermeesch (2017). AFT ages are reported with the associated symmetrical one standard deviation and asymmetrical 95% confidence limits; ages and their uncertainties were calculated using a zeta value and standard error of 12.35698 ± 0.225136 and $1.55125 \times 10^{-10} \text{ yr}^{-1}$ for the ^{238}U total decay constant. Grains with zero spontaneous track counts ($N_s = 0$) have an uncertainty range from 0 Ma to an upper age limit calculated using $N_s = 3$ (+95 % confidence limit column). The $N_s = 0$ ages were recalculated (not shown here) for the purpose of displaying them on a radial plot (Fig. 2) by using an EDM-like equation and adding a $\frac{1}{2}$ count to both the spontaneous and equivalent induced track counts (Vermeesch, 2017). Other data include estimated U, Th and Sm concentrations, the number of etch figures used to calculate their average length parallel (D_{par}) and perpendicular (D_{per}) to the mineral c-axis, and an apatite U-Pb age (excluding values that were rejected following quality control procedures). U, Th and Sm are not absolute measurements due to documented variations in values between analytical sessions (Cogné et al., 2020) and they are not used for any calculations. Original, pre-filtered values are reported in the table and very high values can indicate analytical problems such as U spikes associated with the laser intersecting an inclusion.

Measured Cl and F, and calculated OH (in atoms per formula unit; apfu) and $r_{\text{mr}0}$ values are listed for all probed age grains with acceptable elemental data (Appendix D). The $r_{\text{mr}0}$ values were calculated using the elemental data and equation 6 of Carlson et al. (1999) and then were converted to eD_{par} and eCl values using correlations given in Ketcham et al. (1999). AFT data were sorted into different kinetic populations using eCl (derived from $r_{\text{mr}0}$) values. Some grains have replicate eCl (and D_{par}) values associated with independent age and length measurements (identified using probe x-y coordinates) for the same grain and they provide some measure of the variability in kinetic parameter determination (Issler et al., 2018, in review). Measured D_{par} and effective Cl values for length measurements associated with age grains are shown in tables C1 and C2. In cases of significant variability, a single eCl value (either associated with the age or length measurement) was chosen to be representative of both measurements in order to reduce kinetic population overlap on plots of age and length versus eCl . Some grains were too small or lacked smooth surfaces for probing. Age grains without probe data and a few grains that are inferred to overlap with another population were assigned to kinetic populations using their AFT age. The pooled AFT age (\pm one standard deviation), χ^2 probability for assessing whether data are consistent with a single age population (Q ; $> 5\%$ for a pass), central age (Galbraith, 2005; Vermeesch, 2017) and associated age dispersion are listed for each kinetic population. A few grains were rejected due to poor quality U analyses which yielded ages that were too young (U spike) or too old (U below measurement resolution).

Table B1 continued

Grain No.	N _s	Area Ω _i (cm ²)	²³⁸ U/ ⁴³ Ca		FT age (Ma)	σ (Ma)	-95% C.I. (Ma)	+95% C.I. (Ma)	Etch Figs.	D _{par} (μm)	D _{per} (μm)	U (ppm)	Th (ppm)	Sm (ppm)	Age Meas.					Length Meas.		U-Pb Age (Ma)	2σ (Ma)	Comment			
															meas. F (apfu)	meas. Cl (apfu)	calc. OH (apfu)	mmro	eD _{par} (μm)	eCl (apfu)	meas. D _{par} (μm)				eCl (apfu)		
8B	0	1.2134E-05	0.0175	6.5382E-04	0.0	86.2	172.4	1	1.99	0.29	3	13	92	1.974	0.010	0.017	0.696	2.74	0.305								
21B	2	1.2134E-05	0.0451	1.7227E-03	45.0	31.9	34.0	138.5	2	1.95	0.63	10	28	72	0.935	0.105	0.960	0.695	2.75	0.306			201.0	100.7			
12B	12	3.0577E-05	0.0450	1.7973E-03	106.8	31.2	47.0	83.5	3	2.26	0.39	10	76	268	1.177	0.123	0.701	0.692	2.76	0.312			318.3	205.4			
25B	1	9.7070E-06	0.0724	2.6729E-03	17.5	17.6	15.2	111.2	1	2.20	0.35	9	62	397	1.323	0.087	0.590	0.666	2.89	0.350							
8A	29	1.7473E-05	0.2637	4.5800E-03	77.3	14.5	24.1	34.9	3	2.04	0.45	64	961	379							2.49		117.9	54.4	length gr 7A		
12A	9	1.7473E-05	0.0383	6.6592E-04	164.0	54.8	79.4	152.2	3	2.15	0.45	10	136	176							2.58		516.6	2280.0	length gr 9A		
18A	3	1.4561E-05	0.0146	4.6036E-04	171.6	99.3	117.1	359.0	3	2.07	0.46	3	32	79													
23A	9	9.7070E-06	0.0622	1.3396E-03	181.6	60.8	88.0	168.3	2	2.34	0.48	14	221	219													
9B	11	9.7070E-06	0.0871	5.9477E-03	158.8	49.2	72.8	133.2	4	2.50	0.71	16	40	160									192.5	99.0			
30B	1	9.7070E-06	0.0107	3.3938E-04	117.5	117.6	101.5	705.2	2	2.19	0.43	278	920	193													
37B	11	5.8242E-06	0.1821	2.7181E-03	126.9	38.4	57.3	103.6	4	2.46	0.57	37	323	280									155.6	34.5			
pooled (26)	285				109.2	6.8	12.7	14.4		2.13	0.41				0.084			2.54	0.244							Q=22%	
central age					117.3	7.8																				Dispersion = 11%	
kinetic pop #3 (0.312 < eff Cl < 0.55)																											
24A	10	1.2134E-05	0.0385	6.6863E-04	259.3	82.3	120.5	221.4	3	2.42	0.71	10	136	176	1.065	0.130	0.806	0.718	2.63	0.270			516.6	2280.0			
20A	8	1.4561E-05	0.0168	1.2049E-03	392.5	141.8	198.9	391.3	3	2.73	0.68	3	17	187	1.060	0.178	0.762	0.690	2.78	0.315	2.54	0.312	140.7	122.3	length gr 11A		
23B	3	9.7070E-06	0.0208	8.4673E-04	181.4	105.1	123.9	379.4	1	1.84	0.31	4	45	210	1.203	0.100	0.697	0.676	2.84	0.336							
22A	3	5.8242E-06	0.0115	3.4368E-04	529.1	306.1	358.0	1021.9	2	2.14	0.52	2	12	107	0.959	0.223	0.818	0.666	2.89	0.350	2.61	0.340	1221.4	1095.3	length gr 12A		
11A	4	1.7473E-05	0.0119	3.0726E-04	234.1	117.3	147.2	384.6	3	2.43	0.89	2	20	127	0.958	0.128	0.914	0.662	2.91	0.356	2.37	0.326	303.2	470.7	length gr 4A		
14B	0	1.2134E-05	0.0065	2.5723E-04	0.0	227.7		455.4	1	2.15	0.30	1	4	139	1.149	0.172	0.680	0.662	2.91	0.356							
32B	2	1.9414E-05	0.0053	2.5850E-04	236.5	167.7	178.4	688.5	2	2.06	0.34	1	4	530	1.297	0.246	0.457	0.661	2.91	0.357							
7A	1	1.2134E-05	0.0031	1.1652E-04	322.7	323.0	278.2	1753.5	1	2.53	0.37	1	3	282	1.292	0.262	0.447	0.635	3.03	0.392			270.3	1518.3			
5A	1	7.7656E-06	0.0075	2.1160E-04	209.7	209.8	181.0	1200.9	1	2.60	0.82	2	14	256	1.171	0.322	0.507	0.627	3.06	0.402	2.42	0.406	84.1	612.2	length gr 5A		
19B	2	1.9414E-05	0.0059	2.0594E-04	212.5	150.5	160.3	621.7	2	2.23	0.35	1	11	1700	1.333	0.147	0.520	0.623	3.08	0.408							
3A	5	1.4561E-05	0.0194	4.4408E-04	215.1	96.4	126.5	299.8	2	2.22	0.54	4	19	296	1.191	0.256	0.553	0.609	3.13	0.424	2.51	0.419	282.0	366.8	length gr 2A		
17A	1	1.9414E-05	0.0049	1.8531E-04	129.8	129.9	112.1	774.3	1	2.29	0.41	1	9	197	0.917	0.374	0.709	0.536	3.40	0.506			456.0	1046.1			
10A	1	7.2803E-06	0.0082	4.4531E-04	204.1	204.4	176.2	1174.4	1	1.80	0.32	2	18	158													
15A	2	7.7656E-06	0.0135	3.6325E-04	231.2	163.6	174.3	672.1	1	2.74	0.60	216	431	537													
16A	1	7.7656E-06	0.0069	1.7726E-04	225.9	226.0	194.9	1283.4	1	2.98	0.69	1	16	77													
6B	3	9.7070E-06	0.0093	3.5168E-04	397.4	230.1	269.9	790.8	2	2.80	0.46	2	7	127									295.4	198.6			
pooled (16)	47	1.97E-04			251.6	37.1	63.3	84.1		2.37	0.52				0.211			2.96	0.373							Q=99%	
central age					272.5	40.0																				Dispersion = 0%	
Rejected outlier ages (poor U analyses?)																											
14A	6	1.0192E-05	0.0034	1.0321E-03	1865.5	953.5			2	2.35	0.47	0	20	48													
9A	7	1.7473E-05	0.4924	8.2500E-02	10.0	4.2			2	1.99	0.37	15	2311	439													
36B	1	1.4561E-05	0.3105	2.0469E-02	2.7	2.7			1	2.75	0.62	94	334	88							2.36					len gr 18B	

N_s is the number of spontaneous tracks
 Ω_i is the track count area

Table B2 continued

Grain No.	N _s	Area Ω _i (cm ²)	238U/43Ca		FT age (Ma)	σ (Ma)	-95% C.I. (Ma)	+95% C.I. (Ma)	Etch Figs.	D _{par} (μm)	D _{per} (μm)	U (ppm)	Th (ppm)	Sm (ppm)	F (apfu)	Cl (apfu)	Age Meas.			Length Meas.		U-Pb Age (Ma)	2σ (Ma)	Comment	
			P _i (dmnls)	σ _{P_i} (dmnls)													meas.	meas.	calc.	meas.	eCl (apfu)				D _{par} (μm)
Poor U analysis																									
18	1	1.7473E-05	0.0003	2.3394E-04	1835.4	2243.2			1	1.80	0.25	0	0	17	1.529	0.000	0.464	0.831	1.83	0.026					

N_s is the number of spontaneous tracks

Ω_i is the track count area

APPENDIX C: Apatite fission track length data

Tables C1 and C2 contain measured horizontal, confined fission track lengths and corresponding angles of tracks with respect to the crystallographic c-axis, D_{par} and D_{per} values (etch figure lengths parallel and perpendicular to c-axis), measured Cl and calculated OH contents, and $r_{\text{mr}0}$ values with the derived parameters, eD_{par} and $e\text{Cl}$. $r_{\text{mr}0}$ values were calculated using elemental data (Appendix D) and the Carlson et al. (1999) multivariate equation and these values were converted to eD_{par} and $e\text{Cl}$ values using correlations given in Ketcham et al. (1999). Some length grains have replicate $e\text{Cl}$ (and D_{par}) values associated with independent age and length measurements that were done for the same apatite grain (identified using probe x-y coordinates for the grain mounts). For example, in tables C1 and C2, column 2 lists the grain number for the length measurement and the last column (comments) lists the associated age grain number that corresponds to the same apatite grain. In cases of significant variability, a single $e\text{Cl}$ value (either associated with the age or length measurement) was chosen to be representative of both measurements in order to reduce kinetic population overlap on plots of AFT age and length versus $e\text{Cl}$. Measured D_{par} and $e\text{Cl}$ values for age measurements associated with length grains are shown in the tables. FT length data are grouped into different kinetic populations using the AFT age identifications and available $e\text{Cl}$ and D_{par} values. Multiple parameters are needed for sample P013-12 because not all grains could be probed. The mean AFT length (\pm one standard deviation) and average D_{par} , D_{per} , Cl, eD_{par} and $e\text{Cl}$ values are listed for each kinetic population.

Table C1: Apatite fission track length data for sample McParlon A-25 (1050-1100 m) (GSS P013-12)
Formation/age: Jungle Creek Fm., Permian (Sakmarian-Artinskian)
Sample type/location: well cuttings, NTS 116-I-04, Eagle Plain, Yukon (66.06947 °N, 137.31389 °W)

Track No.	Grain No.	Confined length (μm)	angle to C-axis (degrees)	Etch Figs.	D _{par} (μm)	D _{per} (μm)	Length meas.					Age meas.		Comments	
							meas. Cl (apfu)	calc. OH (apfu)	mmro	eD _{par} (μm)	eCl (apfu)	meas. D _{par} (μm)	eCl (apfu)		
kinetic pop #1 (-0.1 < eff Cl < 0.134 apfu)															
1	15A	14.18	49.13	4	2.06	0.46	0.007	0.377	0.841	1.75	-0.001				
2	15A	11.14	55.07	4	2.06	0.46	0.007	0.377	0.841	1.75	-0.001				
3	15A	13.17	18.22	4	2.06	0.46	0.007	0.377	0.841	1.75	-0.001				
4	15A	12.32	41.15	4	2.06	0.46	0.007	0.377	0.841	1.75	-0.001				
5	15A	10.11	68.56	4	2.06	0.46	0.007	0.377	0.841	1.75	-0.001				
6	14B	11.44	83.89	4	2.10	0.41	0.006	0.257	0.831	1.84	0.027	1.90	0.048	age gr 20B	
7	4B	14.33	56.68	2	1.42	0.34	0.008	0.327	0.808	2.03	0.087	1.78	0.062	age gr 7B	
8	4B	14.97	68.08	2	1.42	0.34	0.008	0.327	0.808	2.03	0.087	1.78	0.062	age gr 7B	
9	4B	13.44	72.28	2	1.42	0.34	0.008	0.327	0.808	2.03	0.087	1.78	0.062	age gr 7B	
10	4B	14.96	58.05	2	1.42	0.34	0.008	0.327	0.808	2.03	0.087	1.78	0.062	age gr 7B	
11	15B	15.19	33.95	4	2.15	0.41	0.041	0.402	0.793	2.15	0.124	1.82	0.112	age gr 26B	
12	8B	14.25	38.11	4	2.16	0.47	0.274	0.136	0.724	2.60	0.260	2.06	0.276	age gr 11B	
13	10A	11.61	78.61	4	1.63	0.35						1.88		age gr 13A	
14	10A	11.79	57.09	4	1.63	0.35						1.88		age gr 13A	
15	1A	14.71	45.80	4	1.94	0.34						2.11		age gr 2A	
16	1A	11.26	64.38	4	1.94	0.34						2.11		age gr 2A	
17	1A	11.13	58.22	4	1.94	0.34						2.11		age gr 2A	
18	1A	7.76	60.42	4	1.94	0.34						2.11		age gr 2A	
19	1A	10.02	54.30	4	1.94	0.34						2.11		age gr 2A	
Ave		12.51			1.86	0.38	0.032					1.95	0.063	1.94	0.098
SD		2.07			0.27	0.06	0.077					0.25	0.078	0.15	0.081
kinetic pop #2 (0.134 < eff Cl < 0.312 apfu)															
20	12B	15.23	51.75	4	1.87	0.28	0.029	0.746	0.785	2.21	0.142	1.77	0.122	age gr 18B	
21	12B	15.26	67.86	4	1.87	0.28	0.029	0.746	0.785	2.21	0.142	1.77	0.122	age gr 18B	
22	2B	9.67	73.85	4	2.05	0.44	0.099	0.449	0.778	2.26	0.156	2.02	0.166	age gr 3B	
23	2B	17.11	20.98	4	2.05	0.44	0.099	0.449	0.778	2.26	0.156	2.02	0.166	age gr 3B	
24	2B	10.85	75.60	4	2.05	0.44	0.099	0.449	0.778	2.26	0.156	2.02	0.166	age gr 3B	
25	6A	11.05	54.43	4	2.06	0.43	0.084	0.260	0.766	2.34	0.182	2.46	0.190	age gr 6A	
26	6A	14.70	37.81	4	2.06	0.43	0.084	0.260	0.766	2.34	0.182	2.46	0.190	age gr 6A	
27	6A	13.65	42.35	4	2.06	0.43	0.084	0.260	0.766	2.34	0.182	2.46	0.190	age gr 6A	
28	6A	11.87	56.39	4	2.06	0.43	0.084	0.260	0.766	2.34	0.182	2.46	0.190	age gr 6A	
29	6A	10.95	30.86	4	2.06	0.43	0.084	0.260	0.766	2.34	0.182	2.46	0.190	age gr 6A	
30	10B	15.06	27.90	4	1.98	0.35	0.071	0.426	0.761	2.37	0.192				
31	11B	14.44	52.74	4	2.12	0.29	0.071	0.558	0.758	2.39	0.197	1.47	0.220	age gr 17B	
32	11B	14.35	68.60	4	2.12	0.29	0.071	0.558	0.758	2.39	0.197	1.47	0.220	age gr 17B	
33	1B	13.39	34.09	4	1.92	0.35	0.062	0.422	0.744	2.48	0.224	1.97	0.228	age gr 1B	
34	1B	11.16	72.07	4	1.92	0.35	0.062	0.422	0.744	2.48	0.224	1.97	0.228	age gr 1B	
35	16B	14.26	78.39	4	2.88	0.47	0.096	0.696	0.742	2.49	0.228	2.09	0.218	age gr 28B	
36	16B	9.07	87.73	4	2.88	0.47	0.096	0.696	0.742	2.49	0.228	2.09	0.218	age gr 28B	
37	17B	9.67	63.24	3	2.47	0.50	0.109	0.691	0.723	2.60	0.261				
38	9B	16.79	36.23	4	2.23	0.41	0.122	0.611	0.722	2.61	0.264	1.57	0.228	age gr 15B	
39	9B	10.25	56.57	4	2.23	0.41	0.122	0.611	0.722	2.61	0.264	1.57	0.228	age gr 15B	
40	3B	11.75	62.35	4	2.59	0.39	0.116	0.688	0.721	2.61	0.264	2.07	0.261	age gr 4B	
41	3B	11.84	58.86	4	2.59	0.39	0.116	0.688	0.721	2.61	0.264	2.07	0.261	age gr 4B	
42	3B	11.54	55.57	4	2.59	0.39	0.116	0.688	0.721	2.61	0.264	2.07	0.261	age gr 4B	
43	3B	15.93	39.48	4	2.59	0.39	0.116	0.688	0.721	2.61	0.264	2.07	0.261	age gr 4B	
44	13B	14.87	65.71	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B	
45	13B	13.87	25.76	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B	

Table C1 continued

							Length meas.					Age meas.		
Track No.	Grain No.	Confined length (μm)	angle to C-axis (degrees)	Etch Figs.	D _{par} (μm)	D _{per} (μm)	meas. Cl (apfu)	calc. OH (apfu)	mmro	eD _{par} (μm)	eCl (apfu)	meas. D _{par} (μm)	eCl (apfu)	Comments
46	13B	11.43	60.19	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B
47	13B	10.02	66.40	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B
48	13B	8.84	75.73	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B
49	13B	11.59	66.16	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B
50	13B	13.97	53.12	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B
51	13B	9.66	64.81	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B
52	13B	13.20	23.86	4	2.57	0.51	0.111	0.651	0.717	2.63	0.271	2.14	0.278	age gr 24B
53	6B	14.65	78.55	4	2.39	0.43	0.073	0.461	0.708	2.68	0.286	2.38	0.256	age gr 10B
54	6B	15.67	35.99	4	2.39	0.43	0.073	0.461	0.708	2.68	0.286	2.38	0.256	age gr 10B
55	7B	11.18	58.60	4	2.47	0.38	0.079	0.504	0.706	2.69	0.290	2.39	0.290	age gr 13B
56	7B	11.02	55.57	4	2.47	0.38	0.079	0.504	0.706	2.69	0.290	2.39	0.290	age gr 13B
57	7B	13.10	62.86	4	2.47	0.38	0.079	0.504	0.706	2.69	0.290	2.39	0.290	age gr 13B
58	7B	12.46	48.11	4	2.47	0.38	0.079	0.504	0.706	2.69	0.290	2.39	0.290	age gr 13B
59	7B	11.19	54.21	4	2.47	0.38	0.079	0.504	0.706	2.69	0.290	2.39	0.290	age gr 13B
60	3A	12.02	34.19	4	2.39	0.51	0.182	0.542	0.696	2.74	0.305			
61	14A	10.06	68.18	4	1.90	0.34								
62	14A	9.88	58.91	4	1.90	0.34								
63	14A	11.54	50.59	4	1.90	0.34								
64	14A	9.26	52.08	4	1.90	0.34								
65	8A	9.94	78.33	4	2.38	0.42								
66	8A	12.07	66.93	4	2.38	0.42								
67	8A	12.07	72.58	4	2.38	0.42								
68	8A	13.11	42.14	4	2.38	0.42								
69	8A	11.87	44.02	4	2.38	0.42								
70	8A	9.16	84.14	4	2.38	0.42								
71	8A	9.98	57.26	4	2.38	0.42								
72	7A	13.16	59.37	4	2.49	0.39						2.04		age gr 8A
73	7A	9.50	87.80	4	2.49	0.39						2.04		age gr 8A
74	7A	7.47	75.50	4	2.49	0.39						2.04		age gr 8A
75	7A	10.06	47.60	4	2.49	0.39						2.04		age gr 8A
76	7A	12.53	35.91	4	2.49	0.39						2.04		age gr 8A
77	7A	7.90	81.56	4	2.49	0.39						2.04		age gr 8A
78	9A	9.41	47.07	4	2.58	0.56						2.15		age gr 12A
79	9A	12.66	31.30	4	2.58	0.56						2.15		age gr 12A
80	9A	14.10	42.41	4	2.58	0.56						2.15		age gr 12A
Ave		12.04			2.34	0.42	0.094			2.53	0.238	2.12	0.252	
SD		2.26			0.26	0.07	0.027			0.16	0.049	0.25	0.034	
kinetic pop #3 (0.312 < eff Cl < 0.55)														
81	11A	12.56	49.04	4	2.54	0.46	0.171	0.735	0.692	2.76	0.312	2.73	0.315	age gr 20A
82	11A	13.50	59.89	4	2.54	0.46	0.171	0.735	0.692	2.76	0.312	2.73	0.315	age gr 20A
83	11A	13.11	52.37	4	2.54	0.46	0.171	0.735	0.692	2.76	0.312	2.73	0.315	age gr 20A
84	4A	10.87	52.54	4	2.37	0.50	0.127	0.830	0.682	2.81	0.326	2.43	0.356	age gr 11A
85	4A	9.04	72.44	4	2.37	0.50	0.127	0.830	0.682	2.81	0.326	2.43	0.356	age gr 11A
86	4A	8.16	52.41	4	2.37	0.50	0.127	0.830	0.682	2.81	0.326	2.43	0.356	age gr 11A
87	12A	9.26	54.02	4	2.61	0.74	0.211	0.870	0.673	2.86	0.340	2.14	0.350	age gr 22A
88	13A	9.43	71.70	4	2.68	0.52	0.149	0.834	0.670	2.87	0.344			
89	13A	14.31	53.41	4	2.68	0.52	0.149	0.834	0.670	2.87	0.344			
90	5A	11.53	89.38	4	2.42	0.52	0.330	0.468	0.624	3.07	0.406	2.60	0.402	age gr 5A
91	5A	13.91	45.43	4	2.42	0.52	0.330	0.468	0.624	3.07	0.406	2.60	0.402	age gr 5A
92	2A	5.89	76.29	4	2.51	0.51	0.263	0.536	0.614	3.11	0.419	2.22	0.424	age gr 3A

Table C1 continued

		Length meas.							Age meas.					
Track No.	Grain No.	Confined length (μm)	angle to C-axis (degrees)	Etch Figs.	D _{par} (μm)	D _{per} (μm)	meas. Cl (apfu)	calc. OH (apfu)	mmro	eD _{par} (μm)	eCl (apfu)	meas. D _{par} (μm)	eCl (apfu)	Comments
93	5B	14.85	60.53	4	2.72	0.49								
94	5B	14.07	60.63	4	2.72	0.49								
Ave		11.46			2.53	0.51	0.194			2.88	0.348	2.50	0.359	
SD		2.74			0.13	0.07	0.075			0.13	0.040	0.19	0.039	

Table C2: Apatite fission track length data for sample 2009LHA003C1 (AtoZ 1148-06)

Formation/age: Imperial Fm., Upper Devonian (early Famennian?)

Sample type/location: outcrop, NTS 116-I-09, Dempster Highway quarry, Yukon (66.552744 °N, 136.338984 °W)

Track No.	Grain No.	Confined length (µm)	angle to C-axis (degrees)	Etch Figs.	D _{par} (µm)	D _{per} (µm)	Length meas.				Age meas.		Comments	
							meas. CI (apfu)	calc. OH (apfu)	rmro	eD _{par} (µm)	eCI (apfu)	D _{par} (µm)		eCI (apfu)
Kinetic pop #1 (-0.1 < effective CI < 0.0725 apfu)														
1	26	10.56	46.58	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
2	26	10.65	57.73	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
3	26	14.13	74.62	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
4	26	16.18	31.47	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
5	26	11.22	47.94	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
6	26	15.43	33.75	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
7	26	16.46	34.72	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
8	26	13.64	52.00	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
9	26	14.83	47.28	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
10	26	14.59	40.41	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
11	26	16.65	34.85	4	2.08	0.46	0.000	0.215	0.846	1.69	-0.017			
12	41	16.55	43.31	4	1.69	0.36	0.010	0.073	0.843	1.73	-0.007			
13	41	11.90	66.92	4	1.69	0.36	0.010	0.073	0.843	1.73	-0.007			
14	41	12.33	51.56	4	1.69	0.36	0.010	0.073	0.843	1.73	-0.007			
15	41	11.66	72.46	4	1.69	0.36	0.010	0.073	0.843	1.73	-0.007			
16	28	10.97	77.15	4	2.18	0.35	0.006	0.176	0.834	1.81	0.017	2.38	0.050	age gr 26
17	28	15.31	35.72	4	2.18	0.35	0.006	0.176	0.834	1.81	0.017	2.38	0.050	age gr 26
18	37	16.39	64.30	4	2.22	0.42	0.032	0.390	0.832	1.82	0.023			
19	23	12.99	68.24	4	1.70	0.37	0.006	0.333	0.832	1.83	0.024			
20	10	13.71	55.44	4	1.85	0.29	0.000	0.000	0.830	1.85	0.029			
21	10	14.35	72.23	4	1.85	0.29	0.000	0.000	0.830	1.85	0.029			
22	38	10.81	77.04	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
23	38	13.08	60.93	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
24	38	10.90	65.45	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
25	38	9.51	36.71	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
26	38	12.20	30.18	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
27	38	12.69	69.02	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
28	38	9.46	39.69	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
29	38	9.43	83.82	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
30	38	7.88	78.24	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
31	38	9.80	59.27	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
32	38	10.53	85.79	4	1.62	0.33	0.000	0.000	0.827	1.87	0.037			
33	49	14.91	39.83	4	2.13	0.39	0.081	0.104	0.827	1.87	0.038			
34	49	13.89	36.65	4	2.13	0.39	0.081	0.104	0.827	1.87	0.038			
35	49	12.30	41.77	4	2.13	0.39	0.081	0.104	0.827	1.87	0.038			
36	16	8.59	68.69	4	1.97	0.32	0.006	0.302	0.827	1.87	0.038			
37	16	14.49	42.97	4	1.97	0.32	0.006	0.302	0.827	1.87	0.038			
38	32	11.91	65.30	4	2.19	0.45	0.042	0.272	0.826	1.88	0.041			
39	14	9.55	80.89	4	2.17	0.41	0.020	0.388	0.825	1.89	0.044			
40	14	11.36	53.81	4	2.17	0.41	0.020	0.388	0.825	1.89	0.044			
41	14	12.54	44.60	4	2.17	0.41	0.020	0.388	0.825	1.89	0.044			
42	14	7.44	88.25	4	2.17	0.41	0.020	0.388	0.825	1.89	0.044			
43	14	11.85	75.98	4	2.17	0.41	0.020	0.388	0.825	1.89	0.044			
44	20	12.18	76.36	4	1.80	0.46	0.004	0.226	0.824	1.90	0.047			
45	20	13.89	24.12	4	1.80	0.46	0.004	0.226	0.824	1.90	0.047			
46	20	9.67	76.46	4	1.80	0.46	0.004	0.226	0.824	1.90	0.047			
47	24	10.73	47.04	4	2.18	0.43	0.024	0.143	0.823	1.91	0.048			
48	24	11.79	56.55	4	2.18	0.43	0.024	0.143	0.823	1.91	0.048			

Table C2 continued

							Length meas.					Age meas.		
Track No.	Grain No.	Confined length (μm)	angle to C-axis (degrees)	Etch Figs.	D_{par} (μm)	D_{per} (μm)	meas. CI (apfu)	calc. OH (apfu)	A to Z mro	calc. D_{par} (μm)	Eff. CI (apfu)	meas. D_{par} (μm)	Eff. CI (apfu)	Comments
49	24	11.40	49.88	4	2.18	0.43	0.024	0.143	0.823	1.91	0.048			
50	24	11.10	72.51	4	2.18	0.43	0.024	0.143	0.823	1.91	0.048			
51	13	10.85	35.10	4	1.84	0.38	0.004	0.196	0.823	1.91	0.049			
52	13	9.59	60.28	4	1.84	0.38	0.004	0.196	0.823	1.91	0.049			
53	31	13.50	84.59	4	1.93	0.38	0.052	0.000	0.817	1.96	0.065			
54	31	12.98	25.39	4	1.93	0.38	0.052	0.000	0.817	1.96	0.065			
55	30	12.10	56.13	4	1.88	0.44	0.079	0.151	0.816	1.97	0.067	2.05	0.060	age gr 28
56	30	13.19	61.17	4	1.88	0.44	0.079	0.151	0.816	1.97	0.067	2.05	0.060	age gr 28
57	30	11.80	27.19	4	1.88	0.44	0.079	0.151	0.816	1.97	0.067	2.05	0.060	age gr 28
58	30	15.57	34.80	4	1.88	0.44	0.079	0.151	0.816	1.97	0.067	2.05	0.060	age gr 28
59	30	13.04	32.86	4	1.88	0.44	0.079	0.151	0.816	1.97	0.067	2.05	0.060	age gr 28
60	12	14.62	55.87	4	1.88	0.41	0.002	0.530	0.815	1.98	0.069			
61	12	10.50	80.01	4	1.88	0.41	0.002	0.530	0.815	1.98	0.069			
62	12	14.84	62.02	4	1.88	0.41	0.002	0.530	0.815	1.98	0.069			
63	12	12.07	44.55	4	1.88	0.41	0.002	0.530	0.815	1.98	0.069			
Ave		12.40			1.93	0.40	0.018			1.85	0.031			
SD		2.23			0.21	0.05	0.027			0.09	0.029			
Kinetic pop #2 (0.0725 < effective CI < 0.7 apfu)														
64	2	14.92	82.37	4	2.15	0.51	0.055	0.312	0.813	2.00	0.076			
65	43	13.53	40.07	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
66	43	10.40	74.16	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
67	43	10.21	55.13	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
68	43	15.09	43.36	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
69	43	13.52	40.49	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
70	43	16.30	36.86	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
71	43	12.38	69.05	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
72	43	14.90	37.66	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
73	43	10.45	71.89	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
74	43	8.06	58.92	4	2.70	0.60	0.042	0.065	0.806	2.05	0.092			
75	9	13.01	46.16	4	2.49	0.48	0.068	0.333	0.805	2.06	0.094	2.22	0.124	age gr 9
76	9	16.60	29.14	4	2.49	0.48	0.068	0.333	0.805	2.06	0.094	2.22	0.124	age gr 9
77	9	10.88	53.49	4	2.49	0.48	0.068	0.333	0.805	2.06	0.094	2.22	0.124	age gr 9
78	9	11.23	81.59	4	2.49	0.48	0.068	0.333	0.805	2.06	0.094	2.22	0.124	age gr 9
79	9	12.87	66.10	4	2.49	0.48	0.068	0.333	0.805	2.06	0.094	2.22	0.124	age gr 9
80	9	11.58	63.55	4	2.49	0.48	0.068	0.333	0.805	2.06	0.094	2.22	0.124	age gr 9
81	9	10.75	51.67	4	2.49	0.48	0.068	0.333	0.805	2.06	0.094	2.22	0.124	age gr 9
82	8	14.00	30.03	4	2.84	0.76	0.010	0.155	0.803	2.08	0.100			
83	8	12.68	85.26	4	2.84	0.76	0.010	0.155	0.803	2.08	0.100			
84	8	15.78	22.15	4	2.84	0.76	0.010	0.155	0.803	2.08	0.100			
85	44	14.02	52.67	4	2.14	0.35	0.072	0.543	0.802	2.08	0.101			
86	39	10.29	54.77	4	2.01	0.33	0.002	0.272	0.802	2.08	0.101	2.15	0.073	age gr 32
87	39	11.91	65.13	4	2.01	0.33	0.002	0.272	0.802	2.08	0.101	2.15	0.073	age gr 32
88	39	13.32	68.63	4	2.01	0.33	0.002	0.272	0.802	2.08	0.101	2.15	0.073	age gr 32
89	39	9.12	67.66	4	2.01	0.33	0.002	0.272	0.802	2.08	0.101	2.15	0.073	age gr 32
90	35	7.46	66.43	4	1.89	0.42	0.013	0.103	0.800	2.10	0.106			
91	35	12.42	65.54	4	1.89	0.42	0.013	0.103	0.800	2.10	0.106			
92	35	12.16	47.44	4	1.89	0.42	0.013	0.103	0.800	2.10	0.106			
93	35	12.14	68.69	4	1.89	0.42	0.013	0.103	0.800	2.10	0.106			
94	35	13.35	77.93	4	1.89	0.42	0.013	0.103	0.800	2.10	0.106			
95	35	9.83	50.48	4	1.89	0.42	0.013	0.103	0.800	2.10	0.106			

Table C2 continued

				Length meas.							Age meas.					
Track No.	Grain No.	Confined length (μm)	angle to C-axis (degrees)	Etch Figs.	D_{par} (μm)	D_{per} (μm)	meas.		A to Z mro	calc.		Eff. Cl (apfu)	meas.		Eff. Cl (apfu)	Comments
							Cl (apfu)	OH (apfu)		calc. D_{par} (μm)	calc. Cl (apfu)		D_{par} (μm)	Cl (apfu)		
96	33	12.58	78.68	4	2.36	0.36	0.046	0.672	0.799	2.11	0.109	2.21	0.108	age gr 30		
97	33	7.86	75.34	4	2.36	0.36	0.046	0.672	0.799	2.11	0.109	2.21	0.108	age gr 30		
98	33	11.62	55.85	4	2.36	0.36	0.046	0.672	0.799	2.11	0.109	2.21	0.108	age gr 30		
99	33	12.20	36.84	4	2.36	0.36	0.046	0.672	0.799	2.11	0.109	2.21	0.108	age gr 30		
100	33	15.96	23.96	4	2.36	0.36	0.046	0.672	0.799	2.11	0.109	2.21	0.108	age gr 30		
101	4	15.07	22.40	4	1.93	0.29	0.104	0.000	0.797	2.12	0.114	2.21	0.116	age gr 6		
102	4	13.28	25.98	4	1.93	0.29	0.104	0.000	0.797	2.12	0.114	2.21	0.116	age gr 6		
103	4	15.81	26.60	4	1.93	0.29	0.104	0.000	0.797	2.12	0.114	2.21	0.116	age gr 6		
104	4	13.12	59.23	4	1.93	0.29	0.104	0.000	0.797	2.12	0.114	2.21	0.116	age gr 6		
105	4	15.96	39.86	4	1.93	0.29	0.104	0.000	0.797	2.12	0.114	2.21	0.116	age gr 6		
106	4	12.51	87.45	4	1.93	0.29	0.104	0.000	0.797	2.12	0.114	2.21	0.116	age gr 6		
107	4	13.84	75.04	4	1.93	0.29	0.104	0.000	0.797	2.12	0.114	2.21	0.116	age gr 6		
108	11	14.89	35.36	4	2.31	0.59	0.029	0.753	0.797	2.12	0.114					
109	11	13.14	51.47	4	2.31	0.59	0.029	0.753	0.797	2.12	0.114					
110	48	12.00	39.22	4	2.12	0.40	0.087	0.275	0.796	2.13	0.115					
111	48	12.84	31.36	4	2.12	0.40	0.087	0.275	0.796	2.13	0.115					
112	40	10.88	53.11	4	3.15	1.05	0.050	0.870	0.794	2.14	0.120	2.61	0.116	age gr 31		
113	40	14.42	25.21	4	3.15	1.05	0.050	0.870	0.794	2.14	0.120	2.61	0.116	age gr 31		
114	51	12.80	59.55	4	2.09	0.57	0.070	0.001	0.785	2.21	0.142					
115	51	10.96	54.93	4	2.09	0.57	0.070	0.001	0.785	2.21	0.142					
116	50	13.01	62.07	4	3.33	0.67	0.115	0.397	0.783	2.22	0.145					
117	50	12.16	43.70	4	3.33	0.67	0.115	0.397	0.783	2.22	0.145					
118	50	13.02	70.64	4	3.33	0.67	0.115	0.397	0.783	2.22	0.145					
119	50	12.65	54.86	4	3.33	0.67	0.115	0.397	0.783	2.22	0.145					
120	36	12.26	57.77	4	1.88	0.34	0.013	0.248	0.782	2.23	0.149					
121	36	13.61	50.81	4	1.88	0.34	0.013	0.248	0.782	2.23	0.149					
122	36	9.25	86.87	4	1.88	0.34	0.013	0.248	0.782	2.23	0.149					
123	36	7.36	69.64	4	1.88	0.34	0.013	0.248	0.782	2.23	0.149					
124	36	11.93	62.00	4	1.88	0.34	0.013	0.248	0.782	2.23	0.149					
125	25	15.10	52.07	4	2.43	0.52	0.000	0.379	0.781	2.24	0.151					
126	25	14.91	64.66	4	2.43	0.52	0.000	0.379	0.781	2.24	0.151					
127	25	12.17	68.83	4	2.43	0.52	0.000	0.379	0.781	2.24	0.151					
128	25	11.24	53.67	4	2.43	0.52	0.000	0.379	0.781	2.24	0.151					
129	25	12.67	59.41	4	2.43	0.52	0.000	0.379	0.781	2.24	0.151					
130	25	12.15	66.70	4	2.43	0.52	0.000	0.379	0.781	2.24	0.151					
131	46	12.00	36.42	4	2.46	0.45	0.056	0.764	0.777	2.27	0.158					
132	46	9.98	48.34	4	2.46	0.45	0.056	0.764	0.777	2.27	0.158					
133	46	15.39	25.53	4	2.46	0.45	0.056	0.764	0.777	2.27	0.158					
134	47	14.28	39.76	4	3.86	1.15	0.025	1.163	0.776	2.27	0.161					
135	47	12.75	55.26	4	3.86	1.15	0.025	1.163	0.776	2.27	0.161					
136	34	14.16	70.27	4	2.49	0.84	0.087	1.096	0.775	2.28	0.163					
137	34	14.71	58.05	4	2.49	0.84	0.087	1.096	0.775	2.28	0.163					
138	34	16.39	39.51	4	2.49	0.84	0.087	1.096	0.775	2.28	0.163					
139	5	10.80	62.34	4	2.29	0.33	0.039	0.203	0.773	2.29	0.167					
140	5	12.83	54.45	4	2.29	0.33	0.039	0.203	0.773	2.29	0.167					
141	22	13.54	31.47	4	1.97	0.57	0.221	0.247	0.773	2.29	0.167	2.25	0.163	age gr 22		
142	22	12.26	78.85	4	1.97	0.57	0.221	0.247	0.773	2.29	0.167	2.25	0.163	age gr 22		
143	22	11.35	52.75	4	1.97	0.57	0.221	0.247	0.773	2.29	0.167	2.25	0.163	age gr 22		
144	22	15.38	68.14	4	1.97	0.57	0.221	0.247	0.773	2.29	0.167	2.25	0.163	age gr 22		
145	22	13.78	34.50	4	1.97	0.57	0.221	0.247	0.773	2.29	0.167	2.25	0.163	age gr 22		

Table C2 continued

							Length meas.					Age meas.			
Track No.	Grain No.	Confined	angle to	Etch Figs.	D _{par} (μm)	D _{per} (μm)	meas.		calc.	A to Z	calc.	Eff.	meas.	Eff.	Comments
		length (μm)	C-axis (degrees)				Cl (apfu)	OH (apfu)	mro	D _{par} (μm)	Cl (apfu)	D _{par} (μm)	Cl (apfu)		
146	22	14.42	45.82	4	1.97	0.57	0.221	0.247	0.773	2.29	0.167	2.25	0.163	age gr 22	
147	17	11.24	60.79	4	2.37	0.36	0.079	0.242	0.769	2.32	0.174	2.18	0.185	age gr 15	
148	17	10.99	45.51	4	2.37	0.36	0.079	0.242	0.769	2.32	0.174	2.18	0.185	age gr 15	
149	17	11.46	64.97	4	2.37	0.36	0.079	0.242	0.769	2.32	0.174	2.18	0.185	age gr 15	
150	17	13.08	43.93	4	2.37	0.36	0.079	0.242	0.769	2.32	0.174	2.18	0.185	age gr 15	
151	17	12.31	61.67	4	2.37	0.36	0.079	0.242	0.769	2.32	0.174	2.18	0.185	age gr 15	
152	3	14.77	29.28	4	3.10	0.46	0.070	0.831	0.768	2.32	0.176				
153	3	12.48	46.74	4	3.10	0.46	0.070	0.831	0.768	2.32	0.176				
154	3	13.05	59.96	4	3.10	0.46	0.070	0.831	0.768	2.32	0.176				
155	3	13.16	44.46	4	3.10	0.46	0.070	0.831	0.768	2.32	0.176				
156	27	10.17	84.63	4	2.36	0.28	0.041	0.414	0.767	2.33	0.179				
157	27	13.28	40.58	4	2.36	0.28	0.041	0.414	0.767	2.33	0.179				
158	27	13.85	43.24	4	2.36	0.28	0.041	0.414	0.767	2.33	0.179				
159	27	13.76	65.55	4	2.36	0.28	0.041	0.414	0.767	2.33	0.179				
160	1	12.06	88.74	4	2.76	0.72	0.174	0.546	0.759	2.38	0.194				
161	1	13.63	46.82	4	2.76	0.72	0.174	0.546	0.759	2.38	0.194				
162	1	13.49	41.96	4	2.76	0.72	0.174	0.546	0.759	2.38	0.194				
163	19	17.14	53.71	4	2.51	0.60	0.173	0.549	0.758	2.39	0.197				
164	19	9.59	70.55	4	2.51	0.60	0.173	0.549	0.758	2.39	0.197				
165	19	10.39	66.42	4	2.51	0.60	0.173	0.549	0.758	2.39	0.197				
166	19	13.13	57.78	4	2.51	0.60	0.173	0.549	0.758	2.39	0.197				
167	19	14.09	58.29	4	2.51	0.60	0.173	0.549	0.758	2.39	0.197				
168	19	10.33	85.49	4	2.51	0.60	0.173	0.549	0.758	2.39	0.197				
169	19	13.70	33.36	4	2.51	0.60	0.173	0.549	0.758	2.39	0.197				
170	42	11.39	85.86	4	2.50	0.85	0.249	0.325	0.716	2.64	0.274				
171	42	14.61	29.23	4	2.50	0.85	0.249	0.325	0.716	2.64	0.274				
172	6	12.20	58.99	4	2.67	0.60	0.129	0.596	0.714	2.65	0.277	2.58	0.272	age gr 4	
173	6	13.74	43.44	4	2.67	0.60	0.129	0.596	0.714	2.65	0.277	2.58	0.272	age gr 4	
174	6	14.83	37.95	4	2.67	0.60	0.129	0.596	0.714	2.65	0.277	2.58	0.272	age gr 4	
175	6	14.84	46.83	4	2.67	0.60	0.129	0.596	0.714	2.65	0.277	2.58	0.272	age gr 4	
176	6	12.35	51.16	4	2.67	0.60	0.129	0.596	0.714	2.65	0.277	2.58	0.272	age gr 4	
177	6	12.95	53.08	4	2.67	0.60	0.129	0.596	0.714	2.65	0.277	2.58	0.272	age gr 4	
178	18	13.69	89.92	4	3.11	0.89	0.182	0.332	0.710	2.67	0.283	2.41	0.293	age gr 16	
179	18	13.95	65.92	4	3.11	0.89	0.182	0.332	0.710	2.67	0.283	2.41	0.293	age gr 16	
180	18	12.46	87.09	4	3.11	0.89	0.182	0.332	0.710	2.67	0.283	2.41	0.293	age gr 16	
181	29	14.90	39.76	4	2.49	0.65	0.215	0.676	0.698	2.74	0.303	2.48	0.341	age gr 25	
182	29	13.01	72.45	4	2.49	0.65	0.215	0.676	0.698	2.74	0.303	2.48	0.341	age gr 25	
183	29	13.52	51.04	4	2.49	0.65	0.215	0.676	0.698	2.74	0.303	2.48	0.341	age gr 25	
184	29	13.37	66.68	4	2.49	0.65	0.215	0.676	0.698	2.74	0.303	2.48	0.341	age gr 25	
185	29	13.39	59.55	4	2.49	0.65	0.215	0.676	0.698	2.74	0.303	2.48	0.341	age gr 25	
186	29	13.63	38.68	4	2.49	0.65	0.215	0.676	0.698	2.74	0.303	2.48	0.341	age gr 25	
187	21	6.85	86.86	4	1.63	0.40	0.140	0.886	0.686	2.80	0.321	2.62	0.353	age gr 23	
188	21	9.30	68.25	4	1.63	0.40	0.140	0.886	0.686	2.80	0.321	2.62	0.353	age gr 23	
189	15	14.32	76.98	4	3.15	0.67	0.204	0.850	0.656	2.94	0.364				
190	52	14.32	46.11	4	4.11	1.12	0.255	0.862	0.629	3.05	0.400				
191	52	15.32	49.59	4	4.11	1.12	0.255	0.862	0.629	3.05	0.400				
192	52	11.97	66.71	4	4.11	1.12	0.255	0.862	0.629	3.05	0.400				
193	52	16.76	50.81	4	4.11	1.12	0.255	0.862	0.629	3.05	0.400				
194	52	14.92	33.13	4	4.11	1.12	0.255	0.862	0.629	3.05	0.400				
195	52	14.45	59.90	4	4.11	1.12	0.255	0.862	0.629	3.05	0.400				

Table C2 continued

				Length meas.						Age meas.				
Track No.	Grain No.	Confined length (μm)	angle to C-axis (degrees)	Etch Figs.	D_{par} (μm)	D_{per} (μm)	meas. Cl (apfu)	calc. OH (apfu)	A to Z mro	calc. D_{par} (μm)	Eff. Cl (apfu)	meas. D_{par} (μm)	Eff. Cl (apfu)	Comments
196	45	15.93	39.97	4	3.72	1.25	0.458	0.823	0.525	3.43	0.517	2.91	0.540	age gr 38
197	45	12.50	81.17	4	3.72	1.25	0.458	0.823	0.525	3.43	0.517	2.91	0.540	age gr 38
198	45	16.62	34.96	4	3.72	1.25	0.458	0.823	0.525	3.43	0.517	2.91	0.540	age gr 38
199	7	12.15	61.23	4	3.90	1.00	0.652	0.576	0.310	4.01	0.694	3.43		age gr 5
200	7	9.24	57.45	4	3.90	1.00	0.652	0.576	0.310	4.01	0.694	3.43		age gr 5
201	7	14.28	55.18	4	3.90	1.00	0.652	0.576	0.310	4.01	0.694	3.43		age gr 5
202	7	11.20	78.83	4	3.90	1.00	0.652	0.576	0.310	4.01	0.694	3.43		age gr 5
Ave		12.84			2.59	0.59	0.120			2.39	0.195			
SD		2.03			0.60	0.25	0.130			0.42	0.128			

APPENDIX D: Apatite elemental data in atoms per formula unit (apfu)

Tables D1 and D2 contain elemental data corresponding to the AFT age and length measurements for samples P013-12 and LHA003. For sample P013-12, EPMA elemental data were acquired as weight % oxide values (see Excel spreadsheet supplement) at the Washington State University (WSU) GeoAnalytical Lab using a JEOL JXA-8500F instrument with an accelerating voltage of 15 KV, a beam current of 20 nA, and a beam size of 5 μm due to the small grain sizes. Elemental weight % oxide values were then converted to apfu using in house software (Probecal) that uses the stoichiometric model of Ketcham (2015) to calculate OH values. For the older LHA003 sample, EPMA elemental data were provided directly as apfu values by AtoZ Inc. and these values were used to interpret the AFT data. Subsequently, it was determined that the weight % oxide values were acquired at the University of Alaska, Fairbanks, Advanced Instrumentation Laboratory using a Cameca SX50 instrument with an accelerating voltage of 20 KV, a beam current of 20 nA, and a beam size of 5 μm (see Excel spreadsheet supplement). As a cross check, the elemental values were converted to apfu values using Probecal and yielded the same kinetic parameters as the AtoZ Inc. apfu values. Thirteen elements were measured for sample P013-12 and these include: F, Cl, Na, Mg, P, S, Ca, Mn, Fe, Sr, Y, La and Ce. These same elements plus Si, Ti, Zr, Al, As, Ba, K, Br, I, Sm and Nd were measured for sample LHA003. Not all the elements measured for LHA003 were used for $r_{\text{mr}0}$ calculations because they are in low abundance and/or do not appear as variables in the original empirical $r_{\text{mr}0}$ equation of Carlson et al. (1999) (see Table D2). Elemental data are grouped by the type of measurement (age or length) and are associated with the grain number and kinetic parameters, $r_{\text{mr}0}$, eD_{par} , eCl , and measured D_{par} . Data quality can be assessed by examining the original elemental weight % totals and the elemental totals for the Ca, P, and anion site.

APPENDIX E: AFTINV parameters and thermal history results

Issler et al. (in review) give a detailed discussion of data interpretation, model boundary conditions, and AFTINV model results for samples P013-12 and LHA003. AFTINV output and plots for c-axis projected length models are listed for the two samples. C-axis projection of track lengths improves model resolution by reducing the length dispersion caused by the variation in length with track orientation (Donelick et al., 1999). The model is run in two stages and model fits to measured AFT parameters are assessed using p-values. First, a set of 300 solutions is obtained at the 0.05 significance level using a nondirected Monte Carlo scheme. In the second stage, the solution set is updated to the 0.5 significance level using a controlled random search (CRS) learning algorithm.

Model output includes information on model constraints, parameters, boundary conditions, run times, and the number of forward models required for convergence. Detailed information is provided on the exponential mean and minimum objective function (best fit solution) time-temperature histories, the upper and lower temperature limits encompassing the thermal solutions, and summary information for the Monte Carlo (0.05 level) and CRS (0.5 level) solutions (model FT age and objective function value per kinetic population, time and magnitude of maximum temperature, and calculated %R_o). Detailed information is also given for the model retention age (age of oldest track > ~ 2 μm) and the time and temperature for the last track that was fully annealed (< ~ 2 μm). The model retention age and annealing time will be similar for conditions of rapid cooling from high temperature; for more protracted and complicated heating/cooling histories, the retention age and annealing time will differ and annealing temperatures will be considerably lower due to cumulative thermal effects.

Plots include: (1) 300 acceptable Monte Carlo and CRS thermal solutions with corresponding exponential mean and minimum objective function (MOF; closest fitting) thermal histories plus temperature bounds defined by the solutions, (2) 300 predicted track length distributions for the Monte Carlo and CRS solutions, and the exponential mean and MOF track length distribution (plus envelope defined by 300 solutions) compared with the measured length data for each kinetic population, (3) histograms showing times of maximum temperature and maximum temperature for each heating/cooling cycle corresponding to the Monte Carlo and CRS solutions, (4) peak temperature versus time of peak temperature for each Monte Carlo and CRS solution per heating/cooling cycle, (5) a histogram showing the distribution of model retention ages for the Monte Carlo and CRS solutions, (6) the distribution of calculated %R_o values (using basin%Ro model; Nielsen et al., 2017) for the Monte Carlo and CRS solutions for post-depositional history and the final phase of burial/exhumation, and (7) the distribution of objective function values for the 300 Monte Carlo and CRS solutions per kinetic population.

P013-12 McParlon A-25 1075 m: Jungle Creek Fm (L Permian, ~290 Ma), %Ro=0.63±0.13, T~15 to 35 deg C
MOD#ID:Tstyle = 10, dep 295-285 Ma, HP1 max HR=CR=5; 2nd HP 115/102.5-0 Ma; max HR=CR=3, CR=20 from 5 Ma
KETCHAM ET AL ANNEALING MODEL FOR B2 CHLORAPATITE

AFTINV v. 6.10 (August 22, 2019)
INTEL VISUAL FORTRAN 19 FOR WINDOWS 2019
(UPDATE 3) QUICKWIN APPLICATION
PROGRAMMER: DALE ISSLER, GSC CALGARY, CANADA
PHONE: 403-470-1903
EMAIL: dale.issler@canada.ca

INVERSION CONTROL PARAMETERS:

MONTE CARLO RANDOM SEARCH TECHNIQUE USED AT 0.05 SIGNIFICANCE LEVEL (95% CONFIDENCE)
CONTROLLED RANDOM SEARCH TECHNIQUE USED AT 0.5 SIGNIFICANCE LEVEL (50% CONFIDENCE)

LENGTH DATA CORRECTED TO C-AXIS PARALLEL ORIENTATION
NUMBER OF RETAINED SOLUTIONS = 300
NUMBER OF MODEL TIME STEPS (M) = 149
NUMBER OF PARAMETERS (M+1) = 150
NUMERICAL ACCURACY (%), ACUR = 0.1000000
COMPONENT TIME STEP LENGTH (DELSUB) = 2.500
OBJ FN (2=CHI2; 3=K-S; 4=KUIPER) = 3
THERMAL HISTORY GENERATION USING UNIFORM RANDOM DEVIATES (IRSEL=1)

KINETIC POPULATION # 1
CONVERGENCE TOLERANCE (0.050 SIGNIFICANCE) = 0.3015230
OF STANDARD DEVIATIONS TO FIT AGE = 2.0 (0.05 SIGNIFICANCE)
CONVERGENCE TOLERANCE (0.5 SIGNIFICANCE) = 0.1837356
OF STANDARD DEVIATIONS TO FIT AGE = 0.674 (0.5 SIGNIFICANCE)

KINETIC POPULATION # 2
CONVERGENCE TOLERANCE (0.050 SIGNIFICANCE) = 0.1709520
OF STANDARD DEVIATIONS TO FIT AGE = 2.0 (0.05 SIGNIFICANCE)
CONVERGENCE TOLERANCE (0.5 SIGNIFICANCE) = 0.1041711
OF STANDARD DEVIATIONS TO FIT AGE = 0.674 (0.5 SIGNIFICANCE)

KINETIC POPULATION # 3
CONVERGENCE TOLERANCE (0.050 SIGNIFICANCE) = 0.3490312
OF STANDARD DEVIATIONS TO FIT AGE = 2.0 (0.05 SIGNIFICANCE)
CONVERGENCE TOLERANCE (0.5 SIGNIFICANCE) = 0.2126852
OF STANDARD DEVIATIONS TO FIT AGE = 0.674 (0.5 SIGNIFICANCE)

COMBINED TRACK POPULATIONS:
CONVERGENCE TOLERANCE (0.050 SIGNIFICANCE) = 0.1382050
CONVERGENCE TOLERANCE (0.5 SIGNIFICANCE) = 8.4216423E-02

AFT AGE BASED ON LA-ICP-MS METHOD

KINETIC POPULATION # 1 (DETRITAL)
MEASURED AFT AGE = 51.25
SIGMA OF ERROR IN MEASURED AGE = 5.74

KINETIC POPULATION # 2 (DETRITAL)
MEASURED AFT AGE = 117.31
SIGMA OF ERROR IN MEASURED AGE = 7.75

KINETIC POPULATION # 3 (DETRITAL)
MEASURED AFT AGE = 251.60
SIGMA OF ERROR IN MEASURED AGE = 37.09

TOTAL NUMBER OF TRACKS MEASURED = 94
TOTAL NUMBER OF TRACKS MODELLED = 94
INITIAL RANDOM NUMBER GENERATOR SEED = 958
SYSTEM RANDOM NUMBER GENERATOR RAN(ISEED)
EXPANSION FACTOR (ALPHA) = 1.300
REPOSITION FACTOR FOR EXPLICIT BOUND (DELTA) = 0.0010

KINETIC POPULATION # 1
C1 RANGE: -0.1000 - 0.1340
REPRESENTATIVE C1 VALUE = 0.0500
RMRO = 0.82248
NUMBER OF TRACK LENGTHS = 19
ORIGINAL MEAN TRACK LENGTH = 16.298
INITIAL C-AXIS PROJECTED TRACK LENGTH = 16.725

KINETIC POPULATION # 2
 C1 RANGE: 0.1340 - 0.3120
 REPRESENTATIVE C1 VALUE = 0.2400
 RMRO = 0.73508
 NUMBER OF TRACK LENGTHS = 61
 ORIGINAL MEAN TRACK LENGTH = 16.501
 INITIAL C-AXIS PROJECTED TRACK LENGTH = 16.915

KINETIC POPULATION # 3
 C1 RANGE: 0.3120 - 0.5500
 REPRESENTATIVE C1 VALUE = 0.5500
 RMRO = 0.49092
 NUMBER OF TRACK LENGTHS = 14
 ORIGINAL MEAN TRACK LENGTH = 16.833
 INITIAL C-AXIS PROJECTED TRACK LENGTH = 17.225

EMPIRICAL MODEL OF AGE REDUCTION
 TRACK LENGTH REDUCTION COEFFICIENTS:
 -19.84399986 0.38951001 -51.25299835 -7.64230013 -0.12327000 -11.98799992
 COMPONENT VARIANCE COEFFICIENTS (CUBIC POLYNOMIAL):
 C1 C2 C3 C4

	WILLETT MEAN LENGTH			
0.78990000	0.00000000	0.00303500	-0.00229830	
KETCHAM ET AL. MEAN LENGTH				
7.46400023	-0.87330002	0.02858000	0.00000000	
KETCHAM ET AL. C-AXIS PROJECTED LENGTH				
2.31200004	-0.24420001	0.00845200	0.00000000	
KETCHAM ET AL. REDUCED MEAN LENGTH				
0.45719999	-0.88150001	0.49470001	0.00000000	
KETCHAM ET AL. REDUCED C-AXIS PROJECTED				
0.10810000	-0.16419999	0.10520000	0.00000000	

	GEOLOGIC TIME (MA)	MODEL TIME (MY)	TEMPERATURE BOUNDS (DEG C)		RATE BOUNDS (DEG C/MY)		TIME INTERVAL
			LOWER	UPPER	COOLING	HEATING	
1	600.00	0.00	245.00	250.00	5.00	5.00	10.00
2	590.00	10.00	195.00	250.00	5.00	5.00	10.00
3	580.00	20.00	145.00	250.00	5.00	5.00	10.00
4	570.00	30.00	95.00	250.00	5.00	5.00	10.00
5	560.00	40.00	45.00	250.00	5.00	5.00	10.00
6	550.00	50.00	0.00	250.00	5.00	5.00	10.00
7	540.00	60.00	0.00	250.00	5.00	5.00	10.00
8	530.00	70.00	0.00	250.00	5.00	5.00	10.00
9	520.00	80.00	0.00	250.00	5.00	5.00	10.00
10	510.00	90.00	0.00	250.00	5.00	5.00	10.00
11	500.00	100.00	0.00	250.00	5.00	5.00	10.00
12	490.00	110.00	0.00	250.00	5.00	5.00	10.00
13	480.00	120.00	0.00	250.00	5.00	5.00	10.00
14	470.00	130.00	0.00	250.00	5.00	5.00	10.00
15	460.00	140.00	0.00	250.00	5.00	5.00	10.00
16	450.00	150.00	0.00	250.00	5.00	5.00	10.00
17	440.00	160.00	0.00	250.00	5.00	5.00	10.00
18	430.00	170.00	0.00	250.00	5.00	5.00	10.00
19	420.00	180.00	0.00	250.00	5.00	5.00	10.00
20	410.00	190.00	0.00	250.00	5.00	5.00	10.00
21	400.00	200.00	0.00	250.00	5.00	5.00	10.00
22	390.00	210.00	0.00	250.00	5.00	5.00	10.00
23	380.00	220.00	0.00	250.00	5.00	5.00	10.00
24	370.00	230.00	0.00	250.00	5.00	5.00	10.00
25	360.00	240.00	0.00	250.00	5.00	5.00	10.00
26	350.00	250.00	0.00	250.00	5.00	5.00	10.00
27	340.00	260.00	0.00	250.00	5.00	5.00	10.00
28	330.00	270.00	0.00	250.00	5.00	5.00	10.00
29	320.00	280.00	0.00	250.00	5.00	5.00	10.00
30	310.00	290.00	0.00	230.00	5.00	5.00	10.00
31	300.00	300.00	0.00	180.00	5.00	5.00	5.00
32	295.00	305.00	0.00	155.00	5.00	5.00	2.50
33	292.50	307.50	0.00	155.00	5.00	5.00	2.50
34	290.00	310.00	0.00	155.00	5.00	5.00	2.50
35	287.50	312.50	0.00	155.00	5.00	5.00	2.50
36	285.00	315.00	0.00	155.00	5.00	5.00	2.50
37	282.50	317.50	0.00	155.00	5.00	5.00	2.50
38	280.00	320.00	0.00	155.00	5.00	5.00	2.50
39	277.50	322.50	0.00	155.00	5.00	5.00	2.50
40	275.00	325.00	0.00	155.00	5.00	5.00	2.50
41	272.50	327.50	0.00	155.00	5.00	5.00	2.50
42	270.00	330.00	0.00	155.00	5.00	5.00	2.50
43	267.50	332.50	0.00	155.00	5.00	5.00	2.50
44	265.00	335.00	0.00	155.00	5.00	5.00	2.50

45	262.50	337.50	0.00	155.00	5.00	5.00	2.50
46	260.00	340.00	0.00	155.00	5.00	5.00	2.50
47	257.50	342.50	0.00	155.00	5.00	5.00	2.50
48	255.00	345.00	0.00	155.00	5.00	5.00	2.50
49	252.50	347.50	0.00	155.00	5.00	5.00	2.50
50	250.00	350.00	0.00	155.00	5.00	5.00	2.50
51	247.50	352.50	0.00	155.00	5.00	5.00	2.50
52	245.00	355.00	0.00	155.00	5.00	5.00	2.50
53	242.50	357.50	0.00	155.00	5.00	5.00	2.50
54	240.00	360.00	0.00	155.00	5.00	5.00	2.50
55	237.50	362.50	0.00	155.00	5.00	5.00	2.50
56	235.00	365.00	0.00	155.00	5.00	5.00	2.50
57	232.50	367.50	0.00	155.00	5.00	5.00	2.50
58	230.00	370.00	0.00	155.00	5.00	5.00	2.50
59	227.50	372.50	0.00	155.00	5.00	5.00	2.50
60	225.00	375.00	0.00	155.00	5.00	5.00	2.50
61	222.50	377.50	0.00	155.00	5.00	5.00	2.50
62	220.00	380.00	0.00	155.00	5.00	5.00	2.50
63	217.50	382.50	0.00	155.00	5.00	5.00	2.50
64	215.00	385.00	0.00	155.00	5.00	5.00	2.50
65	212.50	387.50	0.00	155.00	5.00	5.00	2.50
66	210.00	390.00	0.00	155.00	5.00	5.00	2.50
67	207.50	392.50	0.00	155.00	5.00	5.00	2.50
68	205.00	395.00	0.00	155.00	5.00	5.00	2.50
69	202.50	397.50	0.00	155.00	5.00	5.00	2.50
70	200.00	400.00	0.00	155.00	5.00	5.00	2.50
71	197.50	402.50	0.00	155.00	5.00	5.00	2.50
72	195.00	405.00	0.00	155.00	5.00	5.00	2.50
73	192.50	407.50	0.00	155.00	5.00	5.00	2.50
74	190.00	410.00	0.00	155.00	5.00	5.00	2.50
75	187.50	412.50	0.00	155.00	5.00	5.00	2.50
76	185.00	415.00	0.00	155.00	5.00	5.00	2.50
77	182.50	417.50	0.00	155.00	5.00	5.00	2.50
78	180.00	420.00	0.00	155.00	5.00	5.00	2.50
79	177.50	422.50	0.00	155.00	5.00	5.00	2.50
80	175.00	425.00	0.00	155.00	5.00	5.00	2.50
81	172.50	427.50	0.00	155.00	5.00	5.00	2.50
82	170.00	430.00	0.00	155.00	5.00	5.00	2.50
83	167.50	432.50	0.00	155.00	5.00	5.00	2.50
84	165.00	435.00	0.00	155.00	5.00	5.00	2.50
85	162.50	437.50	0.00	155.00	5.00	5.00	2.50
86	160.00	440.00	0.00	155.00	5.00	5.00	2.50
87	157.50	442.50	0.00	155.00	5.00	5.00	2.50
88	155.00	445.00	0.00	155.00	5.00	5.00	2.50
89	152.50	447.50	0.00	155.00	5.00	5.00	2.50
90	150.00	450.00	0.00	155.00	5.00	5.00	2.50
91	147.50	452.50	0.00	155.00	5.00	5.00	2.50
92	145.00	455.00	0.00	155.00	5.00	5.00	2.50
93	142.50	457.50	0.00	155.00	5.00	5.00	2.50
94	140.00	460.00	0.00	155.00	5.00	5.00	2.50
95	137.50	462.50	0.00	155.00	5.00	5.00	2.50
96	135.00	465.00	0.00	155.00	5.00	5.00	2.50
97	132.50	467.50	0.00	155.00	5.00	5.00	2.50
98	130.00	470.00	0.00	155.00	5.00	5.00	2.50
99	127.50	472.50	0.00	155.00	5.00	5.00	2.50
100	125.00	475.00	0.00	155.00	5.00	5.00	2.50
101	122.50	477.50	0.00	155.00	5.00	5.00	2.50
102	120.00	480.00	0.00	155.00	5.00	5.00	2.50
103	117.50	482.50	0.00	142.50	5.00	5.00	2.50
104	115.00	485.00	0.00	130.00	3.00	3.00	2.50
105	112.50	487.50	0.00	130.00	3.00	3.00	2.50
106	110.00	490.00	0.00	130.00	3.00	3.00	2.50
107	107.50	492.50	0.00	130.00	3.00	3.00	2.50
108	105.00	495.00	0.00	130.00	3.00	3.00	2.50
109	102.50	497.50	0.00	130.00	3.00	3.00	2.50
110	100.00	500.00	0.00	130.00	3.00	3.00	2.50
111	97.50	502.50	0.00	130.00	3.00	3.00	2.50
112	95.00	505.00	0.00	130.00	3.00	3.00	2.50
113	92.50	507.50	0.00	130.00	3.00	3.00	2.50
114	90.00	510.00	0.00	130.00	3.00	3.00	2.50
115	87.50	512.50	0.00	130.00	3.00	3.00	2.50
116	85.00	515.00	0.00	130.00	3.00	3.00	2.50
117	82.50	517.50	0.00	130.00	3.00	3.00	2.50
118	80.00	520.00	0.00	130.00	3.00	3.00	2.50
119	77.50	522.50	0.00	130.00	3.00	3.00	2.50
120	75.00	525.00	0.00	130.00	3.00	3.00	2.50
121	72.50	527.50	0.00	130.00	3.00	3.00	2.50
122	70.00	530.00	0.00	130.00	3.00	3.00	2.50

123	67.50	532.50	0.00	130.00	3.00	3.00	2.50
124	65.00	535.00	0.00	130.00	3.00	3.00	2.50
125	62.50	537.50	0.00	130.00	3.00	3.00	2.50
126	60.00	540.00	0.00	130.00	3.00	3.00	2.50
127	57.50	542.50	0.00	130.00	3.00	3.00	2.50
128	55.00	545.00	0.00	130.00	3.00	3.00	2.50
129	52.50	547.50	0.00	130.00	3.00	3.00	2.50
130	50.00	550.00	0.00	130.00	3.00	3.00	2.50
131	47.50	552.50	0.00	130.00	3.00	3.00	2.50
132	45.00	555.00	0.00	130.00	3.00	3.00	2.50
133	42.50	557.50	0.00	130.00	3.00	3.00	2.50
134	40.00	560.00	0.00	130.00	3.00	3.00	2.50
135	37.50	562.50	0.00	130.00	3.00	3.00	2.50
136	35.00	565.00	0.00	130.00	3.00	3.00	2.50
137	32.50	567.50	0.00	130.00	3.00	3.00	2.50
138	30.00	570.00	0.00	130.00	3.00	3.00	2.50
139	27.50	572.50	0.00	130.00	3.00	3.00	2.50
140	25.00	575.00	0.00	130.00	3.00	3.00	2.50
141	22.50	577.50	0.00	130.00	3.00	3.00	2.50
142	20.00	580.00	0.00	130.00	3.00	3.00	2.50
143	17.50	582.50	0.00	130.00	3.00	3.00	2.50
144	15.00	585.00	0.00	130.00	3.00	3.00	2.50
145	12.50	587.50	0.00	130.00	3.00	3.00	2.50
146	10.00	590.00	0.00	130.00	3.00	3.00	2.50
147	7.50	592.50	0.00	130.00	3.00	3.00	2.50
148	5.00	595.00	0.00	130.00	20.00	3.00	2.50
149	2.50	597.50	7.50	85.00	20.00	3.00	2.50
150	0.00	600.00	15.00	35.00			

HEATING/COOLING SELECTION SUMMARY:

TSTYLE	TIME RANGE	# OF EVENTS	NHP	NCP	MINIMUM HEATING	MINIMUM COOLING	THERMAL PEAK	LOWER TEMP LIMIT DEG C	THERMAL MINIMUM	UPPER TEMP LIMIT DEG C	TEMP MIN TIME INTERVAL (MA)	TYPE OF THERMAL HISTORY
10	600.0- 0.0	2	2	-3	0.10	0.10	1 2	130.0 95.0	1 2	30.0 40.0	295.0- 285.0 115.0- 102.5	COOL-HEAT-COOL-HEAT-COOL

TIME RANGE FOR RANDOM SELECTION OF INITIAL MODEL POINT:
600.00 - 0.00 MA (TIME STEPS 1 TO 150)

%RO = 0.63 +/- 0.130 IS AN EXTRA CONSTRAINT FOR POST-DEPOSITIONAL THERMAL HISTORIES
%RO = 0.60 +/- 0.150 IS AN EXTRA CONSTRAINT FOR POST-EXHUMATION THERMAL HISTORIES
USE BASIN%RO MODEL
%RO CALCULATIONS BEGIN AT DEPOSITION AT APPROXIMATELY 290.00 Ma
%RO CALCULATIONS BEGIN AT ONSET OF REBURIAL AT APPROXIMATELY 110.00 Ma

MEASURED TRACK LENGTH DATA:

KINETIC POPULATION # 1; 19 MEASURED LENGTHS (MICRONS)

CONVENTIONAL MEAN	C-AXIS PROJECTED MEAN	ANGLE TO C-AXIS DEGREES
7.76	11.91	60.42
10.02	12.33	54.30
10.11	12.69	68.56
11.14	13.08	55.07
11.13	13.14	58.22
11.26	13.35	64.38
13.17	13.47	18.22
12.32	13.50	41.15
11.79	13.55	57.09
11.44	13.66	83.89
11.61	13.74	78.61
13.44	14.83	72.28
14.25	14.87	38.11
14.18	15.02	49.13
14.33	15.24	56.68
14.71	15.35	45.80
15.19	15.54	33.95
14.96	15.68	58.05
14.97	15.77	68.08

MEAN OF CONVENTIONAL LENGTHS = 12.51 + OR - 2.07 MICRONS
MEAN OF C-AXIS PROJECTED LENGTHS = 14.04 + OR - 1.20 MICRONS

MEASURED TRACK LENGTH DATA:
 KINETIC POPULATION # 2; 61 MEASURED LENGTHS (MICRONS)

CONVENTIONAL MEAN	C-AXIS PROJECTED MEAN	ANGLE TO C-AXIS DEGREES
9.41	11.71	47.07
9.26	11.78	52.08
10.95	12.12	30.86
10.06	12.15	47.60
9.67	12.32	63.24
9.66	12.35	64.81
9.88	12.36	58.91
7.47	12.38	75.50
9.98	12.38	57.26
9.67	12.51	73.85
8.84	12.51	75.73
10.25	12.54	56.57
10.02	12.60	66.40
7.90	12.62	81.56
10.06	12.66	68.18
9.94	12.71	78.33
9.16	12.78	84.14
9.07	12.88	87.73
9.50	12.89	87.80
11.05	13.00	54.43
11.02	13.01	55.57
12.02	13.05	34.19
11.19	13.09	54.21
11.18	13.18	58.60
11.54	13.23	50.59
10.85	13.24	75.60
11.87	13.27	44.02
11.54	13.35	55.57
11.43	13.38	60.19
11.16	13.40	72.07
12.66	13.45	31.30
12.53	13.50	35.91
11.59	13.59	66.16
11.87	13.59	56.39
11.84	13.62	58.86
11.75	13.62	62.35
13.20	13.66	23.86
12.46	13.79	48.11
12.07	13.90	66.93
12.07	13.97	72.58
13.11	14.11	42.14
13.39	14.11	34.09
13.87	14.28	25.76
13.16	14.49	59.37
13.10	14.51	62.86
13.65	14.51	42.35
14.10	14.84	42.41
13.97	14.94	53.12
14.70	15.21	37.81
14.44	15.26	52.74
15.06	15.34	27.90
14.35	15.37	68.60
14.26	15.38	78.39
14.65	15.62	78.55
14.87	15.68	65.71
15.23	15.80	51.75
15.26	15.95	67.86
15.67	15.96	35.99
15.93	16.20	39.48
16.79	16.87	36.23
17.11	17.12	20.98

MEAN OF CONVENTIONAL LENGTHS = 12.04 + OR - 2.26 MICRONS
 MEAN OF C-AXIS PROJECTED LENGTHS = 13.77 + OR - 1.32 MICRONS

MEASURED TRACK LENGTH DATA:
 KINETIC POPULATION # 3; 14 MEASURED LENGTHS (MICRONS)

CONVENTIONAL MEAN	C-AXIS PROJECTED MEAN	ANGLE TO C-AXIS DEGREES
8.16	11.64	52.41
9.26	11.84	54.02

5.89	12.17	76.29
9.04	12.43	72.44
9.43	12.43	71.70
10.87	12.83	52.54
11.53	13.73	89.38
12.56	13.88	49.04
13.11	14.33	52.37
13.50	14.73	59.89
13.91	14.76	45.43
14.07	15.11	60.63
14.31	15.18	53.41
14.85	15.63	60.53

MEAN OF CONVENTIONAL LENGTHS = 11.46 + OR - 2.74 MICRONS
 MEAN OF C-AXIS PROJECTED LENGTHS = 13.62 + OR - 1.37 MICRONS

NUMBER OF FORWARD RANDOM TRIALS, ITER = 366876
 KINETIC POP# 1: MAX OBJ FUNCTION = 0.301390
 KINETIC POP# 2: MAX OBJ FUNCTION = 0.170405
 KINETIC POP# 3: MAX OBJ FUNCTION = 0.347726
 KINETIC POP# 1: MIN OBJ FUNCTION = 0.168973; SOLUTION # 1
 KINETIC POP# 2: MIN OBJ FUNCTION = 0.104560; SOLUTION # 290
 KINETIC POP# 3: MIN OBJ FUNCTION = 0.195596; SOLUTION # 1
 SOLUTION # 1; OBJ FUNCTION SUM: 0.533889
 SOLUTION # 290; OBJ FUNCTION SUM: 0.594197
 SOLUTION # 1; OBJ FUNCTION SUM: 0.533889
 MIN OBJ SOLUTION: SOLUTION # 288

CONVERGENCE AT 0.050 SIGNIFICANCE LEVEL
 TOTAL NUMBER OF SOLUTIONS: 300
 NUMBER OF 0.5 SOLUTIONS: 0
 STOP DATE - MONTH: 9 DAY: 10 YEAR: 2019
 STOP TIME : 9 HRS 19 MIN 2 S
 TOTAL EXECUTION TIME = 0.074597 HOURS OR 4.4758 MINUTES
 # OF TIME-TEMP ERRORS AND RETRIED SOLUTIONS IN TGEN2 = 12852.000000000

KINETIC POP# 1: MAX OBJ FUNCTION = 0.183728
 KINETIC POP# 2: MAX OBJ FUNCTION = 0.103646
 KINETIC POP# 3: MAX OBJ FUNCTION = 0.211178
 KINETIC POP# 1: MIN OBJ FUNCTION = 0.121212; SOLUTION # 21
 KINETIC POP# 2: MIN OBJ FUNCTION = 0.068476; SOLUTION # 249
 KINETIC POP# 3: MIN OBJ FUNCTION = 0.146428; SOLUTION # 50
 SOLUTION # 21; OBJ FUNCTION SUM: 0.383777
 SOLUTION # 249; OBJ FUNCTION SUM: 0.390618
 SOLUTION # 50; OBJ FUNCTION SUM: 0.355655
 MIN OBJ SOLUTION: SOLUTION # 231

CONVERGENCE AT 0.5 SIGNIFICANCE LEVEL
 NUMBER OF FORWARD MODELS: 528597
 TOTAL NUMBER OF SOLUTIONS: 300
 NUMBER OF 0.5 SOLUTIONS: 300
 STOP DATE - MONTH: 9 DAY: 10 YEAR: 2019
 STOP TIME : 9 HRS 26 MIN 39 S
 TOTAL EXECUTION TIME = 0.201290 HOURS OR 12.0774 MINUTES

P013-12 McParlon A-25 1075 m: Jungle Creek Fm (L Permian, ~290 Ma), %Ro=0.63±0.13, T=15 to 35 deg C
 MOD#1D:Tstyle = 10, dep 295-285 Ma, HP1 max HR=CR=5; 2nd HP 115/102.5-0 Ma; max HR=CR=3, CR=20 from 5 Ma
 KETCHAM ET AL ANNEALING MODEL FOR B2 CHLORAPATITE
 AFTINV v. 6.10 (August 22, 2019)
 INTEL VISUAL FORTRAN 19 FOR WINDOWS 2019
 (UPDATE 3) QUICKWIN APPLICATION

MONTE CARLO RANDOM SEARCH METHOD

MINIMUM OBJECTIVE SOLUTION: LOWEST COMBINED OBJECTIVE FUNCTION

MODEL RESULTS AT 0.0500 SIGNIFICANCE LEVEL

TIME (MY)	TIME (MA)	EXP MEAN TEMPERATURE (DEG C)	EXP MEAN RATE (DEG/MY)	MIN OBJ TEMPERATURE (DEG C)	MIN OBJ RATE (DEG/MY)	LOWER TEMP BOUND	UPPER TEMP BOUND
0.00	600.00	249.99		250.00		247.39	250.00
10.00	590.00	249.95	-0.004	250.00	0.000	243.37	250.00
20.00	580.00	249.90	-0.005	250.00	0.000	238.63	250.00
30.00	570.00	249.73	-0.017	250.00	0.000	225.84	250.00
40.00	560.00	249.53	-0.020	250.00	0.000	214.84	250.00
50.00	550.00	249.28	-0.025	250.00	0.000	211.48	250.00
60.00	540.00	248.92	-0.036	249.55	-0.045	204.43	250.00
70.00	530.00	248.31	-0.062	240.58	-0.898	190.05	250.00
80.00	520.00	247.57	-0.074	239.26	-0.132	178.85	250.00
90.00	510.00	246.29	-0.127	234.48	-0.478	175.63	250.00
100.00	500.00	244.75	-0.155	225.58	-0.890	151.21	250.00
110.00	490.00	242.66	-0.209	220.91	-0.467	131.23	250.00
120.00	480.00	240.12	-0.254	205.60	-1.531	129.58	250.00
130.00	470.00	237.28	-0.285	197.35	-0.825	122.93	250.00
140.00	460.00	233.93	-0.335	189.87	-0.748	109.13	250.00
150.00	450.00	229.77	-0.415	174.19	-1.568	94.23	250.00
160.00	440.00	225.63	-0.415	170.57	-0.363	92.35	250.00
170.00	430.00	220.26	-0.537	163.82	-0.675	79.68	250.00
180.00	420.00	213.75	-0.651	152.47	-1.134	77.73	250.00
190.00	410.00	207.02	-0.672	118.72	-3.375	64.32	250.00
200.00	400.00	199.96	-0.707	115.57	-0.315	62.40	249.54
210.00	390.00	190.34	-0.962	94.24	-2.134	56.02	245.73
220.00	380.00	177.96	-1.237	74.45	-1.979	45.97	227.89
230.00	370.00	163.69	-1.428	69.77	-0.467	33.21	208.81
240.00	360.00	147.61	-1.608	58.32	-1.146	30.56	191.61
250.00	350.00	133.32	-1.429	48.43	-0.989	20.57	182.93
260.00	340.00	109.00	-2.432	41.65	-0.678	16.05	151.50
270.00	330.00	92.29	-1.671	33.13	-0.851	9.35	139.99
280.00	320.00	74.73	-1.756	18.06	-1.508	5.66	115.39
290.00	310.00	53.25	-2.149	14.61	-0.345	3.42	99.60
300.00	300.00	30.87	-2.238	13.38	-0.123	0.84	63.57
305.00	295.00	22.71	-1.631	12.58	-0.159	0.00	54.28
307.50	292.50	20.07	-1.057	11.83	-0.302	0.00	50.25
310.00	290.00	20.19	0.048	13.09	0.503	0.00	54.36
312.50	287.50	21.56	0.548	15.00	0.766	0.00	64.26
315.00	285.00	24.97	1.366	16.57	0.625	0.00	66.43
317.50	282.50	29.15	1.671	18.84	0.911	0.00	67.47
320.00	280.00	32.59	1.376	19.48	0.256	0.00	70.41
322.50	277.50	36.60	1.606	23.45	1.586	0.00	73.80
325.00	275.00	40.62	1.609	27.83	1.752	0.00	81.35
327.50	272.50	44.05	1.371	32.48	1.862	0.00	85.95
330.00	270.00	46.92	1.145	34.31	0.732	0.00	86.51
332.50	267.50	49.76	1.138	36.95	1.056	0.00	87.76
335.00	265.00	52.96	1.279	40.59	1.455	0.00	89.85
337.50	262.50	56.24	1.314	40.93	0.135	0.00	92.38
340.00	260.00	59.06	1.128	42.37	0.578	0.00	94.94
342.50	257.50	62.06	1.198	43.82	0.579	0.00	99.37
345.00	255.00	65.04	1.194	44.77	0.378	0.00	102.36
347.50	252.50	68.21	1.268	45.90	0.453	0.00	106.08
350.00	250.00	71.67	1.384	47.32	0.570	0.00	113.44
352.50	247.50	74.88	1.281	55.81	3.395	0.00	115.18
355.00	245.00	77.59	1.087	56.09	0.111	0.00	115.81
357.50	242.50	81.37	1.513	61.01	1.970	0.00	124.75
360.00	240.00	84.40	1.211	62.94	0.772	0.00	125.24
362.50	237.50	87.17	1.106	64.24	0.518	0.00	126.13
365.00	235.00	90.48	1.327	65.75	0.605	0.00	130.21
367.50	232.50	93.09	1.043	68.21	0.983	0.00	131.56
370.00	230.00	96.27	1.273	71.08	1.149	0.29	133.11
372.50	227.50	99.06	1.114	71.66	0.231	8.53	134.03
375.00	225.00	101.98	1.171	73.62	0.784	10.69	135.00
377.50	222.50	105.08	1.240	75.14	0.605	14.40	141.89
380.00	220.00	107.81	1.091	76.84	0.680	14.67	143.08
382.50	217.50	110.35	1.016	78.25	0.565	14.97	148.02
385.00	215.00	112.61	0.903	79.68	0.572	17.09	140.62
387.50	212.50	114.58	0.788	81.72	0.818	17.86	141.67
390.00	210.00	117.43	1.140	89.52	3.119	21.77	143.98
392.50	207.50	120.23	1.119	96.31	2.716	23.97	146.27
395.00	205.00	122.51	0.912	98.10	0.718	26.28	147.40
397.50	202.50	124.65	0.858	98.71	0.242	27.88	146.38
400.00	200.00	125.97	0.527	100.65	0.777	28.45	147.33
402.50	197.50	127.02	0.421	102.69	0.817	32.18	145.48
405.00	195.00	128.46	0.576	103.60	0.363	33.17	148.16
407.50	192.50	129.12	0.261	110.02	2.568	35.43	150.62
410.00	190.00	129.69	0.229	110.97	0.380	38.37	146.30
412.50	187.50	130.17	0.193	112.22	0.499	44.34	145.47
415.00	185.00	130.41	0.098	121.26	3.616	44.94	148.59
417.50	182.50	130.34	-0.030	122.39	0.453	48.54	145.54
420.00	180.00	130.13	-0.083	124.67	0.910	51.81	146.44
422.50	177.50	129.52	-0.243	126.53	0.747	54.72	149.21
425.00	175.00	128.37	-0.461	127.51	0.390	58.03	145.84
427.50	172.50	127.30	-0.429	130.89	1.353	58.41	148.11
430.00	170.00	126.01	-0.517	135.66	1.908	63.28	144.08
432.50	167.50	125.22	-0.314	141.31	2.258	63.92	145.19
435.00	165.00	124.28	-0.376	140.12	-0.476	73.10	145.62
437.50	162.50	123.34	-0.378	139.57	-0.221	74.24	145.25

TRACK LENGTH OBJ FUNCTION = 0.128073 AGE OBJ FUNCTION = 0.002298
 LENGTH GOF PROBABILITY = 0.2518
 AGE GOF PROBABILITY = 0.9785
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.097895 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.024619

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 43):
 CALCULATED AFT AGE = 119.5 MA MODEL RETENTION AGE = 429.6 MA
 OBJ FUNCTION = 0.125509
 TRACK ANNEALING TIME = 422.1 MA ANNEALING TEMPERATURE = 152.83 DEG C

TRACK LENGTH OBJ FUNCTION = 0.057536 AGE OBJ FUNCTION = 0.024324
 LENGTH GOF PROBABILITY = 0.9851
 AGE GOF PROBABILITY = 0.7760
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.125509 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.019186

AVE AFT AGE = 120.3 MA

AFT KINETIC POPULATION # 3

MAXIMUM OBJECTIVE FUNCTION = 0.347726

EXPONENTIAL MEAN TEMPERATURE SOLUTION:
 OBSERVED AFT AGE = 251.6 MA CALCULATED AFT AGE = 199.5 MA
 MODEL RETENTION AGE = 504.8 MA OBJ FUNCTION = 0.244979
 TRACK ANNEALING TIME = 447.3 MA ANNEALING TEMPERATURE = 227.74 DEG C

TRACK LENGTH OBJ FUNCTION = 0.205617 AGE OBJ FUNCTION = 0.244979
 LENGTH GOF PROBABILITY = 0.5440
 AGE GOF PROBABILITY = 0.1604
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.199872 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.050264

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 43):
 CALCULATED AFT AGE = 248.1 MA MODEL RETENTION AGE = 543.7 MA
 OBJ FUNCTION = 0.256251
 TRACK ANNEALING TIME = 488.7 MA ANNEALING TEMPERATURE = 218.99 DEG C

TRACK LENGTH OBJ FUNCTION = 0.142431 AGE OBJ FUNCTION = 0.016265
 LENGTH GOF PROBABILITY = 0.9185
 AGE GOF PROBABILITY = 0.9257
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.256251 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.039173

AVE AFT AGE = 227.9 MA

RETENTION AGES FOR ALL THERMAL SOLUTIONS:

MODEL #	KINETIC POPULATION# 1			KINETIC POPULATION# 2			KINETIC POPULATION# 3		
	RET AGE	ANNEAL TIME	ANNEAL TEMP	RET AGE	ANNEAL TIME	ANNEAL TEMP	RET AGE	ANNEAL TIME	ANNEAL TEMP
1	142.5	15.0	70.76	456.5	434.0	139.65	548.2	518.2	233.49
2	125.0	122.5	116.51	441.2	441.2	170.62	520.5	480.5	223.40
3	162.5	47.5	93.98	421.7	189.2	139.96	519.0	474.0	220.81
4	145.0	47.5	96.81	411.2	163.7	138.31	536.7	506.7	235.24
5	57.5	45.0	103.29	439.5	177.0	140.38	509.4	481.9	242.01
6	150.0	70.0	104.12	388.0	183.0	143.16	459.8	434.8	238.11
7	165.0	57.5	92.82	392.7	192.7	145.54	490.0	467.5	243.48
8	172.5	25.0	91.72	394.3	191.8	136.30	487.6	457.6	238.98
9	132.5	45.0	103.35	414.7	409.7	155.96	515.2	442.7	210.23
10	135.0	40.0	99.72	376.2	376.2	167.54	446.2	406.2	227.78
11	80.0	65.0	104.31	408.4	190.9	138.82	511.9	476.9	233.62
12	162.5	35.0	101.29	422.6	412.6	145.38	500.2	475.2	236.67
13	137.5	15.0	79.20	388.8	388.8	167.83	490.0	457.5	237.13
14	140.0	52.5	101.35	401.3	398.8	162.33	492.5	452.5	225.42
15	132.5	60.0	101.71	368.4	365.9	162.63	484.2	459.2	236.35
16	162.5	40.0	102.99	405.6	185.6	137.37	466.9	444.4	237.40
17	165.0	52.5	103.94	362.5	357.5	161.83	468.4	423.4	224.81
18	142.5	32.5	99.17	455.6	163.1	142.44	561.5	529.0	235.66
19	82.5	45.0	84.28	414.5	394.5	142.24	481.8	464.3	243.87
20	172.5	30.0	103.11	398.5	391.0	144.58	477.3	447.3	233.34
21	150.0	32.5	85.36	411.7	181.7	126.12	512.6	492.6	240.12
22	75.0	55.0	100.33	402.5	177.5	138.49	513.8	431.2	207.38
23	179.4	46.9	103.72	367.1	182.1	120.68	483.4	413.4	208.36
24	140.0	30.0	91.70	388.4	378.4	148.04	520.8	480.8	227.13
25	155.0	52.5	97.54	345.0	345.0	170.09	438.9	388.9	226.05
26	75.0	42.5	94.70	448.1	190.6	139.04	537.5	505.0	230.95
27	175.0	52.5	103.16	446.2	446.2	169.42	515.0	482.5	231.40
28	160.0	57.5	102.17	353.1	180.6	139.20	483.7	458.7	235.87
29	155.0	65.0	98.85	355.0	352.5	161.95	441.4	401.4	219.58
30	127.5	52.5	101.01	410.6	158.1	123.32	535.0	490.0	234.75
31	132.5	130.0	123.20	463.2	450.7	147.60	506.2	488.7	240.62
32	160.0	50.0	103.79	402.5	400.0	157.45	459.5	439.5	240.89
33	150.0	37.5	86.56	403.7	188.7	133.02	501.2	466.2	233.13
34	135.0	50.0	104.59	382.5	382.5	175.95	463.0	428.0	232.41
35	147.0	67.0	105.56	423.7	413.7	146.67	531.9	506.9	236.01
36	142.5	20.0	61.63	405.0	405.0	177.34	454.4	431.9	243.90
37	125.0	122.5	118.40	401.3	386.3	142.56	528.3	503.3	237.86
38	167.5	160.0	104.98	416.7	186.7	142.99	521.0	478.5	221.95
39	82.5	35.0	81.67	360.3	215.3	130.52	441.1	401.1	227.68
40	135.0	47.5	102.17	453.1	448.1	158.27	558.6	536.1	239.40
41	160.0	67.5	101.09	422.1	182.1	142.18	534.5	474.5	215.50
42	125.0	40.0	95.95	504.8	499.8	146.57	585.7	563.2	238.05
43	145.0	52.5	102.68	429.6	422.1	152.83	543.7	488.7	218.99
44	65.0	42.5	96.35	417.2	407.2	140.30	503.8	476.3	237.63
45	125.0	37.5	94.26	436.5	146.5	136.88	533.5	503.5	236.75
46	165.0	85.0	79.99	410.0	185.0	134.51	526.3	481.3	225.63
47	160.0	45.0	105.49	410.6	178.1	137.18	510.6	490.6	240.31
48	82.5	52.5	90.28	395.4	232.9	130.47	484.0	461.5	235.48
49	144.2	54.2	104.10	409.8	402.3	155.24	556.5	514.0	226.16
50	140.0	37.5	96.72	435.0	412.5	136.15	515.1	482.6	224.59
51	162.5	60.0	104.41	383.7	178.8	138.07	458.3	430.8	239.10

268	137.5	40.0	96.03	434.3	171.8	139.84	512.0	489.5	239.11
269	160.0	32.5	90.49	450.0	152.5	100.81	537.0	519.5	242.10
270	147.5	47.5	103.40	432.2	182.2	132.94	500.2	477.7	240.89
271	77.5	57.5	99.24	405.5	195.5	141.09	515.2	480.2	233.27
272	150.0	15.0	84.71	421.0	386.0	120.67	480.9	458.4	242.46
273	80.0	35.0	75.38	414.9	187.4	118.83	517.8	472.8	224.56
274	157.5	25.0	88.58	399.8	399.8	167.34	561.2	468.7	217.66
275	137.5	32.5	100.06	462.5	155.0	143.64	600.0	600.0	247.39
276	152.5	42.5	92.48	380.0	377.5	166.98	464.4	439.4	236.55
277	167.5	160.0	97.54	367.5	367.5	169.95	458.9	441.4	247.14
278	77.5	45.0	83.26	397.5	395.0	162.48	507.5	472.5	232.52
279	150.0	47.5	91.32	390.0	175.0	141.55	527.1	494.6	231.97
280	127.5	37.5	92.50	431.7	421.7	147.28	528.0	493.0	228.73
281	157.5	35.0	99.20	406.7	381.7	137.24	529.1	459.1	218.48
282	65.0	42.5	94.87	417.3	417.3	166.94	488.1	458.1	234.00
283	157.5	52.5	97.91	360.0	197.5	137.77	441.8	419.3	238.75
284	162.5	47.5	93.74	400.4	385.4	146.16	489.9	447.4	223.18
285	135.0	30.0	83.13	498.7	496.2	159.27	580.1	547.6	231.52
286	162.5	52.5	95.35	410.0	407.5	163.73	505.4	470.4	234.28
287	127.5	127.5	134.37	438.7	438.7	167.26	532.7	490.2	227.60
288	142.5	42.5	100.45	422.4	162.4	133.73	486.2	438.7	205.12
289	152.5	40.0	92.11	375.5	373.0	163.83	456.3	433.8	235.42
290	132.5	27.5	86.42	425.4	412.9	143.13	512.8	472.8	229.83
291	175.0	47.5	90.49	365.6	363.1	161.08	436.3	401.3	232.27
292	140.0	27.5	79.80	398.7	398.7	168.38	477.8	442.8	233.58
293	125.0	32.5	97.93	404.5	387.0	130.12	487.1	459.6	237.55
294	167.5	40.0	85.89	398.2	388.2	148.83	455.9	430.9	241.10
295	135.0	32.5	95.81	437.7	407.7	136.09	517.7	495.2	236.38
296	130.0	22.5	88.45	418.7	418.7	168.01	517.2	472.2	222.48
297	147.5	50.0	101.41	408.3	390.8	147.04	526.1	481.1	224.63
298	130.0	130.0	131.88	485.3	480.3	159.40	568.6	538.6	235.60
299	130.0	57.5	105.51	437.3	429.8	151.94	524.4	481.9	231.81
300	80.0	27.5	82.86	403.6	208.6	137.66	492.0	462.0	242.09

RETENTION AGE DISTRIBUTION FOR ALL ACCEPTABLE SOLUTIONS:

RETENTION AGES: KINETIC POPULATION # 1

AGE BIN (MA)	RELATIVE FREQUENCY
50.0 - 60.0	0.003
60.0 - 70.0	0.033
70.0 - 80.0	0.097
80.0 - 90.0	0.067
90.0 - 100.0	0.000
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.097
130.0 - 140.0	0.153
140.0 - 150.0	0.143
150.0 - 160.0	0.200
160.0 - 170.0	0.163
170.0 - 180.0	0.043
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.000
410.0 - 420.0	0.000
420.0 - 430.0	0.000
430.0 - 440.0	0.000
440.0 - 450.0	0.000
450.0 - 460.0	0.000
460.0 - 470.0	0.000
470.0 - 480.0	0.000
480.0 - 490.0	0.000
490.0 - 500.0	0.000
500.0 - 510.0	0.000
510.0 - 520.0	0.000
520.0 - 530.0	0.000
530.0 - 540.0	0.000
540.0 - 550.0	0.000
550.0 - 560.0	0.000
560.0 - 570.0	0.000
570.0 - 580.0	0.000
580.0 - 590.0	0.000
590.0 - 600.0	0.000

MODEL RETENTION AGE MODE # 1
 AGE RANGE: 50.0 - 90.0 Ma
 NUMBER OF AGES = 60
 AVE MODEL RETENTION AGE = 77.15 +/- 6.71 MA

MODEL RETENTION AGE MODE # 2
 AGE RANGE: 120.0 - 180.0 Ma
 NUMBER OF AGES = 240
 AVE MODEL RETENTION AGE = 150.04 +/- 14.14 MA

RETENTION AGES: KINETIC POPULATION # 2

AGE BIN (MA)	RELATIVE FREQUENCY
50.0 - 60.0	0.000
60.0 - 70.0	0.000
70.0 - 80.0	0.000
80.0 - 90.0	0.000
90.0 - 100.0	0.000
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.000
130.0 - 140.0	0.000
140.0 - 150.0	0.000
150.0 - 160.0	0.000
160.0 - 170.0	0.000
170.0 - 180.0	0.000
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.013
350.0 - 360.0	0.027
360.0 - 370.0	0.063
370.0 - 380.0	0.053
380.0 - 390.0	0.097
390.0 - 400.0	0.110
400.0 - 410.0	0.163
410.0 - 420.0	0.143
420.0 - 430.0	0.107
430.0 - 440.0	0.083
440.0 - 450.0	0.057
450.0 - 460.0	0.030
460.0 - 470.0	0.023
470.0 - 480.0	0.007
480.0 - 490.0	0.017
490.0 - 500.0	0.003
500.0 - 510.0	0.003
510.0 - 520.0	0.000
520.0 - 530.0	0.000
530.0 - 540.0	0.000
540.0 - 550.0	0.000
550.0 - 560.0	0.000
560.0 - 570.0	0.000
570.0 - 580.0	0.000
580.0 - 590.0	0.000
590.0 - 600.0	0.000

AVE MODEL RETENTION AGE = 409.44 +/- 29.69 MA

RETENTION AGES: KINETIC POPULATION # 3

AGE BIN (MA)	RELATIVE FREQUENCY
50.0 - 60.0	0.000
60.0 - 70.0	0.000
70.0 - 80.0	0.000
80.0 - 90.0	0.000
90.0 - 100.0	0.000
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.000
130.0 - 140.0	0.000
140.0 - 150.0	0.000
150.0 - 160.0	0.000
160.0 - 170.0	0.000
170.0 - 180.0	0.000
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.007
410.0 - 420.0	0.003
420.0 - 430.0	0.010

430.0 - 440.0	0.030
440.0 - 450.0	0.050
450.0 - 460.0	0.060
460.0 - 470.0	0.053
470.0 - 480.0	0.073
480.0 - 490.0	0.103
490.0 - 500.0	0.080
500.0 - 510.0	0.087
510.0 - 520.0	0.127
520.0 - 530.0	0.087
530.0 - 540.0	0.090
540.0 - 550.0	0.040
550.0 - 560.0	0.033
560.0 - 570.0	0.023
570.0 - 580.0	0.013
580.0 - 590.0	0.013
590.0 - 600.0	0.017

AVE MODEL RETENTION AGE = 501.71 +/- 38.26 MA

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.63 +/- 0.130; %RO FOR EXP MEAN SOLUTION = 0.70
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.73 +/- 0.016
 MIN %RO = 0.70; MAX %RO = 0.76
 %RO FOR MIN OBJ SOLUTION = 0.74

POST-EXHUMATION THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.60 +/- 0.150; %RO FOR EXP MEAN SOLUTION = 0.58
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.59 +/- 0.017
 MIN %RO = 0.57; MAX %RO = 0.63
 %RO FOR MIN OBJ SOLUTION = 0.61

BINNED %RO VALUES FOR POST-DEPOSITIONAL HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.03	0.000
0.03 - 0.05	0.000
0.05 - 0.08	0.000
0.08 - 0.10	0.000
0.10 - 0.12	0.000
0.12 - 0.15	0.000
0.15 - 0.18	0.000
0.17 - 0.20	0.000
0.20 - 0.23	0.000
0.23 - 0.25	0.000
0.25 - 0.27	0.000
0.28 - 0.30	0.000
0.30 - 0.32	0.000
0.33 - 0.35	0.000
0.35 - 0.37	0.000
0.38 - 0.40	0.000
0.40 - 0.42	0.000
0.43 - 0.45	0.000
0.45 - 0.47	0.000
0.47 - 0.50	0.000
0.50 - 0.52	0.000
0.53 - 0.55	0.000
0.55 - 0.57	0.000
0.57 - 0.60	0.000
0.60 - 0.62	0.000
0.62 - 0.65	0.000
0.65 - 0.68	0.000
0.68 - 0.70	0.000
0.70 - 0.72	0.427
0.73 - 0.75	0.427
0.75 - 0.77	0.147
0.78 - 0.80	0.000
0.80 - 0.82	0.000
0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 134.67 DEG C; MAXIMUM PEAK TEMPERATURE = 150.62 DEG C

PEAK TEMPERATURE: AVERAGE = 141.78 STAND DEV = 2.978

MAX TEMP BIN	RELATIVE FREQUENCY
100.00 - 102.00	0.000
102.00 - 104.00	0.000
104.00 - 106.00	0.000
106.00 - 108.00	0.000
108.00 - 110.00	0.000
110.00 - 112.00	0.000
112.00 - 114.00	0.000
114.00 - 116.00	0.000
116.00 - 118.00	0.000
118.00 - 120.00	0.000
120.00 - 122.00	0.000
122.00 - 124.00	0.000
124.00 - 126.00	0.000
126.00 - 128.00	0.000
128.00 - 130.00	0.000
130.00 - 132.00	0.000
132.00 - 134.00	0.000
134.00 - 136.00	0.027
136.00 - 138.00	0.073
138.00 - 140.00	0.187
140.00 - 142.00	0.267

142.00 - 144.00	0.187
144.00 - 146.00	0.190
146.00 - 148.00	0.050
148.00 - 150.00	0.017
150.00 - 152.00	0.003
152.00 - 154.00	0.000
154.00 - 156.00	0.000
156.00 - 158.00	0.000
158.00 - 160.00	0.000
160.00 - 162.00	0.000
162.00 - 164.00	0.000
164.00 - 166.00	0.000
166.00 - 168.00	0.000
168.00 - 170.00	0.000
170.00 - 172.00	0.000
172.00 - 174.00	0.000
174.00 - 176.00	0.000
176.00 - 178.00	0.000
178.00 - 180.00	0.000
180.00 - 182.00	0.000
182.00 - 184.00	0.000
184.00 - 186.00	0.000
186.00 - 188.00	0.000
188.00 - 190.00	0.000
190.00 - 192.00	0.000
192.00 - 194.00	0.000
194.00 - 196.00	0.000
196.00 - 198.00	0.000
198.00 - 200.00	0.000

MINIMUM PEAK TIME = 130.00 MA; MAXIMUM PEAK TIME = 217.50 MA

TIME OF PEAK TEMP: AVERAGE = 177.77 STAND DEV = 18.706

TIME AT MAX TEMP	RELATIVE FREQUENCY
129.38 - 130.62	0.003
130.62 - 131.88	0.000
131.88 - 133.12	0.013
133.12 - 134.38	0.000
134.38 - 135.62	0.007
135.62 - 136.88	0.000
136.88 - 138.12	0.023
138.12 - 139.38	0.000
139.38 - 140.62	0.000
140.62 - 141.88	0.000
141.88 - 143.12	0.007
143.12 - 144.38	0.000
144.38 - 145.62	0.017
145.62 - 146.88	0.000
146.88 - 148.12	0.010
148.12 - 149.38	0.000
149.38 - 150.62	0.030
150.62 - 151.88	0.000
151.88 - 153.12	0.027
153.12 - 154.38	0.000
154.38 - 155.62	0.013
155.62 - 156.88	0.000
156.88 - 158.12	0.023
158.12 - 159.38	0.000
159.38 - 160.62	0.023
160.62 - 161.88	0.000
161.88 - 163.12	0.027
163.12 - 164.38	0.000
164.38 - 165.62	0.040
165.62 - 166.88	0.000
166.88 - 168.12	0.027
168.12 - 169.38	0.000
169.38 - 170.62	0.023
170.62 - 171.88	0.000
171.88 - 173.12	0.040
173.12 - 174.38	0.000
174.38 - 175.62	0.050
175.62 - 176.88	0.000
176.88 - 178.12	0.060
178.12 - 179.38	0.000
179.38 - 180.62	0.063
180.62 - 181.88	0.000
181.88 - 183.12	0.050
183.12 - 184.38	0.000
184.38 - 185.62	0.067
185.62 - 186.88	0.000
186.88 - 188.12	0.053
188.12 - 189.38	0.000
189.38 - 190.62	0.047
190.62 - 191.88	0.000
191.88 - 193.12	0.040
193.12 - 194.38	0.000
194.38 - 195.62	0.057
195.62 - 196.88	0.000
196.88 - 198.12	0.037
198.12 - 199.38	0.000
199.38 - 200.62	0.033
200.62 - 201.88	0.000
201.88 - 203.12	0.037
203.12 - 204.38	0.000
204.38 - 205.62	0.017
205.62 - 206.88	0.000
206.88 - 208.12	0.020
208.12 - 209.38	0.000
209.38 - 210.62	0.010
210.62 - 211.88	0.000
211.88 - 213.12	0.000
213.12 - 214.38	0.000
214.38 - 215.62	0.003
215.62 - 216.88	0.000
216.88 - 218.12	0.003

DEPOSITION (ALL SOLUTIONS):
 TIME RANGE FOR THERMAL MINIMUM: 285.0 - 295.0 Ma
 TIME OF MINIMUM TEMPERATURE: AVERAGE = 290.3 STAND DEV = 3.5
 TEMPERATURE RANGE FOR THERMAL MINIMUM: 0.0 - 30.0 deg C
 MINIMUM TEMPERATURE: AVERAGE = 10.7 STAND DEV = 11.7

REBURIAL (ALL SOLUTIONS):
 TIME RANGE FOR THERMAL MINIMUM: 102.5 - 115.0 Ma
 TIME OF MINIMUM TEMPERATURE: AVERAGE = 109.2 STAND DEV = 4.3
 TEMPERATURE RANGE FOR THERMAL MINIMUM: 28.8 - 40.0 deg C
 MINIMUM TEMPERATURE: AVERAGE = 39.8 STAND DEV = 1.0

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 1
 AVERAGE OF OBJ FNS= 0.25356 STAND DEV = 0.03135

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0000
0.060 - 0.070	0.0000
0.070 - 0.080	0.0000
0.080 - 0.090	0.0000
0.090 - 0.100	0.0000
0.100 - 0.110	0.0000
0.110 - 0.120	0.0000
0.120 - 0.130	0.0000
0.130 - 0.140	0.0000
0.140 - 0.150	0.0000
0.150 - 0.160	0.0000
0.160 - 0.170	0.0033
0.170 - 0.180	0.0000
0.180 - 0.190	0.0233
0.190 - 0.200	0.0367
0.200 - 0.210	0.0333
0.210 - 0.220	0.0700
0.220 - 0.230	0.0933
0.230 - 0.240	0.0833
0.240 - 0.250	0.0833
0.250 - 0.260	0.1033
0.260 - 0.270	0.0867
0.270 - 0.280	0.1133
0.280 - 0.290	0.1333
0.290 - 0.300	0.1233
0.300 - 0.310	0.0133
0.310 - 0.320	0.0000
0.320 - 0.330	0.0000
0.330 - 0.340	0.0000
0.340 - 0.350	0.0000
0.350 - 0.360	0.0000
0.360 - 0.370	0.0000
0.370 - 0.380	0.0000
0.380 - 0.390	0.0000
0.390 - 0.400	0.0000

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 2
 AVERAGE OF OBJ FNS= 0.14255 STAND DEV = 0.01821

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0000
0.060 - 0.070	0.0000
0.070 - 0.080	0.0000
0.080 - 0.090	0.0000
0.090 - 0.100	0.0000
0.100 - 0.110	0.0367
0.110 - 0.120	0.1100
0.120 - 0.130	0.1433
0.130 - 0.140	0.1500
0.140 - 0.150	0.1567
0.150 - 0.160	0.1833
0.160 - 0.170	0.2067
0.170 - 0.180	0.0133
0.180 - 0.190	0.0000
0.190 - 0.200	0.0000

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 3
 AVERAGE OF OBJ FNS= 0.26800 STAND DEV = 0.04129

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0000
0.060 - 0.070	0.0000
0.070 - 0.080	0.0000
0.080 - 0.090	0.0000
0.090 - 0.100	0.0000
0.100 - 0.110	0.0000

0.110 - 0.120 0.0000
0.120 - 0.130 0.0000
0.130 - 0.140 0.0000
0.140 - 0.150 0.0000
0.150 - 0.160 0.0000
0.160 - 0.170 0.0000
0.170 - 0.180 0.0000
0.180 - 0.190 0.0000
0.190 - 0.200 0.0100
0.200 - 0.210 0.0567
0.210 - 0.220 0.0567
0.220 - 0.230 0.0933
0.230 - 0.240 0.0900
0.240 - 0.250 0.0900
0.250 - 0.260 0.0700
0.260 - 0.270 0.0933
0.270 - 0.280 0.0800
0.280 - 0.290 0.0467
0.290 - 0.300 0.0600
0.300 - 0.310 0.0400
0.310 - 0.320 0.0533
0.320 - 0.330 0.0633
0.330 - 0.340 0.0533
0.340 - 0.350 0.0433
0.350 - 0.360 0.0000
0.360 - 0.370 0.0000
0.370 - 0.380 0.0000
0.380 - 0.390 0.0000
0.390 - 0.400 0.0000

CONTROLLED RANDOM SEARCH TECHNIQUE

MINIMUM OBJECTIVE SOLUTION: LOWEST COMBINED OBJECTIVE FUNCTION

MODEL RESULTS AT 0.5000 SIGNIFICANCE LEVEL

TIME (MY)	TIME (MA)	EXP MEAN TEMPERATURE (DEG C)	EXP MEAN RATE (DEG/MY)	MIN OBJ TEMPERATURE (DEG C)	MIN OBJ RATE (DEG/MY)	LOWER BOUND TEMP	UPPER BOUND TEMP
0.00	600.00	249.99		249.98		249.96	250.00
10.00	590.00	249.94	-0.005	249.92	-0.006	249.86	249.99
20.00	580.00	249.85	-0.009	249.86	-0.006	249.68	249.97
30.00	570.00	249.40	-0.046	249.27	-0.059	248.79	249.90
40.00	560.00	248.80	-0.060	248.92	-0.035	247.49	249.78
50.00	550.00	248.12	-0.068	248.32	-0.060	246.64	249.59
60.00	540.00	246.87	-0.125	246.80	-0.152	244.67	249.25
70.00	530.00	244.38	-0.249	244.23	-0.257	240.43	247.72
80.00	520.00	241.31	-0.307	240.87	-0.336	235.45	246.21
90.00	510.00	236.57	-0.474	235.17	-0.570	228.13	243.94
100.00	500.00	230.86	-0.571	229.04	-0.613	219.34	241.68
110.00	490.00	222.46	-0.840	219.37	-0.967	206.04	240.87
120.00	480.00	220.21	-0.225	220.33	0.096	201.10	236.93
130.00	470.00	211.81	-0.840	211.94	-0.839	187.29	230.33
140.00	460.00	202.34	-0.946	188.78	-2.316	171.50	221.59
150.00	450.00	193.85	-0.849	178.90	-0.989	157.31	215.01
160.00	440.00	187.30	-0.655	171.00	-0.790	143.28	214.92
170.00	430.00	174.56	-1.274	155.69	-1.531	124.75	198.50
180.00	420.00	162.49	-1.207	147.02	-0.867	112.85	185.74
190.00	410.00	149.84	-1.266	135.04	-1.198	95.49	173.22
200.00	400.00	138.60	-1.124	121.68	-1.336	79.01	162.59
210.00	390.00	122.34	-1.626	105.42	-1.626	76.80	145.99
220.00	380.00	112.24	-1.009	91.82	-1.359	64.57	133.16
230.00	370.00	98.35	-1.389	79.10	-1.272	67.29	118.64
240.00	360.00	87.12	-1.123	71.01	-0.809	53.80	106.48
250.00	350.00	76.02	-1.110	63.67	-0.734	44.32	93.81
260.00	340.00	64.32	-1.170	49.79	-1.388	43.96	89.66
270.00	330.00	53.28	-1.104	42.91	-0.688	34.88	73.93
280.00	320.00	41.22	-1.206	33.89	-0.902	23.00	66.13
290.00	310.00	29.37	-1.184	26.42	-0.746	17.75	45.98
300.00	300.00	15.26	-1.411	15.41	-1.101	8.10	28.27
305.00	295.00	10.32	-0.987	10.87	-0.908	3.94	19.59
307.50	292.50	8.43	-0.758	8.70	-0.871	3.59	17.06
310.00	290.00	7.67	-0.303	7.23	-0.586	3.73	17.27
312.50	287.50	8.13	0.185	7.85	0.248	3.90	18.29
315.00	285.00	9.02	0.354	8.89	0.414	4.33	20.28
317.50	282.50	10.45	0.575	10.16	0.511	5.03	23.49
320.00	280.00	11.72	0.506	11.13	0.385	5.60	26.67
322.50	277.50	13.18	0.584	12.36	0.493	6.70	30.02
325.00	275.00	15.28	0.840	14.14	0.711	7.78	34.01
327.50	272.50	16.71	0.573	15.19	0.423	8.42	37.49
330.00	270.00	18.68	0.787	17.05	0.741	9.49	41.48
332.50	267.50	20.49	0.722	18.63	0.632	10.30	45.77
335.00	265.00	22.85	0.947	20.79	0.865	11.37	50.65
337.50	262.50	25.84	1.195	24.11	1.327	13.12	53.38
340.00	260.00	28.10	0.905	26.69	1.035	14.34	54.15
342.50	257.50	30.55	0.977	29.39	1.080	15.34	56.97
345.00	255.00	33.22	1.069	32.36	1.188	17.60	59.46
347.50	252.50	35.60	0.951	33.76	0.557	20.10	66.89
350.00	250.00	38.66	1.226	37.48	1.487	22.22	69.71
352.50	247.50	41.32	1.065	40.78	1.323	23.52	72.37
355.00	245.00	43.55	0.889	43.39	1.043	25.26	73.93
357.50	242.50	46.16	1.047	46.68	1.317	29.57	76.17
360.00	240.00	48.75	1.035	49.92	1.294	33.87	79.20
362.50	237.50	52.78	1.614	55.72	2.320	37.76	80.61
365.00	235.00	56.55	1.504	59.71	1.597	40.13	86.04
367.50	232.50	60.00	1.381	62.70	1.193	42.94	90.50
370.00	230.00	63.93	1.571	65.71	1.208	46.32	94.52
372.50	227.50	66.62	1.076	68.29	1.028	48.90	98.23
375.00	225.00	70.38	1.507	73.66	2.152	51.76	99.91
377.50	222.50	72.43	0.820	74.73	0.425	54.53	101.45
380.00	220.00	75.62	1.276	77.11	0.954	58.81	105.24
382.50	217.50	78.02	0.958	80.22	1.245	62.06	104.97
385.00	215.00	81.29	1.309	82.60	0.951	64.66	108.59
387.50	212.50	83.77	0.992	83.60	0.400	66.12	112.64
390.00	210.00	84.98	0.484	83.31	-0.117	67.93	117.79
392.50	207.50	87.89	1.165	84.18	0.348	71.20	122.87
395.00	205.00	91.17	1.310	86.41	0.891	74.91	126.50

397.50	202.50	94.92	1.502	91.48	2.026	78.10	129.55
400.00	200.00	98.38	1.383	95.42	1.576	81.63	132.52
402.50	197.50	101.47	1.238	96.02	0.239	83.22	138.38
405.00	195.00	105.74	1.705	98.32	0.921	85.87	143.44
407.50	192.50	108.73	1.198	100.45	0.852	86.91	147.25
410.00	190.00	113.13	1.759	109.15	3.480	96.53	140.64
412.50	187.50	117.73	1.839	110.26	0.446	101.80	140.78
415.00	185.00	121.81	1.635	116.70	2.573	108.44	136.28
417.50	182.50	125.22	1.361	121.25	1.821	111.52	138.39
420.00	180.00	129.03	1.524	125.61	1.746	116.53	139.44
422.50	177.50	131.01	0.792	129.17	1.423	120.59	139.66
425.00	175.00	132.26	0.501	128.73	-0.177	123.18	140.50
427.50	172.50	134.75	0.995	134.24	2.207	115.98	143.88
430.00	170.00	134.67	-0.031	134.20	-0.016	113.68	142.92
432.50	167.50	135.05	0.152	135.75	0.619	110.90	142.96
435.00	165.00	134.36	-0.277	135.92	0.068	107.08	139.62
437.50	162.50	134.05	-0.123	136.43	0.203	102.48	137.88
440.00	160.00	132.85	-0.481	134.90	-0.613	98.41	140.02
442.50	157.50	131.15	-0.681	133.07	-0.730	95.66	138.54
445.00	155.00	129.01	-0.854	130.37	-1.082	92.96	136.74
447.50	152.50	127.44	-0.627	128.88	-0.595	89.24	133.77
450.00	150.00	127.08	-0.145	129.89	0.405	82.91	134.28
452.50	147.50	123.84	-1.298	125.32	-1.829	80.60	133.53
455.00	145.00	120.04	-1.519	119.65	-2.269	77.21	130.84
457.50	142.50	117.05	-1.199	115.95	-1.479	74.57	130.94
460.00	140.00	114.16	-1.155	112.91	-1.218	72.03	130.00
462.50	137.50	110.92	-1.294	110.04	-1.146	70.21	130.00
465.00	135.00	106.59	-1.733	104.87	-2.066	68.75	118.26
467.50	132.50	103.91	-1.073	103.35	-0.611	65.01	115.04
470.00	130.00	99.74	-1.667	99.51	-1.535	61.79	110.21
472.50	127.50	94.57	-2.068	94.41	-2.040	59.57	104.12
475.00	125.00	88.73	-2.336	87.26	-2.860	57.38	98.49
477.50	122.50	80.87	-3.145	79.76	-2.999	55.65	89.29
480.00	120.00	72.40	-3.388	71.31	-3.381	51.29	79.40
482.50	117.50	62.33	-4.027	60.47	-4.338	47.64	69.61
485.00	115.00	50.99	-4.537	48.74	-4.692	39.30	58.78
487.50	112.50	49.44	-0.621	49.04	0.120	39.40	54.30
490.00	110.00	46.09	-1.341	45.66	-1.349	40.00	51.09
492.50	107.50	45.91	-0.071	42.25	-1.367	42.00	52.61
495.00	105.00	44.99	-0.366	40.00	-0.899	39.77	54.44
497.50	102.50	41.69	-1.321	43.59	1.435	36.46	61.12
500.00	100.00	48.28	2.636	49.01	2.171	41.40	66.29
502.50	97.50	53.18	1.961	51.73	1.085	44.32	72.87
505.00	95.00	56.39	1.282	55.25	1.408	47.75	79.30
507.50	92.50	59.58	1.275	58.76	1.405	51.21	84.93
510.00	90.00	62.75	1.270	62.31	1.422	52.65	91.45
512.50	87.50	66.29	1.413	68.50	2.473	54.67	92.28
515.00	85.00	69.86	1.430	74.03	2.212	59.63	94.54
517.50	82.50	72.51	1.059	78.36	1.733	61.09	97.32
520.00	80.00	75.23	1.087	78.45	0.035	62.35	101.41
522.50	77.50	77.49	0.906	78.72	0.108	64.37	105.26
525.00	75.00	80.12	1.051	80.59	0.750	66.60	106.96
527.50	72.50	83.09	1.187	81.78	0.476	70.20	109.43
530.00	70.00	85.61	1.011	83.67	0.755	73.29	109.76
532.50	67.50	89.24	1.452	88.26	1.837	79.47	106.66
535.00	65.00	92.54	1.320	92.40	1.653	83.34	105.41
537.50	62.50	94.89	0.938	94.75	0.940	85.57	105.71
540.00	60.00	97.55	1.064	97.47	1.090	90.07	104.78
542.50	57.50	100.25	1.082	100.61	1.255	95.63	104.78
545.00	55.00	101.57	0.525	101.97	0.543	97.71	104.98
547.50	52.50	102.12	0.220	102.25	0.116	95.56	104.40
550.00	50.00	102.80	0.272	103.54	0.512	92.05	104.91
552.50	47.50	102.37	-0.169	103.65	0.044	87.64	105.87
555.00	45.00	99.88	-0.998	100.68	-1.188	87.05	103.09
557.50	42.50	96.97	-1.162	97.56	-1.245	85.86	101.75
560.00	40.00	94.19	-1.111	92.60	-1.987	83.89	99.93
562.50	37.50	91.59	-1.042	88.71	-1.555	80.68	98.69
565.00	35.00	89.57	-0.809	87.67	-0.415	78.59	95.82
567.50	32.50	86.73	-1.137	84.32	-1.340	76.93	92.16
570.00	30.00	84.07	-1.062	81.64	-1.073	75.00	89.68
572.50	27.50	82.13	-0.778	78.57	-1.227	73.71	87.64
575.00	25.00	79.25	-1.152	76.03	-1.017	70.71	83.36
577.50	22.50	75.76	-1.395	73.11	-1.166	69.70	79.02
580.00	20.00	73.66	-0.840	71.81	-0.522	67.76	77.15
582.50	17.50	70.03	-1.451	66.88	-1.973	63.96	73.64
585.00	15.00	67.87	-0.865	65.11	-0.708	61.13	72.39
587.50	12.50	65.36	-1.001	62.30	-1.124	60.07	69.55
590.00	10.00	63.74	-0.650	61.40	-0.360	57.11	67.29
592.50	7.50	61.08	-1.062	59.12	-0.909	53.45	65.34
595.00	5.00	58.53	-1.023	55.94	-1.273	51.48	63.28
597.50	2.50	51.67	-2.743	50.19	-2.300	44.12	58.88
600.00	0.00	27.33	-9.735	26.71	-9.393	24.05	31.37

EXPONENTIAL MEAN: TIME OF DEPOSITION = 290.0 Ma
EXPONENTIAL MEAN: TIME OF REBURIAL = 102.5 Ma

MINIMUM OBJ SOLUTION: TIME OF DEPOSITION = 290.0 Ma
MINIMUM OBJ SOLUTION: TIME OF REBURIAL = 105.0 Ma

SEARCH FOR MAXIMUM TEMPERATURE BETWEEN 285.00 - 115.00 MA

ALL SOLUTIONS ARE AT 0.5000 SIGNIFICANCE LEVEL

%RO MODEL: BASIN%RO

MODEL #	KIN POP# 1 CALCULATED AFT AGE (MA)	KIN POP# 2 CALCULATED AFT AGE (MA)	KIN POP# 3 CALCULATED AFT AGE (MA)	TIME OF MAXIMUM TEMP (MA)	MAXIMUM TEMP (DEG C)	KIN POP# 1 OBJECTIVE FUNCTION	KIN POP# 2 OBJECTIVE FUNCTION	KIN POP# 3 OBJECTIVE FUNCTION	%RO POST-DEP	%RO POST-EXH
1	49.32	119.28	233.45	172.50	134.17	0.136236	0.088382	0.171214	0.713	0.579
2	47.96	118.96	234.38	160.00	134.17	0.156233	0.100773	0.171401	0.709	0.578

TRACK LENGTH OBJ FUNCTION = 0.137561 AGE OBJ FUNCTION = 0.004725
 LENGTH GOF PROBABILITY = 0.8373
 AGE GOF PROBABILITY = 0.9862
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.122211 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.026862
 %RO GOF PROBABILITY (POST-DEPOSITION) = 0.1746
 %RO GOF PROBABILITY (POST-EXHUMATION) = 0.7487

AVE AFT AGE = 50.7 MA

AFT KINETIC POPULATION # 2

MAXIMUM OBJECTIVE FUNCTION = 0.103646

EXPONENTIAL MEAN TEMPERATURE SOLUTION:
 OBSERVED AFT AGE = 117.3 MA CALCULATED AFT AGE = 119.1 MA
 MODEL RETENTION AGE = 419.5 MA OBJ FUNCTION = 0.074419
 TRACK ANNEALING TIME = 397.0 MA ANNEALING TEMPERATURE = 131.23 DEG C

TRACK LENGTH OBJ FUNCTION = 0.074419 AGE OBJ FUNCTION = 0.035381
 LENGTH GOF PROBABILITY = 0.8757
 AGE GOF PROBABILITY = 0.8188
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.067609 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.016156

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 163):
 CALCULATED AFT AGE = 120.2 MA MODEL RETENTION AGE = 432.8 MA
 OBJ FUNCTION = 0.069289
 TRACK ANNEALING TIME = 417.8 MA ANNEALING TEMPERATURE = 146.55 DEG C

TRACK LENGTH OBJ FUNCTION = 0.067100 AGE OBJ FUNCTION = 0.056598
 LENGTH GOF PROBABILITY = 0.9388
 AGE GOF PROBABILITY = 0.7140
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.069289 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.015230

AVE AFT AGE = 118.9 MA

AFT KINETIC POPULATION # 3

MAXIMUM OBJECTIVE FUNCTION = 0.211178

EXPONENTIAL MEAN TEMPERATURE SOLUTION:
 OBSERVED AFT AGE = 251.6 MA CALCULATED AFT AGE = 234.2 MA
 MODEL RETENTION AGE = 541.8 MA OBJ FUNCTION = 0.162195
 TRACK ANNEALING TIME = 481.8 MA ANNEALING TEMPERATURE = 220.33 DEG C

TRACK LENGTH OBJ FUNCTION = 0.162195 AGE OBJ FUNCTION = 0.147731
 LENGTH GOF PROBABILITY = 0.8206
 AGE GOF PROBABILITY = 0.6394
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.138036 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.032985

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 163):
 CALCULATED AFT AGE = 244.5 MA MODEL RETENTION AGE = 543.1 MA
 OBJ FUNCTION = 0.152952
 TRACK ANNEALING TIME = 500.6 MA ANNEALING TEMPERATURE = 230.19 DEG C

TRACK LENGTH OBJ FUNCTION = 0.152952 AGE OBJ FUNCTION = 0.060120
 LENGTH GOF PROBABILITY = 0.8706
 AGE GOF PROBABILITY = 0.8488
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.141467 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.031094

AVE AFT AGE = 235.1 MA

RETENTION AGES FOR ALL THERMAL SOLUTIONS:

MODEL #	KINETIC POPULATION# 1			KINETIC POPULATION# 2			KINETIC POPULATION# 3		
	RET AGE Ma	ANNEAL TIME Ma	ANNEAL TEMP DEG C	RET AGE Ma	ANNEAL TIME Ma	ANNEAL TEMP DEG C	RET AGE Ma	ANNEAL TIME Ma	ANNEAL TEMP DEG C
1	137.5	32.5	89.79	414.0	409.0	156.65	538.6	468.6	217.63
2	135.0	42.5	100.80	419.0	406.5	146.27	537.5	485.0	222.53
3	135.0	35.0	92.32	412.4	404.9	152.54	535.8	478.3	226.01
4	135.0	35.0	93.69	406.8	379.2	118.61	533.9	478.9	230.08
5	145.0	57.5	100.76	428.6	416.1	146.85	544.3	499.3	228.18
6	137.5	30.0	87.47	404.2	391.7	142.19	531.1	456.1	212.95
7	145.0	55.0	102.49	429.8	419.8	146.96	545.2	497.7	226.00
8	145.0	62.5	97.19	438.8	426.3	147.70	542.8	502.8	232.31
9	135.0	47.5	102.22	424.3	394.3	121.10	545.1	500.1	229.92
10	135.0	132.5	116.14	418.4	400.9	139.77	542.0	502.0	232.60
11	147.5	60.0	99.57	431.3	423.8	152.14	545.8	503.3	230.41
12	140.0	52.5	102.25	420.6	160.6	134.60	543.5	503.5	232.23
13	137.5	47.5	103.49	415.5	148.0	129.23	540.4	500.4	232.68
14	137.5	27.5	85.44	419.3	174.3	132.54	540.5	500.5	232.97
15	145.0	57.5	101.86	431.5	401.5	125.02	546.9	506.9	231.73
16	132.5	35.0	93.09	414.3	391.8	131.90	531.2	476.2	225.75
17	145.0	127.5	91.48	420.4	165.4	134.73	541.7	479.2	218.86
18	137.5	47.5	104.23	411.3	396.3	142.71	535.2	482.7	227.86
19	140.0	52.5	101.62	420.6	160.6	133.81	541.1	503.6	233.87
20	137.5	47.5	103.89	419.9	404.9	141.52	540.8	495.8	228.28
21	142.5	45.0	99.19	427.5	140.0	110.85	547.2	507.2	232.52
22	137.5	42.5	100.22	423.8	416.3	153.28	543.8	501.2	230.37
23	140.0	50.0	102.72	413.7	403.7	149.94	538.8	493.8	227.26
24	145.0	25.0	77.80	436.4	418.9	139.45	540.4	480.4	217.03
25	140.0	62.5	90.97	424.7	159.7	136.36	538.8	501.2	234.99
26	146.2	53.8	102.12	427.7	415.2	147.66	545.2	495.2	224.38
27	140.0	62.5	90.88	424.9	417.4	151.58	536.3	488.8	224.74
28	140.0	37.5	94.41	421.2	411.2	149.02	537.6	465.1	212.14
29	145.0	55.0	102.25	419.5	402.0	138.36	547.2	507.2	231.86
30	147.5	57.5	103.03	435.0	422.5	147.91	543.1	495.6	228.22
31	135.0	42.5	100.81	413.0	173.0	134.86	542.8	495.3	228.45
32	145.0	47.5	100.33	420.1	187.6	128.06	549.6	464.6	203.98

249	140.0	40.0	97.09	426.2	413.7	146.50	539.5	474.5	208.00
250	147.5	130.0	92.20	435.3	405.3	130.69	547.2	507.2	231.54
251	137.5	37.5	96.64	419.3	156.8	137.19	531.8	464.3	206.14
252	137.5	55.0	101.30	423.1	150.6	131.20	539.1	464.1	205.97
253	147.5	55.0	100.03	423.9	171.4	137.26	549.3	509.3	231.24
254	135.0	35.0	93.54	404.9	392.4	139.01	533.7	483.7	229.91
255	145.0	52.5	103.24	433.4	178.4	134.88	549.7	512.2	233.95
256	135.0	50.0	103.31	418.7	161.2	132.52	541.2	493.7	227.80
257	150.0	57.5	102.99	427.6	180.1	135.40	546.6	494.1	226.08
258	135.0	20.0	77.73	436.1	156.1	132.43	546.4	506.4	232.33
259	135.0	32.5	90.84	404.1	164.1	135.46	531.1	466.1	222.25
260	137.5	45.0	101.76	421.6	149.1	126.03	542.6	492.6	225.23
261	137.5	52.5	102.63	420.0	190.0	103.02	542.5	482.5	219.07
262	137.5	52.5	102.19	415.9	408.4	153.60	541.0	501.0	233.64
263	137.5	40.0	98.66	426.9	166.9	135.35	535.5	488.0	225.37
264	135.0	40.0	93.70	417.6	405.1	148.52	540.7	500.7	233.60
265	137.5	45.0	102.83	420.0	382.5	115.42	544.4	499.4	228.65
266	145.0	37.5	99.31	414.1	386.6	133.86	538.6	478.6	224.62
267	140.0	47.5	102.68	423.2	408.2	145.06	546.2	508.7	233.29
268	135.0	42.5	101.13	408.0	153.0	133.27	531.2	481.2	229.58
269	142.5	45.0	100.36	425.0	375.0	110.21	546.8	509.3	233.27
270	142.5	32.5	86.06	419.4	156.9	124.97	545.8	505.8	232.83
271	147.5	60.0	99.66	432.1	174.6	137.71	542.7	497.7	228.80
272	137.5	42.5	99.95	415.1	400.1	144.82	539.7	492.2	224.19
273	145.0	45.0	97.92	409.6	402.1	154.14	533.2	478.2	226.57
274	142.5	50.0	102.00	433.9	421.4	145.15	548.8	508.8	232.55
275	140.0	50.0	102.55	414.0	384.0	124.09	539.0	481.5	225.75
276	138.7	48.8	104.30	419.4	166.9	135.47	542.8	502.8	232.74
277	145.6	53.1	102.96	438.8	408.8	129.17	550.4	505.4	230.70
278	137.5	52.5	100.99	412.5	402.5	152.23	535.0	485.0	226.12
279	145.0	50.0	101.88	422.5	157.5	133.76	544.1	509.1	235.08
280	137.5	42.5	100.14	426.6	411.6	142.03	541.9	471.9	209.63
281	135.0	42.5	100.44	412.9	137.9	120.02	541.2	483.8	223.70
282	136.7	49.2	103.26	423.3	410.8	147.45	540.6	490.6	223.11
283	140.0	45.0	92.19	410.0	390.0	145.98	541.2	483.8	223.57
284	135.0	50.0	103.04	422.3	157.3	133.23	539.1	496.6	230.20
285	137.5	50.0	102.63	405.4	397.9	155.99	535.1	490.1	226.88
286	137.5	42.5	100.53	414.3	144.3	121.37	539.6	474.6	217.67
287	145.8	50.8	101.82	426.0	176.0	134.90	546.1	511.1	235.11
288	145.0	40.0	92.48	437.1	412.1	132.12	549.8	504.8	227.62
289	145.0	55.0	101.78	425.0	50.0	102.19	545.7	508.2	234.48
290	137.5	42.5	99.97	419.7	392.2	122.02	537.5	465.0	211.03
291	137.5	52.5	101.30	416.5	404.0	146.37	540.7	500.7	233.20
292	135.0	47.5	103.70	429.9	157.4	135.67	536.8	489.3	224.35
293	147.5	60.0	98.27	450.5	165.5	140.31	553.0	510.5	229.59
294	145.0	40.0	91.06	430.5	415.5	144.28	544.9	504.9	231.82
295	145.0	20.0	73.03	450.7	175.7	138.70	552.8	517.8	235.98
296	145.0	27.5	79.54	442.6	415.1	131.17	552.3	502.3	225.20
297	137.5	47.5	103.91	408.1	163.1	135.27	538.0	483.0	225.66
298	155.0	32.5	79.58	419.8	194.8	145.14	525.0	487.5	231.59
299	147.5	17.5	69.63	426.6	184.1	131.32	540.4	495.4	225.53
300	145.0	47.5	101.22	428.5	418.5	149.48	545.4	492.9	221.97

RETENTION AGE DISTRIBUTION FOR ALL ACCEPTABLE SOLUTIONS:

RETENTION AGES: KINETIC POPULATION # 1

AGE BIN (MA)	RELATIVE FREQUENCY
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.000
130.0 - 140.0	0.603
140.0 - 150.0	0.387
150.0 - 160.0	0.010
160.0 - 170.0	0.000
170.0 - 180.0	0.000
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.000
410.0 - 420.0	0.000
420.0 - 430.0	0.000
430.0 - 440.0	0.000
440.0 - 450.0	0.000
450.0 - 460.0	0.000
460.0 - 470.0	0.000
470.0 - 480.0	0.000
480.0 - 490.0	0.000
490.0 - 500.0	0.000
500.0 - 510.0	0.000
510.0 - 520.0	0.000
520.0 - 530.0	0.000
530.0 - 540.0	0.000
540.0 - 550.0	0.000
550.0 - 560.0	0.000
560.0 - 570.0	0.000

570.0 - 580.0	0.000
580.0 - 590.0	0.000
590.0 - 600.0	0.000

AVE MODEL RETENTION AGE = 140.69 +/- 4.70 MA

RETENTION AGES: KINETIC POPULATION # 2

AGE BIN (MA)	RELATIVE FREQUENCY
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.000
130.0 - 140.0	0.000
140.0 - 150.0	0.000
150.0 - 160.0	0.000
160.0 - 170.0	0.000
170.0 - 180.0	0.000
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.070
410.0 - 420.0	0.343
420.0 - 430.0	0.403
430.0 - 440.0	0.143
440.0 - 450.0	0.027
450.0 - 460.0	0.013
460.0 - 470.0	0.000
470.0 - 480.0	0.000
480.0 - 490.0	0.000
490.0 - 500.0	0.000
500.0 - 510.0	0.000
510.0 - 520.0	0.000
520.0 - 530.0	0.000
530.0 - 540.0	0.000
540.0 - 550.0	0.000
550.0 - 560.0	0.000
560.0 - 570.0	0.000
570.0 - 580.0	0.000
580.0 - 590.0	0.000
590.0 - 600.0	0.000

AVE MODEL RETENTION AGE = 422.69 +/- 8.94 MA

RETENTION AGES: KINETIC POPULATION # 3

AGE BIN (MA)	RELATIVE FREQUENCY
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.000
130.0 - 140.0	0.000
140.0 - 150.0	0.000
150.0 - 160.0	0.000
160.0 - 170.0	0.000
170.0 - 180.0	0.000
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.000
410.0 - 420.0	0.000
420.0 - 430.0	0.000
430.0 - 440.0	0.000
440.0 - 450.0	0.000
450.0 - 460.0	0.000
460.0 - 470.0	0.000

470.0 - 480.0	0.000
480.0 - 490.0	0.000
490.0 - 500.0	0.000
500.0 - 510.0	0.000
510.0 - 520.0	0.000
520.0 - 530.0	0.010
530.0 - 540.0	0.317
540.0 - 550.0	0.637
550.0 - 560.0	0.037
560.0 - 570.0	0.000
570.0 - 580.0	0.000
580.0 - 590.0	0.000
590.0 - 600.0	0.000

AVE MODEL RETENTION AGE = 541.90 +/- 5.02 MA

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.63 +/- 0.130; %RO FOR EXP MEAN SOLUTION = 0.71
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.72 +/- 0.007
 MIN %RO = 0.71; MAX %RO = 0.76
 %RO FOR MIN OBJ SOLUTION = 0.72

POST-EXHUMATION THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.60 +/- 0.150; %RO FOR EXP MEAN SOLUTION = 0.58
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.58 +/- 0.003
 MIN %RO = 0.57; MAX %RO = 0.61
 %RO FOR MIN OBJ SOLUTION = 0.58

BINNED %RO VALUES FOR POST-DEPOSITIONAL HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.03	0.000
0.03 - 0.05	0.000
0.05 - 0.08	0.000
0.08 - 0.10	0.000
0.10 - 0.12	0.000
0.12 - 0.15	0.000
0.15 - 0.18	0.000
0.17 - 0.20	0.000
0.20 - 0.23	0.000
0.23 - 0.25	0.000
0.25 - 0.27	0.000
0.28 - 0.30	0.000
0.30 - 0.32	0.000
0.33 - 0.35	0.000
0.35 - 0.37	0.000
0.38 - 0.40	0.000
0.40 - 0.42	0.000
0.43 - 0.45	0.000
0.45 - 0.47	0.000
0.47 - 0.50	0.000
0.50 - 0.52	0.000
0.53 - 0.55	0.000
0.55 - 0.57	0.000
0.57 - 0.60	0.000
0.60 - 0.62	0.000
0.62 - 0.65	0.000
0.65 - 0.68	0.000
0.68 - 0.70	0.000
0.70 - 0.72	0.890
0.73 - 0.75	0.103
0.75 - 0.77	0.007
0.78 - 0.80	0.000
0.80 - 0.82	0.000
0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 132.47 DEG C; MAXIMUM PEAK TEMPERATURE = 147.25 DEG C

PEAK TEMPERATURE: AVERAGE = 136.21 STAND DEV = 1.888

MAX TEMP BIN	RELATIVE FREQUENCY
100.00 - 102.00	0.000
102.00 - 104.00	0.000
104.00 - 106.00	0.000
106.00 - 108.00	0.000
108.00 - 110.00	0.000
110.00 - 112.00	0.000
112.00 - 114.00	0.000
114.00 - 116.00	0.000
116.00 - 118.00	0.000
118.00 - 120.00	0.000
120.00 - 122.00	0.000
122.00 - 124.00	0.000
124.00 - 126.00	0.000
126.00 - 128.00	0.000
128.00 - 130.00	0.000
130.00 - 132.00	0.000
132.00 - 134.00	0.073
134.00 - 136.00	0.453
136.00 - 138.00	0.347
138.00 - 140.00	0.100
140.00 - 142.00	0.013
142.00 - 144.00	0.007
144.00 - 146.00	0.003
146.00 - 148.00	0.003
148.00 - 150.00	0.000

MINIMUM PEAK TIME = 150.00 MA; MAXIMUM PEAK TIME = 192.50 MA

TIME OF PEAK TEMP: AVERAGE = 167.26 STAND DEV = 5.433

TIME AT MAX TEMP	RELATIVE FREQUENCY
149.38 - 150.62	0.003
150.62 - 151.88	0.000
151.88 - 153.12	0.000
153.12 - 154.38	0.000
154.38 - 155.62	0.000
155.62 - 156.88	0.000
156.88 - 158.12	0.020
158.12 - 159.38	0.000
159.38 - 160.62	0.137
160.62 - 161.88	0.000
161.88 - 163.12	0.163
163.12 - 164.38	0.000
164.38 - 165.62	0.043
165.62 - 166.88	0.000
166.88 - 168.12	0.280
168.12 - 169.38	0.000
169.38 - 170.62	0.040
170.62 - 171.88	0.000
171.88 - 173.12	0.257
173.12 - 174.38	0.000
174.38 - 175.62	0.037
175.62 - 176.88	0.000
176.88 - 178.12	0.010
178.12 - 179.38	0.000
179.38 - 180.62	0.003
180.62 - 181.88	0.000
181.88 - 183.12	0.000
183.12 - 184.38	0.000
184.38 - 185.62	0.000
185.62 - 186.88	0.000
186.88 - 188.12	0.000
188.12 - 189.38	0.000
189.38 - 190.62	0.000
190.62 - 191.88	0.000
191.88 - 193.12	0.007

DEPOSITION (ALL SOLUTIONS):

TIME RANGE FOR THERMAL MINIMUM: 287.5 - 292.5 Ma
TIME OF MINIMUM TEMPERATURE: AVERAGE = 289.4 STAND DEV = 1.4
TEMPERATURE RANGE FOR THERMAL MINIMUM: 3.6 - 17.1 deg C
MINIMUM TEMPERATURE: AVERAGE = 7.5 STAND DEV = 1.9

REBURIAL (ALL SOLUTIONS):

TIME RANGE FOR THERMAL MINIMUM: 102.5 - 115.0 Ma
TIME OF MINIMUM TEMPERATURE: AVERAGE = 105.1 STAND DEV = 4.1
TEMPERATURE RANGE FOR THERMAL MINIMUM: 36.5 - 40.0 deg C
MINIMUM TEMPERATURE: AVERAGE = 39.8 STAND DEV = 0.5

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 1

AVERAGE OF OBJ FNS= 0.15356 STAND DEV = 0.01516

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0000
0.060 - 0.070	0.0000
0.070 - 0.080	0.0000
0.080 - 0.090	0.0000
0.090 - 0.100	0.0000
0.100 - 0.110	0.0000
0.110 - 0.120	0.0000
0.120 - 0.130	0.0533
0.130 - 0.140	0.1667
0.140 - 0.150	0.1933
0.150 - 0.160	0.2300
0.160 - 0.170	0.1933
0.170 - 0.180	0.1300
0.180 - 0.190	0.0333
0.190 - 0.200	0.0000

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 2

AVERAGE OF OBJ FNS= 0.08137 STAND DEV = 0.00999

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0000
0.060 - 0.070	0.0667
0.070 - 0.080	0.4933
0.080 - 0.090	0.2000
0.090 - 0.100	0.1867
0.100 - 0.110	0.0533
0.110 - 0.120	0.0000
0.120 - 0.130	0.0000
0.130 - 0.140	0.0000

0.140 - 0.150	0.0000
0.150 - 0.160	0.0000
0.160 - 0.170	0.0000
0.170 - 0.180	0.0000
0.180 - 0.190	0.0000
0.190 - 0.200	0.0000

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 3

AVERAGE OF OBJ FNS= 0.16623 STAND DEV = 0.01421

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0000
0.060 - 0.070	0.0000
0.070 - 0.080	0.0000
0.080 - 0.090	0.0000
0.090 - 0.100	0.0000
0.100 - 0.110	0.0000
0.110 - 0.120	0.0000
0.120 - 0.130	0.0000
0.130 - 0.140	0.0000
0.140 - 0.150	0.0500
0.150 - 0.160	0.3567
0.160 - 0.170	0.3000
0.170 - 0.180	0.1533
0.180 - 0.190	0.0433
0.190 - 0.200	0.0500
0.200 - 0.210	0.0400
0.210 - 0.220	0.0067
0.220 - 0.230	0.0000
0.230 - 0.240	0.0000
0.240 - 0.250	0.0000
0.250 - 0.260	0.0000
0.260 - 0.270	0.0000
0.270 - 0.280	0.0000
0.280 - 0.290	0.0000
0.290 - 0.300	0.0000

OBSERVED TRACK LENGTH HISTOGRAM FOR KINETIC POPULATION # 1:

BIN SIZE (MICRONS)	RELATIVE FREQUENCY
0.0 - 1.0	0.000
1.0 - 2.0	0.000
2.0 - 3.0	0.000
3.0 - 4.0	0.000
4.0 - 5.0	0.000
5.0 - 6.0	0.000
6.0 - 7.0	0.000
7.0 - 8.0	0.000
8.0 - 9.0	0.000
9.0 - 10.0	0.000
10.0 - 11.0	0.000
11.0 - 12.0	0.053
12.0 - 13.0	0.105
13.0 - 14.0	0.421
14.0 - 15.0	0.105
15.0 - 16.0	0.316
16.0 - 17.0	0.000
17.0 - 18.0	0.000
18.0 - 19.0	0.000
19.0 - 20.0	0.000

OBSERVED TRACK LENGTH HISTOGRAM FOR KINETIC POPULATION # 2:

BIN SIZE (MICRONS)	RELATIVE FREQUENCY
0.0 - 1.0	0.000
1.0 - 2.0	0.000
2.0 - 3.0	0.000
3.0 - 4.0	0.000
4.0 - 5.0	0.000
5.0 - 6.0	0.000
6.0 - 7.0	0.000
7.0 - 8.0	0.000
8.0 - 9.0	0.000
9.0 - 10.0	0.000
10.0 - 11.0	0.000
11.0 - 12.0	0.033
12.0 - 13.0	0.279
13.0 - 14.0	0.344
14.0 - 15.0	0.131
15.0 - 16.0	0.164
16.0 - 17.0	0.033
17.0 - 18.0	0.016
18.0 - 19.0	0.000
19.0 - 20.0	0.000

OBSERVED TRACK LENGTH HISTOGRAM FOR KINETIC POPULATION # 3:

BIN SIZE (MICRONS)	RELATIVE FREQUENCY
0.0 - 1.0	0.000
1.0 - 2.0	0.000
2.0 - 3.0	0.000
3.0 - 4.0	0.000
4.0 - 5.0	0.000
5.0 - 6.0	0.000
6.0 - 7.0	0.000
7.0 - 8.0	0.000
8.0 - 9.0	0.000

291	57.04	132.63	214.39	62.50	103.58	0.274048	0.168903	0.317227	0.748	0.585
292	41.47	119.90	244.97	55.00	111.20	0.256849	0.120820	0.246676	0.722	0.597
293	40.94	103.92	219.12	42.50	108.61	0.270929	0.147682	0.234070	0.717	0.582
294	54.40	131.65	224.42	77.50	106.77	0.202981	0.158123	0.234963	0.718	0.594
295	43.38	107.46	227.08	47.50	105.05	0.284539	0.129466	0.264330	0.728	0.575
296	43.26	105.44	232.30	37.50	104.54	0.243034	0.137791	0.281326	0.735	0.577
297	60.52	121.31	222.81	52.50	101.79	0.293198	0.107142	0.218750	0.711	0.570
298	40.17	120.69	293.60	45.00	105.03	0.291019	0.113795	0.232335	0.717	0.581
299	46.39	120.27	251.10	57.50	110.86	0.283091	0.136282	0.212369	0.709	0.596
300	45.71	121.74	223.94	67.50	110.96	0.261389	0.142665	0.291277	0.738	0.610

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.63 +/- 0.130; %RO FOR EXP MEAN SOLUTION = 0.70
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.73 +/- 0.016
 MIN %RO = 0.70; MAX %RO = 0.76
 %RO FOR MIN OBJ SOLUTION = 0.74

POST-EXHUMATION THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.60 +/- 0.150; %RO FOR EXP MEAN SOLUTION = 0.58
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.59 +/- 0.017
 MIN %RO = 0.57; MAX %RO = 0.63
 %RO FOR MIN OBJ SOLUTION = 0.61

BINNED %RO VALUES FOR POST-EXHUMATION HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.03	0.000
0.03 - 0.05	0.000
0.05 - 0.08	0.000
0.08 - 0.10	0.000
0.10 - 0.12	0.000
0.12 - 0.15	0.000
0.15 - 0.18	0.000
0.17 - 0.20	0.000
0.20 - 0.23	0.000
0.23 - 0.25	0.000
0.25 - 0.27	0.000
0.28 - 0.30	0.000
0.30 - 0.32	0.000
0.33 - 0.35	0.000
0.35 - 0.37	0.000
0.38 - 0.40	0.000
0.40 - 0.42	0.000
0.43 - 0.45	0.000
0.45 - 0.47	0.000
0.47 - 0.50	0.000
0.50 - 0.52	0.000
0.53 - 0.55	0.000
0.55 - 0.57	0.143
0.57 - 0.60	0.577
0.60 - 0.62	0.240
0.62 - 0.65	0.040
0.65 - 0.68	0.000
0.68 - 0.70	0.000
0.70 - 0.72	0.000
0.73 - 0.75	0.000
0.75 - 0.77	0.000
0.78 - 0.80	0.000
0.80 - 0.82	0.000
0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 100.16 DEG C; MAXIMUM PEAK TEMPERATURE = 121.33 DEG C

PEAK TEMPERATURE: AVERAGE = 107.81 STAND DEV = 4.043

MAX TEMP BIN	RELATIVE FREQUENCY
100.00 - 102.00	0.020
102.00 - 104.00	0.103
104.00 - 106.00	0.283
106.00 - 108.00	0.217
108.00 - 110.00	0.107
110.00 - 112.00	0.103
112.00 - 114.00	0.070
114.00 - 116.00	0.057
116.00 - 118.00	0.013
118.00 - 120.00	0.020
120.00 - 122.00	0.007
122.00 - 124.00	0.000
124.00 - 126.00	0.000
126.00 - 128.00	0.000
128.00 - 130.00	0.000
130.00 - 132.00	0.000
132.00 - 134.00	0.000
134.00 - 136.00	0.000
136.00 - 138.00	0.000
138.00 - 140.00	0.000
140.00 - 142.00	0.000
142.00 - 144.00	0.000
144.00 - 146.00	0.000
146.00 - 148.00	0.000
148.00 - 150.00	0.000

MINIMUM PEAK TIME = 32.50 MA; MAXIMUM PEAK TIME = 87.50 MA

TIME OF PEAK TEMP: AVERAGE = 57.48 STAND DEV = 12.739

TIME AT MAX TEMP	RELATIVE FREQUENCY
31.88 - 33.12	0.003
33.12 - 34.38	0.000
34.38 - 35.62	0.017
35.62 - 36.88	0.000
36.88 - 38.12	0.023
38.12 - 39.38	0.000
39.38 - 40.62	0.020
40.62 - 41.88	0.000
41.88 - 43.12	0.067
43.12 - 44.38	0.000
44.38 - 45.62	0.057
45.62 - 46.88	0.000
46.88 - 48.12	0.103
48.12 - 49.38	0.000
49.38 - 50.62	0.090
50.62 - 51.88	0.000
51.88 - 53.12	0.063
53.12 - 54.38	0.000
54.38 - 55.62	0.070
55.62 - 56.88	0.000
56.88 - 58.12	0.077
58.12 - 59.38	0.000
59.38 - 60.62	0.073
60.62 - 61.88	0.000
61.88 - 63.12	0.057
63.12 - 64.38	0.000
64.38 - 65.62	0.050
65.62 - 66.88	0.000
66.88 - 68.12	0.027
68.12 - 69.38	0.000
69.38 - 70.62	0.033
70.62 - 71.88	0.000
71.88 - 73.12	0.033
73.12 - 74.38	0.000
74.38 - 75.62	0.023
75.62 - 76.88	0.000
76.88 - 78.12	0.033
78.12 - 79.38	0.000
79.38 - 80.62	0.023
80.62 - 81.88	0.000
81.88 - 83.12	0.020
83.12 - 84.38	0.000
84.38 - 85.62	0.023
85.62 - 86.88	0.000
86.88 - 88.12	0.013
88.12 - 89.38	0.000

CONTROLLED RANDOM SEARCH TECHNIQUE

MINIMUM OBJECTIVE SOLUTION: LOWEST COMBINED OBJECTIVE FUNCTION

MODEL RESULTS AT 0.5000 SIGNIFICANCE LEVEL

SEARCH FOR MAXIMUM TEMPERATURE BETWEEN 102.50 - 0.00 MA

ALL SOLUTIONS ARE AT 0.5000 SIGNIFICANCE LEVEL

%RO MODEL: BASIN%RO

MODEL #	KIN POP# 1 CALCULATED AFT AGE (MA)	KIN POP# 2 CALCULATED AFT AGE (MA)	KIN POP# 3 CALCULATED AFT AGE (MA)	TIME OF MAXIMUM TEMP (MA)	MAXIMUM TEMP (DEG C)	KIN POP# 1 OBJECTIVE FUNCTION	KIN POP# 2 OBJECTIVE FUNCTION	KIN POP# 3 OBJECTIVE FUNCTION	%RO POST-DEP	%RO POST-EXH
1	49.32	119.28	233.45	50.00	103.72	0.136236	0.088382	0.171214	0.713	0.579
2	47.96	118.96	234.38	47.50	104.25	0.156233	0.100773	0.171401	0.709	0.578
3	49.85	116.61	232.01	47.50	103.63	0.178907	0.083622	0.167427	0.712	0.576
4	48.71	116.59	229.13	47.50	104.92	0.152893	0.075603	0.191073	0.714	0.578
5	53.21	121.76	237.06	52.50	102.65	0.143040	0.088597	0.156292	0.718	0.577
6	49.75	121.71	230.00	47.50	104.29	0.157780	0.096568	0.183676	0.709	0.578
7	52.25	118.25	232.80	50.00	103.42	0.159708	0.073685	0.159843	0.722	0.579
8	54.82	119.16	241.51	55.00	102.48	0.169519	0.076903	0.157012	0.726	0.576
9	53.62	120.67	238.47	55.00	103.43	0.151670	0.097331	0.169571	0.709	0.577
10	48.38	118.51	236.90	50.00	104.44	0.138658	0.087996	0.160909	0.712	0.579
11	54.07	120.80	237.89	57.50	102.64	0.144771	0.074326	0.151750	0.723	0.577
12	50.43	117.25	232.42	50.00	103.61	0.139666	0.070404	0.163100	0.718	0.578
13	51.00	116.44	230.76	50.00	103.49	0.161865	0.072254	0.177198	0.716	0.577
14	48.34	121.18	236.64	47.50	104.38	0.138192	0.095529	0.171182	0.711	0.579
15	52.76	122.40	239.20	55.00	103.08	0.124680	0.101416	0.157589	0.717	0.579
16	49.15	119.62	234.02	50.00	104.29	0.148006	0.098798	0.167907	0.709	0.578
17	52.40	120.29	237.72	50.00	102.30	0.176818	0.075754	0.167896	0.712	0.575
18	48.55	116.00	228.41	47.50	104.85	0.149152	0.072914	0.197190	0.716	0.578
19	50.90	121.21	236.62	50.00	102.91	0.157029	0.083186	0.159858	0.712	0.577
20	49.95	117.54	234.60	47.50	103.97	0.148429	0.076567	0.161112	0.714	0.578
21	52.04	122.48	239.68	52.50	103.05	0.121212	0.102969	0.159596	0.715	0.579
22	48.51	117.28	234.19	47.50	104.22	0.130098	0.075267	0.155448	0.717	0.580
23	48.45	121.29	233.43	47.50	104.85	0.139587	0.097840	0.174588	0.710	0.579
24	51.63	122.19	233.76	57.50	102.96	0.131778	0.097218	0.152250	0.720	0.581
25	49.55	119.61	238.52	47.50	103.81	0.154005	0.071639	0.156546	0.715	0.578
26	53.20	121.96	242.06	55.00	102.24	0.156347	0.092529	0.155756	0.718	0.577
27	49.92	116.54	234.29	47.50	103.67	0.164920	0.072497	0.148016	0.720	0.577
28	50.50	121.67	237.22	47.50	103.55	0.181631	0.086896	0.170796	0.711	0.576
29	52.43	120.61	235.21	55.00	102.93	0.153636	0.068991	0.162383	0.716	0.577
30	50.63	121.45	241.16	57.50	103.38	0.137134	0.082376	0.152879	0.723	0.582
31	47.93	112.76	228.52	50.00	104.26	0.157427	0.090682	0.196225	0.723	0.580
32	54.50	118.11	228.91	52.50	103.45	0.154195	0.079319	0.192928	0.729	0.579

0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 101.63 DEG C; MAXIMUM PEAK TEMPERATURE = 109.76 DEG C

PEAK TEMPERATURE: AVERAGE = 103.61 STAND DEV = 0.907

MAX TEMP BIN	RELATIVE FREQUENCY
100.00 - 102.00	0.010
102.00 - 104.00	0.700
104.00 - 106.00	0.283
106.00 - 108.00	0.000
108.00 - 110.00	0.007
110.00 - 112.00	0.000
112.00 - 114.00	0.000
114.00 - 116.00	0.000
116.00 - 118.00	0.000
118.00 - 120.00	0.000

MINIMUM PEAK TIME = 47.50 MA; MAXIMUM PEAK TIME = 70.00 MA

TIME OF PEAK TEMP: AVERAGE = 51.05 STAND DEV = 3.745

TIME AT MAX TEMP	RELATIVE FREQUENCY
46.88 - 48.12	0.337
48.12 - 49.38	0.000
49.38 - 50.62	0.320
50.62 - 51.88	0.000
51.88 - 53.12	0.070
53.12 - 54.38	0.000
54.38 - 55.62	0.173
55.62 - 56.88	0.000
56.88 - 58.12	0.087
58.12 - 59.38	0.000
59.38 - 60.62	0.007
60.62 - 61.88	0.000
61.88 - 63.12	0.000
63.12 - 64.38	0.000
64.38 - 65.62	0.000
65.62 - 66.88	0.000
66.88 - 68.12	0.000
68.12 - 69.38	0.000
69.38 - 70.62	0.007

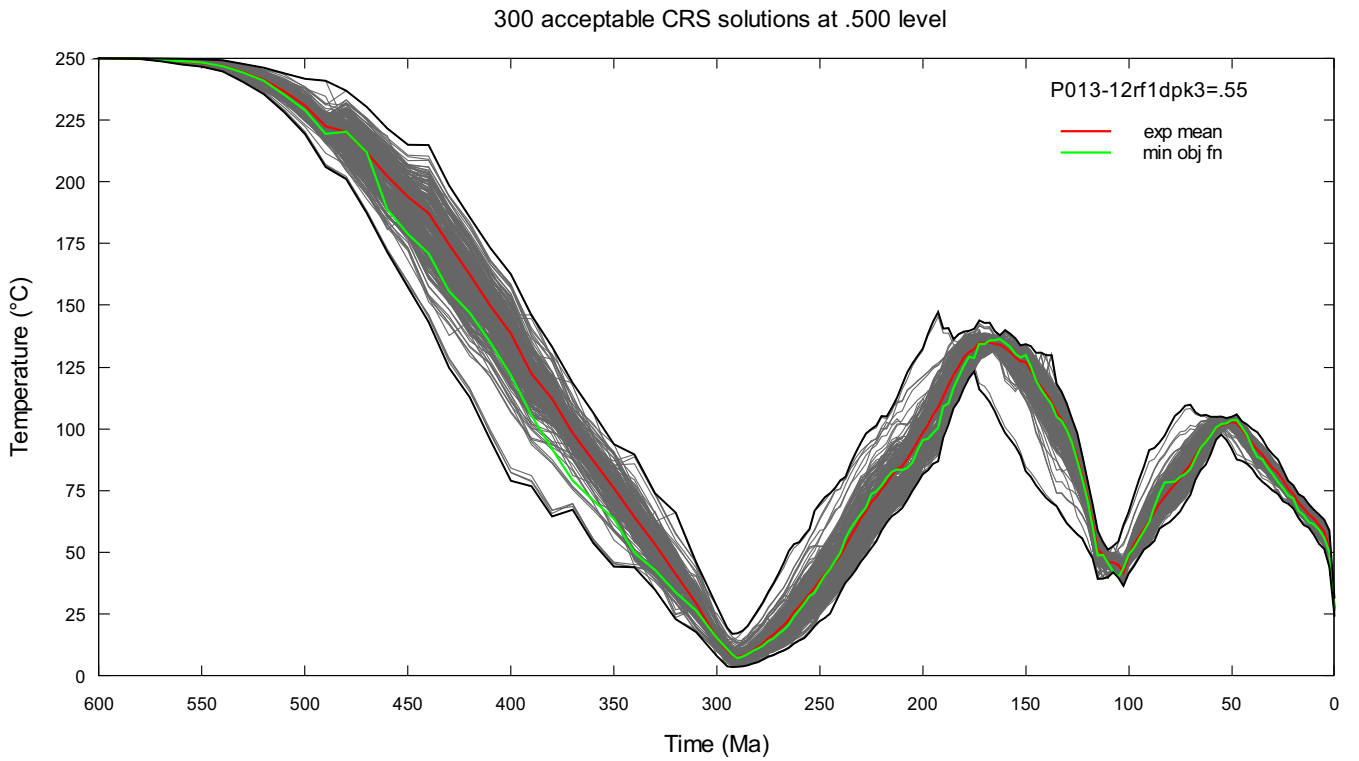
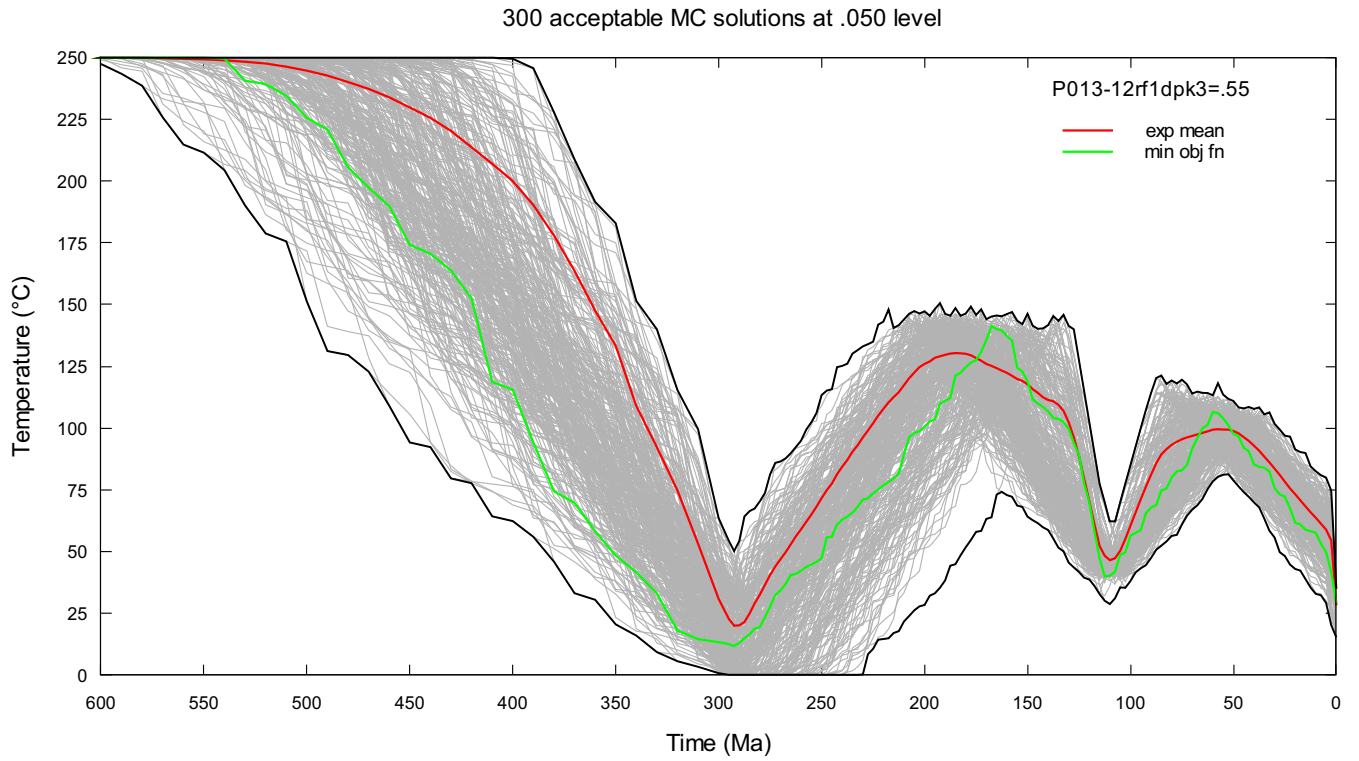


Figure E1. Upper panel shows 300 MC thermal history solutions (light grey) at the 0.05 significance level. The bounding envelopes do not represent solutions. Lower panel shows 300 CRS solutions at the 0.5 significance level that evolved from the initial MC solution set.

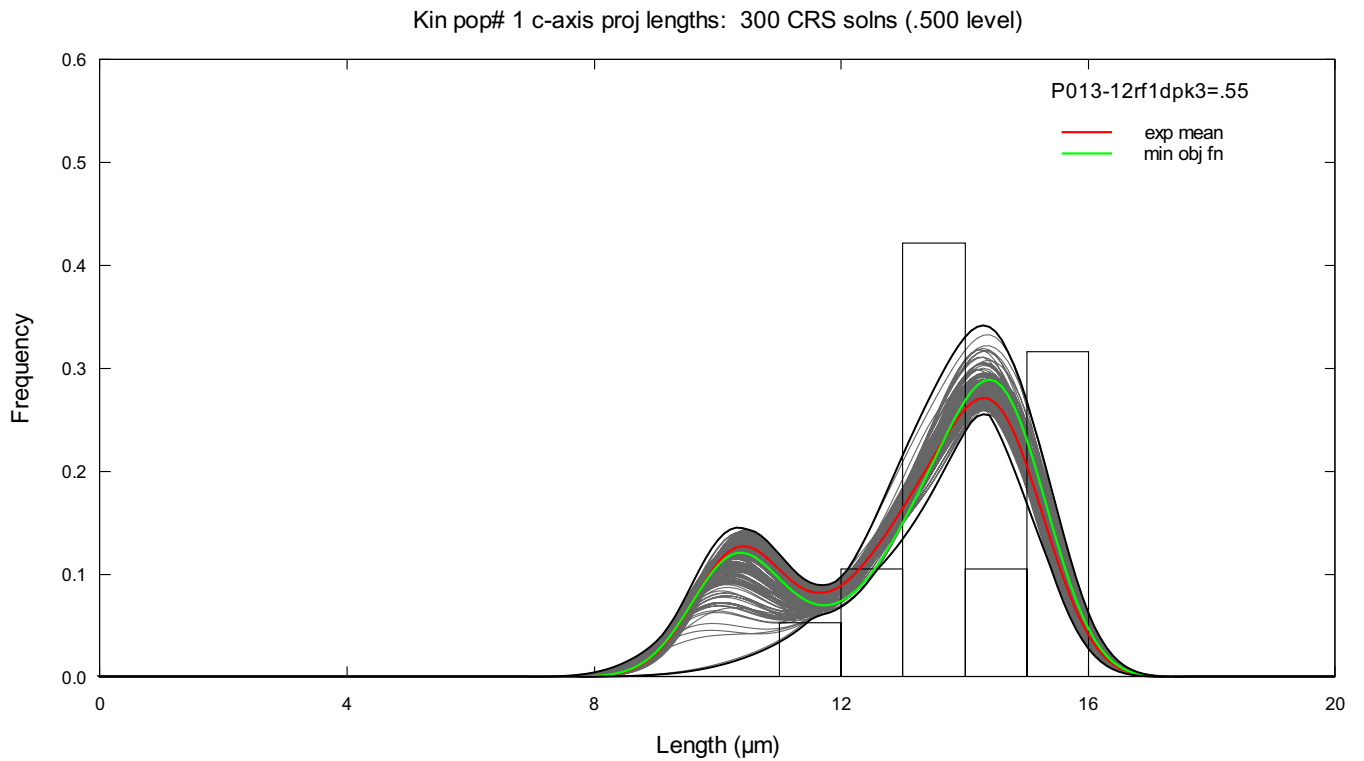
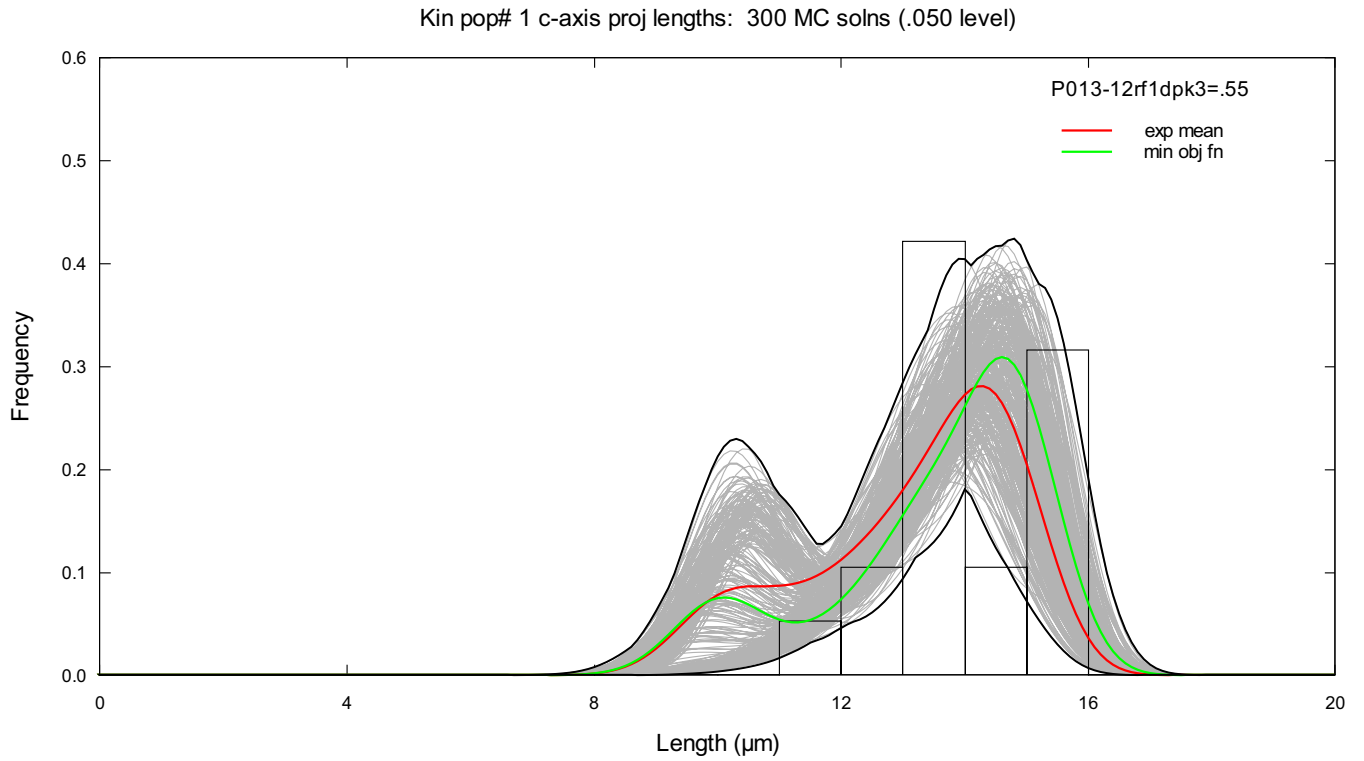


Figure E2. Upper panel shows 300 model predicted track length distributions for kinetic population #1 corresponding to the MC thermal history solutions at the 0.05 significance level in Figure E1. The bounding envelopes do not represent track length solutions. Histogram shows c-axis projected observed lengths. Lower panel shows 300 model predicted track length distributions for kinetic population #1 corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

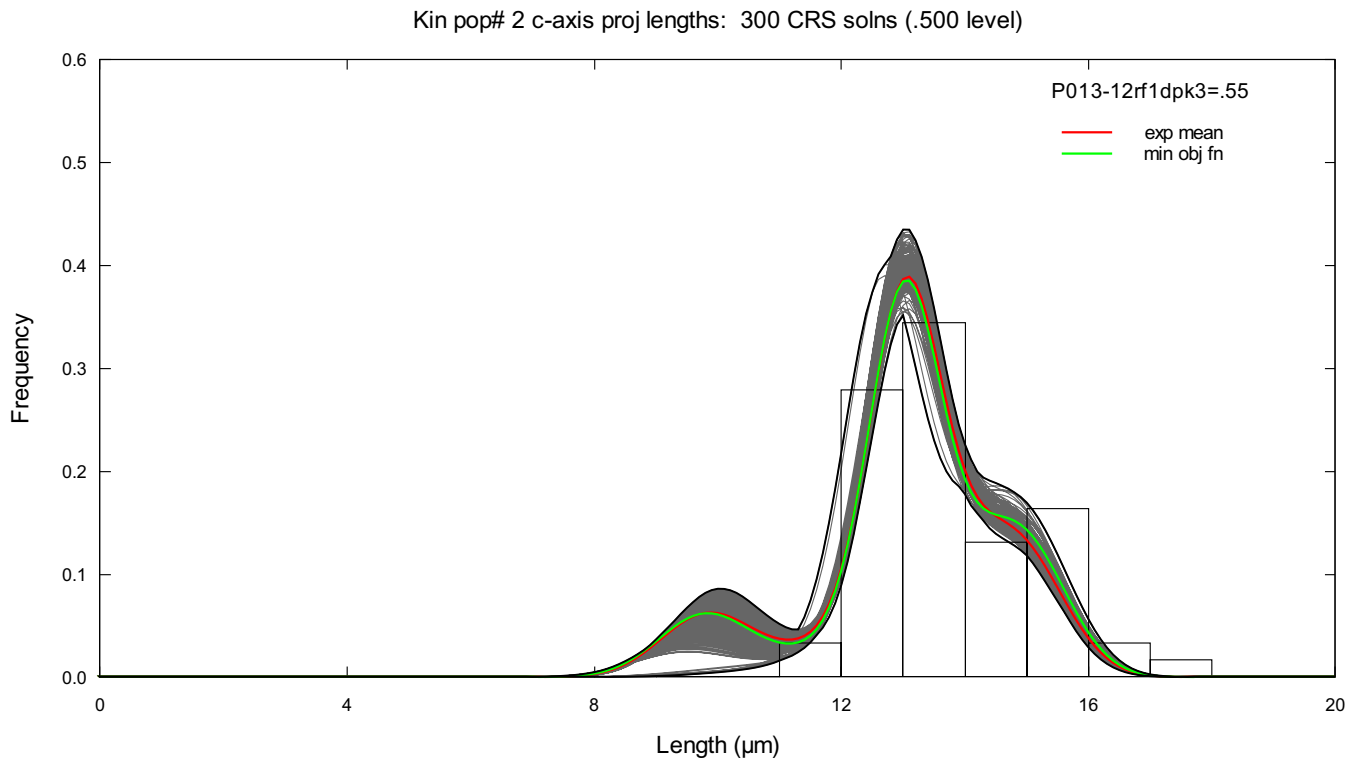
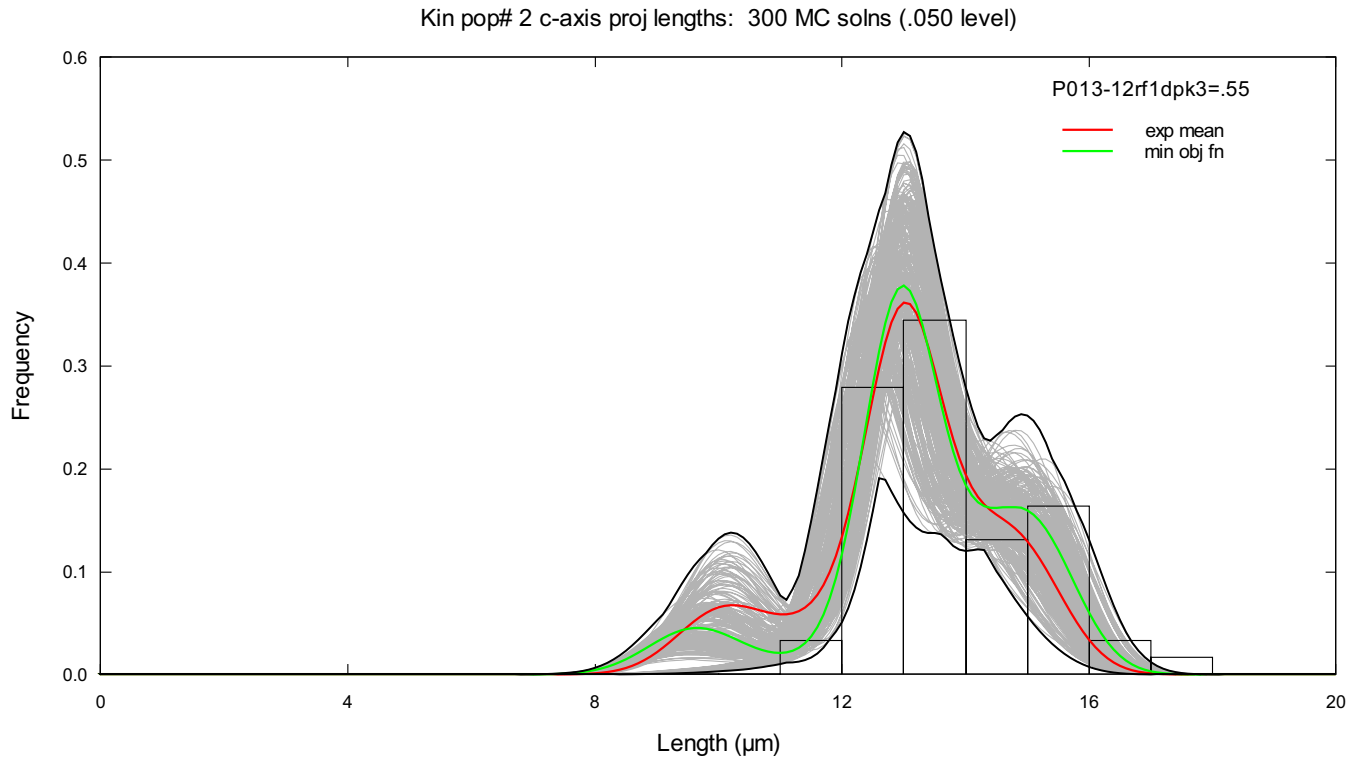


Figure E3. Upper panel shows 300 model predicted track length distributions for kinetic population #2 corresponding to the MC thermal history solutions at the 0.05 significance level in Figure E1. The bounding envelopes do not represent track length solutions. Histogram shows c-axis projected observed lengths. Lower panel shows 300 model predicted track length distributions for kinetic population #2 corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

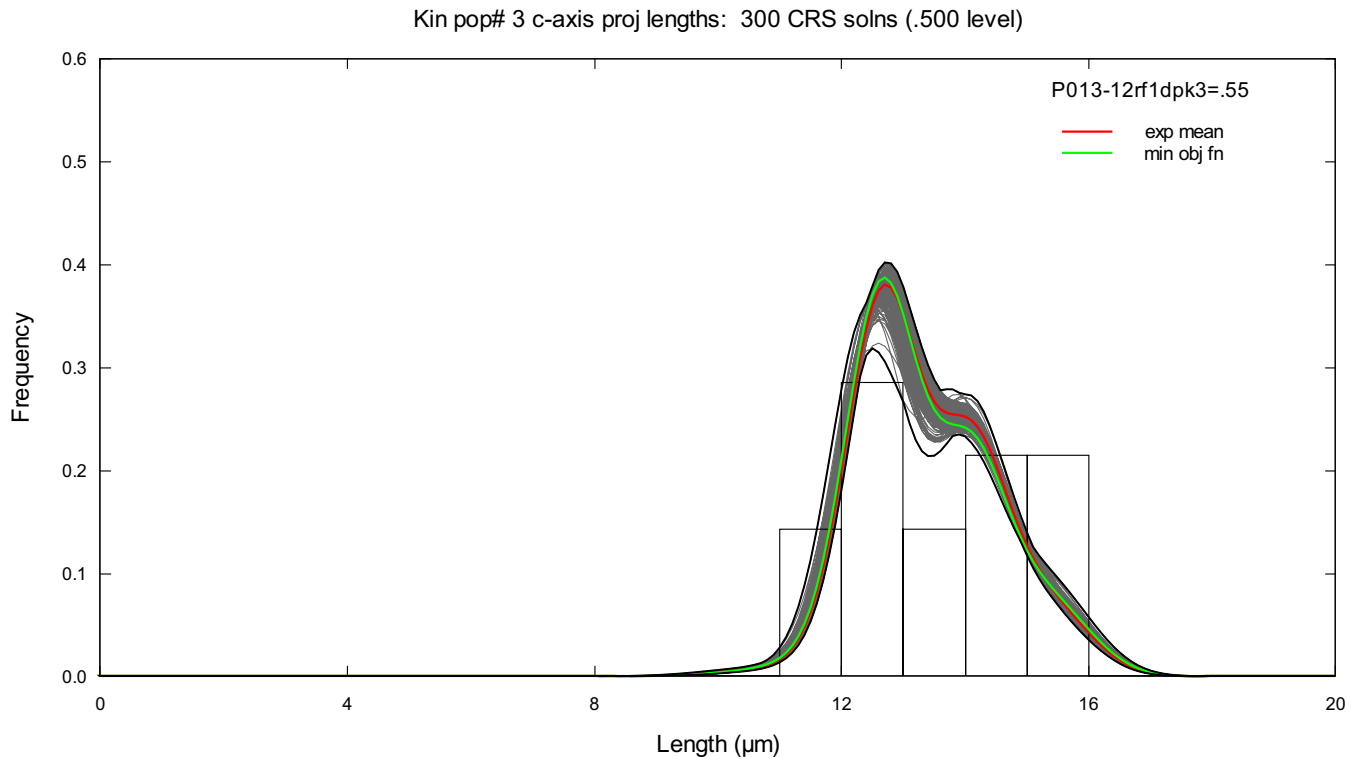
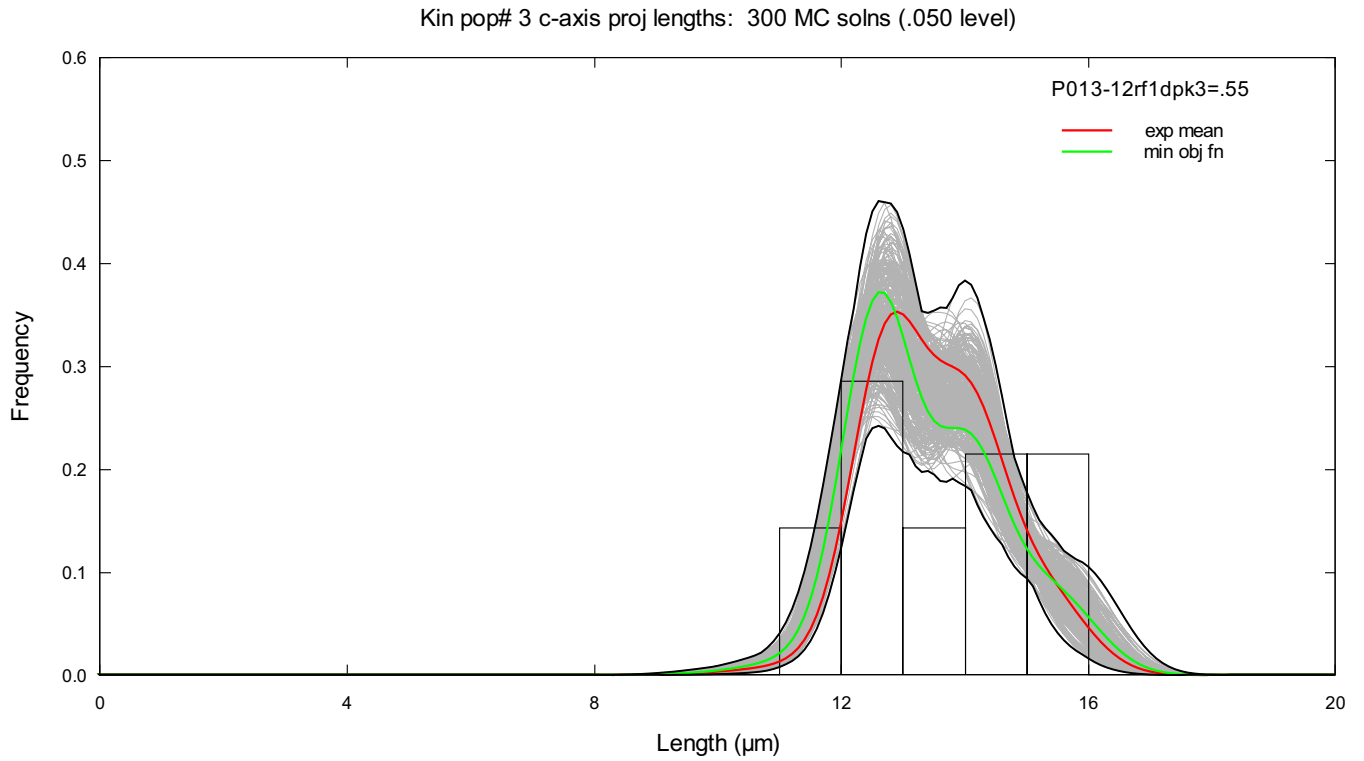


Figure E4. Upper panel shows 300 model predicted track length distributions for kinetic population #3 corresponding to the MC thermal history solutions at the 0.05 significance level in Figure E1. The bounding envelopes do not represent track length solutions. Histogram shows c-axis projected observed lengths. Lower panel shows 300 model predicted track length distributions for kinetic population #3 corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

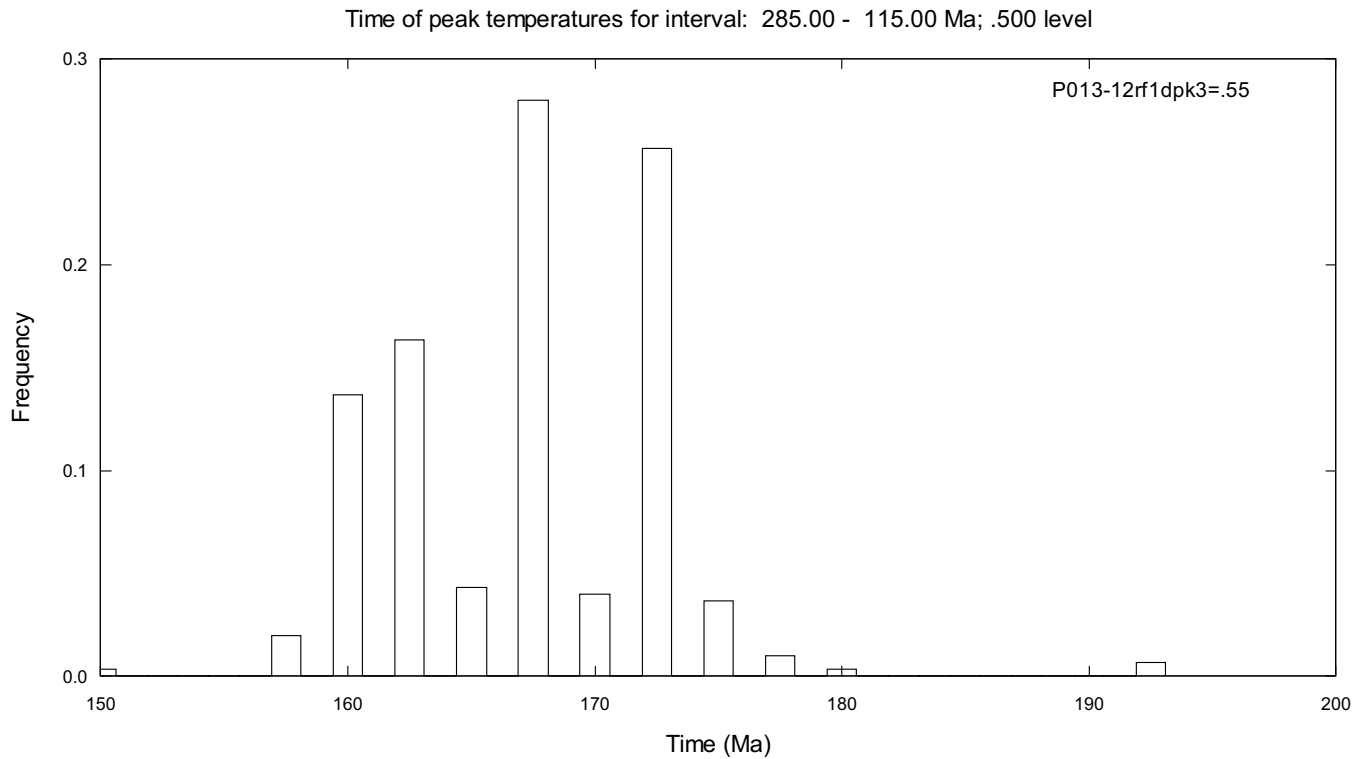
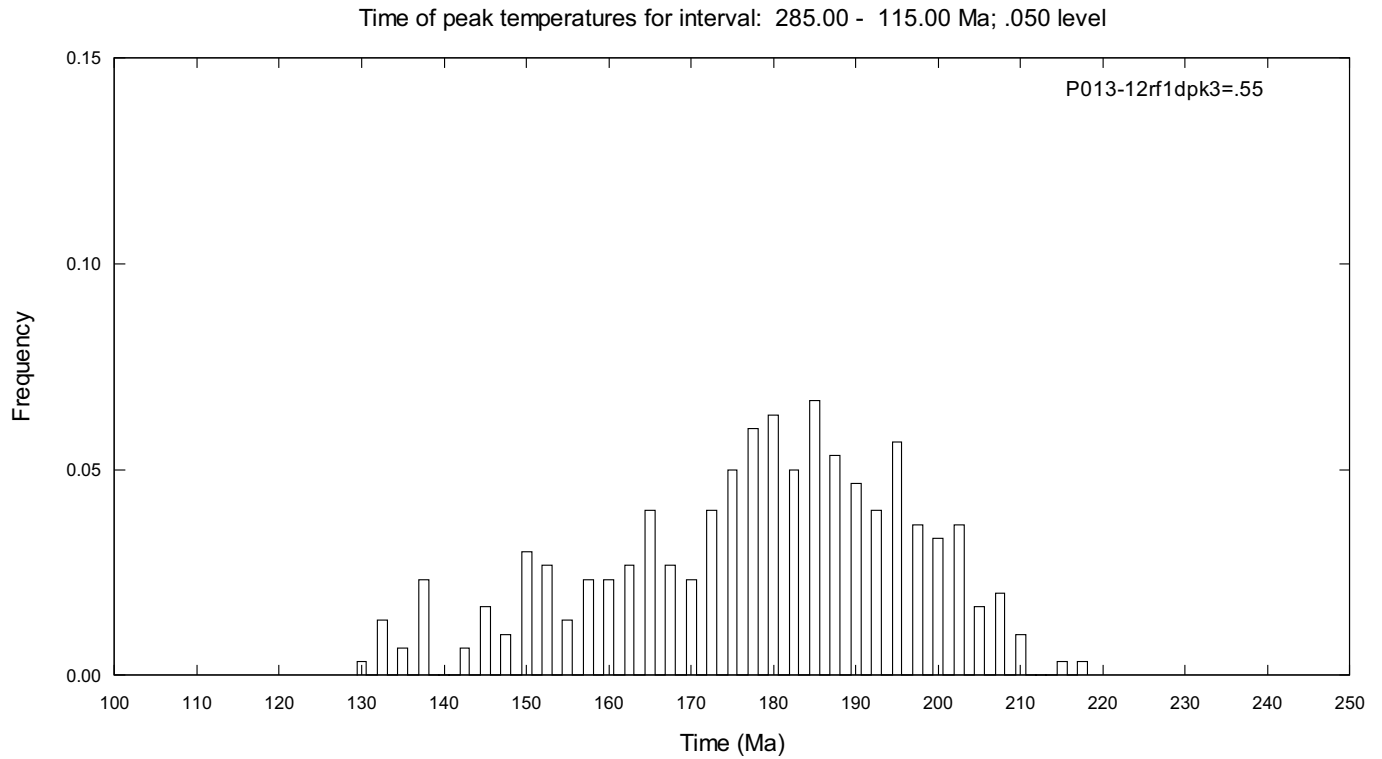


Figure E5. Upper panel shows the distribution of times of maximum temperature for thermal peak 1 over the time interval, 285 - 115 Ma, corresponding to the 300 MC thermal history solutions at the 0.05 significance level in Figure E1. Lower panel shows the distribution of times of maximum temperature for thermal peak 1 over the time interval, 285 - 115 Ma, corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

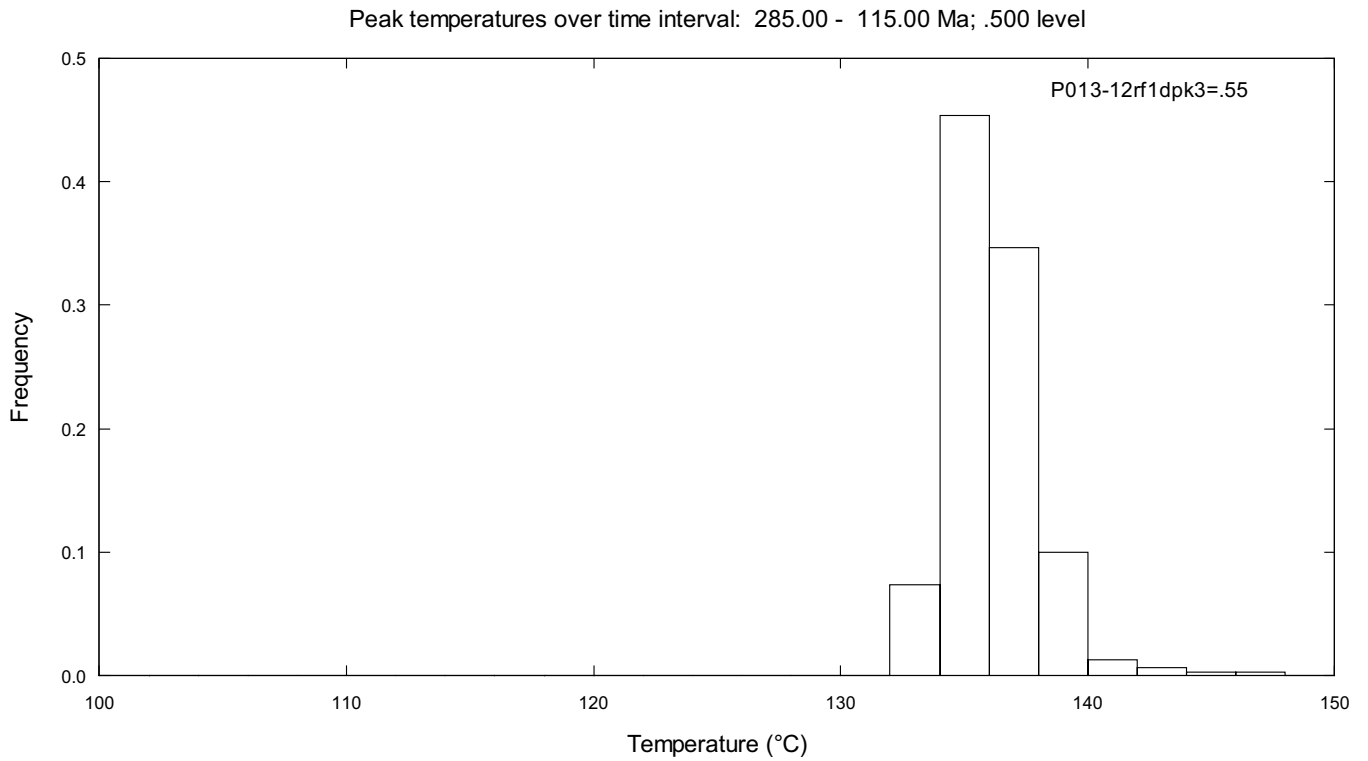
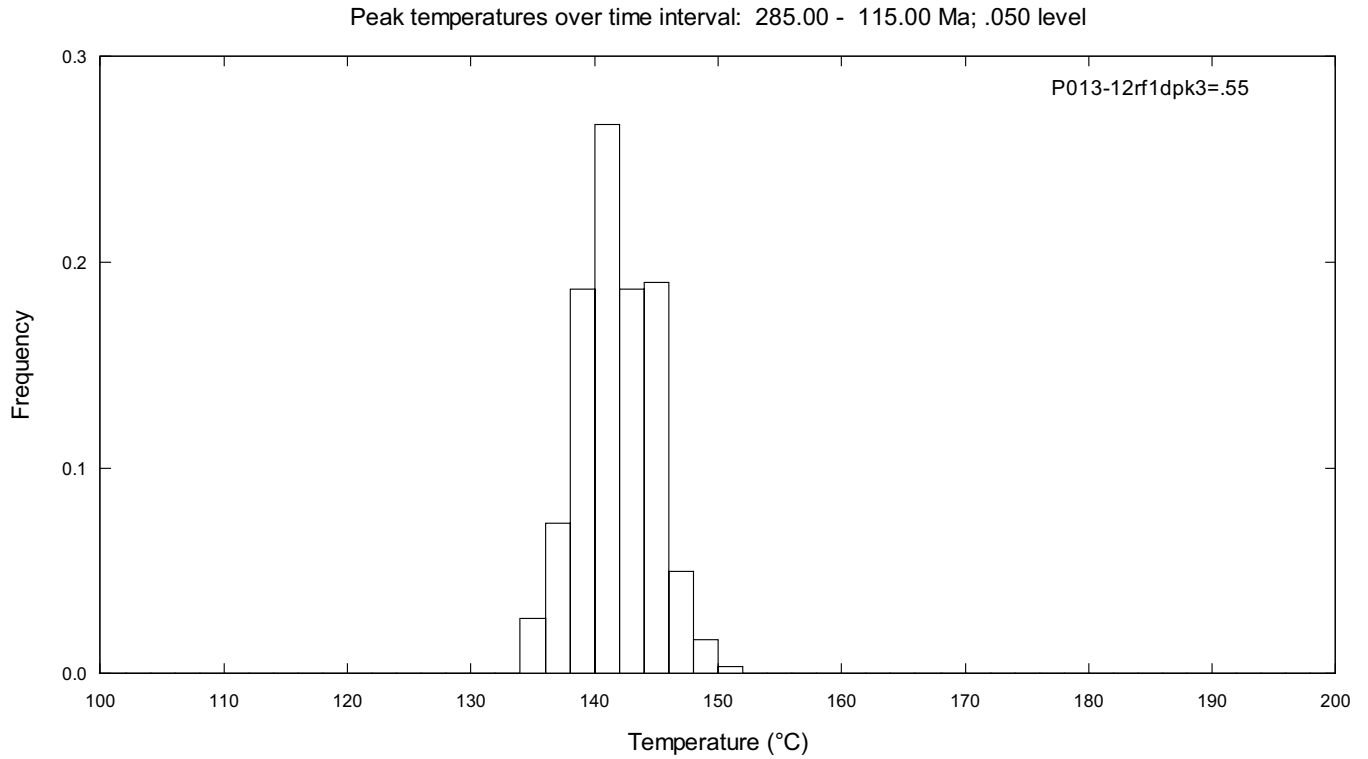


Figure E6. Upper panel shows the distribution of maximum temperatures for thermal peak 1 over the time interval, 285 - 115 Ma, corresponding to the 300 MC thermal history solutions at the 0.05 significance level in Figure E1. Lower panel shows the distribution of maximum temperatures for thermal peak 1 over the time interval, 285 - 115 Ma, corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

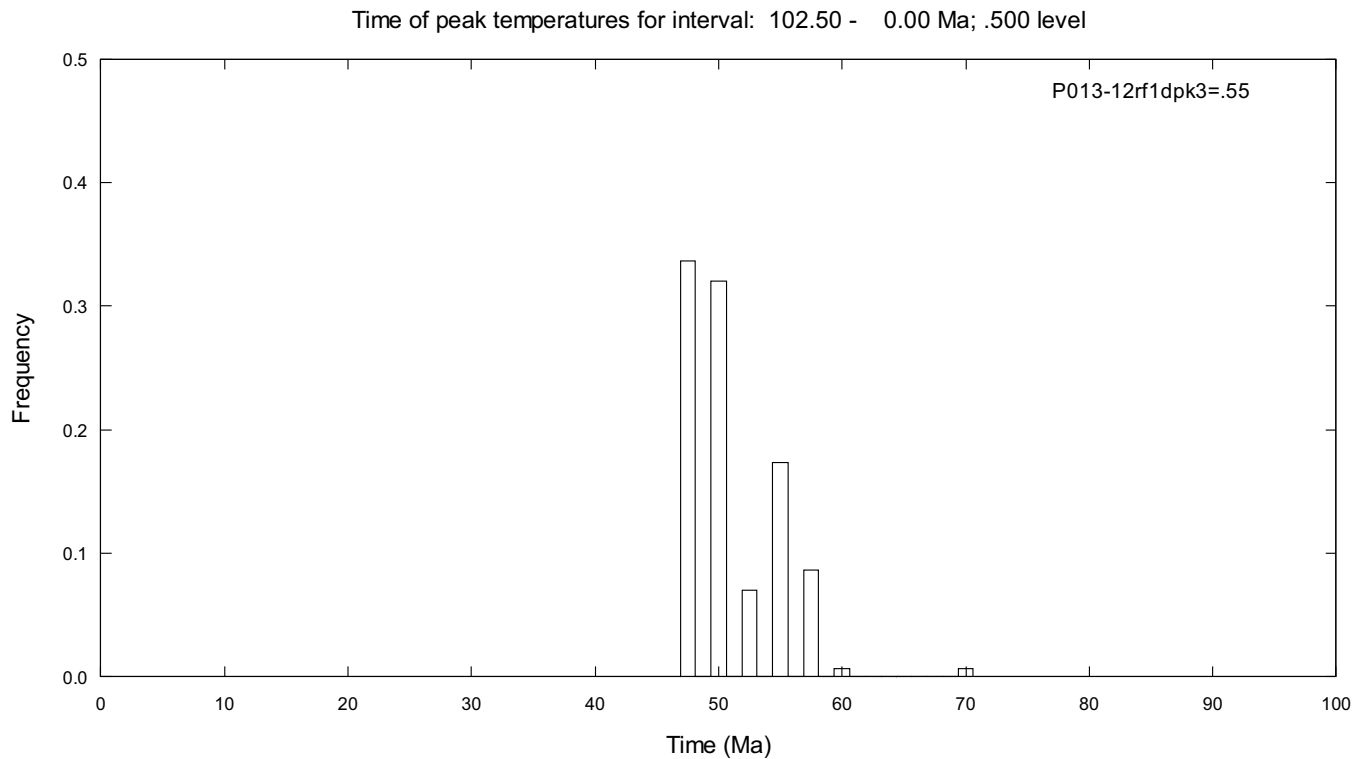
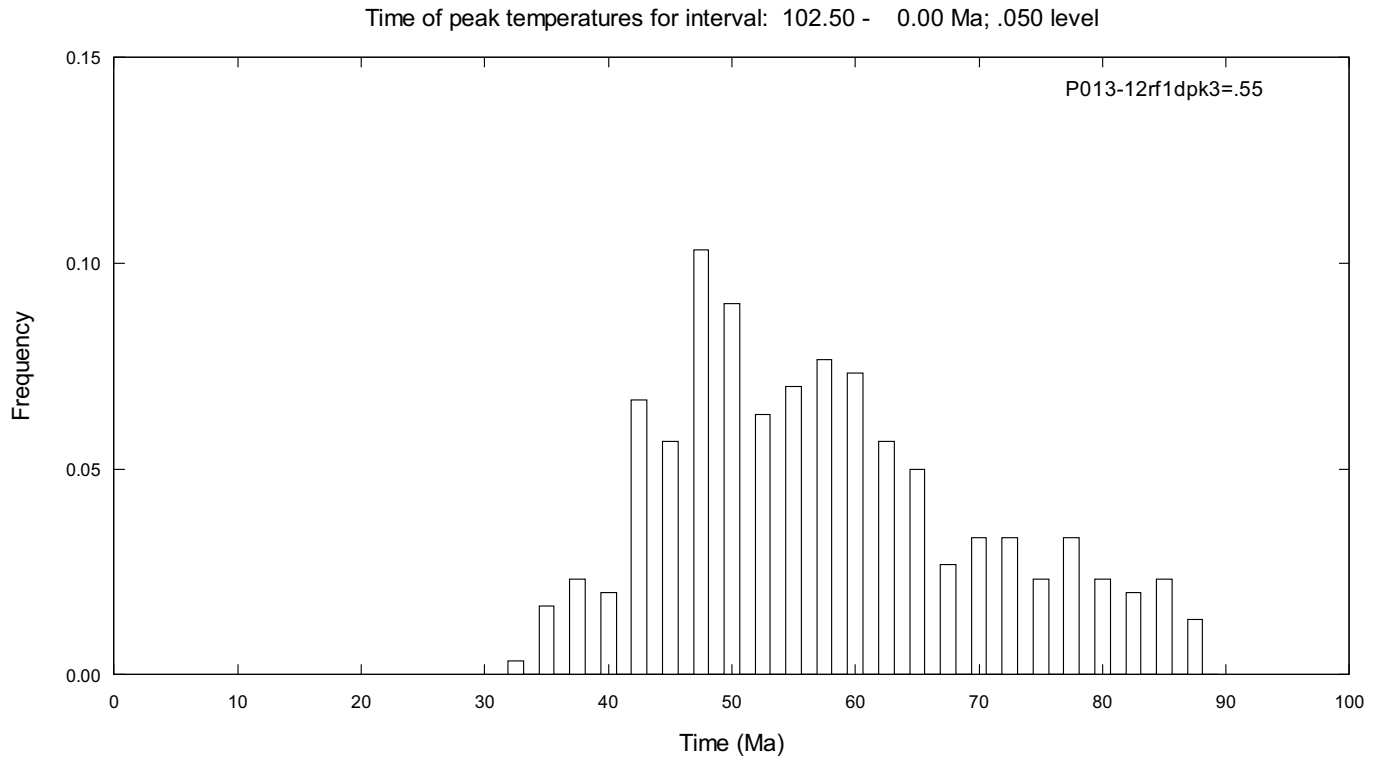


Figure E7. Upper panel shows the distribution of times of maximum temperature for thermal peak 2 over the time interval, 102.5 - 0 Ma, corresponding to the 300 MC thermal history solutions at the 0.05 significance level in Figure E1. Lower panel shows the distribution of times of maximum temperature for thermal peak 2 over the time interval, 102.5 - 0 Ma, corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

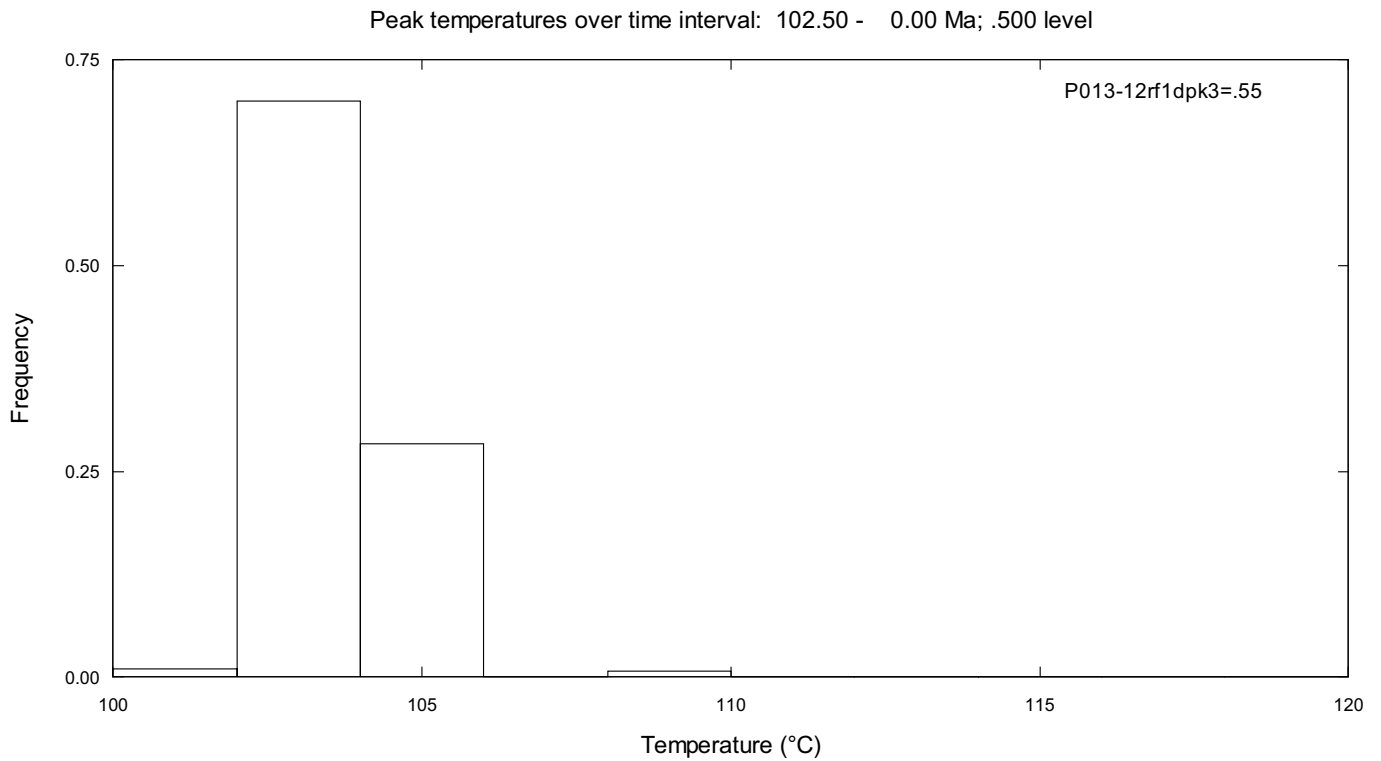
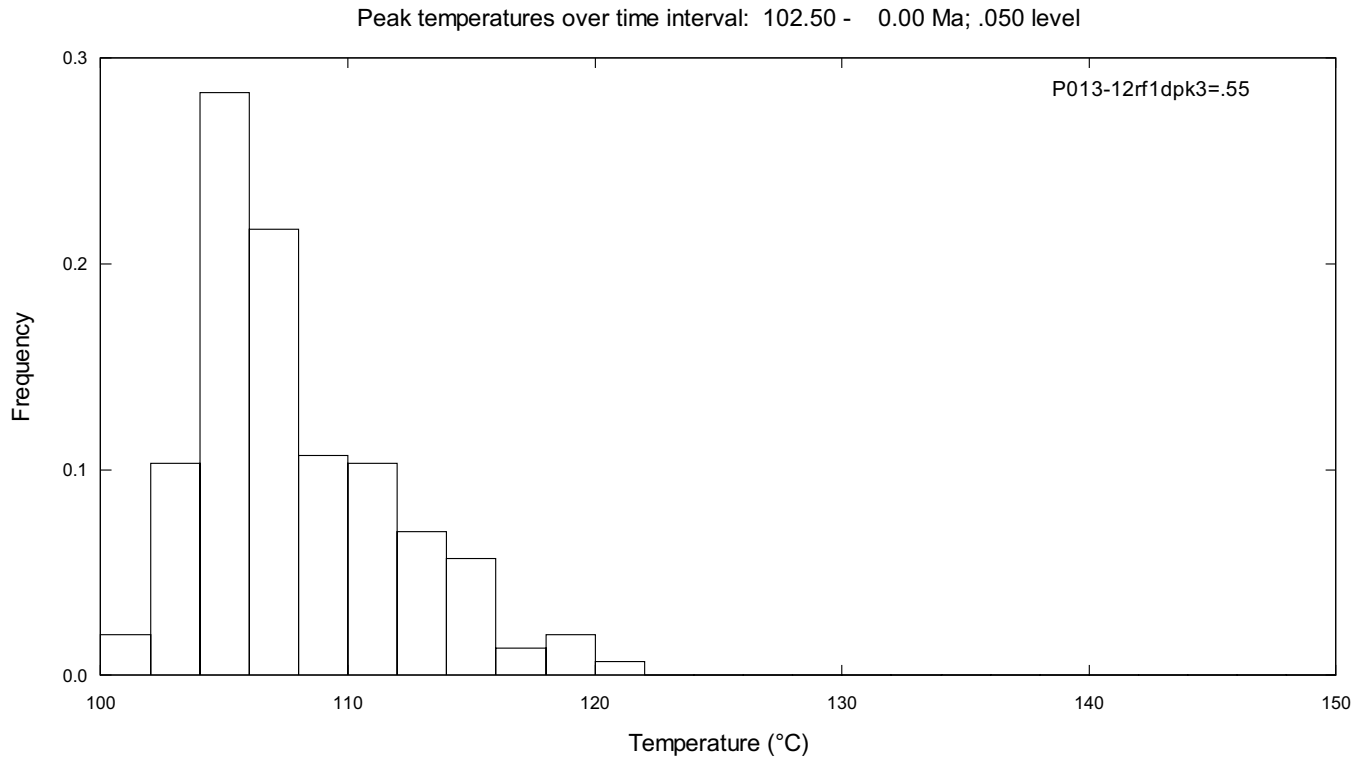


Figure E8. Upper panel shows the distribution of maximum temperatures for thermal peak 2 over the time interval, 102.5 - 0 Ma, corresponding to the 300 MC thermal history solutions at the 0.05 significance level in Figure E1. Lower panel shows the distribution of maximum temperatures for thermal peak 2 over the time interval, 102.5 - 0 Ma, corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

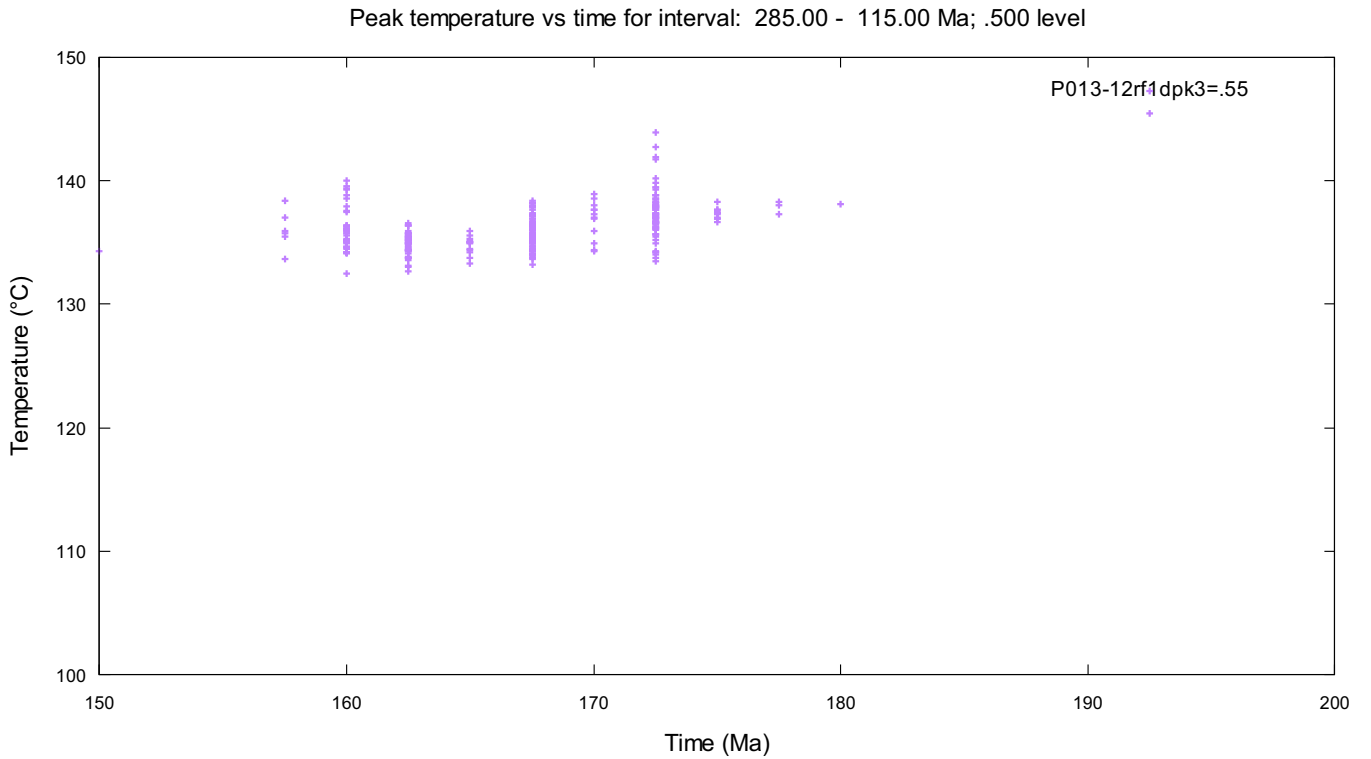
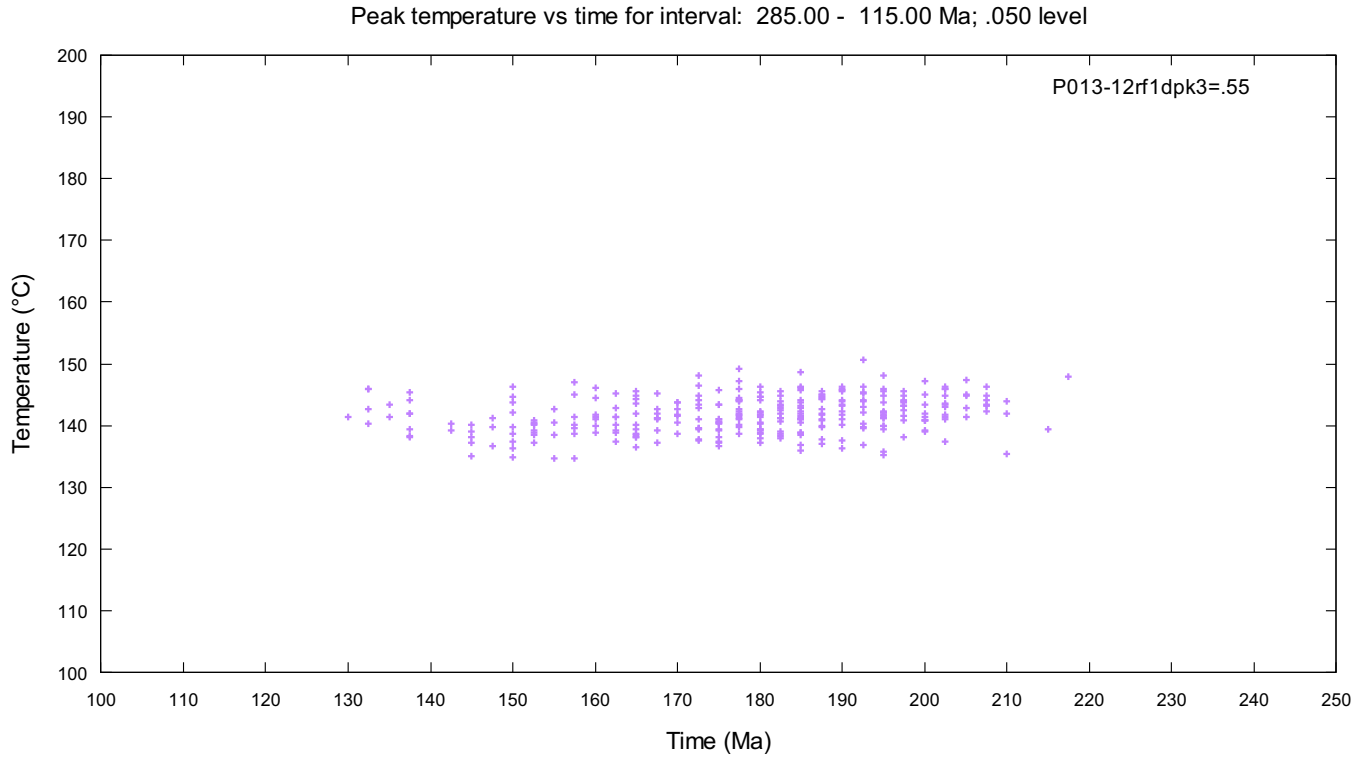


Figure E9. Upper panel shows maximum temperature versus time for thermal peak 1 over the time interval, 285 - 115 Ma, corresponding to the 300 MC thermal history solutions at the 0.05 significance level in Figure E1. Lower panel shows maximum temperature versus time for thermal peak 1 over the time interval, 285 - 115 Ma, corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

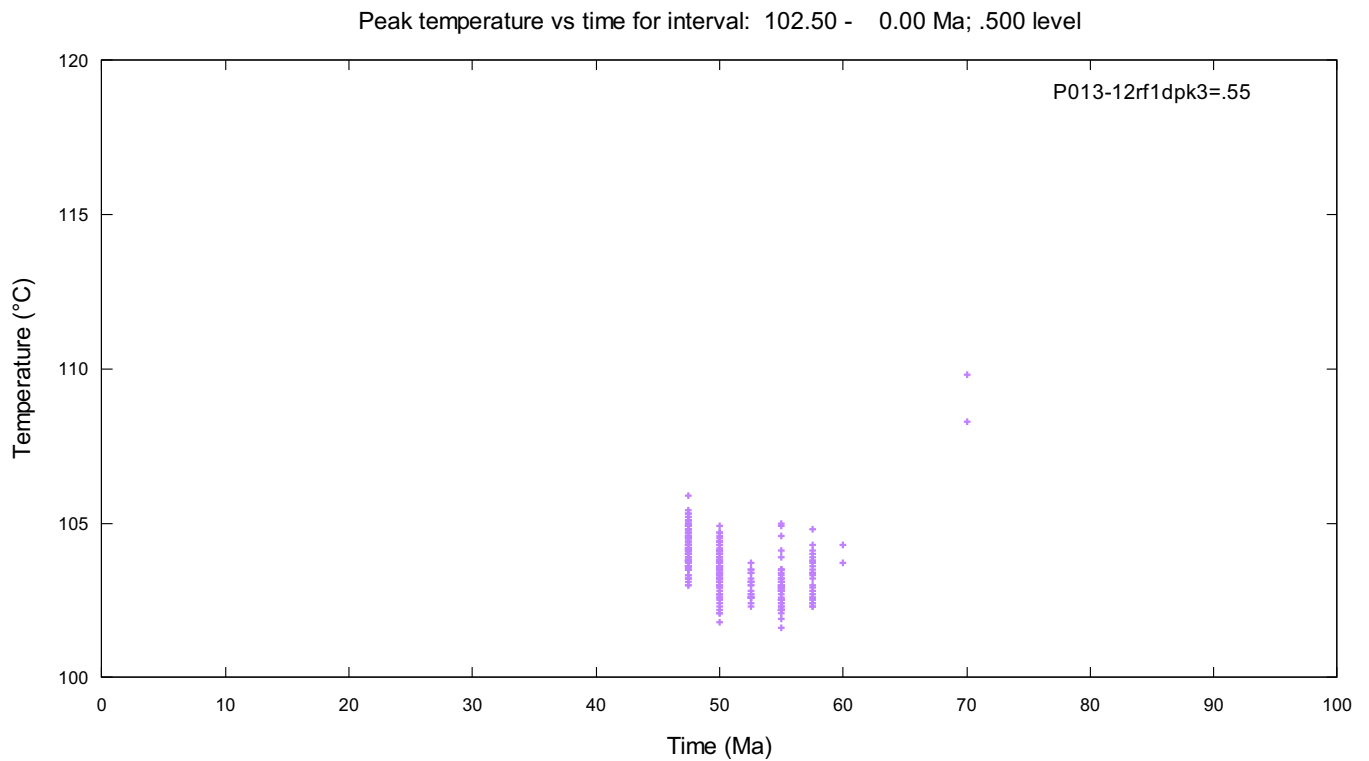
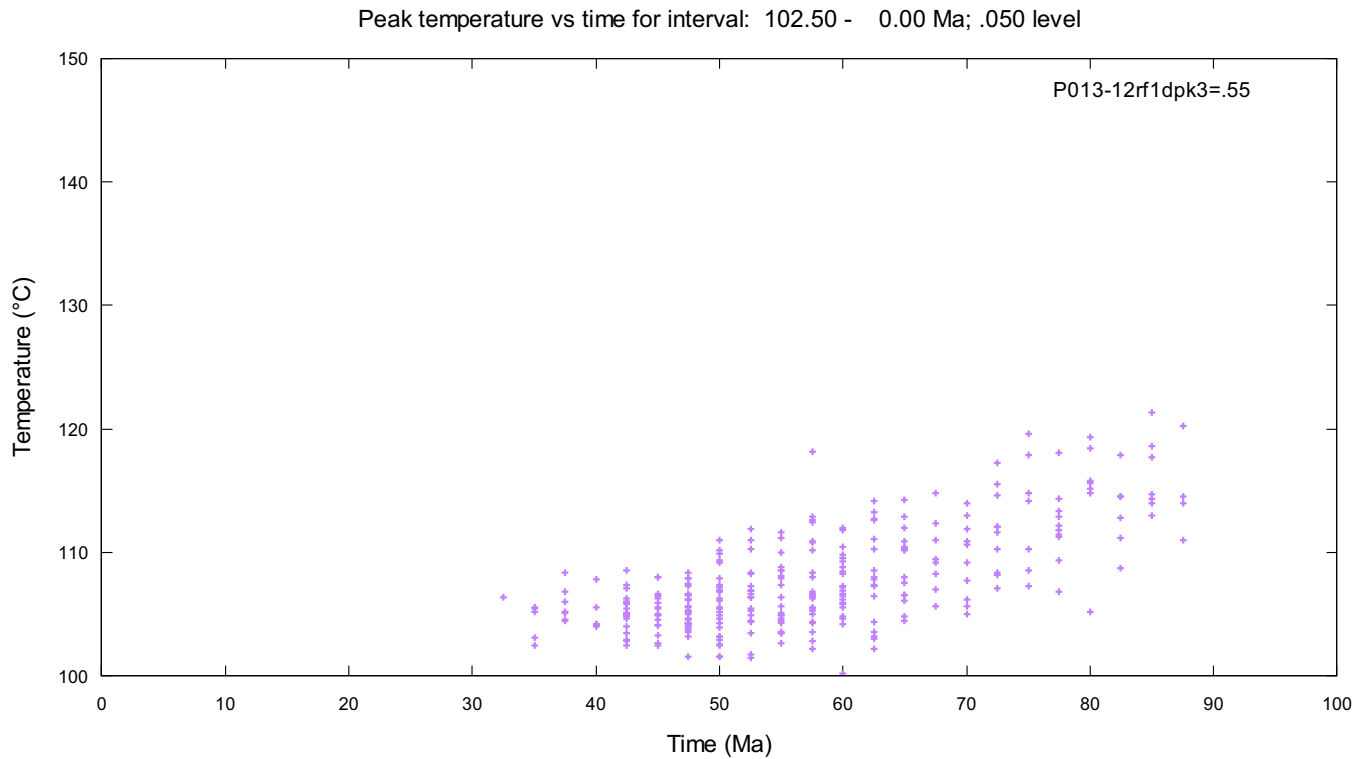


Figure E10. Upper panel shows maximum temperature versus time for thermal peak 2 over the time interval, 102.5 - 0 Ma, corresponding to the 300 MC thermal history solutions at the 0.05 significance level in Figure E1. Lower panel shows maximum temperature versus time for thermal peak 2 over the time interval, 102.5 - 0 Ma, corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

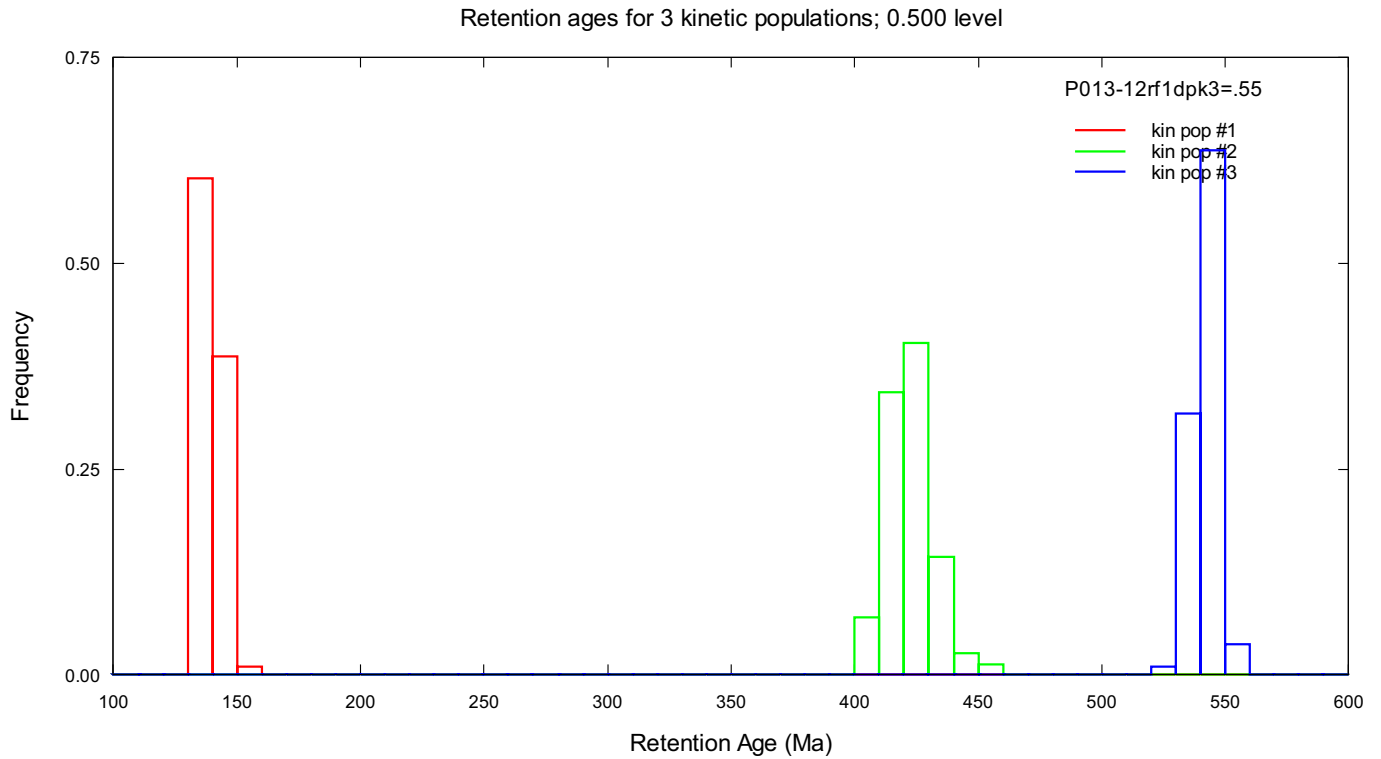
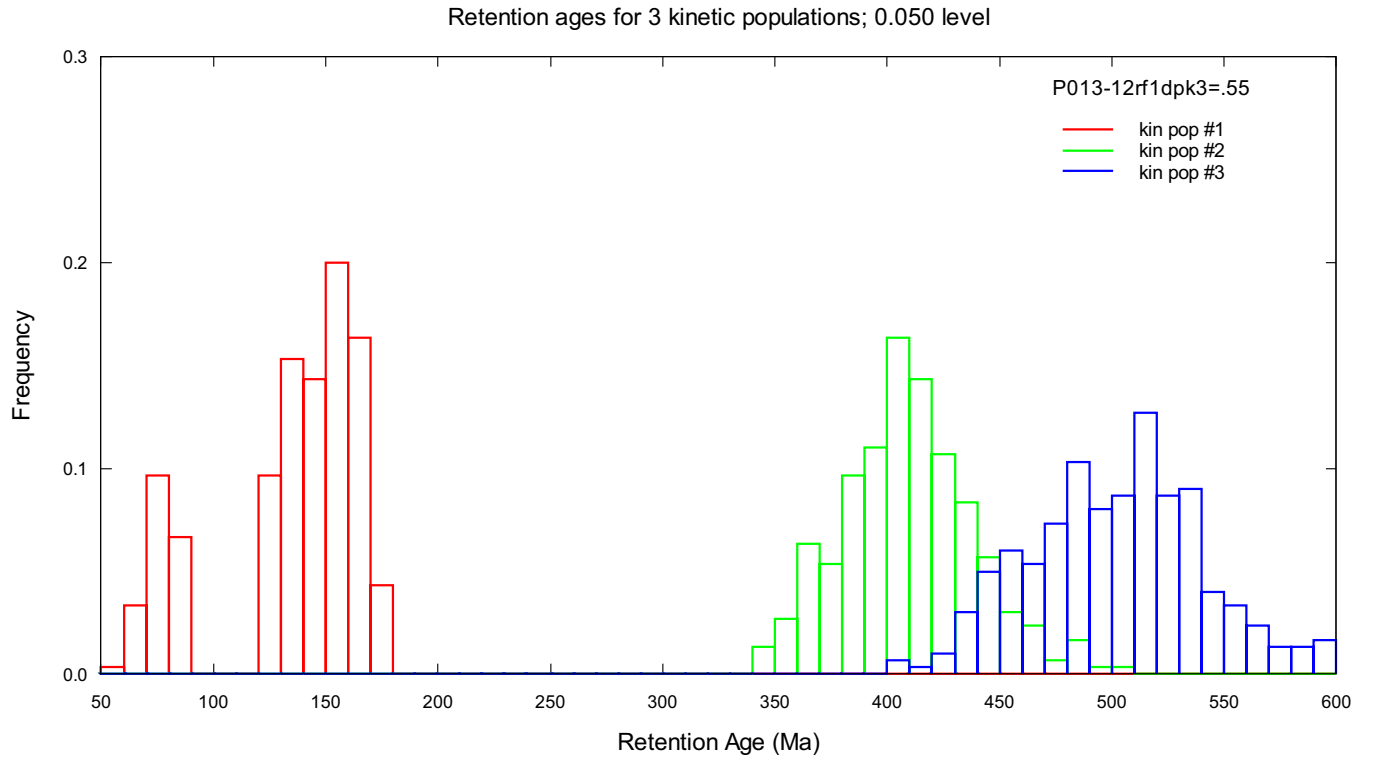


Figure E11. Upper panel shows distribution of model retention ages (age of shortest model track length; $\sim 2\mu\text{m}$) for each kinetic population corresponding to the 300 MC thermal history solutions at the 0.05 significance level in Figure E1. Lower panel shows distribution of model retention ages for each kinetic population, corresponding to the CRS thermal history solutions at the 0.5 significance level in Figure E1.

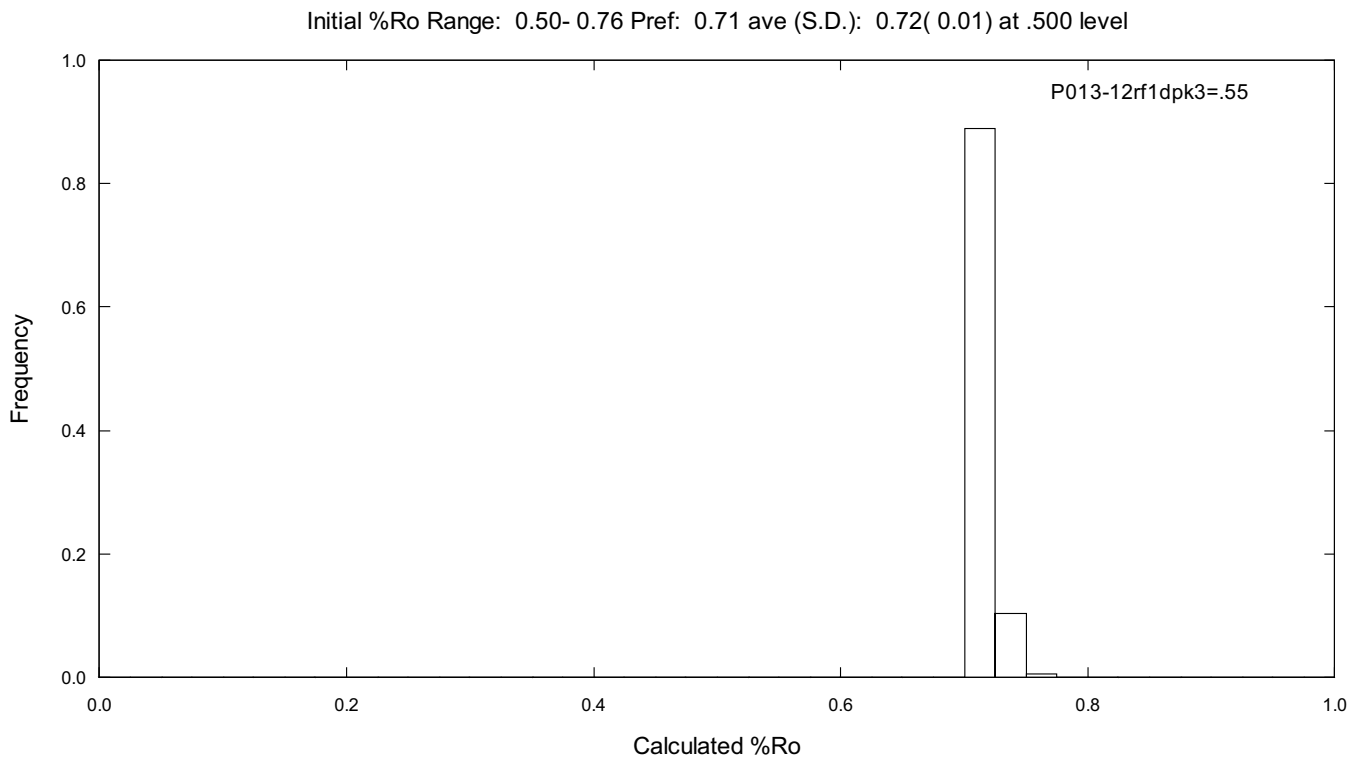
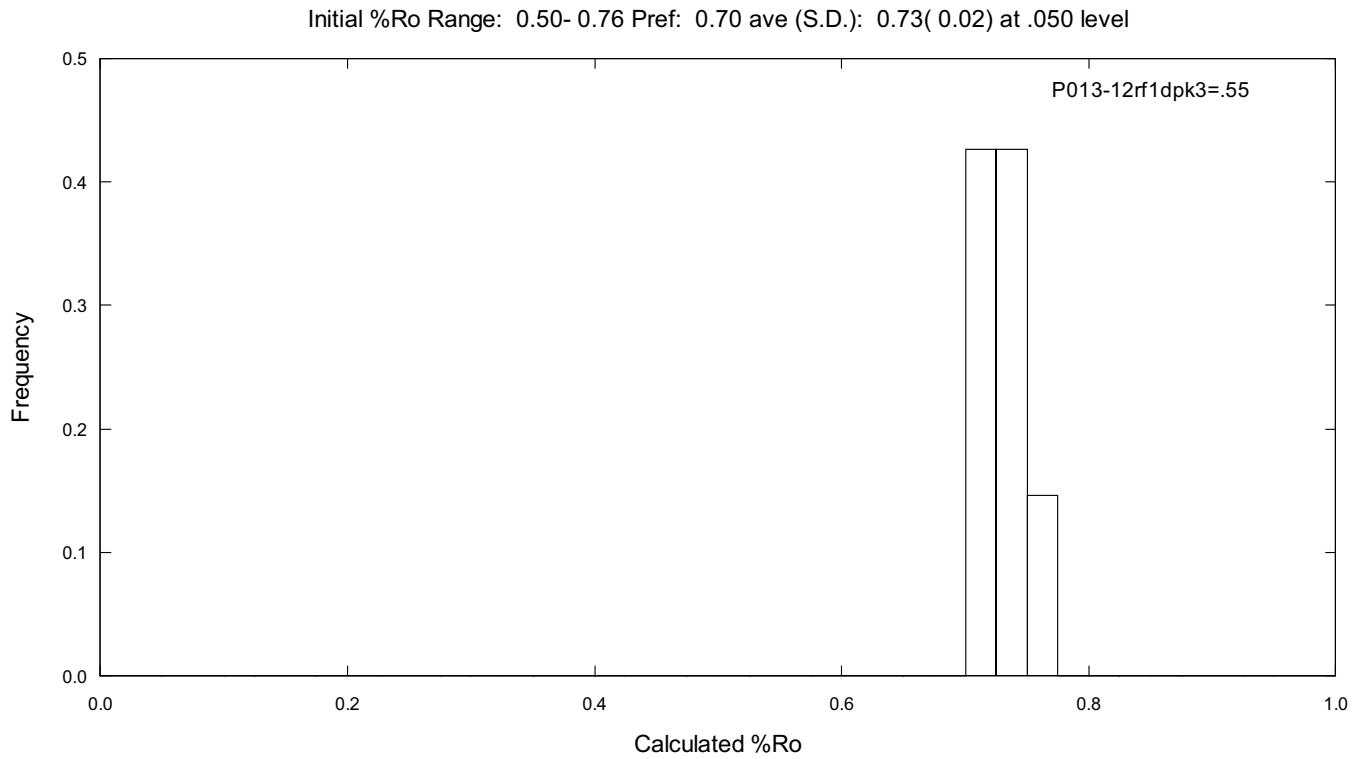


Figure E12. Upper panel shows distribution of calculated vitrinite reflectance values (basin%Ro model) for the post-depositional (post 295-285 Ma) history corresponding to the 300 MC thermal solutions at the 0.05 significance level in Figure E1. Lower panel shows distribution of calculated vitrinite reflectance values for the post-depositional (post 295-285 Ma) history corresponding to the CRS thermal solutions at the 0.5 significance level in Figure E1.

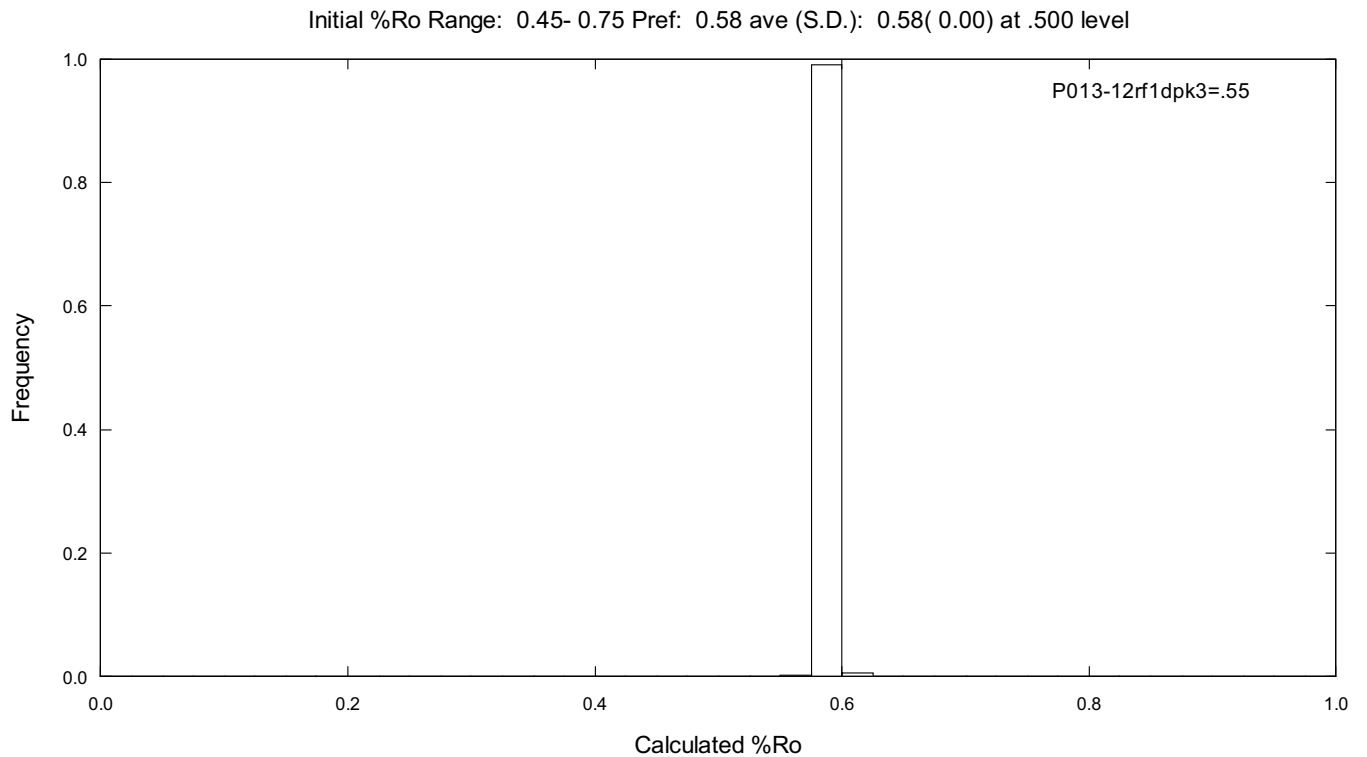
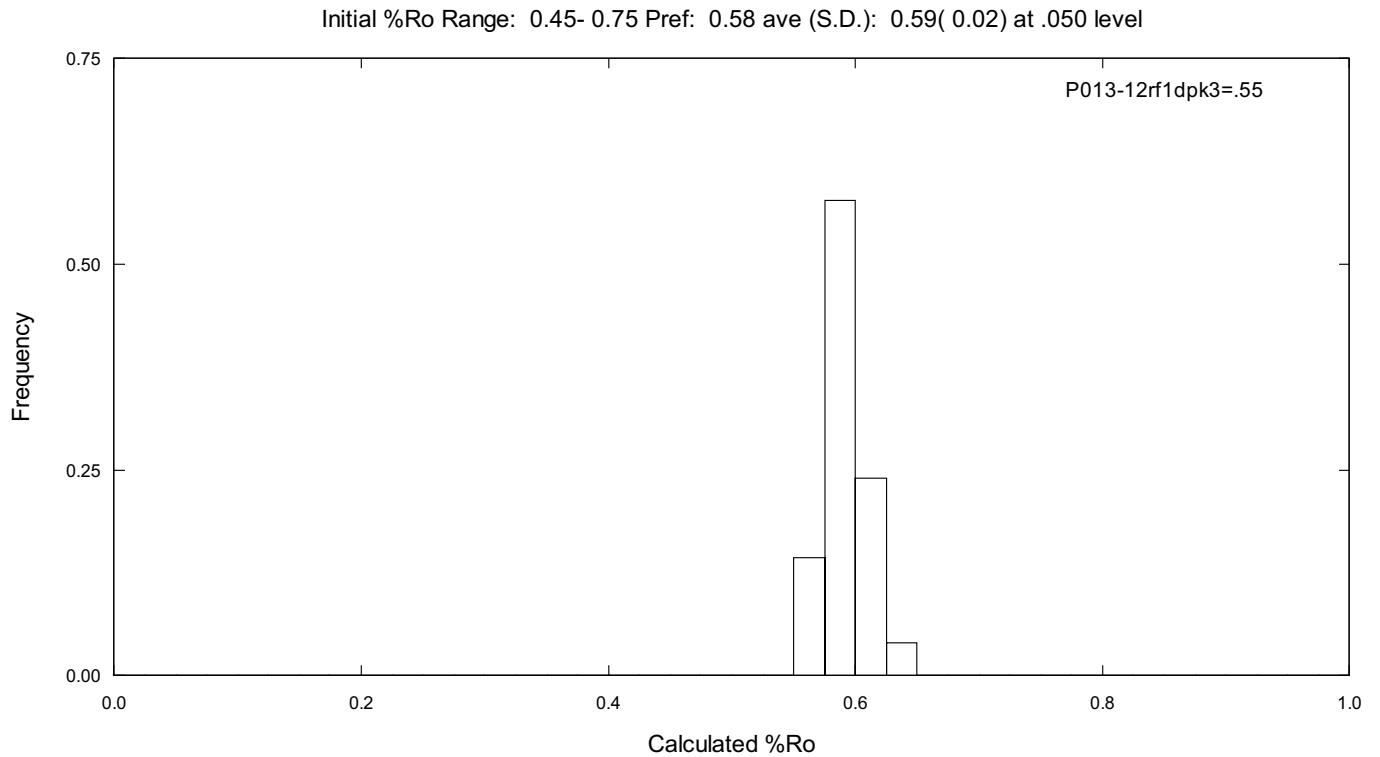


Figure E13. Upper panel shows distribution of calculated vitrinite reflectance values (basin%Ro model) for the post-thermal peak 1 history corresponding to the 300 MC thermal solutions at the 0.05 significance level in Figure E1. Calculations start after the onset of Cretaceous reburial (115-102.5 Ma). Lower panel shows distribution of calculated vitrinite reflectance values for the post-thermal peak 1 history corresponding to the CRS thermal solutions at the 0.5 significance level in Figure E1.

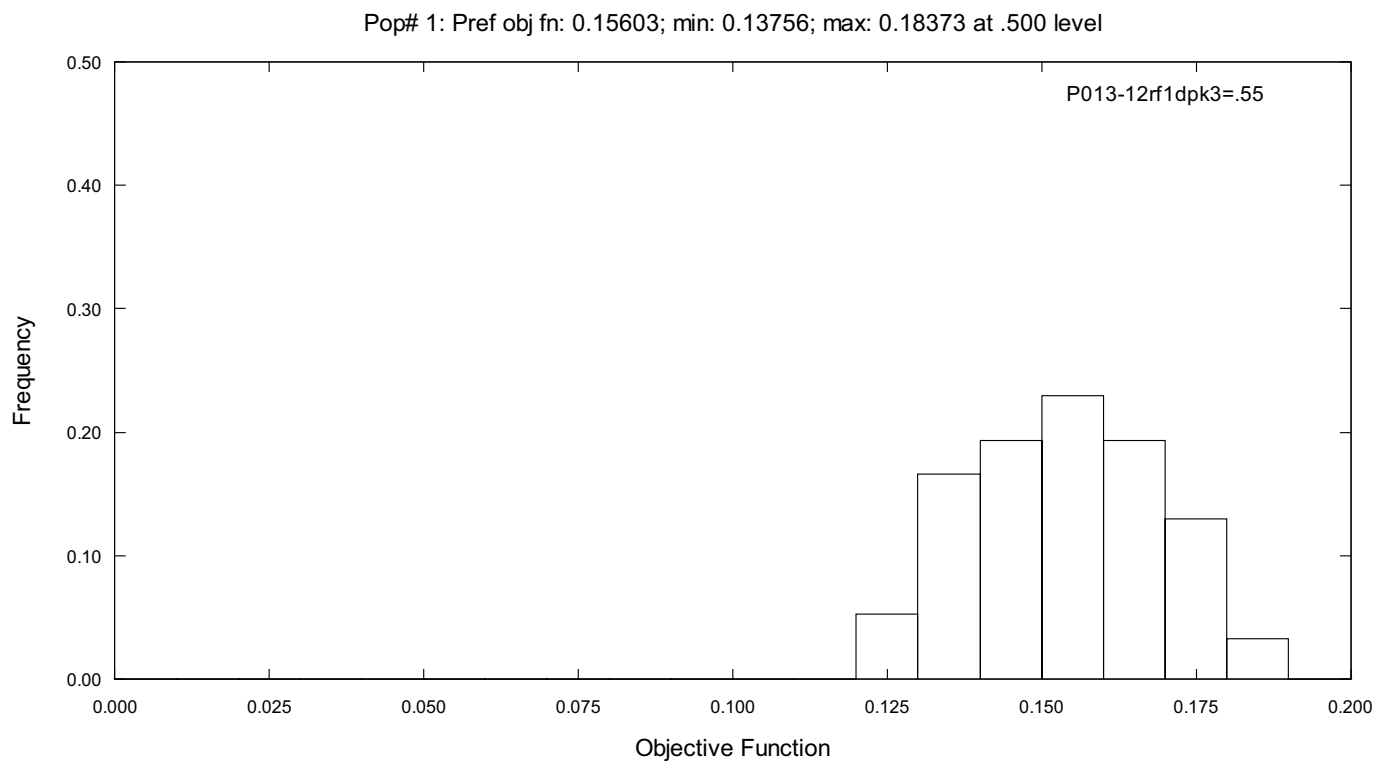
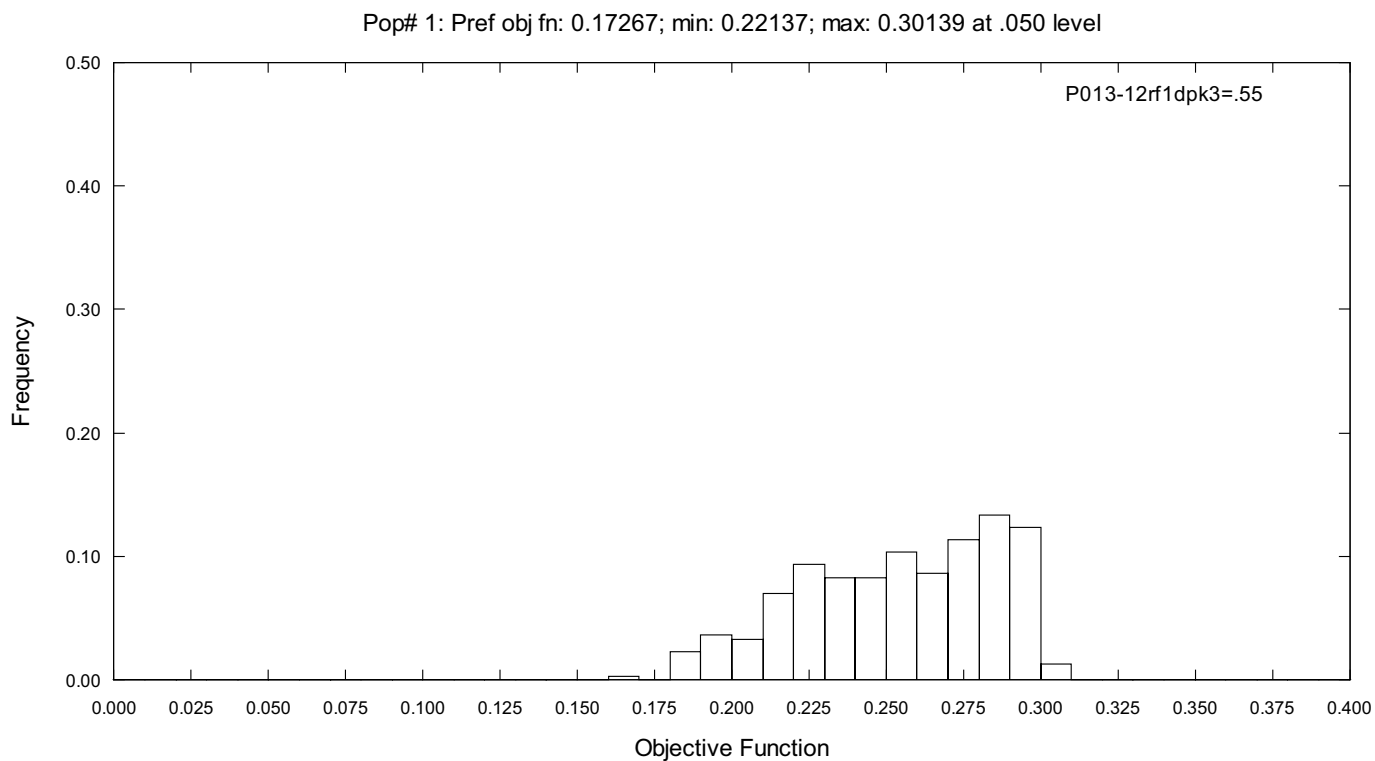


Figure E14. Upper panel shows distribution of objective function values for kinetic population #1 corresponding to the 300 MC thermal solutions in Figure E1 (0.05 significance level). Lower panel shows distribution of objective function values for kinetic population #1 corresponding to the CRS thermal solutions at the 0.5 significance level in Figure E1.

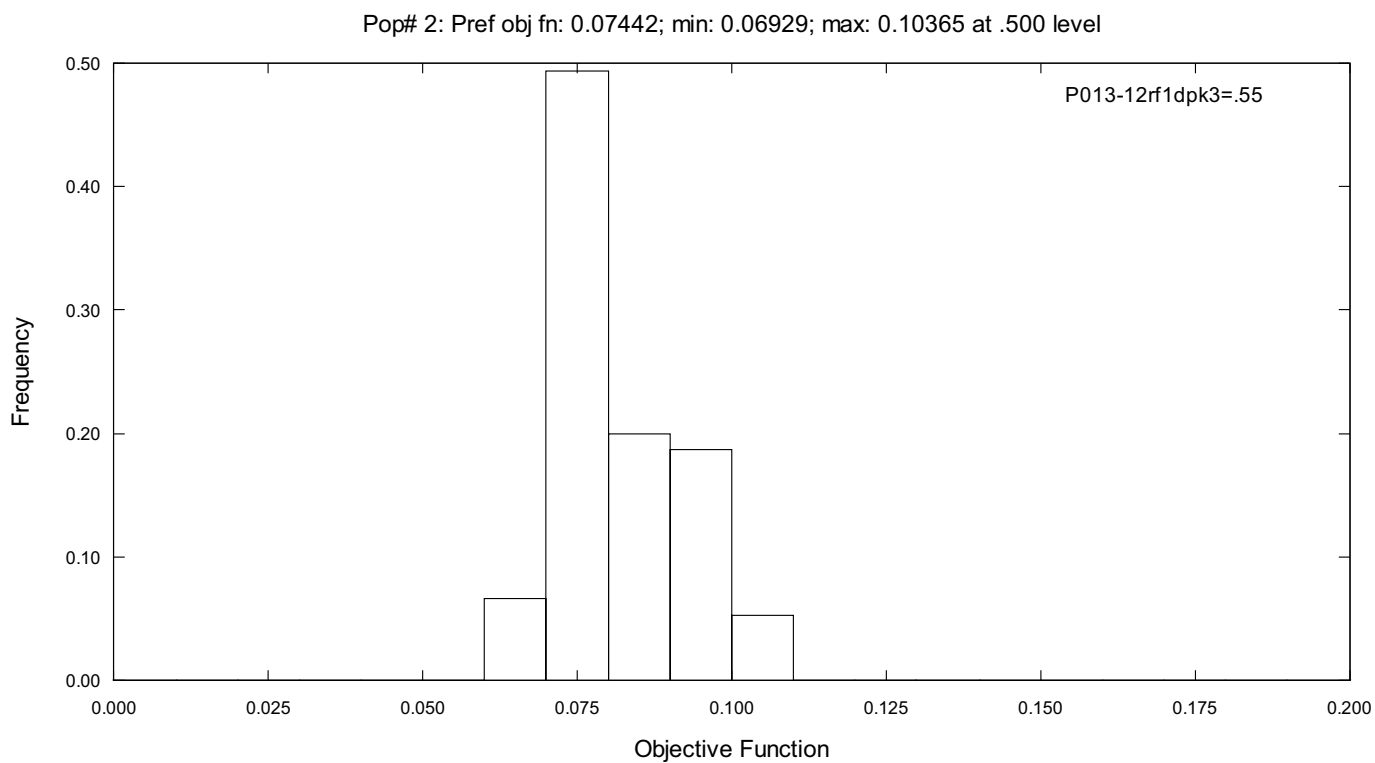
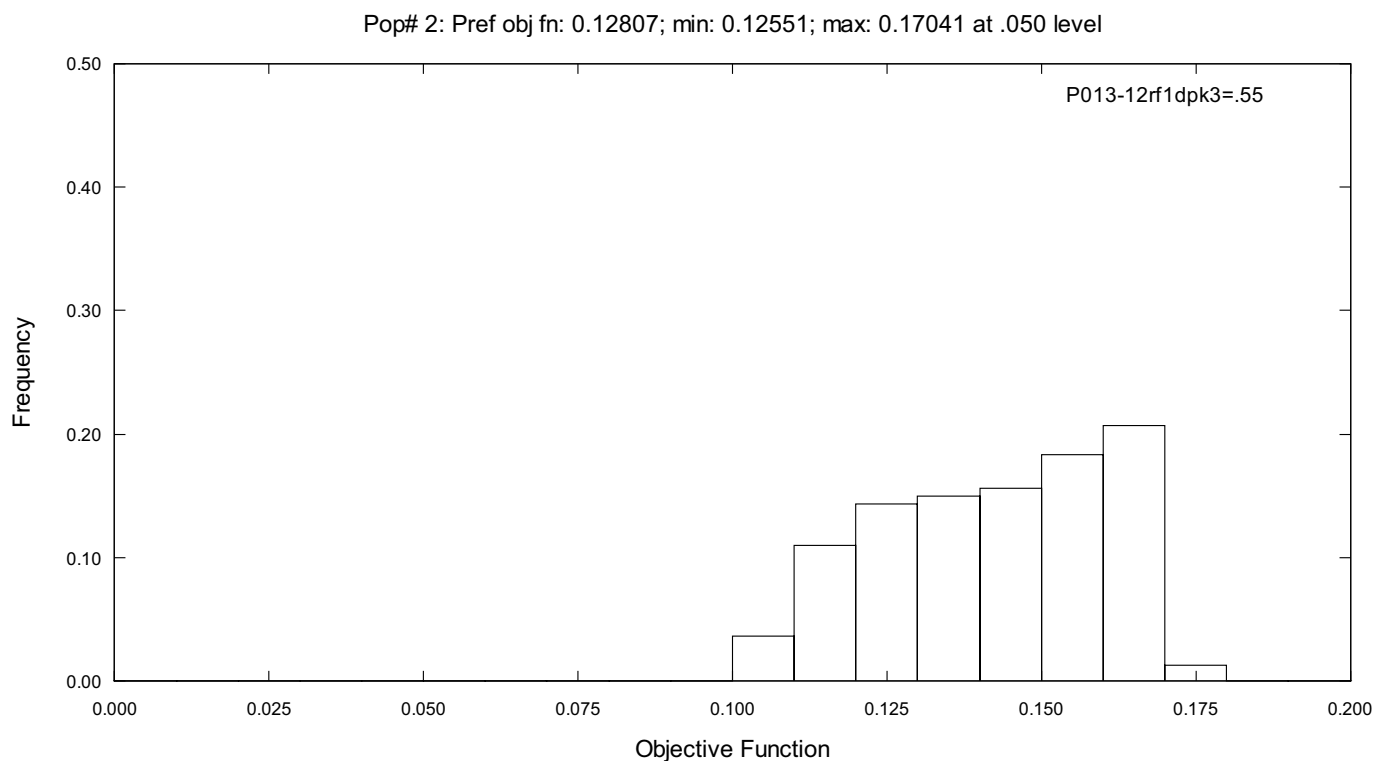


Figure E15. Upper panel shows distribution of objective function values for kinetic population #2 corresponding to the 300 MC thermal solutions in Figure E1 (0.05 significance level). Lower panel shows distribution of objective function values for kinetic population #2 corresponding to the CRS thermal solutions at the 0.5 significance level in Figure E1.

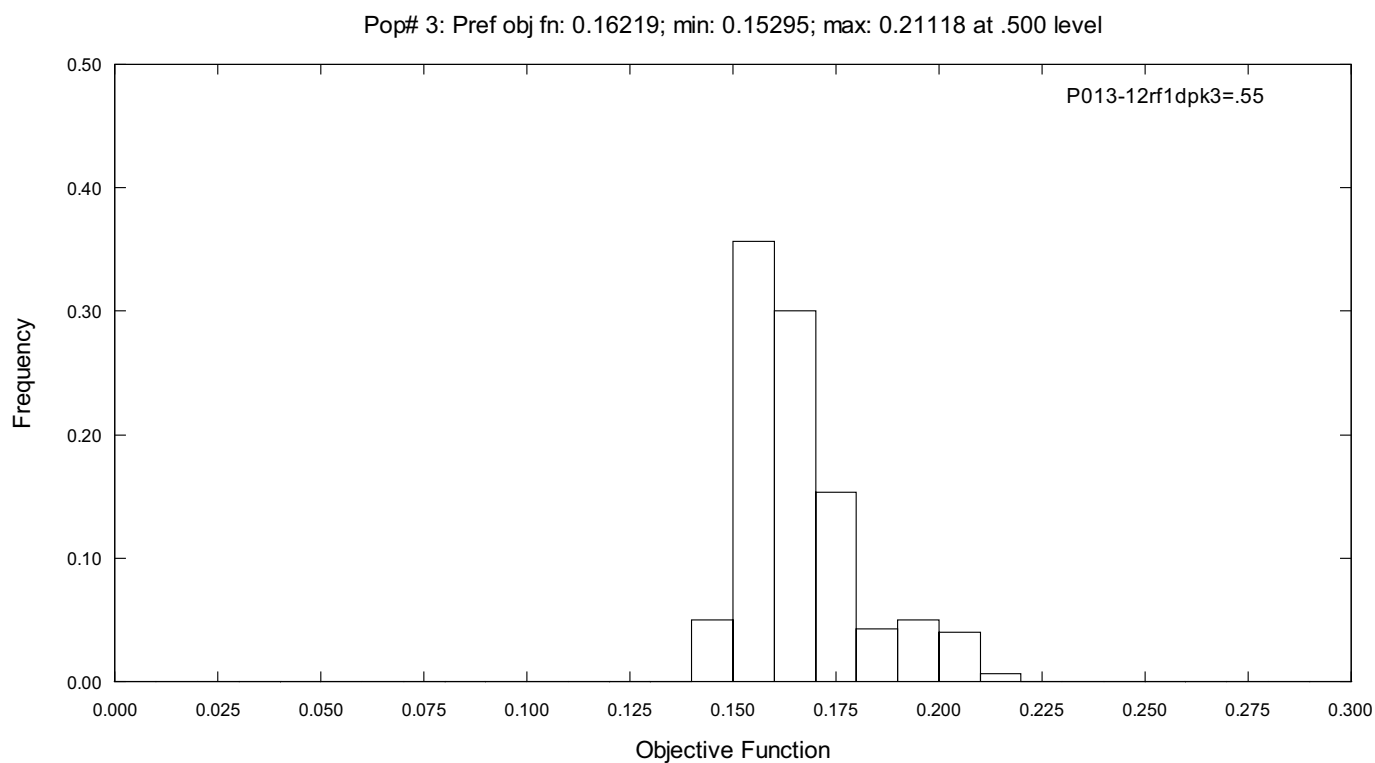
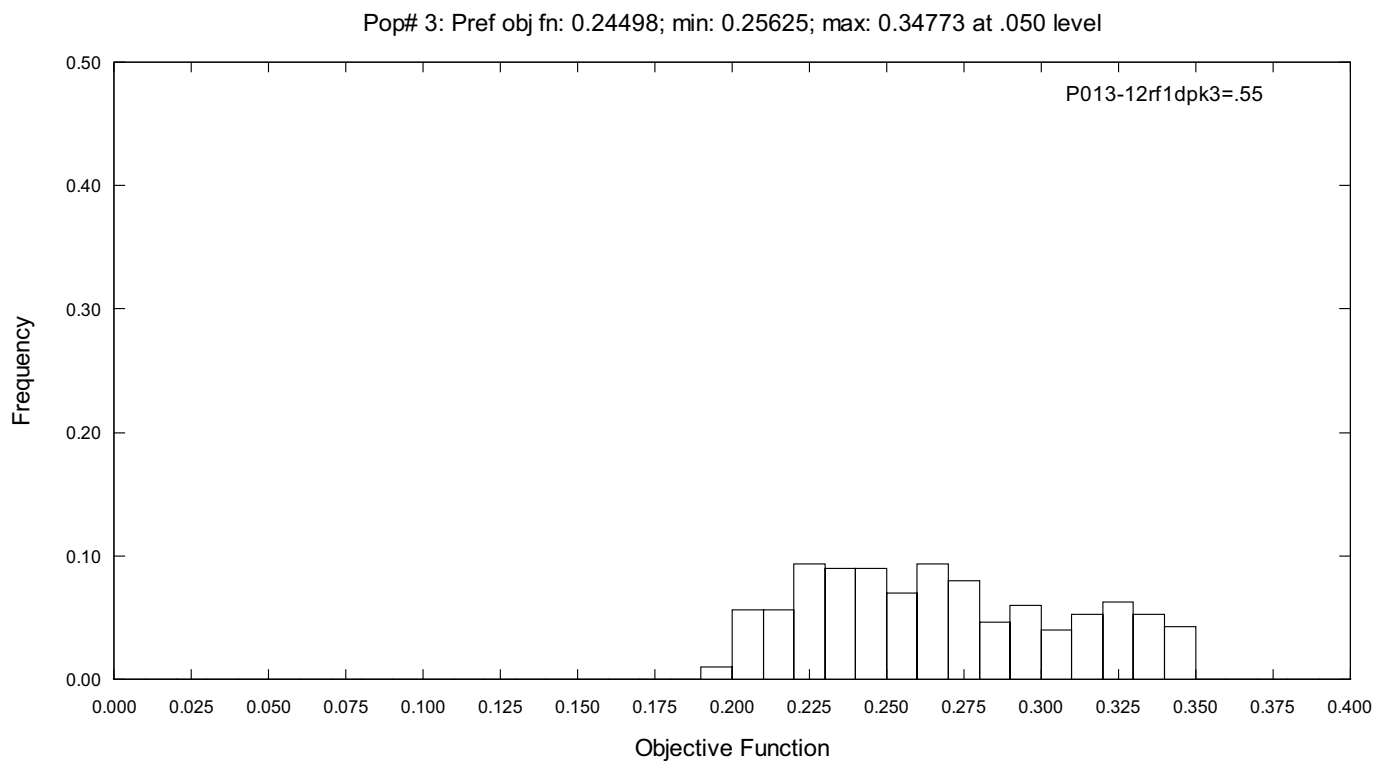


Figure E16. Upper panel shows distribution of objective function values for kinetic population #3 corresponding to the 300 MC thermal solutions in Figure E1 (0.05 significance level). Lower panel shows distribution of objective function values for kinetic population #3 corresponding to the CRS thermal solutions at the 0.5 significance level in Figure E1.

2009LHA003 (1148-06): Imperial Fm (U. Dev. - early Famennian), %Ro~1.62±0.24, T~0-5 deg C
MOD#1E:Tstyle = 10,5,4, dep 377.5-365 Ma, HP1 HR=15,CR=5; HP2 HR=CR=5; HP3 max HR=CR=3, CR=20 at 5 Ma
KETCHAM ET AL ANNEALING MODEL FOR B2 CHLORAPATITE

AFTINV v. 6.10 (August 22, 2019)
INTEL VISUAL FORTRAN 19 FOR WINDOWS 2019
(UPDATE 3) QUICKWIN APPLICATION
PROGRAMMER: DALE ISSLER, GSC CALGARY, CANADA
PHONE: 403-470-1903
EMAIL: dale.issler@canada.ca

INVERSION CONTROL PARAMETERS:

MONTE CARLO RANDOM SEARCH TECHNIQUE USED AT 0.05 SIGNIFICANCE LEVEL (95% CONFIDENCE)
CONTROLLED RANDOM SEARCH TECHNIQUE USED AT 0.5 SIGNIFICANCE LEVEL (50% CONFIDENCE)
LENGTH DATA CORRECTED TO C-AXIS PARALLEL ORIENTATION
NUMBER OF RETAINED SOLUTIONS = 300
NUMBER OF MODEL TIME STEPS (M) = 186
NUMBER OF PARAMETERS (M+1) = 187
NUMERICAL ACCURACY (%), ACUR = 0.1000000
COMPONENT TIME STEP LENGTH (DELSUB) = 2.500
OBJ FN (2=CHI2; 3=K-S; 4=KUIPER) = 3
THERMAL HISTORY GENERATION USING UNIFORM RANDOM DEVIATES (IRSEL=1)

KINETIC POPULATION # 1
CONVERGENCE TOLERANCE (0.050 SIGNIFICANCE) = 0.1682668
OF STANDARD DEVIATIONS TO FIT AGE = 2.0 (0.05 SIGNIFICANCE)
CONVERGENCE TOLERANCE (0.5 SIGNIFICANCE) = 0.1025348
OF STANDARD DEVIATIONS TO FIT AGE = 0.674 (0.5 SIGNIFICANCE)

KINETIC POPULATION # 2
CONVERGENCE TOLERANCE (0.050 SIGNIFICANCE) = 0.1139426
OF STANDARD DEVIATIONS TO FIT AGE = 2.0 (0.05 SIGNIFICANCE)
CONVERGENCE TOLERANCE (0.5 SIGNIFICANCE) = 0.0694319
OF STANDARD DEVIATIONS TO FIT AGE = 0.674 (0.5 SIGNIFICANCE)

COMBINED TRACK POPULATIONS:
CONVERGENCE TOLERANCE (0.050 SIGNIFICANCE) = 0.0947044
CONVERGENCE TOLERANCE (0.5 SIGNIFICANCE) = 5.7708949E-02

AFT AGE BASED ON LA-ICP-MS METHOD

KINETIC POPULATION # 1 (DETRITAL)
MEASURED AFT AGE = 119.29
SIGMA OF ERROR IN MEASURED AGE = 12.25

KINETIC POPULATION # 2 (DETRITAL)
MEASURED AFT AGE = 252.40
SIGMA OF ERROR IN MEASURED AGE = 11.61

TOTAL NUMBER OF TRACKS MEASURED = 202
TOTAL NUMBER OF TRACKS MODELLED = 202
INITIAL RANDOM NUMBER GENERATOR SEED = 958
SYSTEM RANDOM NUMBER GENERATOR RAN(ISEED)
EXPANSION FACTOR (ALPHA) = 1.300
REPOSITION FACTOR FOR EXPLICIT BOUND (DELTA) = 0.0010

KINETIC POPULATION # 1
C1 RANGE: -0.1000 - 0.0725
REPRESENTATIVE C1 VALUE = 0.0300
RMRO = 0.82980
NUMBER OF TRACK LENGTHS = 63
ORIGINAL MEAN TRACK LENGTH = 16.276
INITIAL C-AXIS PROJECTED TRACK LENGTH = 16.705

KINETIC POPULATION # 2
C1 RANGE: 0.0725 - 0.7000
REPRESENTATIVE C1 VALUE = 0.5000
RMRO = 0.54182
NUMBER OF TRACK LENGTHS = 139
ORIGINAL MEAN TRACK LENGTH = 16.779
INITIAL C-AXIS PROJECTED TRACK LENGTH = 17.175

EMPIRICAL MODEL OF AGE REDUCTION
TRACK LENGTH REDUCTION COEFFICIENTS:
-19.84399986 0.38951001 -51.25299835 -7.64230013 -0.12327000 -11.98799992

COMPONENT VARIANCE COEFFICIENTS (CUBIC POLYNOMIAL):

	C1	C2	C3	C4
WILLETT MEAN LENGTH	0.78990000	0.00000000	0.00303500	-0.00229830
KETCHAM ET AL. MEAN LENGTH	7.46400023	-0.87330002	0.02858000	0.00000000
KETCHAM ET AL. C-AXIS PROJECTED LENGTH	2.31200004	-0.24420001	0.00845200	0.00000000
KETCHAM ET AL. REDUCED MEAN LENGTH	0.45719999	-0.88150001	0.49470001	0.00000000
KETCHAM ET AL. REDUCED C-AXIS PROJECTED	0.10810000	-0.16419999	0.10520000	0.00000000

	GEOLOGIC TIME (MA)	MODEL TIME (MY)	TEMPERATURE BOUNDS (DEG C)		RATE BOUNDS (DEG C/MY)		TIME INTERVAL
			LOWER	UPPER	COOLING	HEATING	
1	700.00	0.00	245.00	250.00	5.00	5.00	10.00
2	690.00	10.00	195.00	250.00	5.00	5.00	10.00
3	680.00	20.00	145.00	250.00	5.00	5.00	10.00
4	670.00	30.00	95.00	250.00	5.00	5.00	10.00
5	660.00	40.00	45.00	250.00	5.00	5.00	10.00
6	650.00	50.00	0.00	250.00	5.00	5.00	10.00
7	640.00	60.00	0.00	250.00	5.00	5.00	10.00
8	630.00	70.00	0.00	250.00	5.00	5.00	10.00
9	620.00	80.00	0.00	250.00	5.00	5.00	10.00
10	610.00	90.00	0.00	250.00	5.00	5.00	10.00
11	600.00	100.00	0.00	250.00	5.00	5.00	10.00
12	590.00	110.00	0.00	250.00	5.00	5.00	10.00
13	580.00	120.00	0.00	250.00	5.00	5.00	10.00
14	570.00	130.00	0.00	250.00	5.00	5.00	10.00
15	560.00	140.00	0.00	250.00	5.00	5.00	10.00
16	550.00	150.00	0.00	250.00	5.00	5.00	10.00
17	540.00	160.00	0.00	250.00	5.00	5.00	10.00
18	530.00	170.00	0.00	250.00	5.00	5.00	10.00
19	520.00	180.00	0.00	250.00	5.00	5.00	10.00
20	510.00	190.00	0.00	250.00	5.00	5.00	10.00
21	500.00	200.00	0.00	250.00	5.00	5.00	10.00
22	490.00	210.00	0.00	250.00	5.00	5.00	10.00
23	480.00	220.00	0.00	250.00	5.00	5.00	10.00
24	470.00	230.00	0.00	250.00	5.00	5.00	10.00
25	460.00	240.00	0.00	250.00	5.00	5.00	10.00
26	450.00	250.00	0.00	250.00	5.00	5.00	10.00
27	440.00	260.00	0.00	250.00	5.00	5.00	10.00
28	430.00	270.00	0.00	250.00	5.00	5.00	10.00
29	420.00	280.00	0.00	250.00	5.00	5.00	10.00
30	410.00	290.00	0.00	250.00	5.00	5.00	10.00
31	400.00	300.00	0.00	250.00	5.00	5.00	10.00
32	390.00	310.00	0.00	250.00	5.00	5.00	5.00
33	385.00	315.00	0.00	232.50	5.00	5.00	2.50
34	382.50	317.50	0.00	220.00	5.00	5.00	2.50
35	380.00	320.00	0.00	207.50	5.00	5.00	2.50
36	377.50	322.50	0.00	195.00	5.00	15.00	2.50
37	375.00	325.00	0.00	195.00	5.00	15.00	2.50
38	372.50	327.50	0.00	195.00	5.00	15.00	2.50
39	370.00	330.00	0.00	195.00	5.00	15.00	2.50
40	367.50	332.50	0.00	195.00	5.00	15.00	2.50
41	365.00	335.00	0.00	195.00	5.00	15.00	2.50
42	362.50	337.50	0.00	195.00	5.00	15.00	2.50
43	360.00	340.00	0.00	195.00	5.00	15.00	2.50
44	357.50	342.50	0.00	195.00	5.00	15.00	2.50
45	355.00	345.00	0.00	195.00	5.00	15.00	2.50
46	352.50	347.50	0.00	195.00	5.00	15.00	2.50
47	350.00	350.00	0.00	195.00	5.00	15.00	2.50
48	347.50	352.50	0.00	195.00	5.00	15.00	2.50
49	345.00	355.00	0.00	195.00	5.00	15.00	2.50
50	342.50	357.50	0.00	195.00	5.00	15.00	2.50
51	340.00	360.00	0.00	195.00	5.00	15.00	2.50
52	337.50	362.50	0.00	195.00	5.00	15.00	2.50
53	335.00	365.00	0.00	195.00	5.00	15.00	2.50
54	332.50	367.50	0.00	195.00	5.00	15.00	2.50
55	330.00	370.00	0.00	195.00	5.00	15.00	2.50
56	327.50	372.50	0.00	195.00	5.00	15.00	2.50
57	325.00	375.00	0.00	195.00	5.00	15.00	2.50
58	322.50	377.50	0.00	195.00	5.00	15.00	2.50
59	320.00	380.00	0.00	195.00	5.00	15.00	2.50
60	317.50	382.50	0.00	195.00	5.00	15.00	2.50
61	315.00	385.00	0.00	195.00	5.00	15.00	2.50
62	312.50	387.50	0.00	195.00	5.00	15.00	2.50
63	310.00	390.00	0.00	195.00	5.00	15.00	2.50

64	307.50	392.50	0.00	195.00	5.00	15.00	2.50
65	305.00	395.00	0.00	195.00	5.00	15.00	2.50
66	302.50	397.50	0.00	195.00	5.00	15.00	2.50
67	300.00	400.00	0.00	195.00	5.00	15.00	2.50
68	297.50	402.50	0.00	195.00	5.00	15.00	2.50
69	295.00	405.00	0.00	195.00	5.00	15.00	2.50
70	292.50	407.50	0.00	195.00	5.00	15.00	2.50
71	290.00	410.00	0.00	195.00	5.00	15.00	2.50
72	287.50	412.50	0.00	195.00	5.00	15.00	2.50
73	285.00	415.00	0.00	195.00	5.00	15.00	2.50
74	282.50	417.50	0.00	195.00	5.00	15.00	2.50
75	280.00	420.00	0.00	195.00	5.00	15.00	2.50
76	277.50	422.50	0.00	195.00	5.00	15.00	2.50
77	275.00	425.00	0.00	195.00	5.00	15.00	2.50
78	272.50	427.50	0.00	195.00	5.00	15.00	2.50
79	270.00	430.00	0.00	195.00	5.00	15.00	2.50
80	267.50	432.50	0.00	195.00	5.00	15.00	2.50
81	265.00	435.00	0.00	195.00	5.00	15.00	2.50
82	262.50	437.50	0.00	195.00	5.00	15.00	2.50
83	260.00	440.00	0.00	195.00	5.00	15.00	2.50
84	257.50	442.50	0.00	195.00	5.00	15.00	2.50
85	255.00	445.00	0.00	195.00	5.00	15.00	2.50
86	252.50	447.50	0.00	195.00	5.00	15.00	2.50
87	250.00	450.00	0.00	195.00	5.00	15.00	2.50
88	247.50	452.50	0.00	187.50	5.00	15.00	2.50
89	245.00	455.00	0.00	175.00	5.00	15.00	2.50
90	242.50	457.50	0.00	162.50	5.00	15.00	2.50
91	240.00	460.00	0.00	150.00	5.00	5.00	2.50
92	237.50	462.50	0.00	150.00	5.00	5.00	2.50
93	235.00	465.00	0.00	150.00	5.00	5.00	2.50
94	232.50	467.50	0.00	150.00	5.00	5.00	2.50
95	230.00	470.00	0.00	150.00	5.00	5.00	2.50
96	227.50	472.50	0.00	150.00	5.00	5.00	2.50
97	225.00	475.00	0.00	150.00	5.00	5.00	2.50
98	222.50	477.50	0.00	150.00	5.00	5.00	2.50
99	220.00	480.00	0.00	150.00	5.00	5.00	2.50
100	217.50	482.50	0.00	150.00	5.00	5.00	2.50
101	215.00	485.00	0.00	150.00	5.00	5.00	2.50
102	212.50	487.50	0.00	150.00	5.00	5.00	2.50
103	210.00	490.00	0.00	150.00	5.00	5.00	2.50
104	207.50	492.50	0.00	150.00	5.00	5.00	2.50
105	205.00	495.00	0.00	150.00	5.00	5.00	2.50
106	202.50	497.50	0.00	150.00	5.00	5.00	2.50
107	200.00	500.00	0.00	150.00	5.00	5.00	2.50
108	197.50	502.50	0.00	150.00	5.00	5.00	2.50
109	195.00	505.00	0.00	150.00	5.00	5.00	2.50
110	192.50	507.50	0.00	150.00	5.00	5.00	2.50
111	190.00	510.00	0.00	150.00	5.00	5.00	2.50
112	187.50	512.50	0.00	150.00	5.00	5.00	2.50
113	185.00	515.00	0.00	150.00	5.00	5.00	2.50
114	182.50	517.50	0.00	150.00	5.00	5.00	2.50
115	180.00	520.00	0.00	150.00	5.00	5.00	2.50
116	177.50	522.50	0.00	150.00	5.00	5.00	2.50
117	175.00	525.00	0.00	150.00	5.00	5.00	2.50
118	172.50	527.50	0.00	150.00	5.00	5.00	2.50
119	170.00	530.00	0.00	150.00	5.00	5.00	2.50
120	167.50	532.50	0.00	150.00	5.00	5.00	2.50
121	165.00	535.00	0.00	150.00	5.00	5.00	2.50
122	162.50	537.50	0.00	150.00	5.00	5.00	2.50
123	160.00	540.00	0.00	150.00	5.00	5.00	2.50
124	157.50	542.50	0.00	150.00	5.00	5.00	2.50
125	155.00	545.00	0.00	150.00	5.00	5.00	2.50
126	152.50	547.50	0.00	150.00	5.00	5.00	2.50
127	150.00	550.00	0.00	150.00	5.00	5.00	2.50
128	147.50	552.50	0.00	150.00	5.00	5.00	2.50
129	145.00	555.00	0.00	150.00	5.00	5.00	2.50
130	142.50	557.50	0.00	150.00	5.00	5.00	2.50
131	140.00	560.00	0.00	150.00	5.00	5.00	2.50
132	137.50	562.50	0.00	150.00	5.00	5.00	2.50
133	135.00	565.00	0.00	150.00	5.00	5.00	2.50
134	132.50	567.50	0.00	150.00	5.00	5.00	2.50
135	130.00	570.00	0.00	150.00	5.00	5.00	2.50
136	127.50	572.50	0.00	150.00	5.00	5.00	2.50
137	125.00	575.00	0.00	150.00	5.00	5.00	2.50
138	122.50	577.50	0.00	147.50	5.00	5.00	2.50
139	120.00	580.00	0.00	135.00	5.00	5.00	2.50
140	117.50	582.50	0.00	122.50	5.00	5.00	2.50
141	115.00	585.00	0.00	110.00	3.00	3.00	2.50

142	112.50	587.50	0.00	110.00	3.00	3.00	2.50
143	110.00	590.00	0.00	110.00	3.00	3.00	2.50
144	107.50	592.50	0.00	110.00	3.00	3.00	2.50
145	105.00	595.00	0.00	110.00	3.00	3.00	2.50
146	102.50	597.50	0.00	110.00	3.00	3.00	2.50
147	100.00	600.00	0.00	110.00	3.00	3.00	2.50
148	97.50	602.50	0.00	110.00	3.00	3.00	2.50
149	95.00	605.00	0.00	110.00	3.00	3.00	2.50
150	92.50	607.50	0.00	110.00	3.00	3.00	2.50
151	90.00	610.00	0.00	110.00	3.00	3.00	2.50
152	87.50	612.50	0.00	110.00	3.00	3.00	2.50
153	85.00	615.00	0.00	110.00	3.00	3.00	2.50
154	82.50	617.50	0.00	110.00	3.00	3.00	2.50
155	80.00	620.00	0.00	110.00	3.00	3.00	2.50
156	77.50	622.50	0.00	110.00	3.00	3.00	2.50
157	75.00	625.00	0.00	110.00	3.00	3.00	2.50
158	72.50	627.50	0.00	110.00	3.00	3.00	2.50
159	70.00	630.00	0.00	110.00	3.00	3.00	2.50
160	67.50	632.50	0.00	110.00	3.00	3.00	2.50
161	65.00	635.00	0.00	110.00	3.00	3.00	2.50
162	62.50	637.50	0.00	110.00	3.00	3.00	2.50
163	60.00	640.00	0.00	110.00	3.00	3.00	2.50
164	57.50	642.50	0.00	110.00	3.00	3.00	2.50
165	55.00	645.00	0.00	110.00	3.00	3.00	2.50
166	52.50	647.50	0.00	110.00	3.00	3.00	2.50
167	50.00	650.00	0.00	110.00	3.00	3.00	2.50
168	47.50	652.50	0.00	110.00	3.00	3.00	2.50
169	45.00	655.00	0.00	110.00	3.00	3.00	2.50
170	42.50	657.50	0.00	110.00	3.00	3.00	2.50
171	40.00	660.00	0.00	110.00	3.00	3.00	2.50
172	37.50	662.50	0.00	110.00	3.00	3.00	2.50
173	35.00	665.00	0.00	110.00	3.00	3.00	2.50
174	32.50	667.50	0.00	110.00	3.00	3.00	2.50
175	30.00	670.00	0.00	110.00	3.00	3.00	2.50
176	27.50	672.50	0.00	110.00	3.00	3.00	2.50
177	25.00	675.00	0.00	110.00	3.00	3.00	2.50
178	22.50	677.50	0.00	110.00	3.00	3.00	2.50
179	20.00	680.00	0.00	110.00	3.00	3.00	2.50
180	17.50	682.50	0.00	110.00	3.00	3.00	2.50
181	15.00	685.00	0.00	110.00	3.00	3.00	2.50
182	12.50	687.50	0.00	110.00	3.00	3.00	2.50
183	10.00	690.00	0.00	110.00	3.00	3.00	2.50
184	7.50	692.50	0.00	110.00	3.00	3.00	2.50
185	5.00	695.00	0.00	105.00	20.00	3.00	2.50
186	2.50	697.50	0.00	55.00	20.00	3.00	2.50
187	0.00	700.00	0.00	5.00			

HEATING/COOLING SELECTION SUMMARY:

TSTYLE	TIME RANGE MA	# OF HEATING	EVENTS COOLING	NHP	NCP	MINIMUM HEATING	MINIMUM COOLING	THERMAL PEAK	LOWER TEMP LIMIT DEG C	THERMAL MINIMUM	UPPER TEMP LIMIT DEG C	TEMP MIN TIME INTERVAL (MA)	TYPE OF THERMAL HISTORY
10	700.0- 117.5	2	MONOTONIC	2	-3	0.01	0.01	1	155.0	1	30.0	377.5- 365.0	COOL-HEAT-COOL-HEAT-COOL
5	117.5- 97.5	1	MONOTONIC	-1	1	0.01	0.01	2	0.0	2	150.0	240.0- 210.0	EXHUMATION THEN BURIAL
4	97.5- 0.0	1	MONOTONIC	1	-1	0.01	0.01	1	60.0	1	110.0	115.0- 100.0	BURIAL THEN EXHUMATION

TIME RANGE FOR RANDOM SELECTION OF INITIAL MODEL POINT:
700.00 - 0.00 MA (TIME STEPS 1 TO 187)

%RO = 1.62 +/- 0.240 IS AN EXTRA CONSTRAINT FOR POST-DEPOSITIONAL THERMAL HISTORIES

%RO = 0.50 +/- 0.200 IS AN EXTRA CONSTRAINT FOR POST-EXHUMATION THERMAL HISTORIES

USE BASIN%RO MODEL

%RO CALCULATIONS BEGIN AT DEPOSITION AT APPROXIMATELY 370.00 Ma

%RO CALCULATIONS BEGIN AT ONSET OF REBURIAL AT APPROXIMATELY 110.00 Ma

MEASURED TRACK LENGTH DATA:

KINETIC POPULATION # 1; 63 MEASURED LENGTHS (MICRONS)

CONVENTIONAL MEAN	C-AXIS PROJECTED MEAN	ANGLE TO C-AXIS DEGREES
9.51	11.36	36.71
9.46	11.46	39.69
9.59	12.21	60.28
10.85	12.23	35.10
8.59	12.27	68.69
9.80	12.32	59.27
10.56	12.45	46.58
7.88	12.51	78.24

10.73	12.58	47.04
9.67	12.58	76.46
11.80	12.62	27.19
9.55	12.70	80.89
9.43	12.78	83.82
10.65	12.82	57.73
7.44	12.83	88.25
11.22	12.94	47.94
12.20	13.05	30.18
10.50	13.06	80.01
10.53	13.11	85.79
11.40	13.11	49.88
10.90	13.14	65.45
11.36	13.19	53.81
10.81	13.23	77.04
10.97	13.33	77.15
11.10	13.37	72.51
12.07	13.42	44.55
12.30	13.51	41.77
12.98	13.52	25.39
11.79	13.54	56.55
11.66	13.71	72.46
12.10	13.73	56.13
12.54	13.76	44.60
11.91	13.78	65.30
12.33	13.79	51.56
11.90	13.79	66.92
13.04	13.80	32.86
11.85	13.87	75.98
12.18	14.08	76.36
13.89	14.26	24.12
12.69	14.32	69.02
13.08	14.46	60.93
12.99	14.50	68.24
13.19	14.54	61.17
13.89	14.56	36.65
13.64	14.69	52.00
13.71	14.80	55.44
13.50	14.93	84.59
14.49	15.14	42.97
14.59	15.17	40.41
14.13	15.28	74.62
14.35	15.40	72.23
14.91	15.41	39.83
14.62	15.42	55.87
14.83	15.46	47.28
14.84	15.63	62.02
15.31	15.67	35.72
15.43	15.74	33.75
15.57	15.86	34.80
16.18	16.34	31.47
16.46	16.59	34.72
16.39	16.67	64.30
16.55	16.70	43.31
16.65	16.75	34.85

MEAN OF CONVENTIONAL LENGTHS = 12.40 + OR - 2.23 MICRONS
 MEAN OF C-AXIS PROJECTED LENGTHS = 13.97 + OR - 1.35 MICRONS

MEASURED TRACK LENGTH DATA:
 KINETIC POPULATION # 2; 139 MEASURED LENGTHS (MICRONS)

CONVENTIONAL MEAN	C-AXIS PROJECTED MEAN	ANGLE TO C-AXIS DEGREES
8.06	11.89	58.92
9.24	11.93	57.45
7.46	12.09	66.43
9.83	12.10	50.48
9.98	12.12	48.34
7.36	12.18	69.64
9.12	12.28	67.66
9.30	12.31	68.25
9.59	12.41	70.55
7.86	12.42	75.34
10.21	12.47	55.13
10.29	12.52	54.77
6.85	12.69	86.86

10.99	12.71	45.51
10.75	12.73	51.67
10.39	12.83	66.42
10.88	12.86	53.11
9.25	12.86	86.87
10.88	12.87	53.49
10.17	12.89	84.63
10.40	12.95	74.16
10.45	12.95	71.89
10.96	12.96	54.93
10.33	12.99	85.49
10.80	13.02	62.34
11.24	13.11	53.67
12.00	13.12	36.42
11.35	13.16	52.75
12.00	13.21	39.22
11.24	13.27	60.79
12.20	13.28	36.84
11.62	13.41	55.85
12.16	13.46	43.70
11.46	13.48	64.97
11.20	13.49	78.83
11.23	13.52	81.59
11.58	13.54	63.55
12.16	13.57	47.44
12.84	13.59	31.36
11.39	13.64	85.86
11.93	13.73	62.00
12.48	13.77	46.74
11.91	13.77	65.13
13.28	13.79	25.98
12.35	13.79	51.16
11.97	13.84	66.71
12.20	13.86	58.99
12.15	13.86	61.23
12.26	13.87	57.77
12.15	13.95	66.70
12.14	13.97	68.69
12.31	13.97	61.67
12.17	13.99	68.83
12.06	14.06	88.74
12.65	14.07	54.86
12.42	14.11	65.54
12.38	14.13	69.05
13.08	14.13	43.93
13.01	14.13	46.16
12.26	14.14	78.85
12.75	14.15	55.26
13.54	14.16	31.47
12.67	14.17	59.41
12.83	14.19	54.45
13.28	14.19	40.58
13.16	14.20	44.46
12.95	14.24	53.08
12.80	14.26	59.55
12.46	14.30	87.09
12.50	14.30	81.17
12.51	14.33	87.45
13.70	14.33	33.36
13.14	14.34	51.47
12.58	14.34	78.68
13.53	14.36	40.07
13.52	14.37	40.49
13.49	14.38	41.96
12.87	14.40	66.10
13.63	14.41	38.68
13.78	14.42	34.50
13.05	14.43	59.96
12.68	14.43	85.26
13.01	14.44	62.07
13.13	14.45	57.78
13.12	14.46	59.23
14.00	14.49	30.03
13.02	14.55	70.64
13.01	14.56	72.45
13.63	14.59	46.82
13.52	14.59	51.04
13.74	14.60	43.44

13.39	14.65	59.55
13.61	14.65	50.81
13.85	14.67	43.24
13.32	14.72	68.63
13.37	14.73	66.68
14.42	14.74	25.21
13.35	14.81	77.93
14.28	14.93	39.76
13.76	14.97	65.55
14.02	14.97	52.67
14.61	14.99	29.23
13.69	15.05	89.92
14.32	15.07	46.11
13.95	15.09	65.92
14.09	15.10	58.29
13.84	15.10	75.04
14.77	15.12	29.28
14.42	15.14	45.82
14.28	15.18	55.18
14.16	15.27	70.27
15.07	15.27	22.40
14.92	15.31	33.13
14.83	15.32	37.95
14.89	15.32	35.36
14.45	15.36	59.90
14.90	15.37	37.66
14.90	15.40	39.76
14.32	15.41	76.98
14.84	15.46	46.83
14.71	15.51	58.05
15.39	15.60	25.53
15.09	15.60	43.36
14.91	15.70	64.66
15.10	15.71	52.07
14.92	15.80	82.37
15.32	15.84	49.59
15.78	15.91	22.15
15.81	15.98	26.60
15.38	16.03	68.14
15.96	16.08	23.96
15.93	16.20	39.97
15.96	16.23	39.86
16.30	16.47	36.86
16.39	16.56	39.51
16.60	16.68	29.14
16.62	16.72	34.96
16.76	16.89	50.81
17.14	17.16	53.71

MEAN OF CONVENTIONAL LENGTHS = 12.84 + OR - 2.03 MICRONS
 MEAN OF C-AXIS PROJECTED LENGTHS = 14.27 + OR - 1.15 MICRONS

NUMBER OF FORWARD RANDOM TRIALS, ITER = 1419076
 KINETIC POP# 1: MAX OBJ FUNCTION = 0.168266
 KINETIC POP# 2: MAX OBJ FUNCTION = 0.113835
 KINETIC POP# 1: MIN OBJ FUNCTION = 0.054271; SOLUTION # 224
 KINETIC POP# 2: MIN OBJ FUNCTION = 0.055153; SOLUTION # 290
 SOLUTION # 224; OBJ FUNCTION SUM: 0.158259
 SOLUTION # 290; OBJ FUNCTION SUM: 0.121673
 MIN OBJ SOLUTION: SOLUTION # 290

CONVERGENCE AT 0.050 SIGNIFICANCE LEVEL
 TOTAL NUMBER OF SOLUTIONS: 300
 NUMBER OF 0.5 SOLUTIONS: 13
 STOP DATE - MONTH: 9 DAY: 30 YEAR: 2019
 STOP TIME : 12 HRS 9 MIN 15 S
 TOTAL EXECUTION TIME = 0.401697 HOURS OR 24.1018 MINUTES
 # OF TIME-TEMP ERRORS AND RETRIED SOLUTIONS IN TGEN2 = 39230.000000000

KINETIC POP# 1: MAX OBJ FUNCTION = 0.102163
 KINETIC POP# 2: MAX OBJ FUNCTION = 0.069425
 KINETIC POP# 1: MIN OBJ FUNCTION = 0.049305; SOLUTION # 214
 KINETIC POP# 2: MIN OBJ FUNCTION = 0.050152; SOLUTION # 70
 SOLUTION # 214; OBJ FUNCTION SUM: 0.114913
 SOLUTION # 70; OBJ FUNCTION SUM: 0.147357
 MIN OBJ SOLUTION: SOLUTION # 133

CONVERGENCE AT 0.5 SIGNIFICANCE LEVEL
NUMBER OF FORWARD MODELS: 90670
TOTAL NUMBER OF SOLUTIONS: 300
NUMBER OF 0.5 SOLUTIONS: 300
STOP DATE - MONTH: 9 DAY: 30 YEAR: 2019
STOP TIME : 14 HRS 42 MIN 21 S
TOTAL EXECUTION TIME = 2.953359 HOURS OR 177.2015 MINUTES

AFT KINETIC POPULATION # 1

MAXIMUM OBJECTIVE FUNCTION = 0.168266

EXPONENTIAL MEAN TEMPERATURE SOLUTION:

OBSERVED AFT AGE = 119.3 MA CALCULATED AFT AGE = 124.6 MA
 MODEL RETENTION AGE = 175.0 MA OBJ FUNCTION = 0.082001
 TRACK ANNEALING TIME = 117.5 MA ANNEALING TEMPERATURE = 61.77 DEG C

TRACK LENGTH OBJ FUNCTION = 0.073172 AGE OBJ FUNCTION = 0.036691
 LENGTH GOF PROBABILITY = 0.8765
 AGE GOF PROBABILITY = 0.6628
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.082001 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.015621
 %RO GOF PROBABILITY (POST-DEPOSITION) = 0.3297
 %RO GOF PROBABILITY (POST-EXHUMATION) = 0.8527

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 300):

CALCULATED AFT AGE = 120.7 MA MODEL RETENTION AGE = 165.0 MA
 OBJ FUNCTION = 0.091053
 TRACK ANNEALING TIME = 150.0 MA ANNEALING TEMPERATURE = 100.35 DEG C

TRACK LENGTH OBJ FUNCTION = 0.091053 AGE OBJ FUNCTION = 0.009480
 LENGTH GOF PROBABILITY = 0.6526
 AGE GOF PROBABILITY = 0.9103
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.034255 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.001372
 %RO GOF PROBABILITY (POST-DEPOSITION) = 0.6839
 %RO GOF PROBABILITY (POST-EXHUMATION) = 0.9870

AVE AFT AGE = 125.6 MA

AFT KINETIC POPULATION # 2

MAXIMUM OBJECTIVE FUNCTION = 0.113835

EXPONENTIAL MEAN TEMPERATURE SOLUTION:

OBSERVED AFT AGE = 252.4 MA CALCULATED AFT AGE = 238.6 MA
 MODEL RETENTION AGE = 533.2 MA OBJ FUNCTION = 0.067878
 TRACK ANNEALING TIME = 500.7 MA ANNEALING TEMPERATURE = 216.22 DEG C

TRACK LENGTH OBJ FUNCTION = 0.066606 AGE OBJ FUNCTION = 0.067878
 LENGTH GOF PROBABILITY = 0.5541
 AGE GOF PROBABILITY = 0.2335
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.055528 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.010578

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 300):

CALCULATED AFT AGE = 249.4 MA MODEL RETENTION AGE = 503.0 MA
 OBJ FUNCTION = 0.068438
 TRACK ANNEALING TIME = 488.0 MA ANNEALING TEMPERATURE = 228.41 DEG C

TRACK LENGTH OBJ FUNCTION = 0.068438 AGE OBJ FUNCTION = 0.014712
 LENGTH GOF PROBABILITY = 0.5188
 AGE GOF PROBABILITY = 0.7962
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.023196 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.000929

AVE AFT AGE = 247.8 MA

RETENTION AGES FOR ALL THERMAL SOLUTIONS:

MODEL #	KINETIC POPULATION# 1			KINETIC POPULATION# 2		
	RET AGE Ma	ANNEAL TIME Ma	ANNEAL TEMP DEG C	RET AGE Ma	ANNEAL TIME Ma	ANNEAL TEMP DEG C
1	287.5	122.5	70.57	576.0	556.0	218.59
2	262.5	145.0	94.46	520.0	517.5	247.82
3	270.0	20.0	59.79	537.5	505.0	197.11
4	162.5	150.0	100.04	542.7	532.7	229.48
5	297.5	140.0	94.87	592.5	580.0	229.45
6	175.0	157.5	93.00	526.7	519.2	230.00
7	187.5	160.0	89.85	510.4	495.4	222.85
8	170.0	157.5	95.28	507.6	500.1	236.93
9	172.5	62.5	69.53	530.6	518.1	229.18
10	187.5	177.5	100.70	569.2	559.2	227.50
11	175.0	155.0	96.92	638.9	608.9	221.79
12	275.0	100.0	77.03	504.2	494.2	232.00
13	175.0	157.5	89.63	511.5	466.5	217.53
14	167.5	155.0	97.03	470.0	465.0	233.89
15	162.5	147.5	101.62	533.6	521.1	232.09
16	182.5	57.5	79.16	547.8	542.8	235.64
17	145.0	85.0	93.42	542.3	504.8	215.71
18	285.0	155.0	95.33	578.2	545.7	218.20
19	175.0	55.0	59.55	537.1	532.1	235.01
20	165.0	152.5	103.32	552.5	537.5	228.51
21	187.5	82.5	79.70	563.8	543.8	221.35
22	148.8	143.7	108.09	515.0	477.5	205.76
23	297.5	57.5	76.05	545.6	538.1	233.95
24	285.0	42.5	74.35	563.0	550.5	230.61
25	287.5	67.5	84.06	578.7	571.2	233.31
26	145.0	135.0	106.14	597.9	585.4	222.32
27	152.5	145.0	107.04	540.9	533.4	230.89
28	155.0	132.5	91.37	580.4	560.4	224.14
29	282.5	160.0	89.60	504.6	494.6	221.27
30	282.5	127.5	90.26	560.1	552.6	234.28
31	162.5	82.5	80.32	540.9	525.9	221.18
32	176.9	169.4	105.11	620.1	605.1	226.36
33	177.5	177.5	121.36	554.2	531.7	213.60
34	292.5	130.0	91.31	529.1	526.6	239.92
35	255.0	137.5	62.06	491.1	471.1	220.77
36	165.0	125.0	86.91	546.4	538.9	234.66
37	162.5	142.5	91.67	619.9	604.9	220.91

254	275.0	62.5	83.24	557.4	539.9	216.60
255	167.5	160.0	106.14	570.0	567.5	247.68
256	187.5	165.0	94.15	546.8	534.3	228.20
257	195.0	62.5	78.19	568.1	558.1	230.21
258	181.2	178.8	111.45	519.9	504.9	223.27
259	282.5	75.0	87.16	520.7	510.7	230.22
260	275.0	52.5	76.71	567.3	549.8	223.14
261	157.5	142.5	97.65	530.3	525.3	238.77
262	270.0	150.0	98.28	503.8	493.7	232.09
263	270.0	75.0	79.54	570.4	522.9	212.59
264	182.5	170.0	95.35	541.2	528.7	220.41
265	177.5	65.0	83.38	586.4	571.4	228.93
266	175.0	72.5	80.31	615.8	598.3	225.83
267	282.5	120.0	59.61	528.0	513.0	229.89
268	270.0	140.0	89.00	590.1	532.6	196.93
269	170.0	135.0	88.96	550.5	543.0	229.03
270	178.1	175.6	113.88	500.6	488.1	225.34
271	165.0	150.0	100.28	597.7	590.2	235.20
272	162.5	47.5	81.48	475.4	467.9	236.84
273	152.5	135.0	97.01	563.1	555.6	233.66
274	162.5	62.5	71.17	536.6	506.6	206.56
275	176.7	166.7	98.51	552.9	545.4	234.71
276	270.0	42.5	76.10	545.8	533.3	228.89
277	160.0	117.5	65.48	543.0	538.0	238.46
278	180.0	47.5	83.29	648.8	638.8	215.40
279	182.5	165.0	101.52	545.9	505.9	211.55
280	252.5	127.5	72.54	568.4	543.4	216.42
281	170.0	160.0	102.13	552.4	522.4	201.29
282	172.5	165.0	101.03	549.2	539.2	222.13
283	156.2	148.8	99.46	543.6	538.6	236.68
284	280.0	67.5	84.91	565.5	540.5	223.12
285	185.0	162.5	91.33	537.9	515.4	221.22
286	145.0	55.0	79.67	516.6	506.6	226.20
287	290.0	142.5	98.87	563.7	553.7	229.61
288	165.0	145.0	90.26	565.2	555.2	230.32
289	268.7	136.2	98.68	558.0	553.0	235.38
290	175.0	145.0	85.48	564.2	529.2	220.11
291	172.5	165.0	108.95	480.0	477.5	247.57
292	165.0	152.5	99.97	535.7	523.2	229.61
293	155.0	147.5	103.84	593.9	533.9	194.82
294	177.5	57.5	84.28	524.0	519.0	237.10
295	152.5	60.0	82.70	595.7	570.7	211.92
296	170.0	65.0	81.13	502.4	484.9	219.19
297	167.5	155.0	96.57	541.1	508.6	201.23
298	162.5	147.5	103.30	498.8	491.3	232.30
299	175.0	122.5	61.31	558.7	551.2	230.11
300	165.0	150.0	100.35	503.0	488.0	228.41

RETENTION AGE DISTRIBUTION FOR ALL ACCEPTABLE SOLUTIONS:

RETENTION AGES: KINETIC POPULATION # 1

AGE BIN (MA)	RELATIVE FREQUENCY
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.000
130.0 - 140.0	0.007
140.0 - 150.0	0.033
150.0 - 160.0	0.163
160.0 - 170.0	0.270
170.0 - 180.0	0.153
180.0 - 190.0	0.100
190.0 - 200.0	0.007
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.003
240.0 - 250.0	0.000
250.0 - 260.0	0.033
260.0 - 270.0	0.063
270.0 - 280.0	0.053
280.0 - 290.0	0.073
290.0 - 300.0	0.030
300.0 - 310.0	0.010
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.000
410.0 - 420.0	0.000
420.0 - 430.0	0.000
430.0 - 440.0	0.000
440.0 - 450.0	0.000
450.0 - 460.0	0.000
460.0 - 470.0	0.000
470.0 - 480.0	0.000
480.0 - 490.0	0.000
490.0 - 500.0	0.000
500.0 - 510.0	0.000
510.0 - 520.0	0.000
520.0 - 530.0	0.000
530.0 - 540.0	0.000
540.0 - 550.0	0.000
550.0 - 560.0	0.000
560.0 - 570.0	0.000
570.0 - 580.0	0.000
580.0 - 590.0	0.000
590.0 - 600.0	0.000
600.0 - 610.0	0.000
610.0 - 620.0	0.000

620.0 - 630.0	0.000
630.0 - 640.0	0.000
640.0 - 650.0	0.000
650.0 - 660.0	0.000
660.0 - 670.0	0.000
670.0 - 680.0	0.000
680.0 - 690.0	0.000
690.0 - 700.0	0.000

MODEL RETENTION AGE MODE # 1
 AGE RANGE: 130.0 - 200.0 Ma
 NUMBER OF AGES = 220
 AVE MODEL RETENTION AGE = 167.61 +/- 11.14 MA

MODEL RETENTION AGE MODE # 2
 AGE RANGE: 230.0 - 310.0 Ma
 NUMBER OF AGES = 80
 AVE MODEL RETENTION AGE = 276.52 +/- 13.92 MA

RETENTION AGES: KINETIC POPULATION # 2

AGE BIN (MA)	RELATIVE FREQUENCY
100.0 - 110.0	0.000
110.0 - 120.0	0.000
120.0 - 130.0	0.000
130.0 - 140.0	0.000
140.0 - 150.0	0.000
150.0 - 160.0	0.000
160.0 - 170.0	0.000
170.0 - 180.0	0.000
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.000
410.0 - 420.0	0.000
420.0 - 430.0	0.000
430.0 - 440.0	0.000
440.0 - 450.0	0.000
450.0 - 460.0	0.000
460.0 - 470.0	0.007
470.0 - 480.0	0.010
480.0 - 490.0	0.007
490.0 - 500.0	0.030
500.0 - 510.0	0.083
510.0 - 520.0	0.067
520.0 - 530.0	0.077
530.0 - 540.0	0.100
540.0 - 550.0	0.150
550.0 - 560.0	0.107
560.0 - 570.0	0.100
570.0 - 580.0	0.070
580.0 - 590.0	0.043
590.0 - 600.0	0.060
600.0 - 610.0	0.017
610.0 - 620.0	0.037
620.0 - 630.0	0.013
630.0 - 640.0	0.013
640.0 - 650.0	0.003
650.0 - 660.0	0.007
660.0 - 670.0	0.000
670.0 - 680.0	0.000
680.0 - 690.0	0.000
690.0 - 700.0	0.000

AVE MODEL RETENTION AGE = 550.84 +/- 35.52 MA

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 1.62 +/- 0.240; %RO FOR EXP MEAN SOLUTION = 1.50
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 1.62 +/- 0.128
 MIN %RO = 1.38; MAX %RO = 1.86
 %RO FOR MIN OBJ SOLUTION = 1.57

POST-EXHUMATION THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.50 +/- 0.200; %RO FOR EXP MEAN SOLUTION = 0.48
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.49 +/- 0.015
 MIN %RO = 0.46; MAX %RO = 0.54
 %RO FOR MIN OBJ SOLUTION = 0.50

BINNED %RO VALUES FOR POST-DEPOSITIONAL HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.05	0.000
0.05 - 0.10	0.000
0.10 - 0.15	0.000
0.15 - 0.20	0.000
0.20 - 0.25	0.000
0.25 - 0.30	0.000
0.30 - 0.35	0.000
0.35 - 0.40	0.000
0.40 - 0.45	0.000
0.45 - 0.50	0.000
0.50 - 0.55	0.000
0.55 - 0.60	0.000
0.60 - 0.65	0.000
0.65 - 0.70	0.000
0.70 - 0.75	0.000
0.75 - 0.80	0.000
0.80 - 0.85	0.000
0.85 - 0.90	0.000
0.90 - 0.95	0.000
0.95 - 1.00	0.000
1.00 - 1.05	0.000
1.05 - 1.10	0.000
1.10 - 1.15	0.000
1.15 - 1.20	0.000
1.20 - 1.25	0.000
1.25 - 1.30	0.000
1.30 - 1.35	0.000
1.35 - 1.40	0.047
1.40 - 1.45	0.083
1.45 - 1.50	0.103
1.50 - 1.55	0.087
1.55 - 1.60	0.147
1.60 - 1.65	0.127
1.65 - 1.70	0.110
1.70 - 1.75	0.120
1.75 - 1.80	0.080
1.80 - 1.85	0.077
1.85 - 1.90	0.020
1.90 - 1.95	0.000
1.95 - 2.00	0.000

MINIMUM PEAK TEMPERATURE = 167.62 DEG C; MAXIMUM PEAK TEMPERATURE = 188.55 DEG C

PEAK TEMPERATURE: AVERAGE = 176.95 STAND DEV = 4.201

MAX TEMP BIN	RELATIVE FREQUENCY
150.00 - 152.00	0.000
152.00 - 154.00	0.000
154.00 - 156.00	0.000
156.00 - 158.00	0.000
158.00 - 160.00	0.000
160.00 - 162.00	0.000
162.00 - 164.00	0.000
164.00 - 166.00	0.000
166.00 - 168.00	0.003
168.00 - 170.00	0.033
170.00 - 172.00	0.093
172.00 - 174.00	0.140
174.00 - 176.00	0.160
176.00 - 178.00	0.140
178.00 - 180.00	0.180
180.00 - 182.00	0.120
182.00 - 184.00	0.087
184.00 - 186.00	0.020
186.00 - 188.00	0.020
188.00 - 190.00	0.003
190.00 - 192.00	0.000
192.00 - 194.00	0.000
194.00 - 196.00	0.000
196.00 - 198.00	0.000
198.00 - 200.00	0.000

MINIMUM PEAK TIME = 295.00 MA; MAXIMUM PEAK TIME = 362.50 MA

TIME OF PEAK TEMP: AVERAGE = 338.90 STAND DEV = 13.786

TIME AT MAX TEMP	RELATIVE FREQUENCY
294.38 - 295.62	0.003
295.62 - 296.88	0.000
296.88 - 298.12	0.003
298.12 - 299.38	0.000
299.38 - 300.62	0.000
300.62 - 301.88	0.000
301.88 - 303.12	0.000
303.12 - 304.38	0.000
304.38 - 305.62	0.003
305.62 - 306.88	0.000
306.88 - 308.12	0.010
308.12 - 309.38	0.000
309.38 - 310.62	0.007
310.62 - 311.88	0.000
311.88 - 313.12	0.017
313.12 - 314.38	0.000
314.38 - 315.62	0.013
315.62 - 316.88	0.000
316.88 - 318.12	0.033
318.12 - 319.38	0.000
319.38 - 320.62	0.017
320.62 - 321.88	0.000
321.88 - 323.12	0.030
323.12 - 324.38	0.000
324.38 - 325.62	0.050

325.62 - 326.88	0.000
326.88 - 328.12	0.057
328.12 - 329.38	0.000
329.38 - 330.62	0.050
330.62 - 331.88	0.000
331.88 - 333.12	0.073
333.12 - 334.38	0.000
334.38 - 335.62	0.050
335.62 - 336.88	0.000
336.88 - 338.12	0.053
338.12 - 339.38	0.000
339.38 - 340.62	0.067
340.62 - 341.88	0.000
341.88 - 343.12	0.060
343.12 - 344.38	0.000
344.38 - 345.62	0.070
345.62 - 346.88	0.000
346.88 - 348.12	0.047
348.12 - 349.38	0.000
349.38 - 350.62	0.053
350.62 - 351.88	0.000
351.88 - 353.12	0.073
353.12 - 354.38	0.000
354.38 - 355.62	0.070
355.62 - 356.88	0.000
356.88 - 358.12	0.040
358.12 - 359.38	0.000
359.38 - 360.62	0.020
360.62 - 361.88	0.000
361.88 - 363.12	0.030

DEPOSITION (ALL SOLUTIONS):

TIME RANGE FOR THERMAL MINIMUM: 365.0 - 377.5 Ma
 TIME OF MINIMUM TEMPERATURE: AVERAGE = 371.3 STAND DEV = 4.3
 TEMPERATURE RANGE FOR THERMAL MINIMUM: 2.0 - 30.0 deg C
 MINIMUM TEMPERATURE: AVERAGE = 28.6 STAND DEV = 2.9

REBURIAL (ALL SOLUTIONS):

TIME RANGE FOR THERMAL MINIMUM: 100.0 - 115.0 Ma
 TIME OF MINIMUM TEMPERATURE: AVERAGE = 107.3 STAND DEV = 4.9
 TEMPERATURE RANGE FOR THERMAL MINIMUM: 9.8 - 73.3 deg C
 MINIMUM TEMPERATURE: AVERAGE = 44.1 STAND DEV = 12.7

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 1

AVERAGE OF OBJ FNS= 0.13221 STAND DEV = 0.02606

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0033
0.060 - 0.070	0.0100
0.070 - 0.080	0.0200
0.080 - 0.090	0.0400
0.090 - 0.100	0.0567
0.100 - 0.110	0.0900
0.110 - 0.120	0.0867
0.120 - 0.130	0.1000
0.130 - 0.140	0.1600
0.140 - 0.150	0.1300
0.150 - 0.160	0.1400
0.160 - 0.170	0.1633
0.170 - 0.180	0.0000
0.180 - 0.190	0.0000
0.190 - 0.200	0.0000

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 2

AVERAGE OF OBJ FNS= 0.09196 STAND DEV = 0.01468

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.0167
0.060 - 0.070	0.1000
0.070 - 0.080	0.1033
0.080 - 0.090	0.1833
0.090 - 0.100	0.2467
0.100 - 0.110	0.2300
0.110 - 0.120	0.1200
0.120 - 0.130	0.0000
0.130 - 0.140	0.0000
0.140 - 0.150	0.0000
0.150 - 0.160	0.0000
0.160 - 0.170	0.0000
0.170 - 0.180	0.0000
0.180 - 0.190	0.0000
0.190 - 0.200	0.0000

TRACK LENGTH OBJ FUNCTION = 0.059377 AGE OBJ FUNCTION = 0.072951
 LENGTH GOF PROBABILITY = 0.9757
 AGE GOF PROBABILITY = 0.6313
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.055904 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.009542
 %RO GOF PROBABILITY (POST-DEPOSITION) = 0.2755
 %RO GOF PROBABILITY (POST-EXHUMATION) = 0.8523

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 296):
 CALCULATED AFT AGE = 122.3 MA MODEL RETENTION AGE = 175.0 MA
 OBJ FUNCTION = 0.051629
 TRACK ANNEALING TIME = 60.0 MA ANNEALING TEMPERATURE = 78.82 DEG C

TRACK LENGTH OBJ FUNCTION = 0.051629 AGE OBJ FUNCTION = 0.037684
 LENGTH GOF PROBABILITY = 0.9951
 AGE GOF PROBABILITY = 0.8042
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.002555 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.007823
 %RO GOF PROBABILITY (POST-DEPOSITION) = 0.9966
 %RO GOF PROBABILITY (POST-EXHUMATION) = 0.8168
 AVE AFT AGE = 124.4 MA

AFT KINETIC POPULATION # 2

MAXIMUM OBJECTIVE FUNCTION = 0.069425

EXPONENTIAL MEAN TEMPERATURE SOLUTION:
 OBSERVED AFT AGE = 252.4 MA CALCULATED AFT AGE = 252.7 MA
 MODEL RETENTION AGE = 556.2 MA OBJ FUNCTION = 0.067086
 TRACK ANNEALING TIME = 518.7 MA ANNEALING TEMPERATURE = 210.72 DEG C

TRACK LENGTH OBJ FUNCTION = 0.067086 AGE OBJ FUNCTION = 0.002675
 LENGTH GOF PROBABILITY = 0.5448
 AGE GOF PROBABILITY = 0.9793
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.037856 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.006461

LOWEST COMBINED OBJECTIVE FUNCTION

MINIMUM OBJECTIVE SOLUTION (SOLUTION # 296):
 CALCULATED AFT AGE = 253.2 MA MODEL RETENTION AGE = 571.1 MA
 OBJ FUNCTION = 0.063983
 TRACK ANNEALING TIME = 543.6 MA ANNEALING TEMPERATURE = 216.77 DEG C

TRACK LENGTH OBJ FUNCTION = 0.063983 AGE OBJ FUNCTION = 0.007066
 LENGTH GOF PROBABILITY = 0.6060
 AGE GOF PROBABILITY = 0.9453
 %RO OBJ FUNCTION (POST-DEPOSITION) = 0.001730 %RO OBJ FUNCTION (POST-EXHUMATION) = 0.005298
 AVE AFT AGE = 253.5 MA

RETENTION AGES FOR ALL THERMAL SOLUTIONS:

MODEL #	KINETIC POPULATION# 1			KINETIC POPULATION# 2		
	RET AGE Ma	ANNEAL TIME Ma	ANNEAL TEMP DEG C	RET AGE Ma	ANNEAL TIME Ma	ANNEAL TEMP DEG C
1	275.0	55.0	78.39	570.0	542.5	217.67
2	277.5	132.5	77.31	557.8	535.3	223.23
3	165.0	65.0	78.59	545.3	510.3	205.91
4	177.5	132.5	79.25	563.5	538.5	222.46
5	177.5	137.5	84.43	572.2	547.2	217.72
6	277.5	132.5	75.58	558.7	523.7	210.10
7	161.7	149.2	102.84	532.7	522.7	228.92
8	187.5	30.0	58.16	566.8	541.8	222.22
9	265.0	40.0	67.22	563.1	540.6	223.94
10	275.0	132.5	77.58	558.3	530.8	218.29
11	272.5	65.0	80.61	564.6	532.1	215.90
12	172.5	37.5	63.64	554.2	524.2	215.84
13	277.5	62.5	77.66	571.7	546.7	218.60
14	175.0	132.5	79.03	560.4	535.4	222.57
15	172.5	135.0	79.76	554.9	502.4	188.31
16	167.5	135.0	87.51	547.5	512.5	214.14
17	170.0	142.5	91.41	561.8	529.3	215.97
18	170.0	145.0	93.02	570.2	535.2	216.98
19	275.0	60.0	78.76	561.5	536.5	223.00
20	172.5	140.0	87.28	562.9	532.9	219.39
21	175.0	140.0	88.19	556.7	529.2	218.66
22	170.0	142.5	92.27	568.4	535.9	221.68
23	277.5	135.0	81.57	564.3	541.8	220.56
24	165.0	127.5	79.55	539.7	524.7	226.97
25	177.5	132.5	79.45	555.1	507.6	199.99
26	175.0	137.5	86.24	564.5	529.5	214.54
27	160.0	42.5	66.04	536.6	514.1	212.92
28	175.0	132.5	80.29	561.0	521.0	211.33
29	165.0	140.0	92.10	539.8	524.8	228.14
30	275.0	55.0	73.77	569.1	549.1	222.23
31	175.0	52.5	73.78	557.4	532.4	218.83
32	165.0	145.0	90.26	565.2	555.2	230.32
33	167.5	137.5	87.01	563.9	536.4	221.02
34	180.0	32.5	57.66	568.1	533.1	210.48
35	277.5	145.0	92.50	566.6	544.1	222.21
36	277.5	60.0	80.06	556.7	516.7	208.18
37	282.5	132.5	83.22	543.5	528.5	228.06
38	282.5	142.5	92.30	533.4	513.4	216.44
39	170.0	137.5	83.65	571.4	536.4	215.33
40	260.0	40.0	67.86	562.4	529.9	213.38
41	177.5	137.5	84.83	559.5	532.0	217.64
42	170.0	132.5	78.43	552.4	532.4	222.95
43	275.0	70.0	80.16	547.5	510.0	208.72
44	270.0	67.5	82.46	554.5	524.5	212.19
45	265.0	50.0	68.82	553.7	531.2	224.19
46	275.0	67.5	76.52	575.6	538.1	211.88

263	180.0	60.0	78.51	577.6	550.1	216.81
264	267.5	67.5	81.04	561.8	539.3	222.93
265	180.0	37.5	65.64	547.0	512.0	199.52
266	162.5	145.0	92.30	541.7	526.7	226.96
267	172.5	145.0	93.77	562.9	532.9	218.86
268	277.5	142.5	88.07	568.0	508.0	200.35
269	172.5	140.0	88.81	562.5	522.5	210.97
270	177.5	75.0	66.06	557.4	524.9	212.24
271	185.0	55.0	77.65	573.8	548.8	219.83
272	275.0	47.5	67.60	553.7	528.7	218.37
273	182.5	60.0	74.23	562.7	515.2	202.55
274	275.0	65.0	78.81	568.7	548.7	222.49
275	177.5	27.5	52.86	574.4	556.9	221.76
276	182.5	47.5	73.75	573.5	548.5	219.67
277	272.5	30.0	52.44	551.5	526.5	220.75
278	277.5	65.0	81.29	560.4	535.4	221.22
279	167.5	140.0	85.73	552.3	532.3	226.10
280	175.0	122.5	61.31	558.7	551.2	230.11
281	167.5	137.5	91.48	551.9	524.4	218.96
282	175.0	150.0	94.29	570.0	540.0	220.48
283	165.0	150.0	100.35	503.0	488.0	228.41
284	265.0	52.5	72.16	553.4	518.4	208.65
285	170.0	135.0	84.89	559.4	521.9	213.18
286	175.0	130.0	75.70	567.3	537.3	217.92
287	167.5	155.0	101.31	540.8	525.8	227.67
288	175.0	65.0	72.04	554.2	526.7	217.57
289	165.0	145.0	91.64	532.5	517.5	228.44
290	177.5	60.0	74.25	556.8	521.8	210.80
291	275.0	140.0	86.11	561.2	508.7	202.30
292	185.0	47.5	74.34	564.2	541.7	223.18
293	280.0	145.0	93.51	561.1	538.6	222.32
294	182.5	62.5	78.45	571.6	546.6	219.90
295	275.0	132.5	75.85	567.1	539.6	218.60
296	175.0	60.0	78.82	571.1	543.6	216.77
297	177.5	40.0	69.15	572.5	547.5	218.63
298	172.5	62.5	73.95	545.6	505.6	206.11
299	267.5	55.0	77.57	555.3	527.8	218.84
300	170.0	137.5	87.15	565.6	538.1	222.24

RETENTION AGE DISTRIBUTION FOR ALL ACCEPTABLE SOLUTIONS:

RETENTION AGES: KINETIC POPULATION # 1

AGE BIN (MA)	RELATIVE FREQUENCY
150.0 - 160.0	0.020
160.0 - 170.0	0.200
170.0 - 180.0	0.323
180.0 - 190.0	0.067
190.0 - 200.0	0.007
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.003
240.0 - 250.0	0.003
250.0 - 260.0	0.017
260.0 - 270.0	0.077
270.0 - 280.0	0.273
280.0 - 290.0	0.010
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.000
410.0 - 420.0	0.000
420.0 - 430.0	0.000
430.0 - 440.0	0.000
440.0 - 450.0	0.000
450.0 - 460.0	0.000
460.0 - 470.0	0.000
470.0 - 480.0	0.000
480.0 - 490.0	0.000
490.0 - 500.0	0.000
500.0 - 510.0	0.000
510.0 - 520.0	0.000
520.0 - 530.0	0.000
530.0 - 540.0	0.000
540.0 - 550.0	0.000
550.0 - 560.0	0.000
560.0 - 570.0	0.000
570.0 - 580.0	0.000
580.0 - 590.0	0.000
590.0 - 600.0	0.000
600.0 - 610.0	0.000
610.0 - 620.0	0.000
620.0 - 630.0	0.000
630.0 - 640.0	0.000
640.0 - 650.0	0.000
650.0 - 660.0	0.000
660.0 - 670.0	0.000
670.0 - 680.0	0.000
680.0 - 690.0	0.000
690.0 - 700.0	0.000

MODEL RETENTION AGE MODE # 1
 AGE RANGE: 150.0 - 200.0 Ma
 NUMBER OF AGES = 185
 AVE MODEL RETENTION AGE = 173.54 +/- 6.88 MA

MODEL RETENTION AGE MODE # 2
 AGE RANGE: 230.0 - 290.0 Ma
 NUMBER OF AGES = 115
 AVE MODEL RETENTION AGE = 273.21 +/- 6.64 MA

RETENTION AGES: KINETIC POPULATION # 2

AGE BIN (MA)	RELATIVE FREQUENCY
150.0 - 160.0	0.000
160.0 - 170.0	0.000
170.0 - 180.0	0.000
180.0 - 190.0	0.000
190.0 - 200.0	0.000
200.0 - 210.0	0.000
210.0 - 220.0	0.000
220.0 - 230.0	0.000
230.0 - 240.0	0.000
240.0 - 250.0	0.000
250.0 - 260.0	0.000
260.0 - 270.0	0.000
270.0 - 280.0	0.000
280.0 - 290.0	0.000
290.0 - 300.0	0.000
300.0 - 310.0	0.000
310.0 - 320.0	0.000
320.0 - 330.0	0.000
330.0 - 340.0	0.000
340.0 - 350.0	0.000
350.0 - 360.0	0.000
360.0 - 370.0	0.000
370.0 - 380.0	0.000
380.0 - 390.0	0.000
390.0 - 400.0	0.000
400.0 - 410.0	0.000
410.0 - 420.0	0.000
420.0 - 430.0	0.000
430.0 - 440.0	0.000
440.0 - 450.0	0.000
450.0 - 460.0	0.000
460.0 - 470.0	0.000
470.0 - 480.0	0.003
480.0 - 490.0	0.000
490.0 - 500.0	0.003
500.0 - 510.0	0.007
510.0 - 520.0	0.000
520.0 - 530.0	0.007
530.0 - 540.0	0.060
540.0 - 550.0	0.097
550.0 - 560.0	0.273
560.0 - 570.0	0.370
570.0 - 580.0	0.173
580.0 - 590.0	0.000
590.0 - 600.0	0.007
600.0 - 610.0	0.000
610.0 - 620.0	0.000
620.0 - 630.0	0.000
630.0 - 640.0	0.000
640.0 - 650.0	0.000
650.0 - 660.0	0.000
660.0 - 670.0	0.000
670.0 - 680.0	0.000
680.0 - 690.0	0.000
690.0 - 700.0	0.000

AVE MODEL RETENTION AGE = 559.16 +/- 13.10 MA

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 1.62 +/- 0.240; %RO FOR EXP MEAN SOLUTION = 1.49
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 1.55 +/- 0.046
 MIN %RO = 1.47; MAX %RO = 1.70
 %RO FOR MIN OBJ SOLUTION = 1.62

POST-EXHUMATION THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.50 +/- 0.200; %RO FOR EXP MEAN SOLUTION = 0.48
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.48 +/- 0.008
 MIN %RO = 0.47; MAX %RO = 0.50
 %RO FOR MIN OBJ SOLUTION = 0.48

BINNED %RO VALUES FOR POST-DEPOSITIONAL HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.05	0.000
0.05 - 0.10	0.000
0.10 - 0.15	0.000
0.15 - 0.20	0.000
0.20 - 0.25	0.000
0.25 - 0.30	0.000
0.30 - 0.35	0.000
0.35 - 0.40	0.000
0.40 - 0.45	0.000
0.45 - 0.50	0.000
0.50 - 0.55	0.000
0.55 - 0.60	0.000
0.60 - 0.65	0.000
0.65 - 0.70	0.000
0.70 - 0.75	0.000
0.75 - 0.80	0.000
0.80 - 0.85	0.000
0.85 - 0.90	0.000
0.90 - 0.95	0.000

0.95 - 1.00	0.000
1.00 - 1.05	0.000
1.05 - 1.10	0.000
1.10 - 1.15	0.000
1.15 - 1.20	0.000
1.20 - 1.25	0.000
1.25 - 1.30	0.000
1.30 - 1.35	0.000
1.35 - 1.40	0.000
1.40 - 1.45	0.000
1.45 - 1.50	0.097
1.50 - 1.55	0.523
1.55 - 1.60	0.243
1.60 - 1.65	0.100
1.65 - 1.70	0.030
1.70 - 1.75	0.007
1.75 - 1.80	0.000
1.80 - 1.85	0.000
1.85 - 1.90	0.000
1.90 - 1.95	0.000
1.95 - 2.00	0.000

MINIMUM PEAK TEMPERATURE = 168.62 DEG C; MAXIMUM PEAK TEMPERATURE = 186.31 DEG C

PEAK TEMPERATURE: AVERAGE = 173.39 STAND DEV = 2.270

MAX TEMP BIN	RELATIVE FREQUENCY
150.00 - 152.00	0.000
152.00 - 154.00	0.000
154.00 - 156.00	0.000
156.00 - 158.00	0.000
158.00 - 160.00	0.000
160.00 - 162.00	0.000
162.00 - 164.00	0.000
164.00 - 166.00	0.000
166.00 - 168.00	0.000
168.00 - 170.00	0.023
170.00 - 172.00	0.213
172.00 - 174.00	0.490
174.00 - 176.00	0.160
176.00 - 178.00	0.060
178.00 - 180.00	0.037
180.00 - 182.00	0.010
182.00 - 184.00	0.003
184.00 - 186.00	0.000
186.00 - 188.00	0.003
188.00 - 190.00	0.000
190.00 - 192.00	0.000
192.00 - 194.00	0.000
194.00 - 196.00	0.000
196.00 - 198.00	0.000
198.00 - 200.00	0.000

MINIMUM PEAK TIME = 322.50 MA; MAXIMUM PEAK TIME = 360.00 MA

TIME OF PEAK TEMP: AVERAGE = 341.02 STAND DEV = 7.313

TIME AT MAX TEMP	RELATIVE FREQUENCY
321.88 - 323.12	0.003
323.12 - 324.38	0.000
324.38 - 325.62	0.003
325.62 - 326.88	0.000
326.88 - 328.12	0.000
328.12 - 329.38	0.000
329.38 - 330.62	0.040
330.62 - 331.88	0.000
331.88 - 333.12	0.217
333.12 - 334.38	0.000
334.38 - 335.62	0.073
335.62 - 336.88	0.000
336.88 - 338.12	0.070
338.12 - 339.38	0.000
339.38 - 340.62	0.013
340.62 - 341.88	0.000
341.88 - 343.12	0.143
343.12 - 344.38	0.000
344.38 - 345.62	0.217
345.62 - 346.88	0.000
346.88 - 348.12	0.150
348.12 - 349.38	0.000
349.38 - 350.62	0.017
350.62 - 351.88	0.000
351.88 - 353.12	0.003
353.12 - 354.38	0.000
354.38 - 355.62	0.000
355.62 - 356.88	0.000
356.88 - 358.12	0.030
358.12 - 359.38	0.000
359.38 - 360.62	0.020

DEPOSITION (ALL SOLUTIONS):

TIME RANGE FOR THERMAL MINIMUM: 365.0 - 377.5 Ma
 TIME OF MINIMUM TEMPERATURE: AVERAGE = 375.0 STAND DEV = 2.8
 TEMPERATURE RANGE FOR THERMAL MINIMUM: 20.1 - 30.0 deg C
 MINIMUM TEMPERATURE: AVERAGE = 29.7 STAND DEV = 0.8

REBURIAL (ALL SOLUTIONS):

TIME RANGE FOR THERMAL MINIMUM: 100.0 - 115.0 Ma
 TIME OF MINIMUM TEMPERATURE: AVERAGE = 104.9 STAND DEV = 4.5
 TEMPERATURE RANGE FOR THERMAL MINIMUM: 32.2 - 60.7 deg C
 MINIMUM TEMPERATURE: AVERAGE = 46.6 STAND DEV = 4.1

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 1

AVERAGE OF OBJ FNS= 0.07640 STAND DEV = 0.01456

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0100
0.050 - 0.060	0.1600
0.060 - 0.070	0.1733
0.070 - 0.080	0.2033
0.080 - 0.090	0.2467
0.090 - 0.100	0.1600
0.100 - 0.110	0.0467
0.110 - 0.120	0.0000
0.120 - 0.130	0.0000
0.130 - 0.140	0.0000
0.140 - 0.150	0.0000
0.150 - 0.160	0.0000
0.160 - 0.170	0.0000
0.170 - 0.180	0.0000
0.180 - 0.190	0.0000
0.190 - 0.200	0.0000

OBJECTIVE FUNCTIONS: KINETIC POPULATION # 2

AVERAGE OF OBJ FNS= 0.06434 STAND DEV = 0.00419

OBJ FUNC	RELATIVE FREQUENCY
0.000 - 0.010	0.0000
0.010 - 0.020	0.0000
0.020 - 0.030	0.0000
0.030 - 0.040	0.0000
0.040 - 0.050	0.0000
0.050 - 0.060	0.1600
0.060 - 0.070	0.8400
0.070 - 0.080	0.0000
0.080 - 0.090	0.0000
0.090 - 0.100	0.0000

OBSERVED TRACK LENGTH HISTOGRAM FOR KINETIC POPULATION # 1:

BIN SIZE (MICRONS)	RELATIVE FREQUENCY
0.0 - 1.0	0.000
1.0 - 2.0	0.000
2.0 - 3.0	0.000
3.0 - 4.0	0.000
4.0 - 5.0	0.000
5.0 - 6.0	0.000
6.0 - 7.0	0.000
7.0 - 8.0	0.000
8.0 - 9.0	0.000
9.0 - 10.0	0.000
10.0 - 11.0	0.000
11.0 - 12.0	0.032
12.0 - 13.0	0.222
13.0 - 14.0	0.333
14.0 - 15.0	0.159
15.0 - 16.0	0.175
16.0 - 17.0	0.079
17.0 - 18.0	0.000
18.0 - 19.0	0.000
19.0 - 20.0	0.000

OBSERVED TRACK LENGTH HISTOGRAM FOR KINETIC POPULATION # 2:

BIN SIZE (MICRONS)	RELATIVE FREQUENCY
0.0 - 1.0	0.000
1.0 - 2.0	0.000
2.0 - 3.0	0.000
3.0 - 4.0	0.000
4.0 - 5.0	0.000
5.0 - 6.0	0.000
6.0 - 7.0	0.000
7.0 - 8.0	0.000
8.0 - 9.0	0.000
9.0 - 10.0	0.000
10.0 - 11.0	0.000
11.0 - 12.0	0.014
12.0 - 13.0	0.158
13.0 - 14.0	0.209
14.0 - 15.0	0.353
15.0 - 16.0	0.194
16.0 - 17.0	0.065
17.0 - 18.0	0.007
18.0 - 19.0	0.000
19.0 - 20.0	0.000

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 1.62 +/- 0.240; %RO FOR EXP MEAN SOLUTION = 1.50
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 1.62 +/- 0.128
 MIN %RO = 1.38; MAX %RO = 1.86
 %RO FOR MIN OBJ SOLUTION = 1.57

POST-EXHUMATION THERMAL HISTORY (240-210 to 0 Ma):

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.60 +/- 0.300; %RO FOR EXP MEAN SOLUTION = 0.60
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.61 +/- 0.025
 MIN %RO = 0.56; MAX %RO = 0.67
 %RO FOR MIN OBJ SOLUTION = 0.62

BINNED %RO VALUES FOR POST-EXHUMATION HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.03	0.000
0.03 - 0.05	0.000
0.05 - 0.08	0.000
0.08 - 0.10	0.000
0.10 - 0.12	0.000
0.12 - 0.15	0.000
0.15 - 0.18	0.000
0.17 - 0.20	0.000
0.20 - 0.23	0.000
0.23 - 0.25	0.000
0.25 - 0.27	0.000
0.28 - 0.30	0.000
0.30 - 0.32	0.000
0.33 - 0.35	0.000
0.35 - 0.37	0.000
0.38 - 0.40	0.000
0.40 - 0.42	0.000
0.43 - 0.45	0.000
0.45 - 0.47	0.000
0.47 - 0.50	0.000
0.50 - 0.52	0.000
0.53 - 0.55	0.000
0.55 - 0.57	0.137
0.57 - 0.60	0.267
0.60 - 0.62	0.313
0.62 - 0.65	0.237
0.65 - 0.68	0.047
0.68 - 0.70	0.000
0.70 - 0.72	0.000
0.73 - 0.75	0.000
0.75 - 0.77	0.000
0.78 - 0.80	0.000
0.80 - 0.82	0.000
0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 99.09 DEG C; MAXIMUM PEAK TEMPERATURE = 131.07 DEG C

PEAK TEMPERATURE: AVERAGE = 111.81 STAND DEV = 6.250

MAX TEMP BIN	RELATIVE FREQUENCY
50.00 - 52.00	0.000
52.00 - 54.00	0.000
54.00 - 56.00	0.000
56.00 - 58.00	0.000
58.00 - 60.00	0.000
60.00 - 62.00	0.000
62.00 - 64.00	0.000
64.00 - 66.00	0.000
66.00 - 68.00	0.000
68.00 - 70.00	0.000
70.00 - 72.00	0.000
72.00 - 74.00	0.000
74.00 - 76.00	0.000
76.00 - 78.00	0.000
78.00 - 80.00	0.000
80.00 - 82.00	0.000
82.00 - 84.00	0.000
84.00 - 86.00	0.000
86.00 - 88.00	0.000
88.00 - 90.00	0.000
90.00 - 92.00	0.000
92.00 - 94.00	0.000
94.00 - 96.00	0.000
96.00 - 98.00	0.000
98.00 - 100.00	0.007
100.00 - 102.00	0.033
102.00 - 104.00	0.067
104.00 - 106.00	0.087
106.00 - 108.00	0.117
108.00 - 110.00	0.120
110.00 - 112.00	0.117
112.00 - 114.00	0.097
114.00 - 116.00	0.080
116.00 - 118.00	0.090
118.00 - 120.00	0.093
120.00 - 122.00	0.037
122.00 - 124.00	0.020
124.00 - 126.00	0.020
126.00 - 128.00	0.013
128.00 - 130.00	0.000
130.00 - 132.00	0.003

132.00 - 134.00 0.000
 134.00 - 136.00 0.000
 136.00 - 138.00 0.000
 138.00 - 140.00 0.000
 140.00 - 142.00 0.000
 142.00 - 144.00 0.000
 144.00 - 146.00 0.000
 146.00 - 148.00 0.000
 148.00 - 150.00 0.000

MINIMUM PEAK TIME = 130.00 MA; MAXIMUM PEAK TIME = 200.00 MA

TIME OF PEAK TEMP: AVERAGE = 165.72 STAND DEV = 13.891

TIME AT MAX TEMP	RELATIVE FREQUENCY
129.38 - 130.62	0.007
130.62 - 131.88	0.000
131.88 - 133.12	0.007
133.12 - 134.38	0.000
134.38 - 135.62	0.003
135.62 - 136.88	0.000
136.88 - 138.12	0.007
138.12 - 139.38	0.000
139.38 - 140.62	0.010
140.62 - 141.88	0.000
141.88 - 143.12	0.013
143.12 - 144.38	0.000
144.38 - 145.62	0.030
145.62 - 146.88	0.000
146.88 - 148.12	0.023
148.12 - 149.38	0.000
149.38 - 150.62	0.027
150.62 - 151.88	0.000
151.88 - 153.12	0.043
153.12 - 154.38	0.000
154.38 - 155.62	0.083
155.62 - 156.88	0.000
156.88 - 158.12	0.090
158.12 - 159.38	0.000
159.38 - 160.62	0.057
160.62 - 161.88	0.000
161.88 - 163.12	0.077
163.12 - 164.38	0.000
164.38 - 165.62	0.057
165.62 - 166.88	0.000
166.88 - 168.12	0.057
168.12 - 169.38	0.000
169.38 - 170.62	0.087
170.62 - 171.88	0.000
171.88 - 173.12	0.053
173.12 - 174.38	0.000
174.38 - 175.62	0.043
175.62 - 176.88	0.000
176.88 - 178.12	0.047
178.12 - 179.38	0.000
179.38 - 180.62	0.027
180.62 - 181.88	0.000
181.88 - 183.12	0.047
183.12 - 184.38	0.000
184.38 - 185.62	0.027
185.62 - 186.88	0.000
186.88 - 188.12	0.013
188.12 - 189.38	0.000
189.38 - 190.62	0.023
190.62 - 191.88	0.000
191.88 - 193.12	0.023
193.12 - 194.38	0.000
194.38 - 195.62	0.003
195.62 - 196.88	0.000
196.88 - 198.12	0.007
198.12 - 199.38	0.000
199.38 - 200.62	0.010
200.62 - 201.88	0.000

CONTROLLED RANDOM SEARCH TECHNIQUE

MINIMUM OBJECTIVE SOLUTION: LOWEST COMBINED OBJECTIVE FUNCTION

MODEL RESULTS AT 0.5000 SIGNIFICANCE LEVEL

SEARCH FOR MAXIMUM TEMPERATURE BETWEEN 210.00 - 117.50 MA

ALL SOLUTIONS ARE AT 0.5000 SIGNIFICANCE LEVEL

%RO MODEL: BASIN%RO

MODEL #	KIN POP# 1 CALCULATED AFT AGE (MA)	KIN POP# 2 CALCULATED AFT AGE (MA)	TIME OF MAXIMUM TEMP (MA)	MAXIMUM TEMP (DEG C)	KIN POP# 1 OBJECTIVE FUNCTION	KIN POP# 2 OBJECTIVE FUNCTION	%RO POST-DEP	%RO POST-EXH
1	121.95	256.97	157.50	104.83	0.060677	0.062353	1.563	0.485
2	123.98	253.06	157.50	103.49	0.058213	0.068841	1.510	0.493
3	124.81	256.18	157.50	108.36	0.068439	0.064877	1.481	0.482
4	125.38	255.56	165.00	103.21	0.082299	0.062157	1.519	0.473
5	123.64	253.65	172.50	105.05	0.053957	0.064984	1.622	0.485
6	124.35	253.70	157.50	103.38	0.062718	0.067844	1.506	0.491
7	123.75	250.04	157.50	110.45	0.089916	0.052707	1.538	0.483
8	125.71	256.57	165.00	102.47	0.083815	0.061919	1.520	0.473
9	124.83	250.48	157.50	104.18	0.077045	0.065294	1.531	0.484
10	127.27	258.07	157.50	102.85	0.099002	0.067562	1.484	0.475
11	124.26	251.64	157.50	104.69	0.061602	0.069192	1.512	0.491

0.33 - 0.35	0.000
0.35 - 0.37	0.000
0.38 - 0.40	0.000
0.40 - 0.42	0.000
0.43 - 0.45	0.000
0.45 - 0.47	0.000
0.47 - 0.50	0.000
0.50 - 0.52	0.000
0.53 - 0.55	0.000
0.55 - 0.57	0.010
0.57 - 0.60	0.873
0.60 - 0.62	0.113
0.62 - 0.65	0.003
0.65 - 0.68	0.000
0.68 - 0.70	0.000
0.70 - 0.72	0.000
0.73 - 0.75	0.000
0.75 - 0.77	0.000
0.78 - 0.80	0.000
0.80 - 0.82	0.000
0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 99.36 DEG C; MAXIMUM PEAK TEMPERATURE = 115.80 DEG C

PEAK TEMPERATURE: AVERAGE = 105.09 STAND DEV = 2.544

MAX TEMP BIN	RELATIVE FREQUENCY
50.00 - 52.00	0.000
52.00 - 54.00	0.000
54.00 - 56.00	0.000
56.00 - 58.00	0.000
58.00 - 60.00	0.000
60.00 - 62.00	0.000
62.00 - 64.00	0.000
64.00 - 66.00	0.000
66.00 - 68.00	0.000
68.00 - 70.00	0.000
70.00 - 72.00	0.000
72.00 - 74.00	0.000
74.00 - 76.00	0.000
76.00 - 78.00	0.000
78.00 - 80.00	0.000
80.00 - 82.00	0.000
82.00 - 84.00	0.000
84.00 - 86.00	0.000
86.00 - 88.00	0.000
88.00 - 90.00	0.000
90.00 - 92.00	0.000
92.00 - 94.00	0.000
94.00 - 96.00	0.000
96.00 - 98.00	0.000
98.00 - 100.00	0.003
100.00 - 102.00	0.017
102.00 - 104.00	0.367
104.00 - 106.00	0.350
106.00 - 108.00	0.153
108.00 - 110.00	0.047
110.00 - 112.00	0.043
112.00 - 114.00	0.007
114.00 - 116.00	0.013
116.00 - 118.00	0.000
118.00 - 120.00	0.000

MINIMUM PEAK TIME = 137.50 MA; MAXIMUM PEAK TIME = 175.00 MA

TIME OF PEAK TEMP: AVERAGE = 162.52 STAND DEV = 6.088

TIME AT MAX TEMP	RELATIVE FREQUENCY
136.88 - 138.12	0.003
138.12 - 139.38	0.000
139.38 - 140.62	0.000
140.62 - 141.88	0.000
141.88 - 143.12	0.000
143.12 - 144.38	0.000
144.38 - 145.62	0.000
145.62 - 146.88	0.000
146.88 - 148.12	0.000
148.12 - 149.38	0.000
149.38 - 150.62	0.000
150.62 - 151.88	0.000
151.88 - 153.12	0.007
153.12 - 154.38	0.000
154.38 - 155.62	0.047
155.62 - 156.88	0.000
156.88 - 158.12	0.350
158.12 - 159.38	0.000
159.38 - 160.62	0.160
160.62 - 161.88	0.000
161.88 - 163.12	0.037
163.12 - 164.38	0.000
164.38 - 165.62	0.117
165.62 - 166.88	0.000
166.88 - 168.12	0.020
168.12 - 169.38	0.000
169.38 - 170.62	0.137
170.62 - 171.88	0.000
171.88 - 173.12	0.113
173.12 - 174.38	0.000
174.38 - 175.62	0.010

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 1.62 +/- 0.240; %RO FOR EXP MEAN SOLUTION = 1.50
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 1.62 +/- 0.128
 MIN %RO = 1.38; MAX %RO = 1.86
 %RO FOR MIN OBJ SOLUTION = 1.57

POST-EXHUMATION THERMAL HISTORY (115-100 to 0 Ma):

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.50 +/- 0.200; %RO FOR EXP MEAN SOLUTION = 0.48
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.49 +/- 0.015
 MIN %RO = 0.46; MAX %RO = 0.54
 %RO FOR MIN OBJ SOLUTION = 0.50

BINNED %RO VALUES FOR POST-EXHUMATION HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.03	0.000
0.03 - 0.05	0.000
0.05 - 0.08	0.000
0.08 - 0.10	0.000
0.10 - 0.12	0.000
0.12 - 0.15	0.000
0.15 - 0.18	0.000
0.17 - 0.20	0.000
0.20 - 0.23	0.000
0.23 - 0.25	0.000
0.25 - 0.27	0.000
0.28 - 0.30	0.000
0.30 - 0.32	0.000
0.33 - 0.35	0.000
0.35 - 0.37	0.000
0.38 - 0.40	0.000
0.40 - 0.42	0.000
0.43 - 0.45	0.000
0.45 - 0.47	0.210
0.47 - 0.50	0.570
0.50 - 0.52	0.210
0.53 - 0.55	0.010
0.55 - 0.57	0.000
0.57 - 0.60	0.000
0.60 - 0.62	0.000
0.62 - 0.65	0.000
0.65 - 0.68	0.000
0.68 - 0.70	0.000
0.70 - 0.72	0.000
0.73 - 0.75	0.000
0.75 - 0.77	0.000
0.78 - 0.80	0.000
0.80 - 0.82	0.000
0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 72.20 DEG C; MAXIMUM PEAK TEMPERATURE = 94.08 DEG C

PEAK TEMPERATURE: AVERAGE = 82.71 STAND DEV = 4.440

MAX TEMP BIN	RELATIVE FREQUENCY
50.00 - 52.00	0.000
52.00 - 54.00	0.000
54.00 - 56.00	0.000
56.00 - 58.00	0.000
58.00 - 60.00	0.000
60.00 - 62.00	0.000
62.00 - 64.00	0.000
64.00 - 66.00	0.000
66.00 - 68.00	0.000
68.00 - 70.00	0.000
70.00 - 72.00	0.000
72.00 - 74.00	0.013
74.00 - 76.00	0.060
76.00 - 78.00	0.070
78.00 - 80.00	0.130
80.00 - 82.00	0.180
82.00 - 84.00	0.173
84.00 - 86.00	0.133
86.00 - 88.00	0.097
88.00 - 90.00	0.100
90.00 - 92.00	0.030
92.00 - 94.00	0.010
94.00 - 96.00	0.003
96.00 - 98.00	0.000
98.00 - 100.00	0.000

MINIMUM PEAK TIME = 27.50 MA; MAXIMUM PEAK TIME = 95.00 MA

TIME OF PEAK TEMP: AVERAGE = 65.15 STAND DEV = 12.265

TIME AT MAX TEMP	RELATIVE FREQUENCY
26.88 - 28.12	0.003
28.12 - 29.38	0.000
29.38 - 30.62	0.000
30.62 - 31.88	0.000
31.88 - 33.12	0.003
33.12 - 34.38	0.000
34.38 - 35.62	0.003
35.62 - 36.88	0.000
36.88 - 38.12	0.000

38.12 - 39.38 0.000
 39.38 - 40.62 0.007
 40.62 - 41.88 0.000
 41.88 - 43.12 0.020
 43.12 - 44.38 0.000
 44.38 - 45.62 0.030
 45.62 - 46.88 0.000
 46.88 - 48.12 0.037
 48.12 - 49.38 0.000
 49.38 - 50.62 0.033
 50.62 - 51.88 0.000
 51.88 - 53.12 0.053
 53.12 - 54.38 0.000
 54.38 - 55.62 0.057
 55.62 - 56.88 0.000
 56.88 - 58.12 0.063
 58.12 - 59.38 0.000
 59.38 - 60.62 0.070
 60.62 - 61.88 0.000
 61.88 - 63.12 0.073
 63.12 - 64.38 0.000
 64.38 - 65.62 0.060
 65.62 - 66.88 0.000
 66.88 - 68.12 0.083
 68.12 - 69.38 0.000
 69.38 - 70.62 0.070
 70.62 - 71.88 0.000
 71.88 - 73.12 0.070
 73.12 - 74.38 0.000
 74.38 - 75.62 0.080
 75.62 - 76.88 0.000
 76.88 - 78.12 0.053
 78.12 - 79.38 0.000
 79.38 - 80.62 0.037
 80.62 - 81.88 0.000
 81.88 - 83.12 0.020
 83.12 - 84.38 0.000
 84.38 - 85.62 0.037
 85.62 - 86.88 0.000
 86.88 - 88.12 0.023
 88.12 - 89.38 0.000
 89.38 - 90.62 0.000
 90.62 - 91.88 0.000
 91.88 - 93.12 0.010
 93.12 - 94.38 0.000
 94.38 - 95.62 0.003

CONTROLLED RANDOM SEARCH TECHNIQUE

MINIMUM OBJECTIVE SOLUTION: LOWEST COMBINED OBJECTIVE FUNCTION

MODEL RESULTS AT 0.5000 SIGNIFICANCE LEVEL

SEARCH FOR MAXIMUM TEMPERATURE BETWEEN 97.50 - 0.00 MA

ALL SOLUTIONS ARE AT 0.5000 SIGNIFICANCE LEVEL

%RO MODEL: BASIN%RO

MODEL #	KIN POP# 1 CALCULATED AFT AGE (MA)	KIN POP# 2 CALCULATED AFT AGE (MA)	TIME OF MAXIMUM TEMP (MA)	MAXIMUM TEMP (DEG C)	KIN POP# 1 OBJECTIVE FUNCTION	KIN POP# 2 OBJECTIVE FUNCTION	%RO POST-DEP	%RO POST-EXH
1	121.95	256.97	60.00	79.55	0.060677	0.062353	1.563	0.485
2	123.98	253.06	65.00	81.14	0.058213	0.068841	1.510	0.493
3	124.81	256.18	65.00	78.64	0.068439	0.064877	1.481	0.482
4	125.38	255.56	55.00	74.52	0.082299	0.062157	1.519	0.473
5	123.64	253.65	65.00	79.40	0.053957	0.064984	1.622	0.485
6	124.35	253.70	65.00	81.01	0.062718	0.067844	1.506	0.491
7	123.75	250.04	67.50	81.04	0.089916	0.052707	1.538	0.483
8	125.71	256.57	55.00	74.49	0.083815	0.061919	1.520	0.473
9	124.83	250.48	65.00	78.79	0.077045	0.065294	1.531	0.484
10	127.27	258.07	65.00	76.69	0.099002	0.067562	1.484	0.475
11	124.26	251.64	65.00	81.06	0.061602	0.069192	1.512	0.491
12	126.19	252.92	55.00	73.43	0.094177	0.060897	1.519	0.469
13	122.69	257.91	60.00	78.68	0.059265	0.067664	1.513	0.483
14	125.99	255.27	55.00	74.72	0.083117	0.060845	1.523	0.473
15	123.83	249.84	60.00	79.43	0.079359	0.068682	1.503	0.483
16	122.59	253.26	60.00	76.21	0.074876	0.061226	1.568	0.476
17	121.63	255.75	45.00	79.17	0.100640	0.053670	1.567	0.484
18	124.93	254.72	45.00	75.40	0.090582	0.067551	1.491	0.473
19	120.30	258.71	67.50	81.55	0.059354	0.061477	1.516	0.494
20	125.74	252.75	55.00	74.37	0.080790	0.063504	1.506	0.473
21	126.88	256.59	55.00	73.10	0.099815	0.062333	1.518	0.467
22	121.95	254.42	45.00	78.17	0.100172	0.058838	1.529	0.478
23	124.22	258.08	72.50	78.73	0.061194	0.065193	1.539	0.486
24	124.38	250.14	67.50	77.53	0.099497	0.066711	1.665	0.483
25	126.16	255.83	60.00	74.61	0.085256	0.061606	1.522	0.473
26	125.19	253.97	55.00	73.98	0.086101	0.067082	1.493	0.471
27	124.38	248.53	72.50	78.87	0.073391	0.066170	1.603	0.479
28	124.80	254.64	55.00	74.33	0.082422	0.060044	1.533	0.472
29	123.98	251.25	72.50	76.87	0.101800	0.053516	1.536	0.480
30	124.46	257.64	67.50	78.67	0.064163	0.065238	1.552	0.486
31	125.50	252.91	60.00	74.55	0.082236	0.064382	1.557	0.473
32	125.47	259.34	72.50	83.11	0.075845	0.065296	1.653	0.487
33	123.21	254.84	45.00	77.01	0.094190	0.053309	1.566	0.475
34	123.96	255.53	60.00	77.86	0.058052	0.063499	1.541	0.482
35	124.08	251.18	65.00	82.11	0.062200	0.066621	1.533	0.493
36	123.76	253.41	65.00	82.10	0.065238	0.066876	1.511	0.495
37	126.34	257.85	72.50	80.48	0.087509	0.064811	1.495	0.485
38	126.59	256.07	65.00	74.95	0.091603	0.069028	1.511	0.477
39	125.44	255.25	47.50	74.96	0.086414	0.054683	1.578	0.473

256	122.64	249.99	72.50	82.72	0.070240	0.064892	1.557	0.496
257	123.19	258.32	45.00	77.79	0.098119	0.053216	1.570	0.477
258	124.84	253.49	60.00	79.02	0.086208	0.065029	1.537	0.485
259	125.37	254.15	60.00	75.17	0.075375	0.059968	1.546	0.475
260	122.52	253.56	65.00	82.82	0.070895	0.068091	1.512	0.496
261	125.96	257.64	55.00	74.23	0.086051	0.064667	1.504	0.472
262	124.38	253.11	72.50	82.00	0.070462	0.068095	1.512	0.496
263	122.71	250.83	60.00	79.23	0.088900	0.061096	1.552	0.486
264	122.54	250.30	72.50	81.40	0.049963	0.067916	1.523	0.493
265	124.89	250.40	60.00	78.78	0.072104	0.063843	1.528	0.481
266	126.41	249.97	72.50	78.69	0.088332	0.066540	1.484	0.477
267	123.89	252.63	47.50	75.80	0.084684	0.062485	1.633	0.475
268	123.85	251.17	65.00	82.59	0.071238	0.069425	1.543	0.494
269	124.12	253.21	45.00	76.11	0.091985	0.059993	1.533	0.475
270	126.25	256.53	60.00	74.46	0.087376	0.067275	1.488	0.472
271	124.58	251.98	60.00	79.27	0.065636	0.066335	1.610	0.485
272	123.43	252.89	65.00	81.82	0.055165	0.065542	1.526	0.493
273	125.32	255.54	55.00	75.08	0.076853	0.069002	1.591	0.474
274	124.17	257.34	67.50	78.95	0.060576	0.065559	1.567	0.487
275	124.80	255.58	47.50	77.41	0.074158	0.056342	1.592	0.479
276	124.07	253.63	60.00	80.18	0.061974	0.068665	1.638	0.487
277	125.62	256.38	60.00	75.02	0.088731	0.068050	1.500	0.472
278	124.12	253.79	65.00	81.30	0.059914	0.068963	1.514	0.493
279	124.60	256.93	65.00	78.61	0.065895	0.062619	1.567	0.482
280	131.01	264.65	50.00	80.90	0.101658	0.069353	1.586	0.480
281	122.62	254.51	60.00	75.85	0.079530	0.059092	1.556	0.475
282	126.94	255.45	45.00	77.04	0.098474	0.058075	1.598	0.471
283	120.67	249.40	72.50	85.95	0.091053	0.068438	1.571	0.502
284	123.40	250.89	72.50	81.54	0.051299	0.067216	1.518	0.493
285	125.67	249.25	45.00	76.31	0.091436	0.065478	1.702	0.471
286	125.75	255.81	55.00	74.60	0.081248	0.063846	1.555	0.473
287	125.83	249.09	62.50	78.05	0.084576	0.060108	1.524	0.484
288	126.05	254.84	55.00	72.86	0.100985	0.062284	1.509	0.467
289	126.78	252.40	72.50	78.55	0.098900	0.067668	1.515	0.473
290	125.94	257.90	55.00	74.65	0.082498	0.066289	1.571	0.473
291	123.65	251.06	72.50	81.86	0.060696	0.065900	1.534	0.494
292	125.26	258.05	55.00	75.51	0.075364	0.066221	1.574	0.476
293	123.68	253.63	72.50	82.27	0.066993	0.068123	1.526	0.495
294	124.28	249.50	60.00	78.80	0.082331	0.064982	1.558	0.485
295	123.85	250.80	65.00	81.76	0.056594	0.069313	1.564	0.493
296	122.33	253.19	65.00	79.31	0.051629	0.063983	1.614	0.485
297	124.14	250.58	60.00	79.33	0.083178	0.060771	1.561	0.486
298	123.87	253.55	60.00	75.13	0.087635	0.066535	1.481	0.472
299	122.22	254.49	65.00	83.12	0.066364	0.066758	1.516	0.495
300	123.63	252.77	45.00	76.97	0.093058	0.058957	1.619	0.477

POST-DEPOSITIONAL THERMAL HISTORY:

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 1.62 +/- 0.240; %RO FOR EXP MEAN SOLUTION = 1.49
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 1.55 +/- 0.046
 MIN %RO = 1.47; MAX %RO = 1.70
 %RO FOR MIN OBJ SOLUTION = 1.62

POST-EXHUMATION THERMAL HISTORY (115-100 to 0 Ma):

%RO CONSTRAINT INCLUDED:
 INPUT %RO RANGE = 0.50 +/- 0.200; %RO FOR EXP MEAN SOLUTION = 0.48
 AVERAGE %RO FOR ALL SOLUTIONS (MEAN & STD. DEV.) = 0.48 +/- 0.008
 MIN %RO = 0.47; MAX %RO = 0.50
 %RO FOR MIN OBJ SOLUTION = 0.48

BINNED %RO VALUES FOR POST-EXHUMATION HISTORY:

%RO BIN	RELATIVE FREQUENCY
0.00 - 0.03	0.000
0.03 - 0.05	0.000
0.05 - 0.08	0.000
0.08 - 0.10	0.000
0.10 - 0.12	0.000
0.12 - 0.15	0.000
0.15 - 0.18	0.000
0.17 - 0.20	0.000
0.20 - 0.23	0.000
0.23 - 0.25	0.000
0.25 - 0.27	0.000
0.28 - 0.30	0.000
0.30 - 0.32	0.000
0.33 - 0.35	0.000
0.35 - 0.37	0.000
0.38 - 0.40	0.000
0.40 - 0.42	0.000
0.43 - 0.45	0.000
0.45 - 0.47	0.257
0.47 - 0.50	0.740
0.50 - 0.52	0.003
0.53 - 0.55	0.000
0.55 - 0.57	0.000
0.57 - 0.60	0.000
0.60 - 0.62	0.000
0.62 - 0.65	0.000
0.65 - 0.68	0.000
0.68 - 0.70	0.000
0.70 - 0.72	0.000
0.73 - 0.75	0.000
0.75 - 0.77	0.000
0.78 - 0.80	0.000
0.80 - 0.82	0.000
0.82 - 0.85	0.000
0.85 - 0.88	0.000
0.88 - 0.90	0.000
0.90 - 0.93	0.000
0.93 - 0.95	0.000
0.95 - 0.97	0.000
0.98 - 1.00	0.000

MINIMUM PEAK TEMPERATURE = 72.86 DEG C; MAXIMUM PEAK TEMPERATURE = 85.95 DEG C

PEAK TEMPERATURE: AVERAGE = 78.56 STAND DEV = 2.899

MAX TEMP BIN	RELATIVE FREQUENCY
50.00 - 52.00	0.000
52.00 - 54.00	0.000
54.00 - 56.00	0.000
56.00 - 58.00	0.000
58.00 - 60.00	0.000
60.00 - 62.00	0.000
62.00 - 64.00	0.000
64.00 - 66.00	0.000
66.00 - 68.00	0.000
68.00 - 70.00	0.000
70.00 - 72.00	0.000
72.00 - 74.00	0.050
74.00 - 76.00	0.220
76.00 - 78.00	0.117
78.00 - 80.00	0.303
80.00 - 82.00	0.183
82.00 - 84.00	0.113
84.00 - 86.00	0.013
86.00 - 88.00	0.000
88.00 - 90.00	0.000
90.00 - 92.00	0.000
92.00 - 94.00	0.000
94.00 - 96.00	0.000
96.00 - 98.00	0.000
98.00 - 100.00	0.000

MINIMUM PEAK TIME = 45.00 MA; MAXIMUM PEAK TIME = 75.00 MA

TIME OF PEAK TEMP: AVERAGE = 61.23 STAND DEV = 7.297

TIME AT MAX TEMP	RELATIVE FREQUENCY
44.38 - 45.62	0.067
45.62 - 46.88	0.000
46.88 - 48.12	0.030
48.12 - 49.38	0.000
49.38 - 50.62	0.010
50.62 - 51.88	0.000
51.88 - 53.12	0.003
53.12 - 54.38	0.000
54.38 - 55.62	0.160
55.62 - 56.88	0.000
56.88 - 58.12	0.017
58.12 - 59.38	0.000
59.38 - 60.62	0.197
60.62 - 61.88	0.000
61.88 - 63.12	0.017
63.12 - 64.38	0.000
64.38 - 65.62	0.303
65.62 - 66.88	0.000
66.88 - 68.12	0.087
68.12 - 69.38	0.000
69.38 - 70.62	0.007
70.62 - 71.88	0.000
71.88 - 73.12	0.100
73.12 - 74.38	0.000
74.38 - 75.62	0.003
75.62 - 76.88	0.000

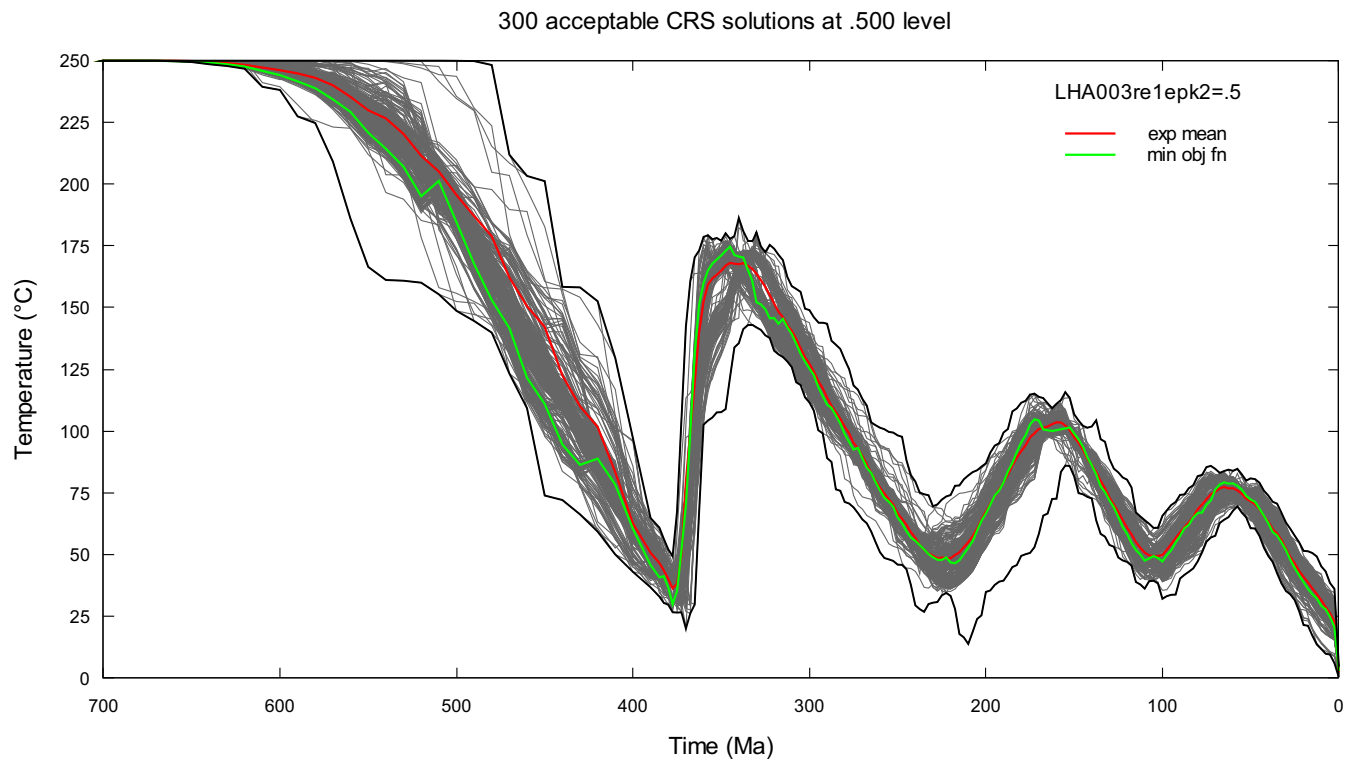
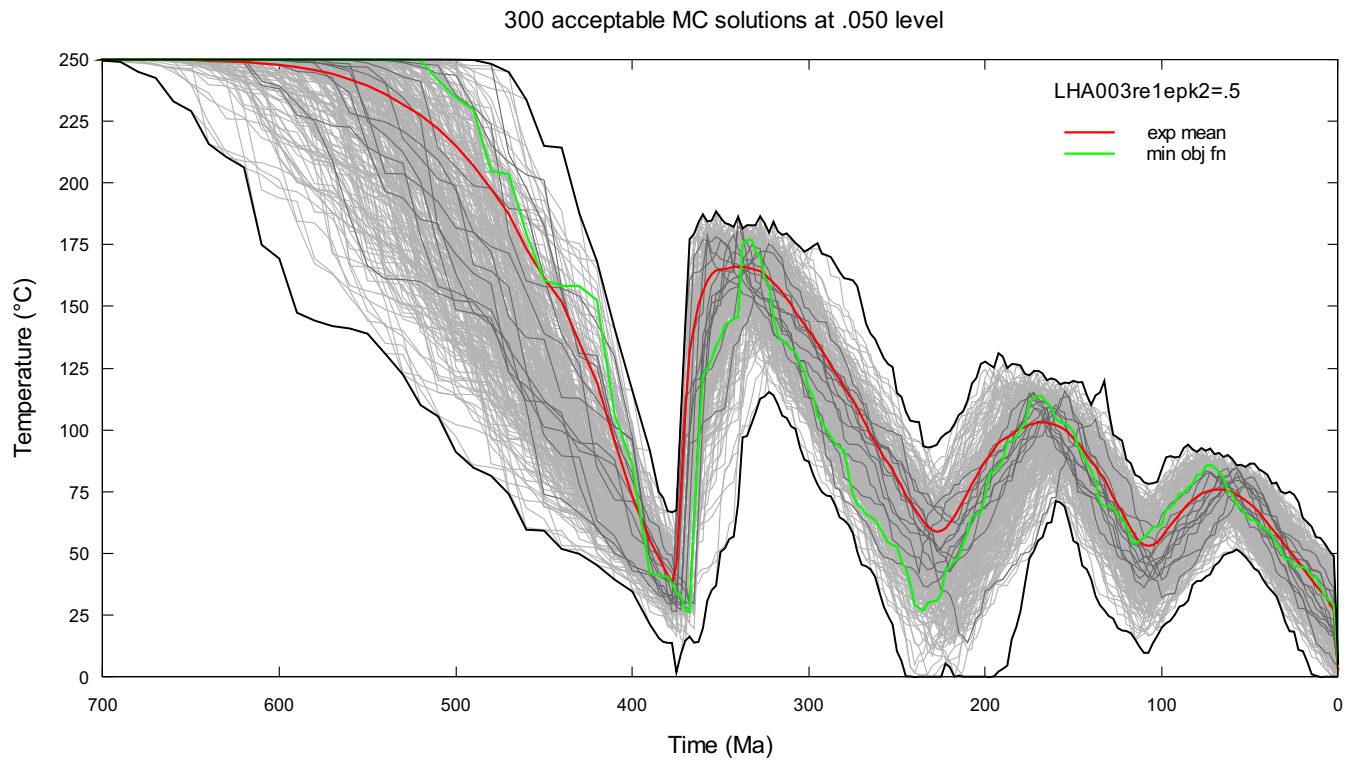


Figure E17. Upper panel shows 300 MC thermal history solutions (287 solutions (light grey) exceeding 0.05 significance level and 13 solutions (darker grey) exceeding 0.5 level). The bounding envelopes do not represent solutions. Lower panel shows 300 solutions exceeding the 0.5 significance level (13 MC solutions and 287 CRS solutions that evolved from the initial MC solution set).

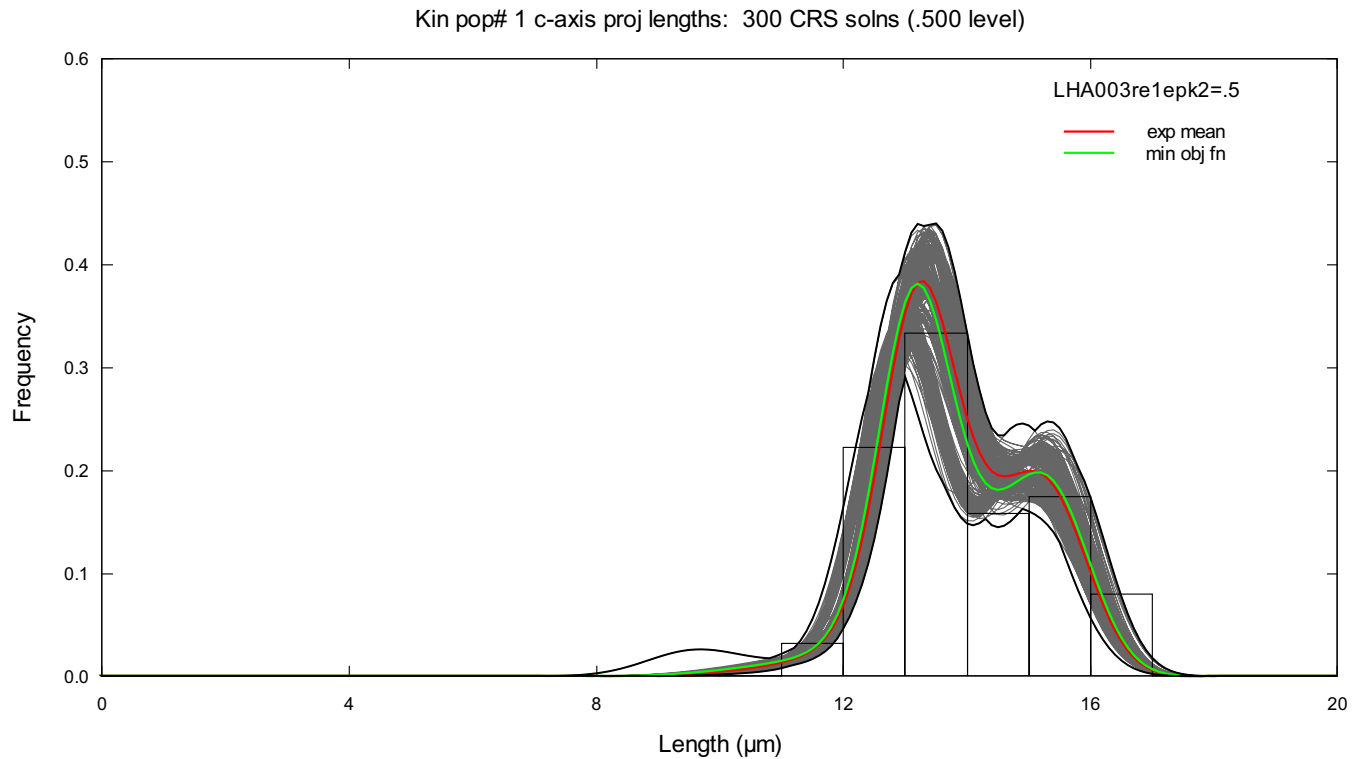
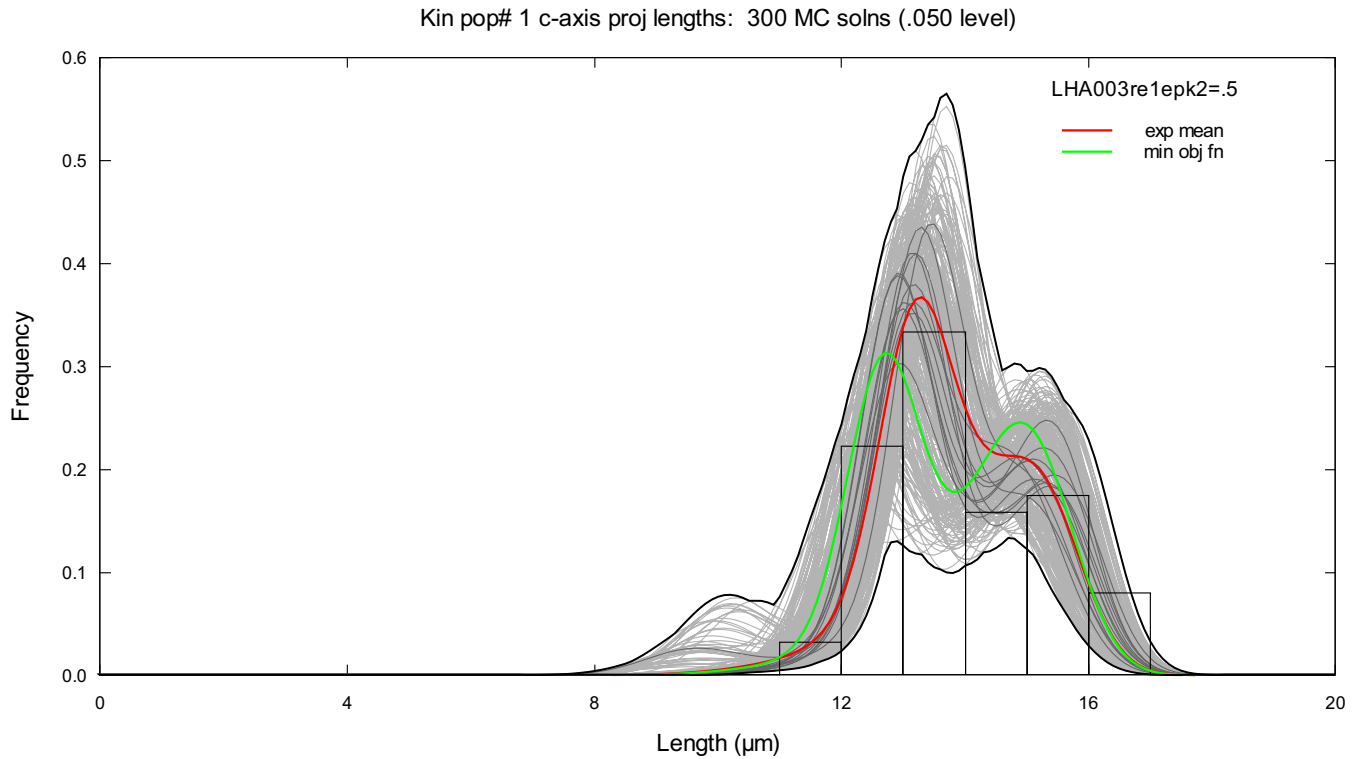


Figure E18. Upper panel shows 300 model predicted track length distributions for kinetic population #1 corresponding to the MC thermal history solutions in Figure E17 (287 solutions (light grey) exceeding 0.05 significance level and 13 solutions (darker grey) exceeding 0.5 level). The bounding envelopes do not represent track length solutions. Histogram shows c-axis projected observed lengths. Lower panel shows 300 model predicted track length distributions for kinetic population #1 corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

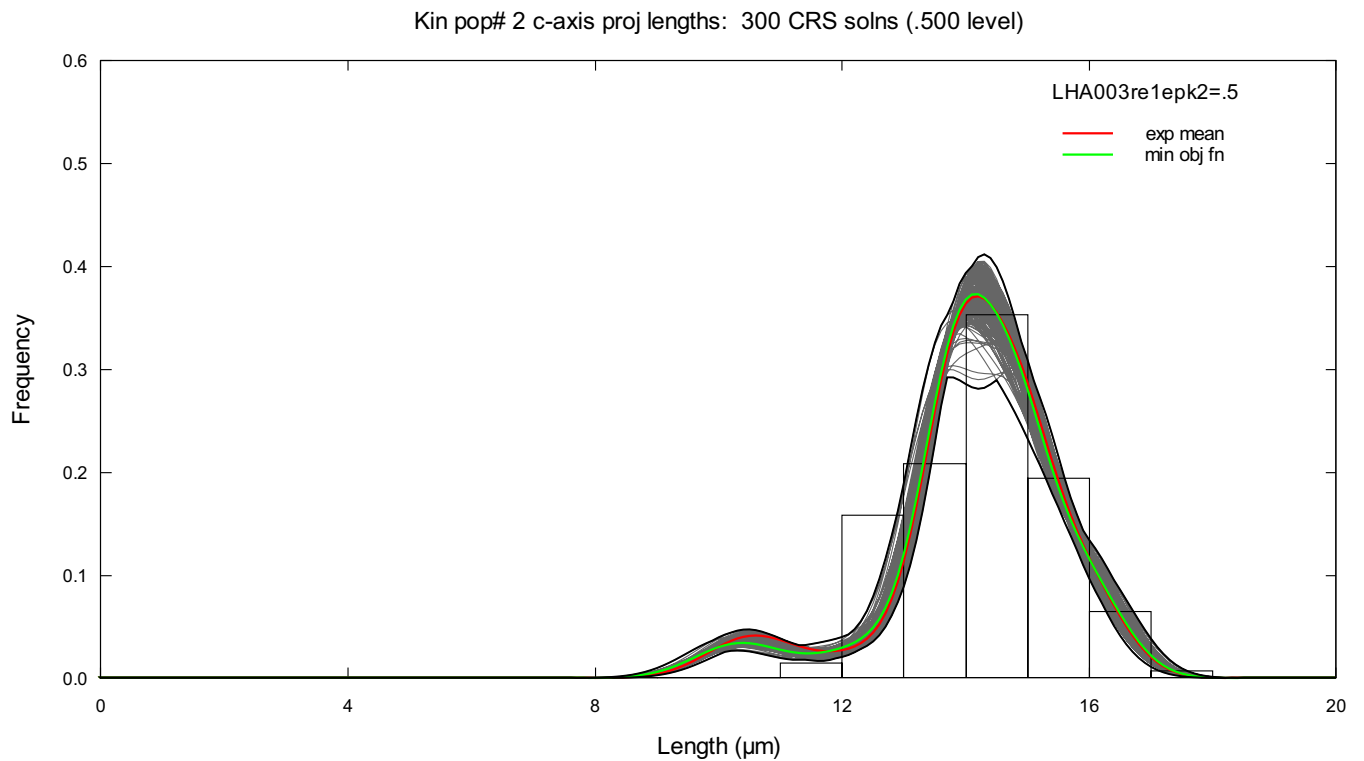
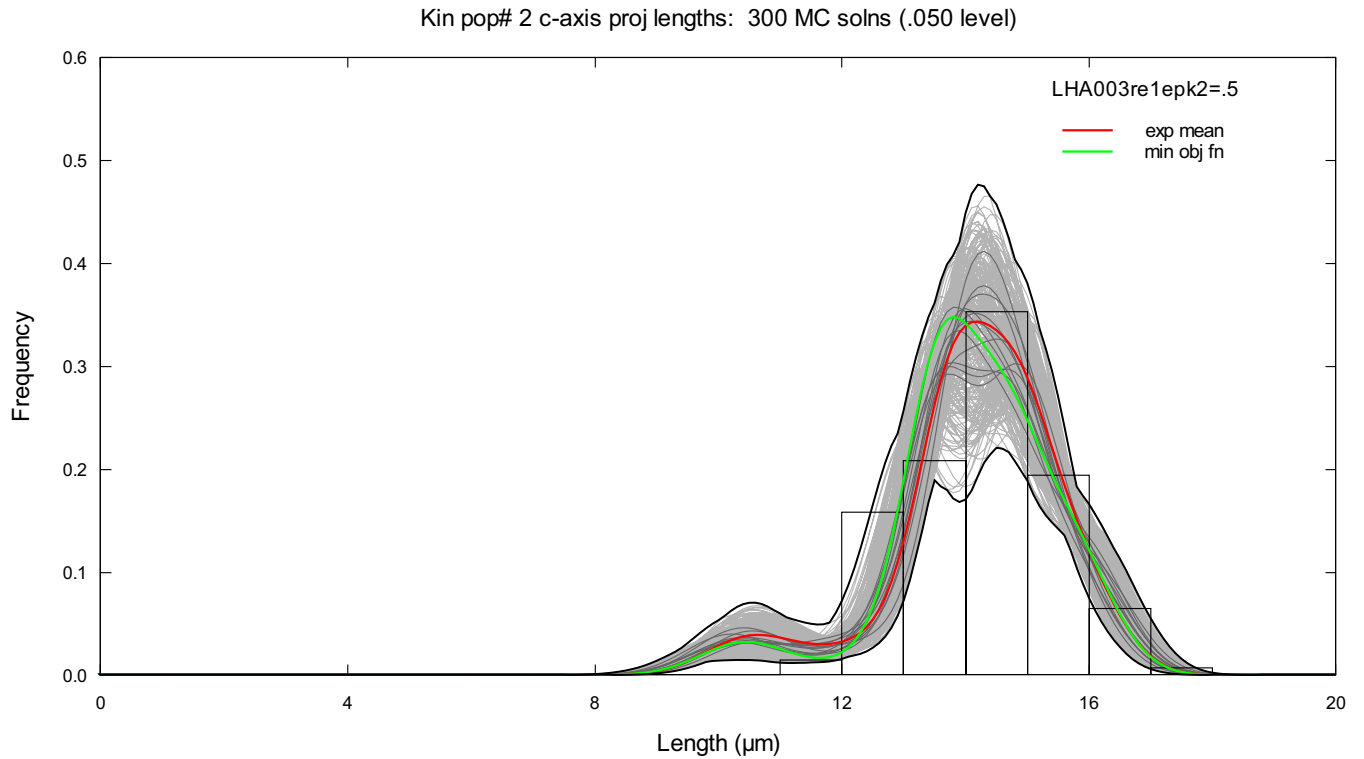


Figure E19. Upper panel shows 300 model predicted track length distributions for kinetic population #2 corresponding to the MC thermal history solutions in Figure E17 (287 solutions (light grey) exceeding 0.05 significance level and 13 solutions (darker grey) exceeding 0.5 level). The bounding envelopes do not represent track length solutions. Histogram shows c-axis projected observed lengths. Lower panel shows 300 model predicted track length distributions for kinetic population #2 corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

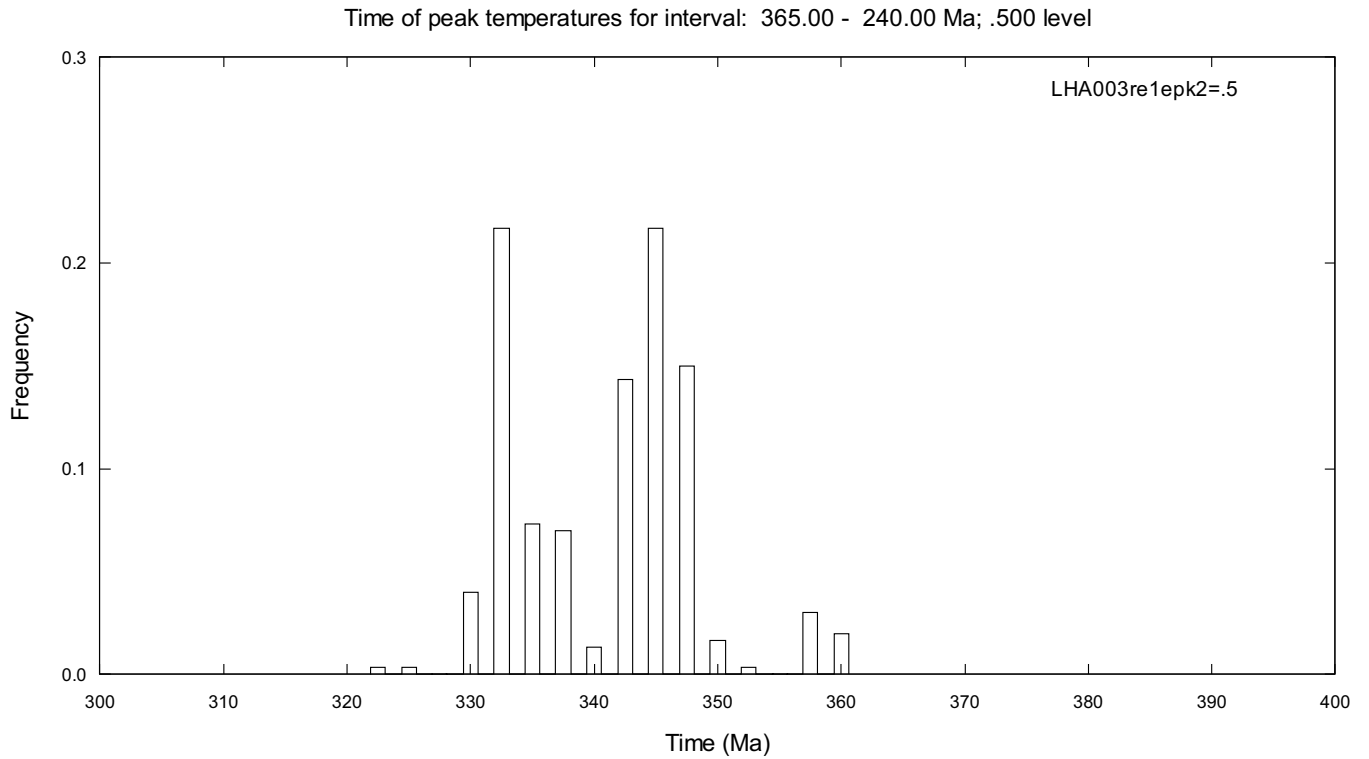
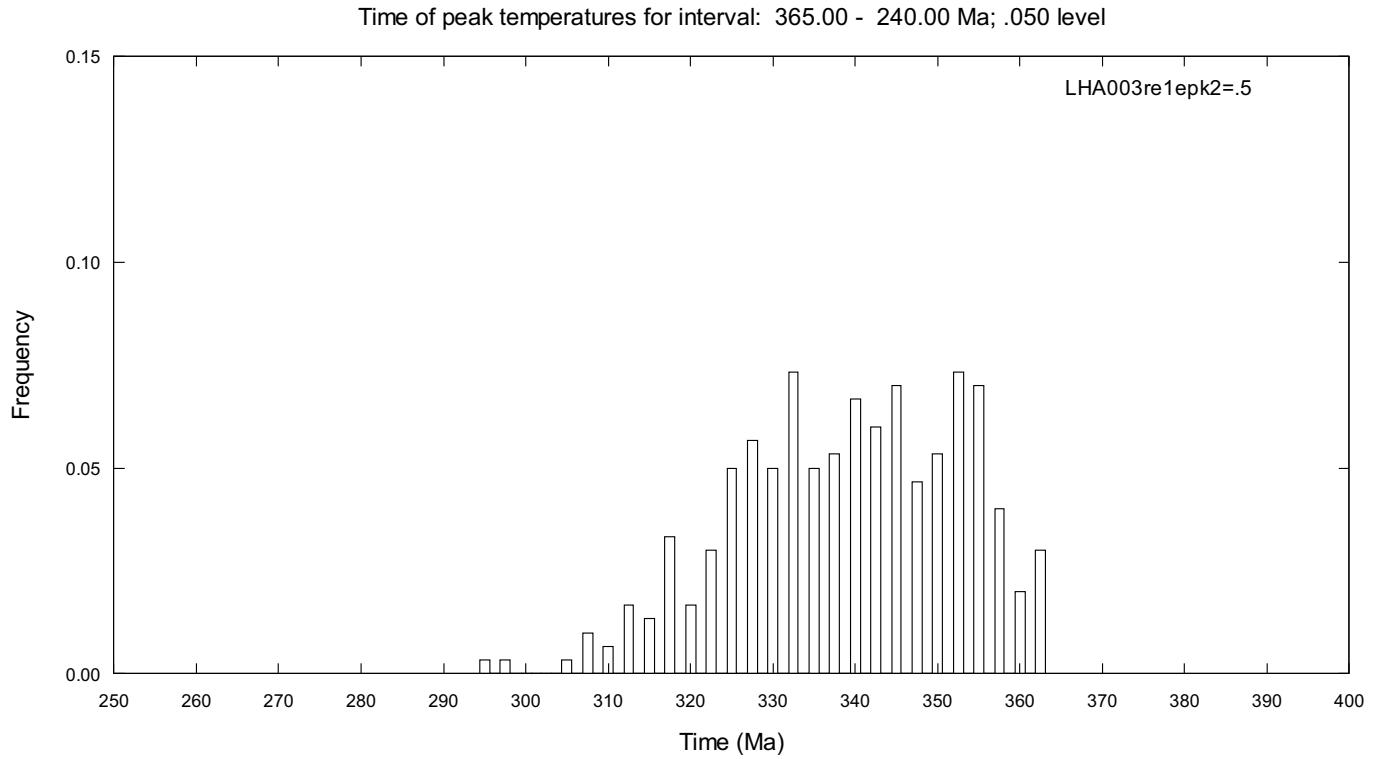


Figure E20. Upper panel shows the distribution of times of maximum temperature for thermal peak 1 over the time interval, 365 - 240 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows the distribution of times of maximum temperature for thermal peak 1 over the time interval, 365 - 240 Ma, corresponding to the thermal history solutions that exceeded the 0.5 significance level in Figure E17.

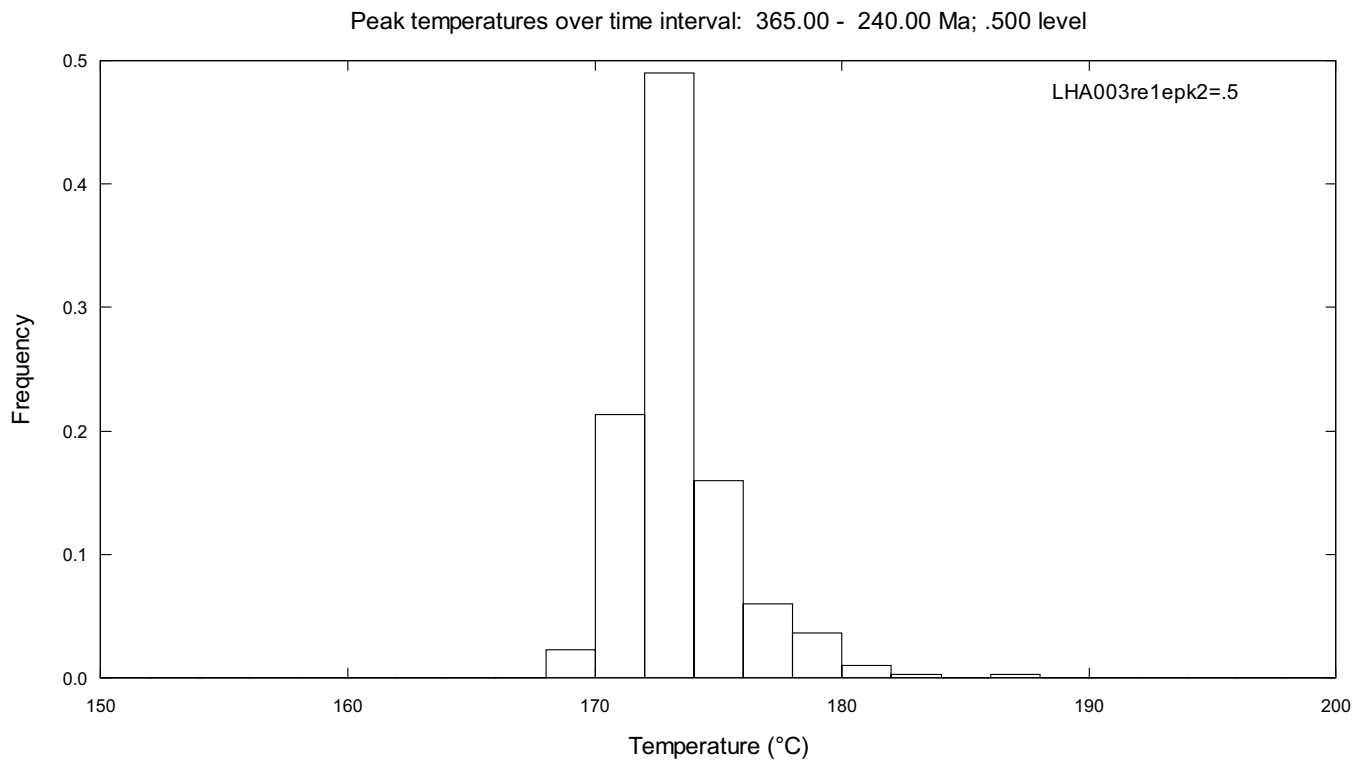
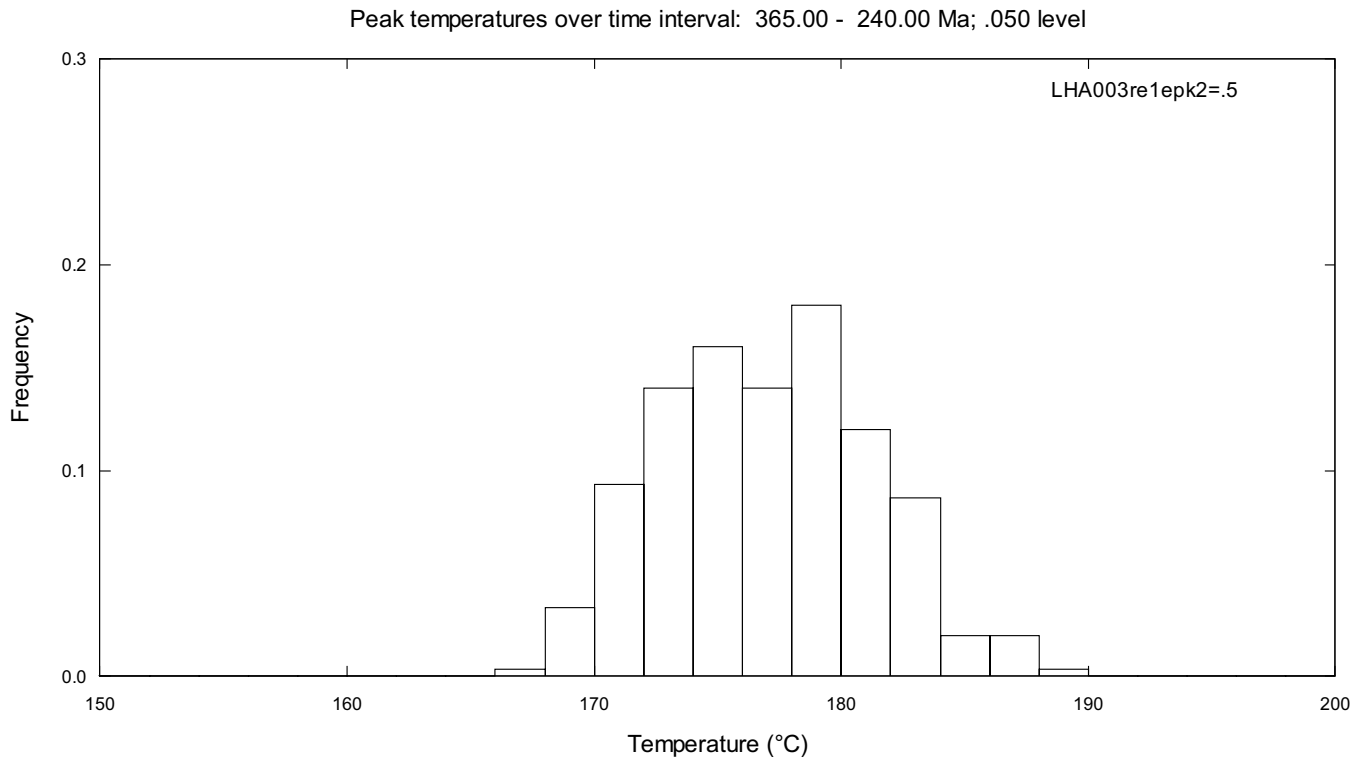


Figure E21. Upper panel shows the distribution of maximum temperatures for thermal peak 1 over the time interval, 365 - 240 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows the distribution of maximum temperatures for thermal peak 1 over the time interval, 365 - 240 Ma, corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

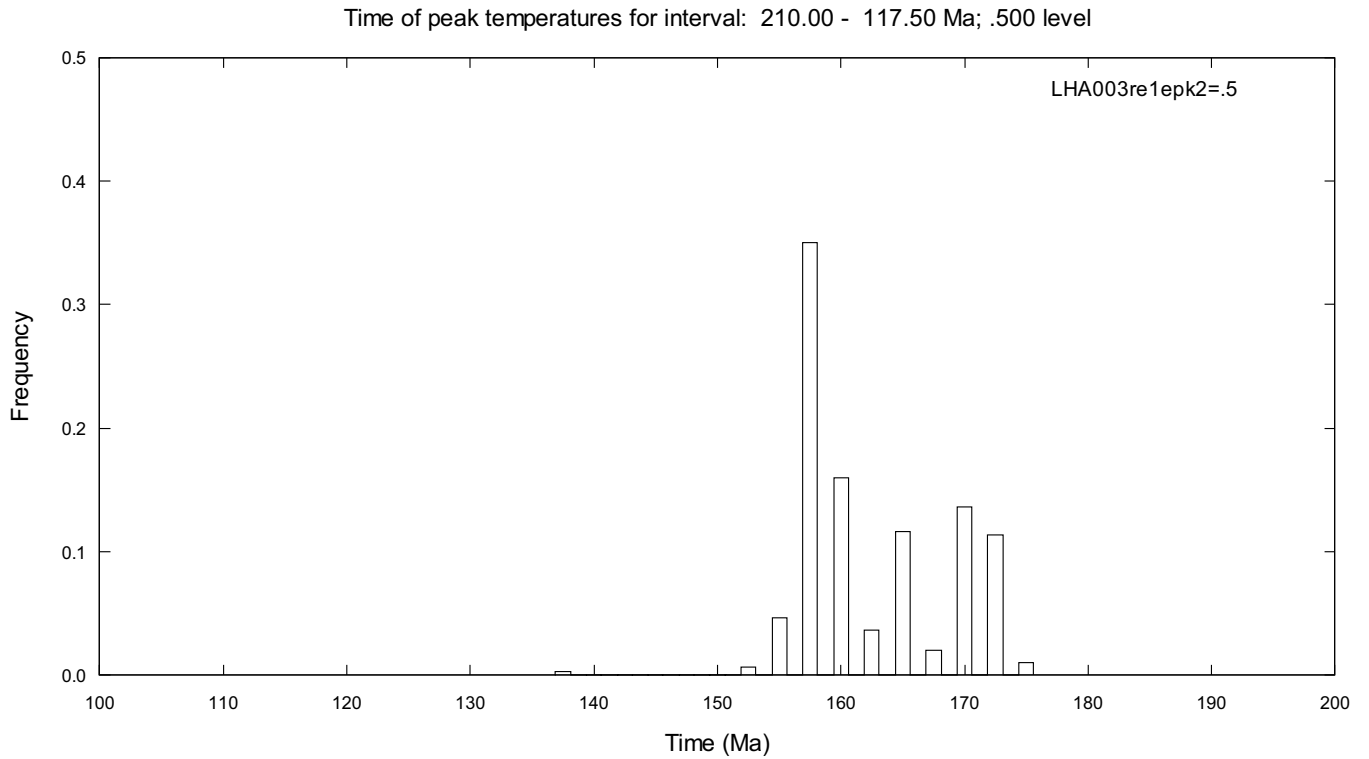
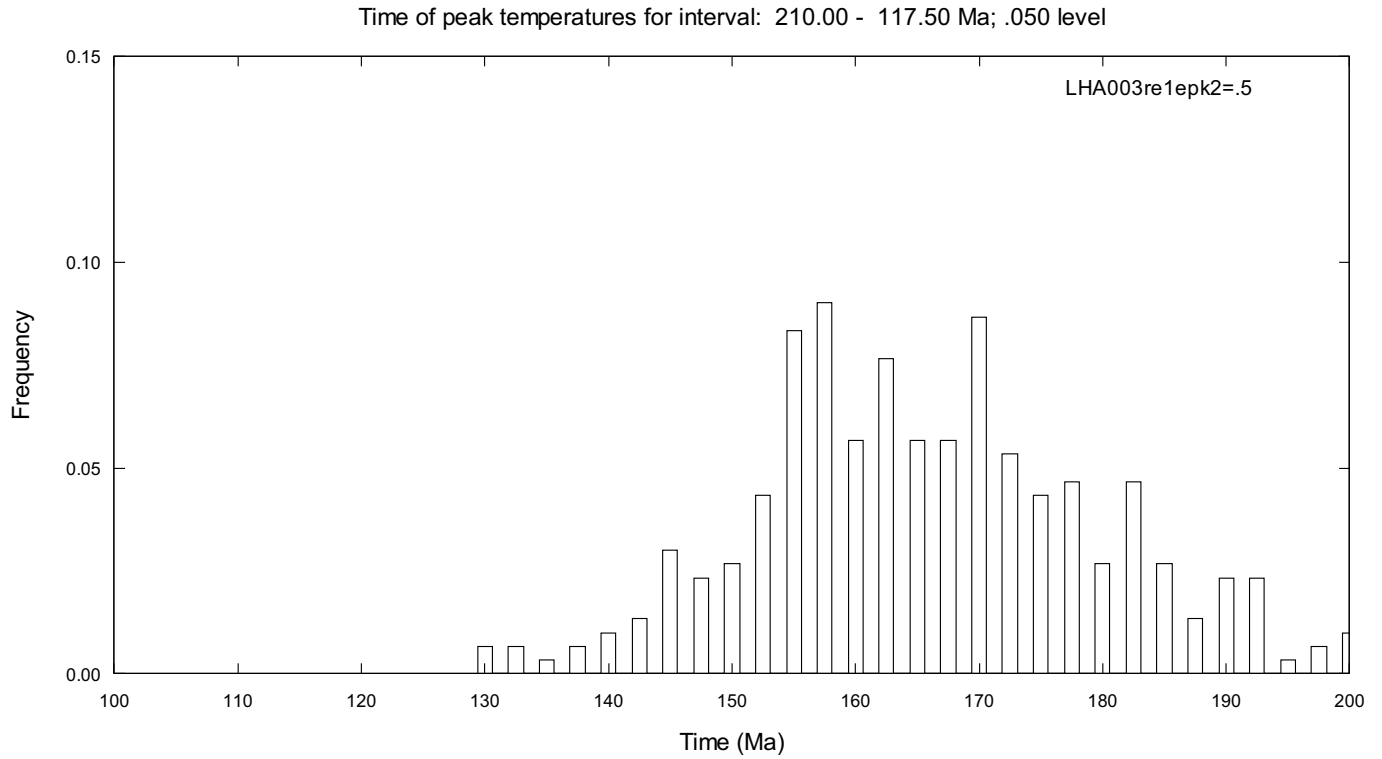


Figure E22. Upper panel shows the distribution of times of maximum temperature for thermal peak 2 over the time interval, 210 - 117.5 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows the distribution of times of maximum temperature for thermal peak 2 over the time interval, 210 - 117.5 Ma, corresponding to the thermal history solutions that exceeded the 0.5 significance level in Figure E17.

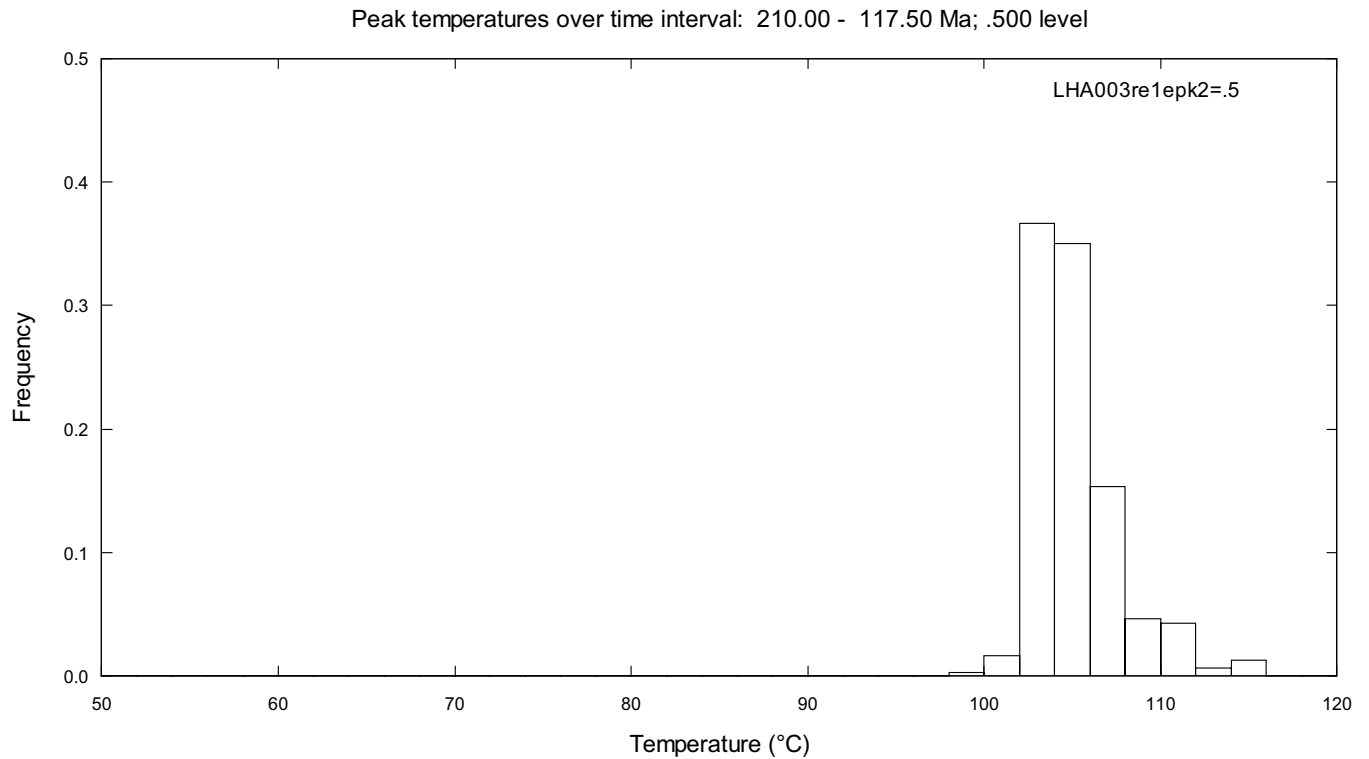
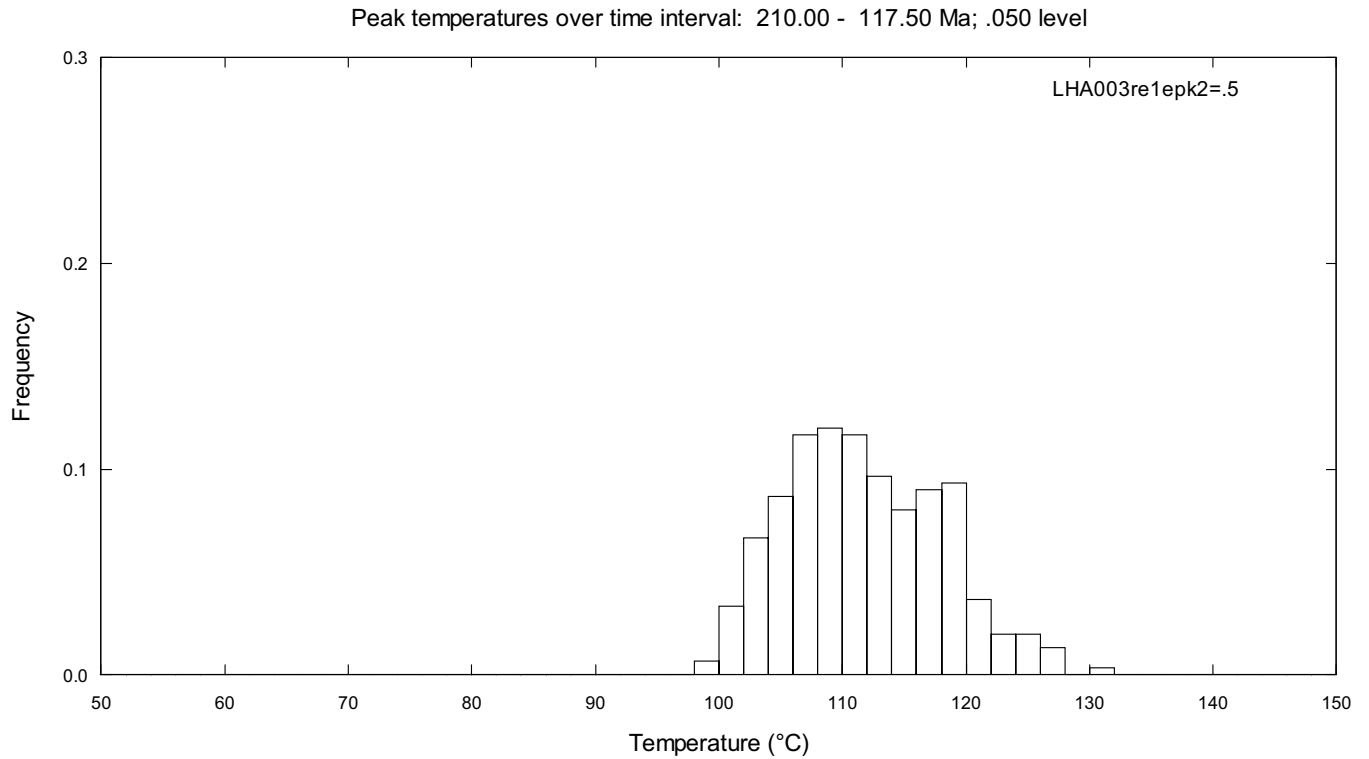


Figure E23. Upper panel shows the distribution of maximum temperatures for thermal peak 2 over the time interval, 210 - 117.5 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows the distribution of maximum temperatures for thermal peak 2 over the time interval, 210 - 117.5 Ma, corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

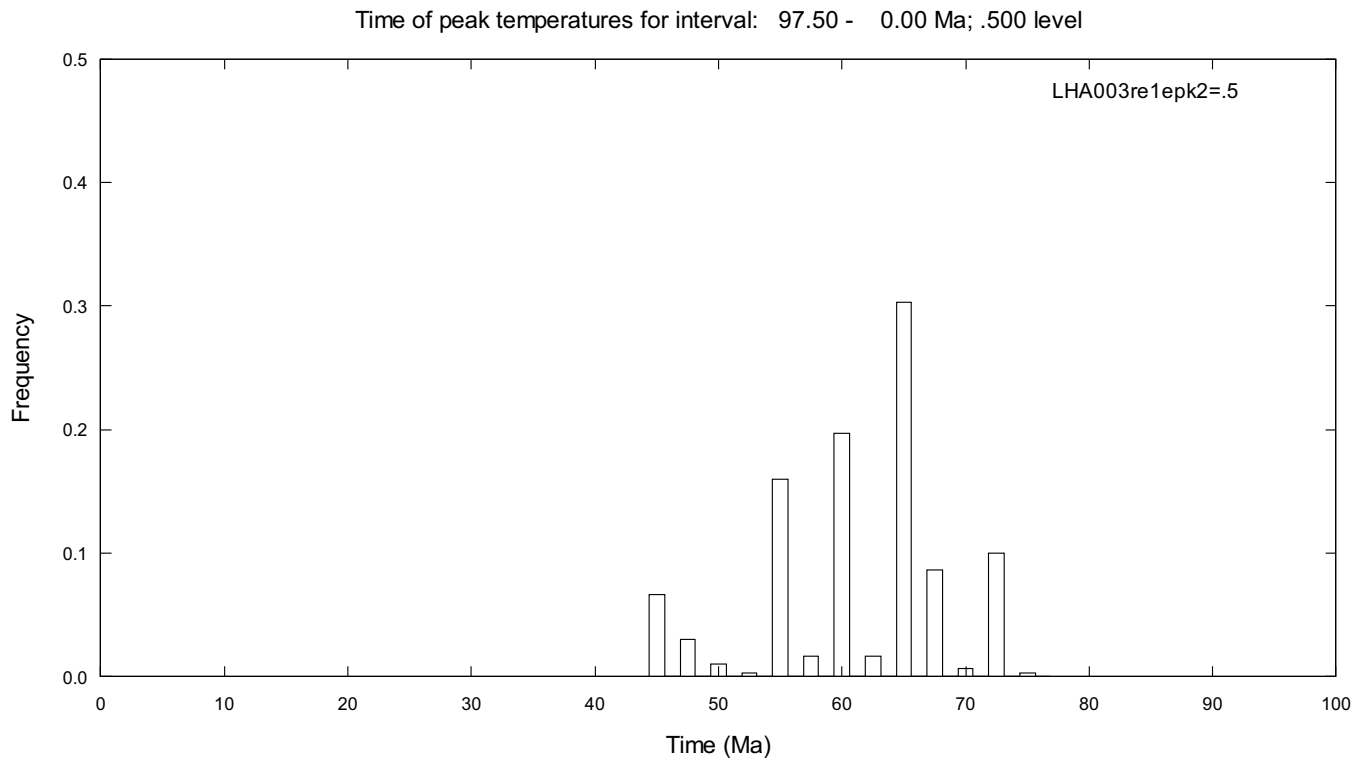
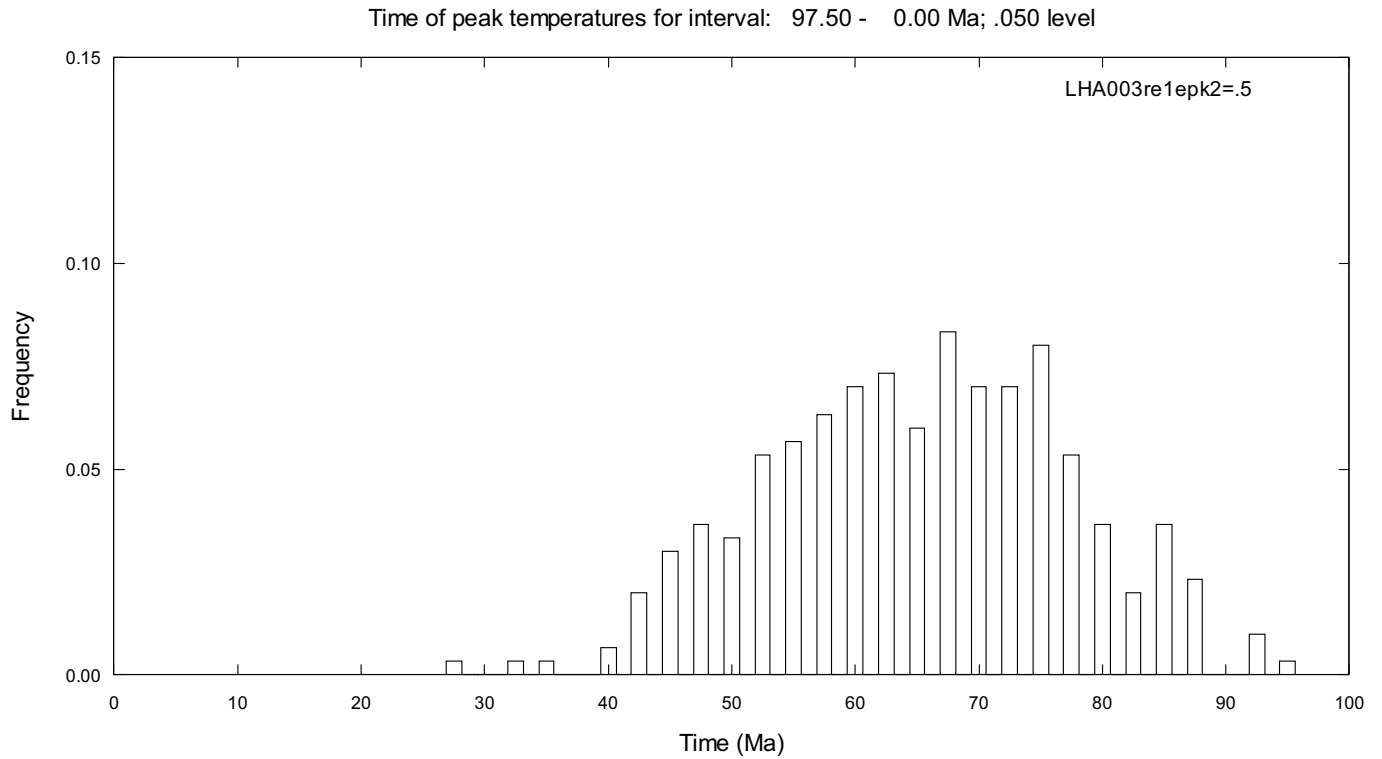


Figure E24. Upper panel shows the distribution of times of maximum temperature for thermal peak 3 over the time interval, 97.5 - 0 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows the distribution of times of maximum temperature for thermal peak 3 over the time interval, 97.5 - 0 Ma, corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

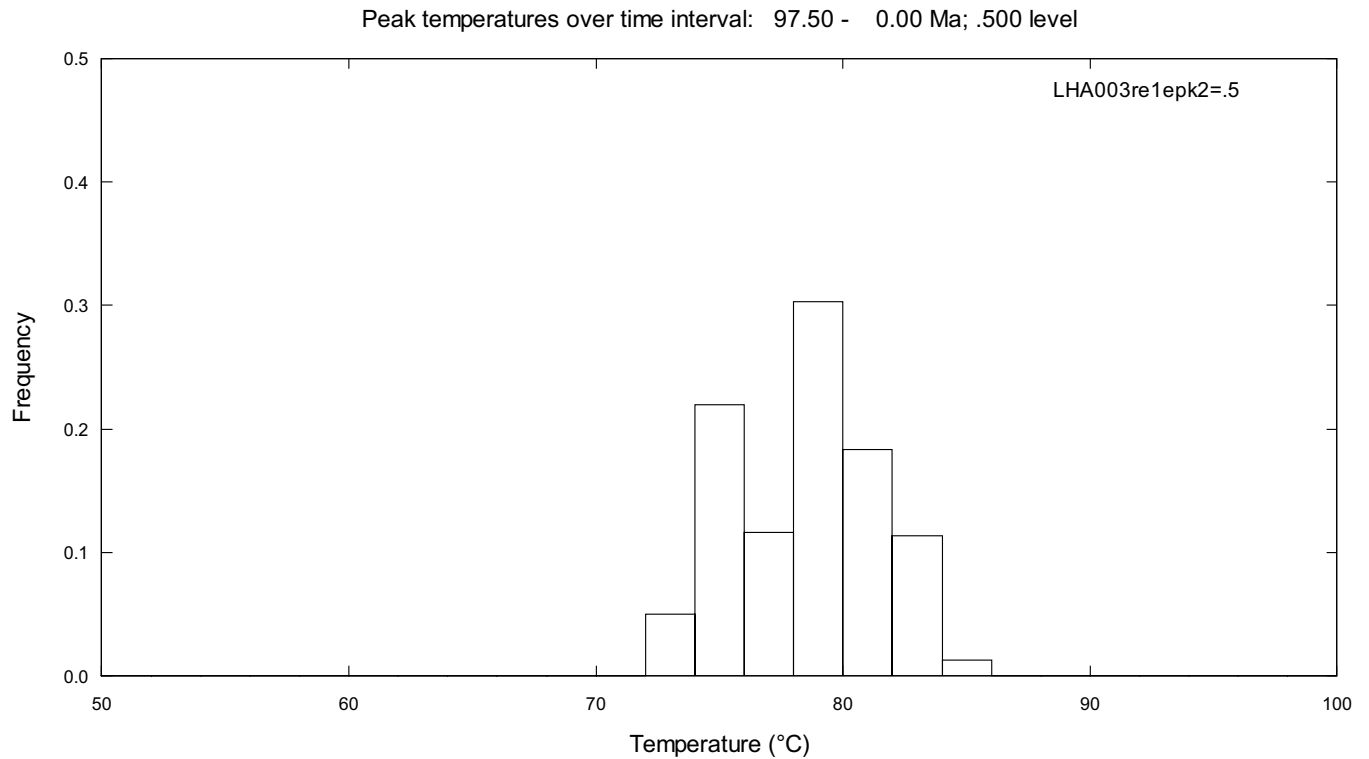
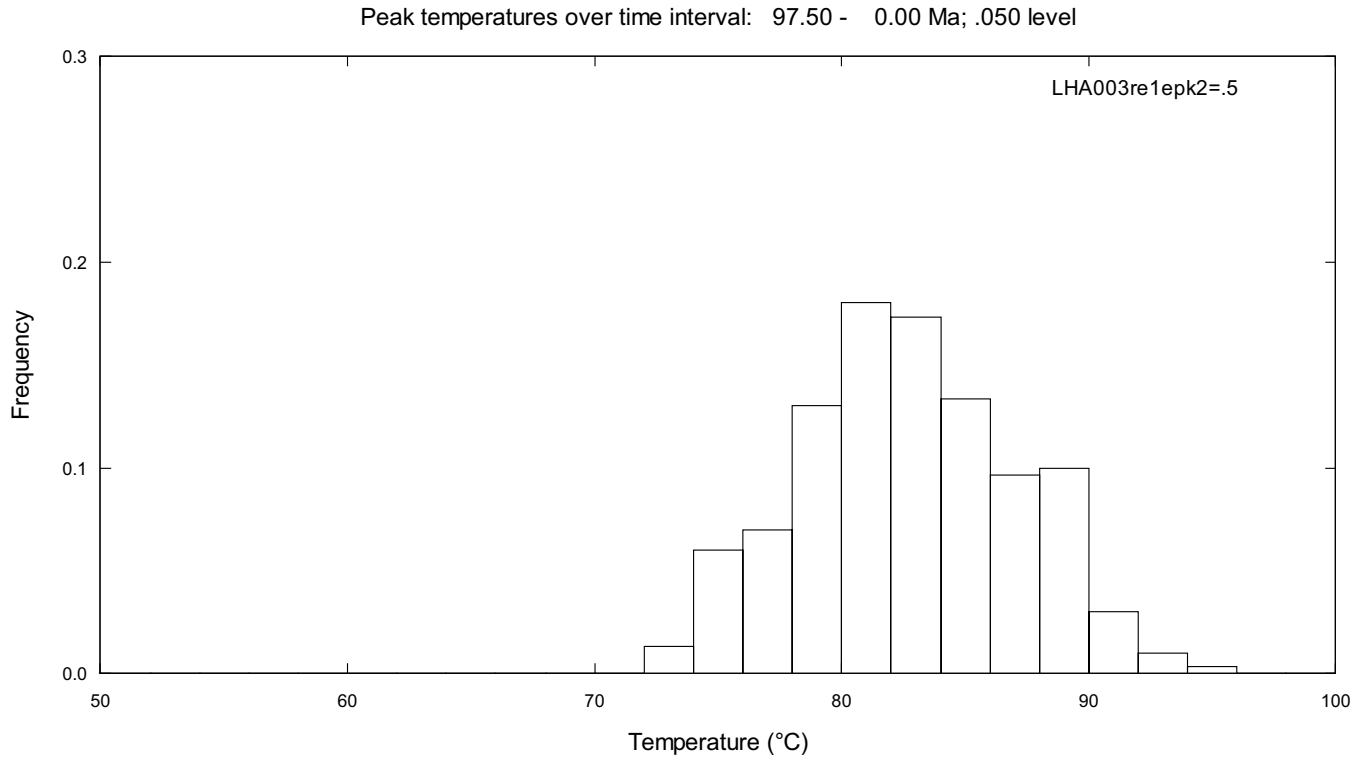


Figure E25. Upper panel shows the distribution of maximum temperatures for thermal peak 3 over the time interval, 97.5 - 0 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows the distribution of maximum temperatures for thermal peak 3 over the time interval, 97.5 - 0 Ma, corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

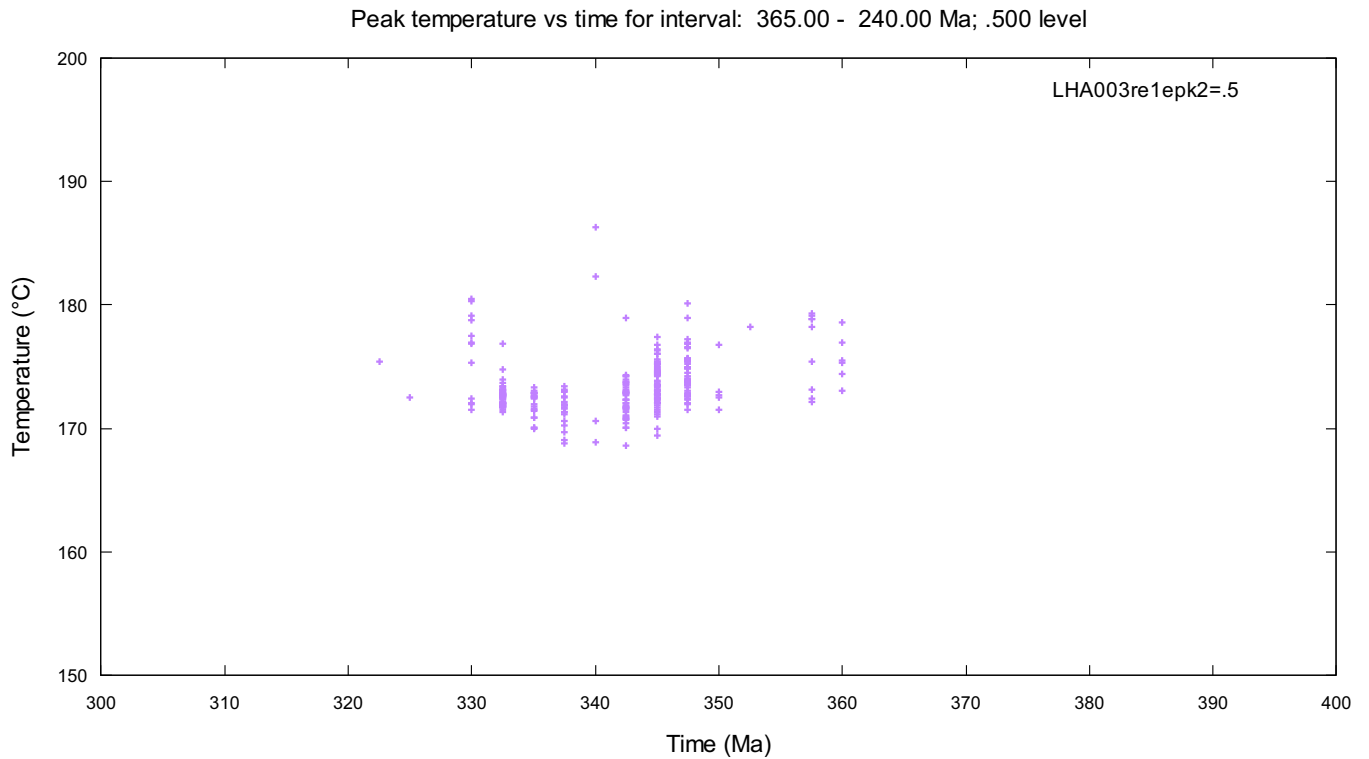
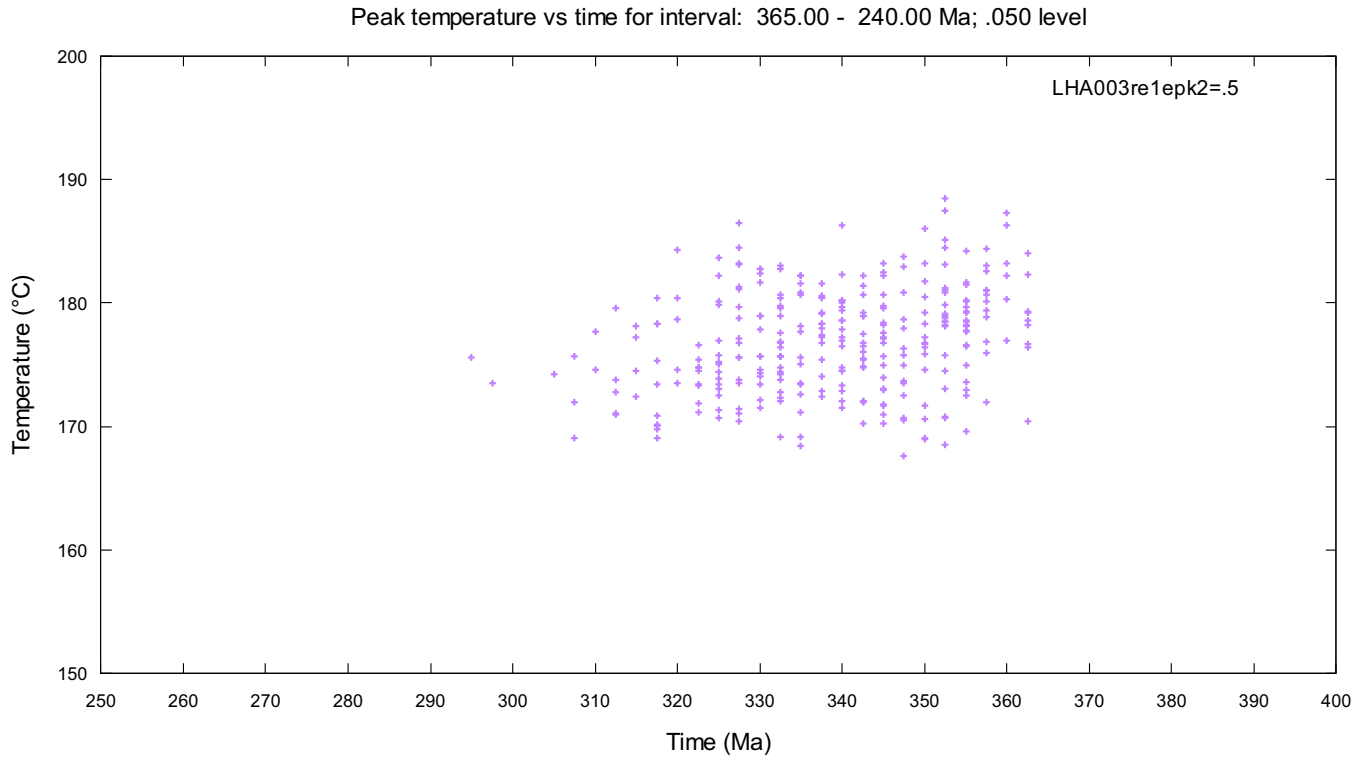


Figure E26. Upper panel shows maximum temperature versus time for thermal peak 1 over the time interval, 365 - 240 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows maximum temperature versus time for thermal peak 1 over the time interval, 365 - 240 Ma, corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

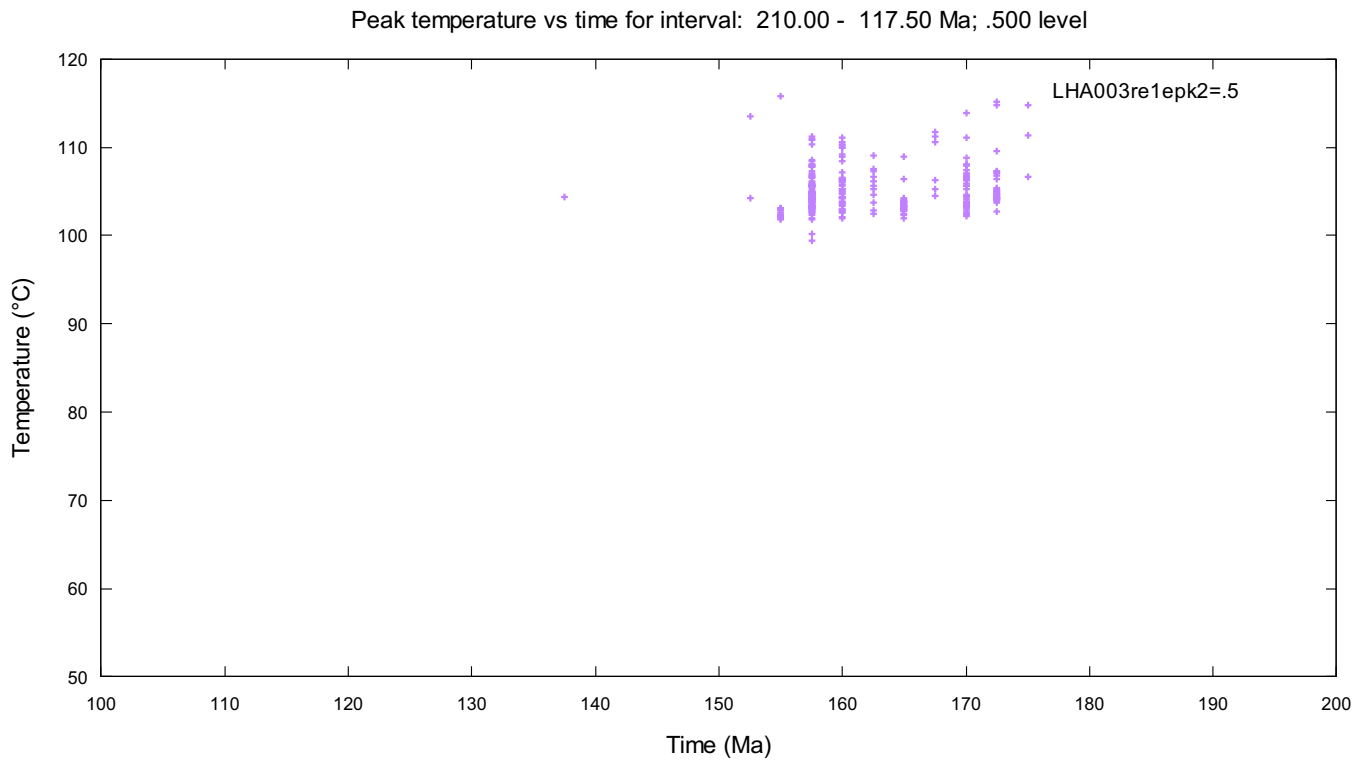
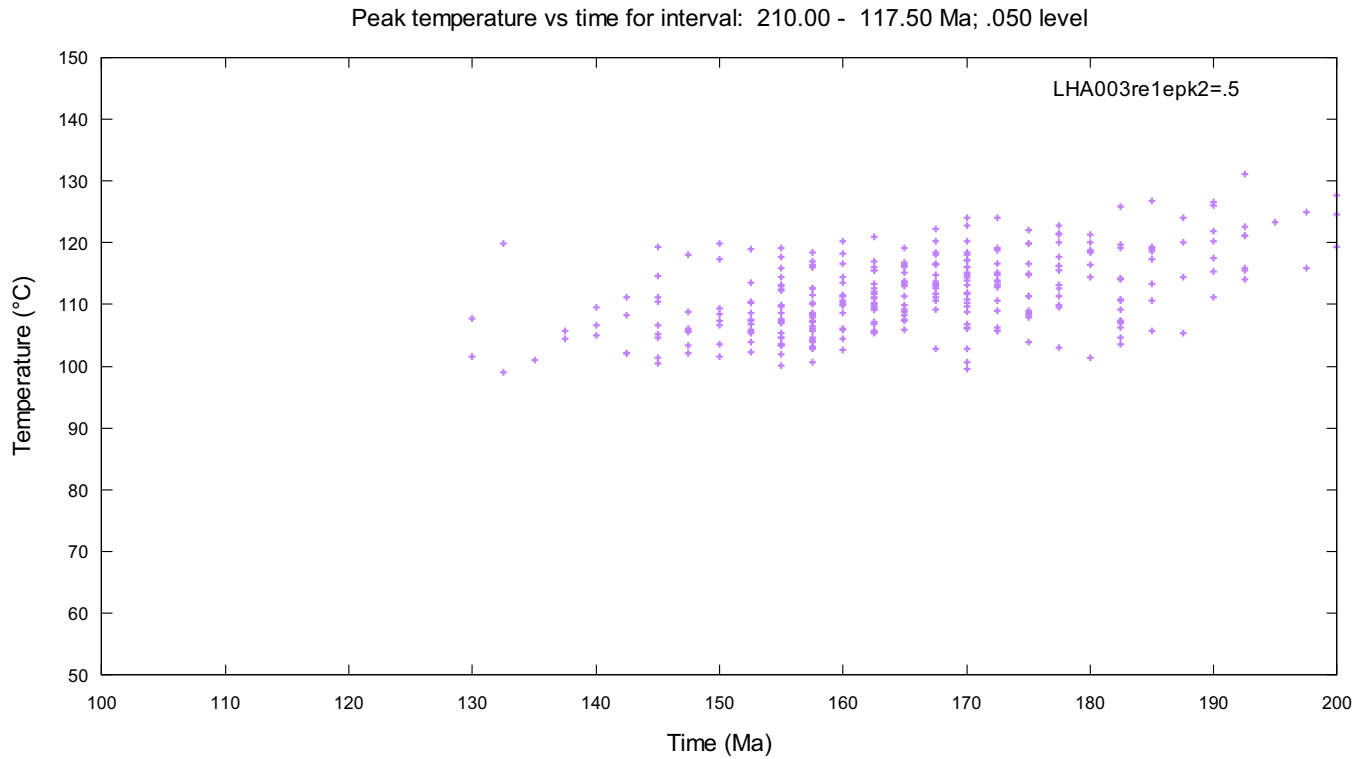


Figure E27. Upper panel shows maximum temperature versus time for thermal peak 2 over the time interval, 210 - 117.5 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows maximum temperature versus time for thermal peak 2 over the time interval, 210 - 117.5 Ma, corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

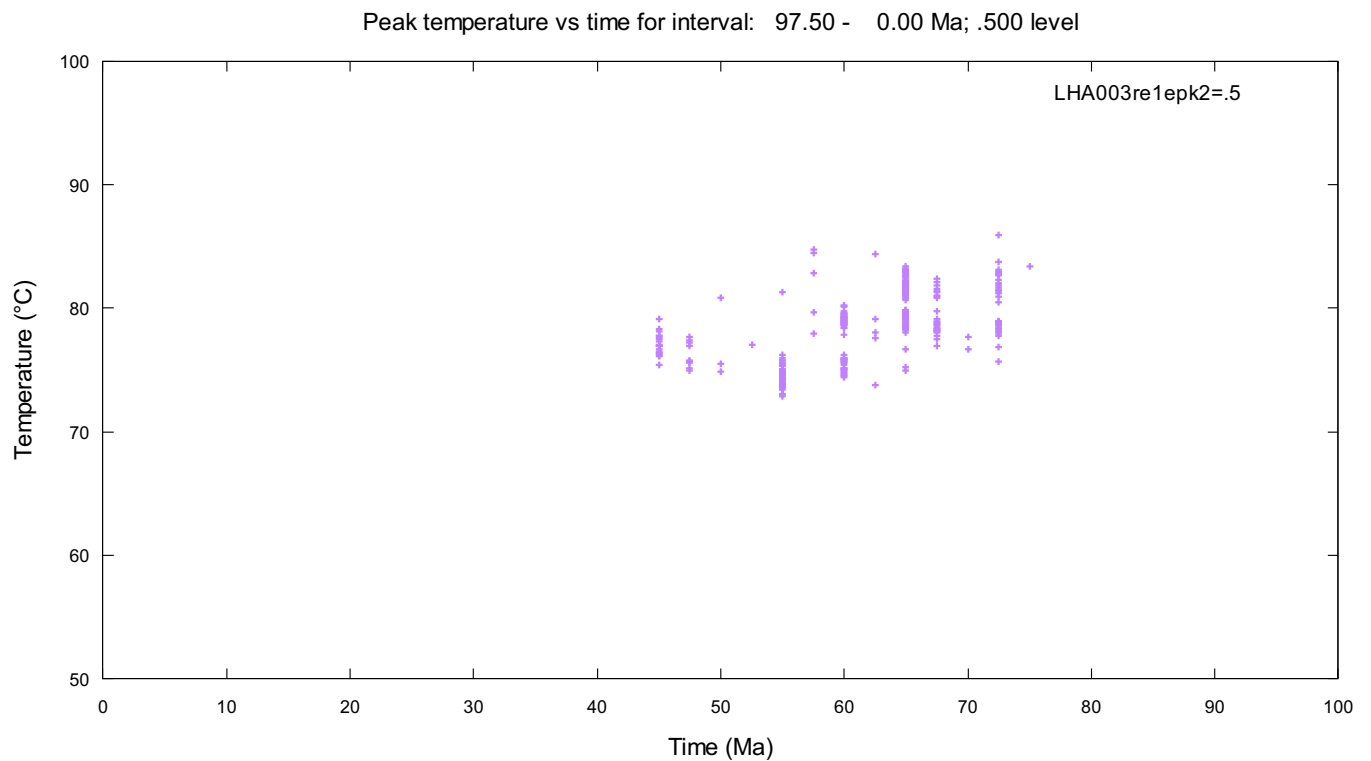
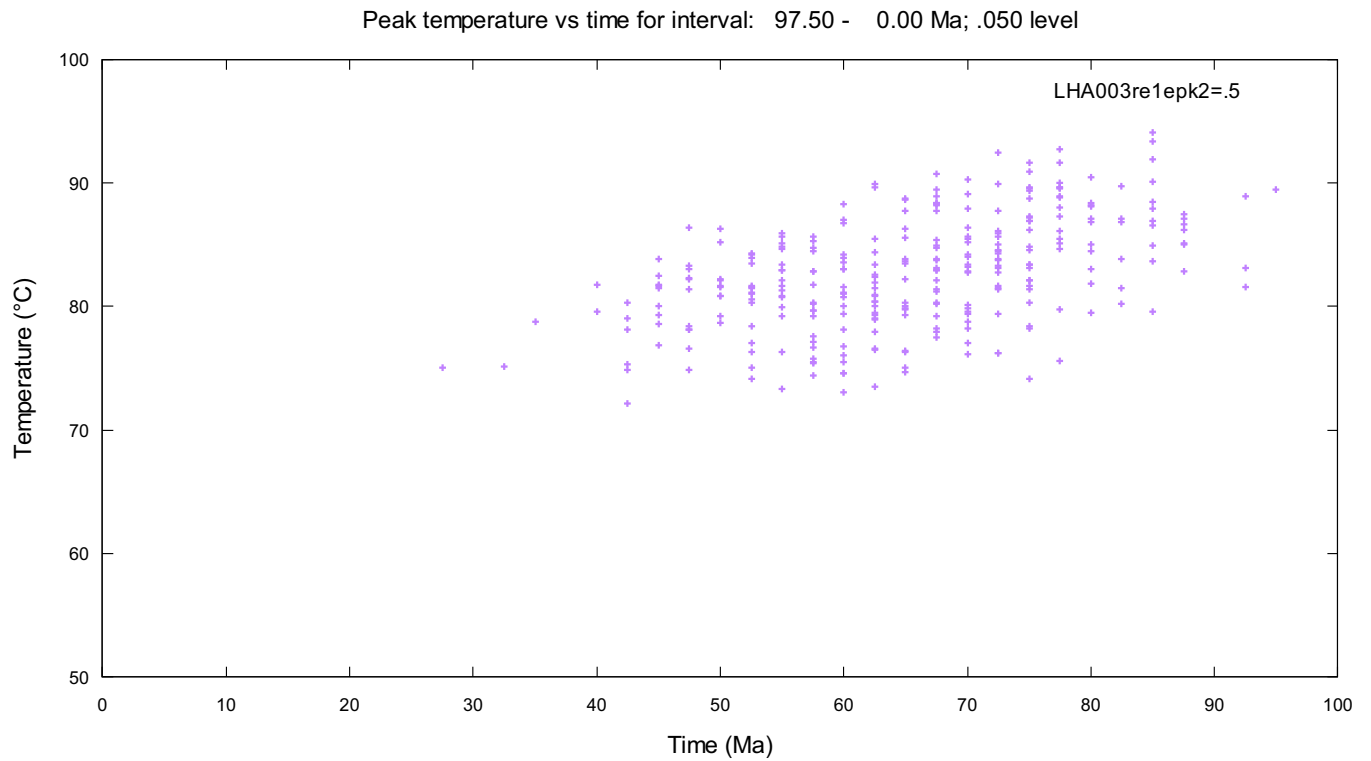


Figure E28. Upper panel shows maximum temperature versus time for thermal peak 3 over the time interval, 97.5 - 0 Ma, corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows maximum temperature versus time for thermal peak 3 over the time interval, 97.5 - 0 Ma, corresponding to the thermal history solutions that exceeded the 0.5 significance level in Figure E17.

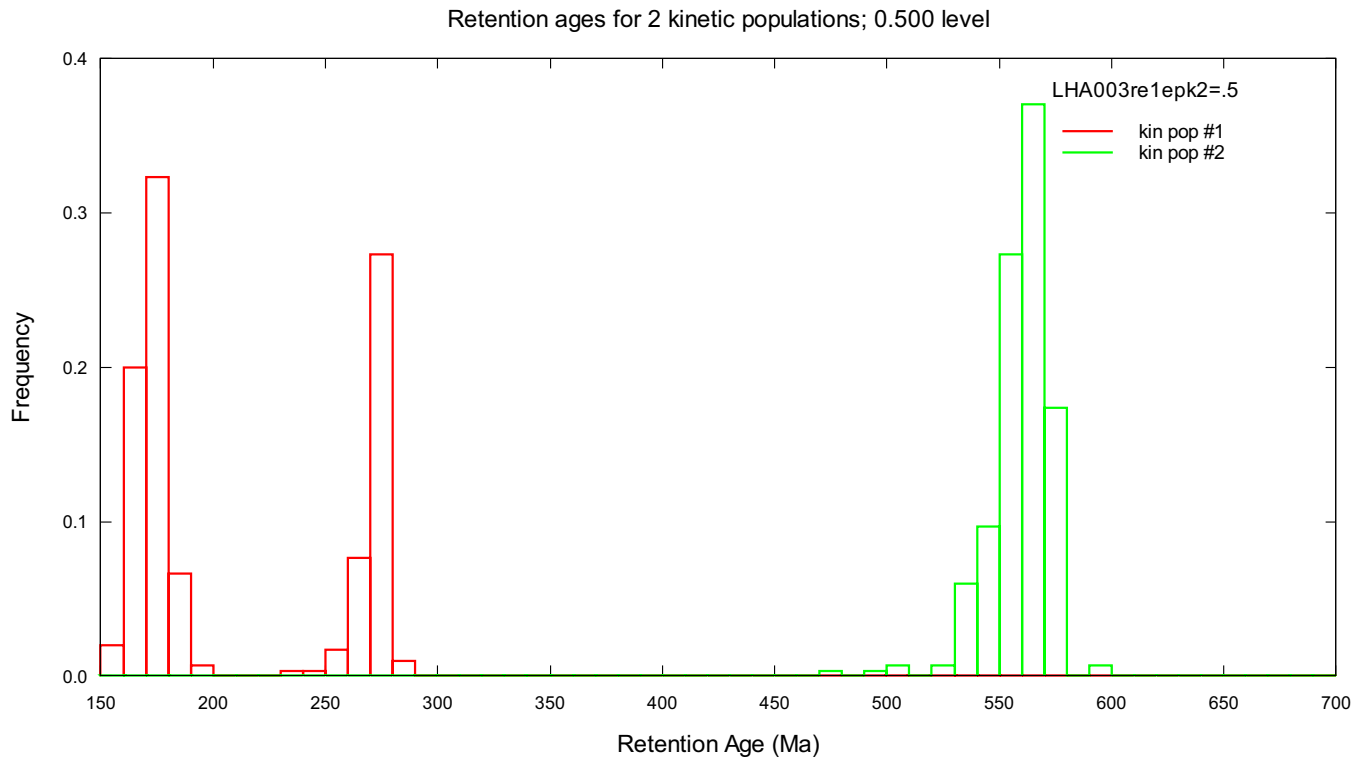
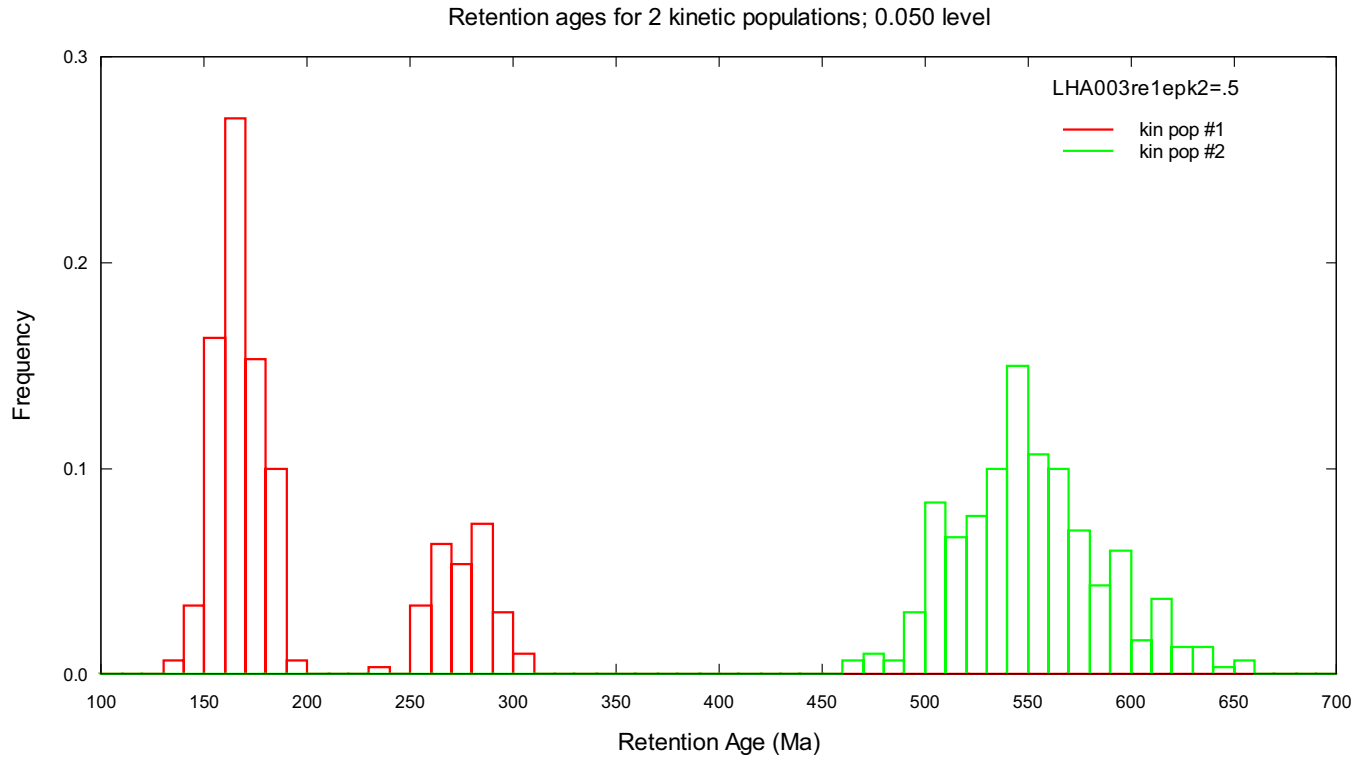


Figure E29. Upper panel shows distribution of model retention ages (age of shortest model track length; $\sim 2\mu\text{m}$) for each kinetic population corresponding to the 300 MC thermal history solutions in Figure E17. Lower panel shows distribution of model retention ages for each kinetic population, corresponding to the thermal history solutions that exceed the 0.5 significance level in Figure E17.

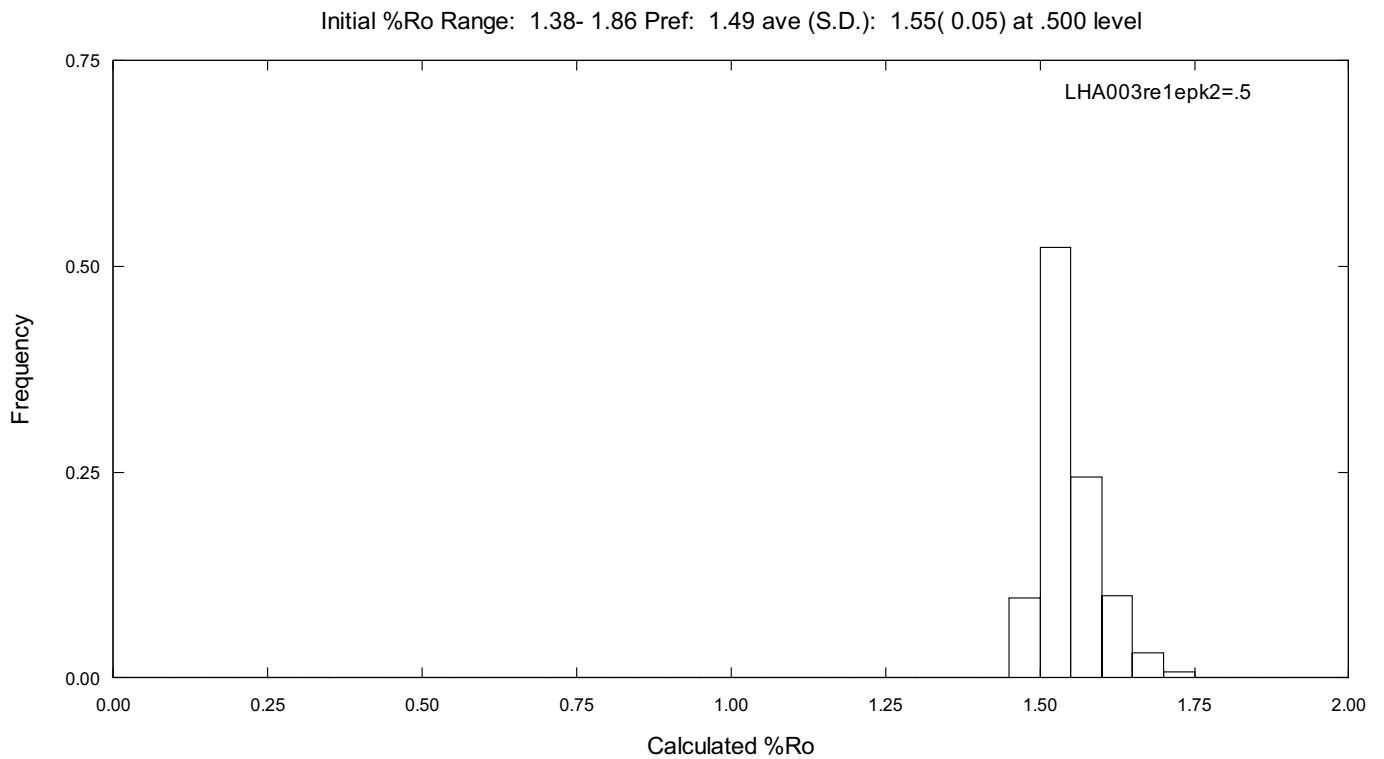
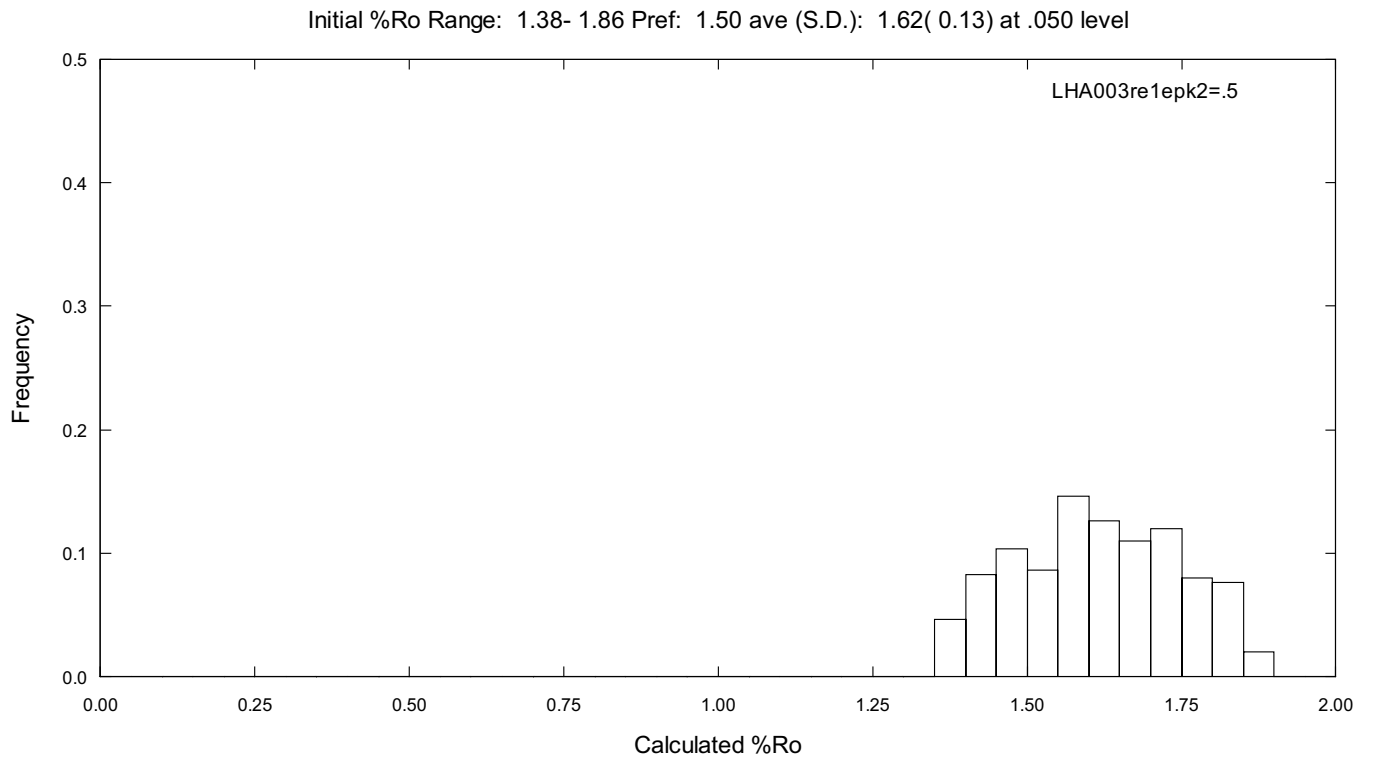


Figure E30. Upper panel shows distribution of calculated vitrinite reflectance values (basin%Ro model) for the post-depositional (post 377.5-365 Ma) history corresponding to the 300 MC thermal solutions in Figure E17. Lower panel shows distribution of calculated vitrinite reflectance values for the post-depositional (post 377.5-365 Ma) history corresponding to the thermal solutions that exceed the 0.5 significance level in Figure E17.

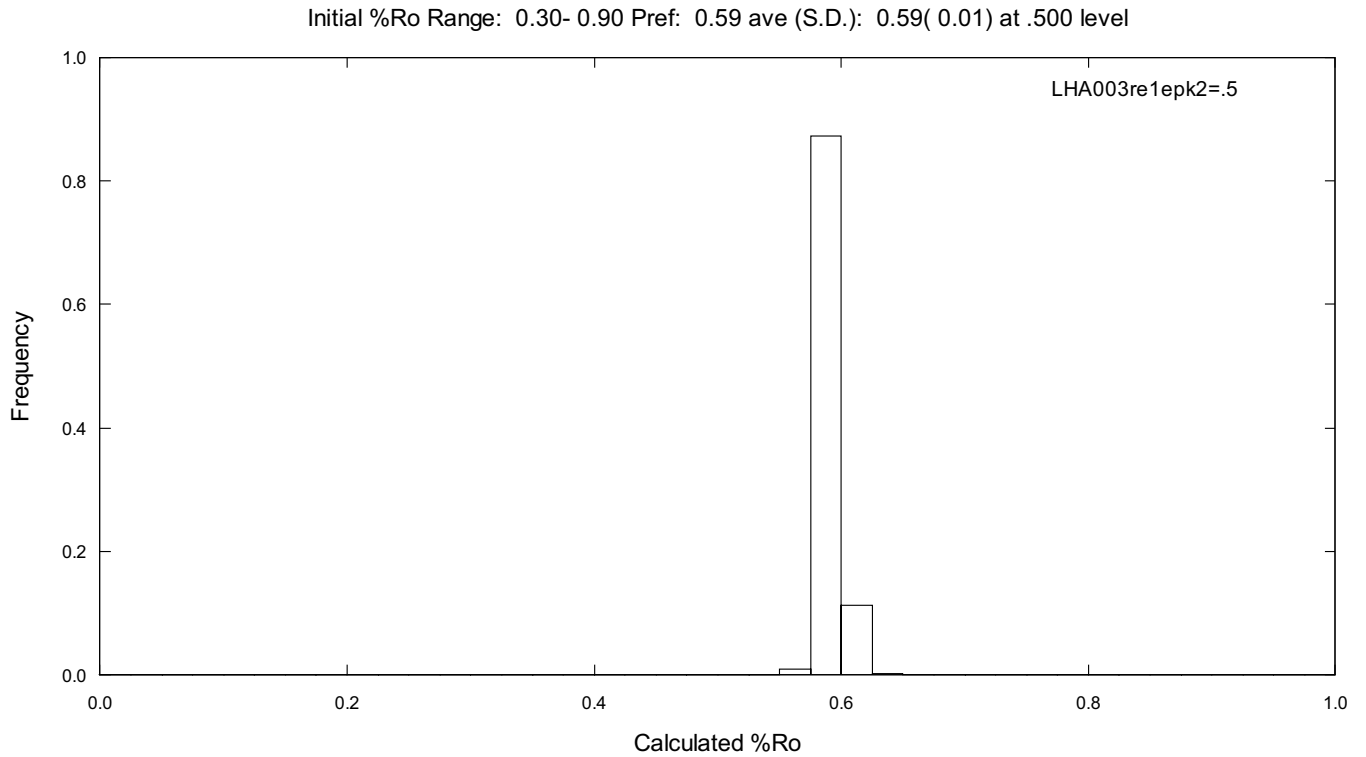
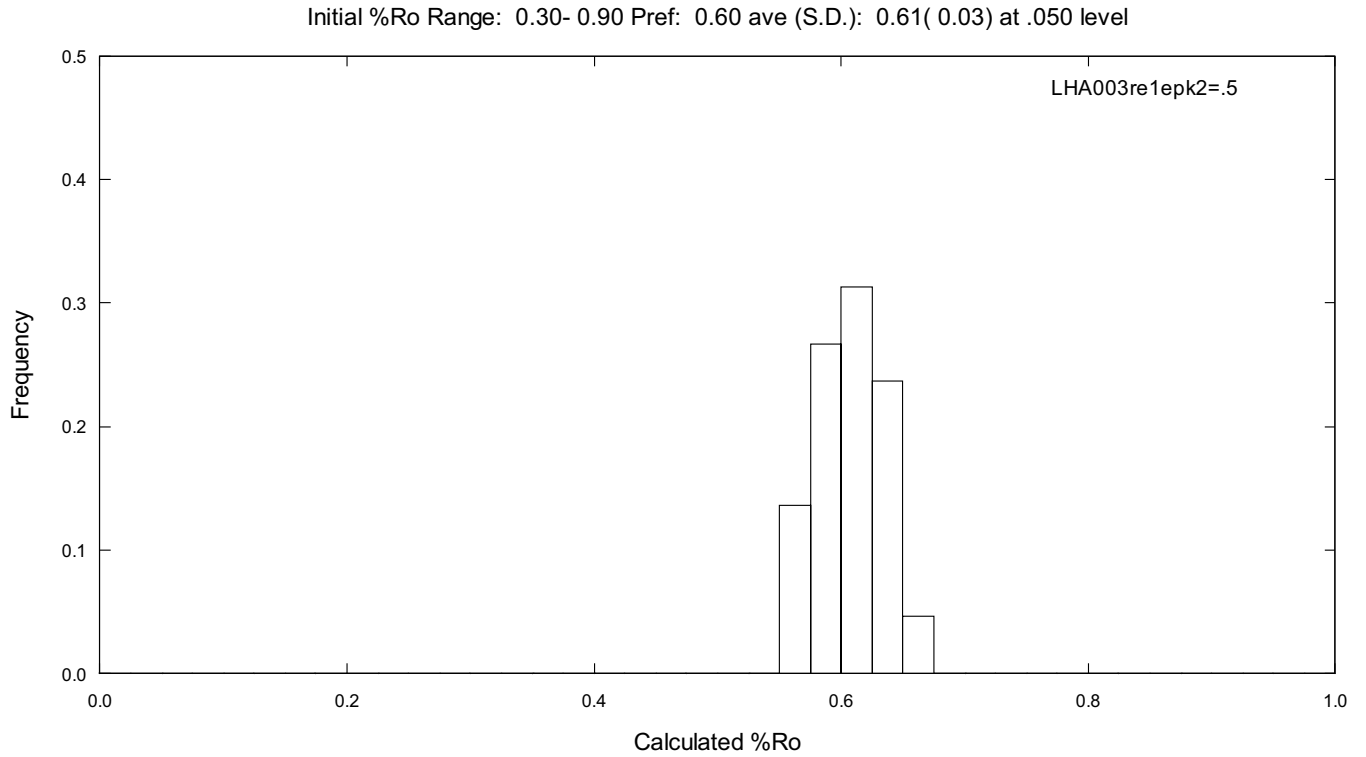


Figure E31. Upper panel shows distribution of calculated vitrinite reflectance values (basin%Ro model) for the post-thermal peak 1 history corresponding to the 300 MC thermal solutions in Figure E17. Calculations start after the onset of Triassic reburial (240-210 Ma). Lower panel shows distribution of calculated vitrinite reflectance values for the post-thermal peak 1 history corresponding to the thermal solutions that exceed the 0.5 significance level in Figure E17.

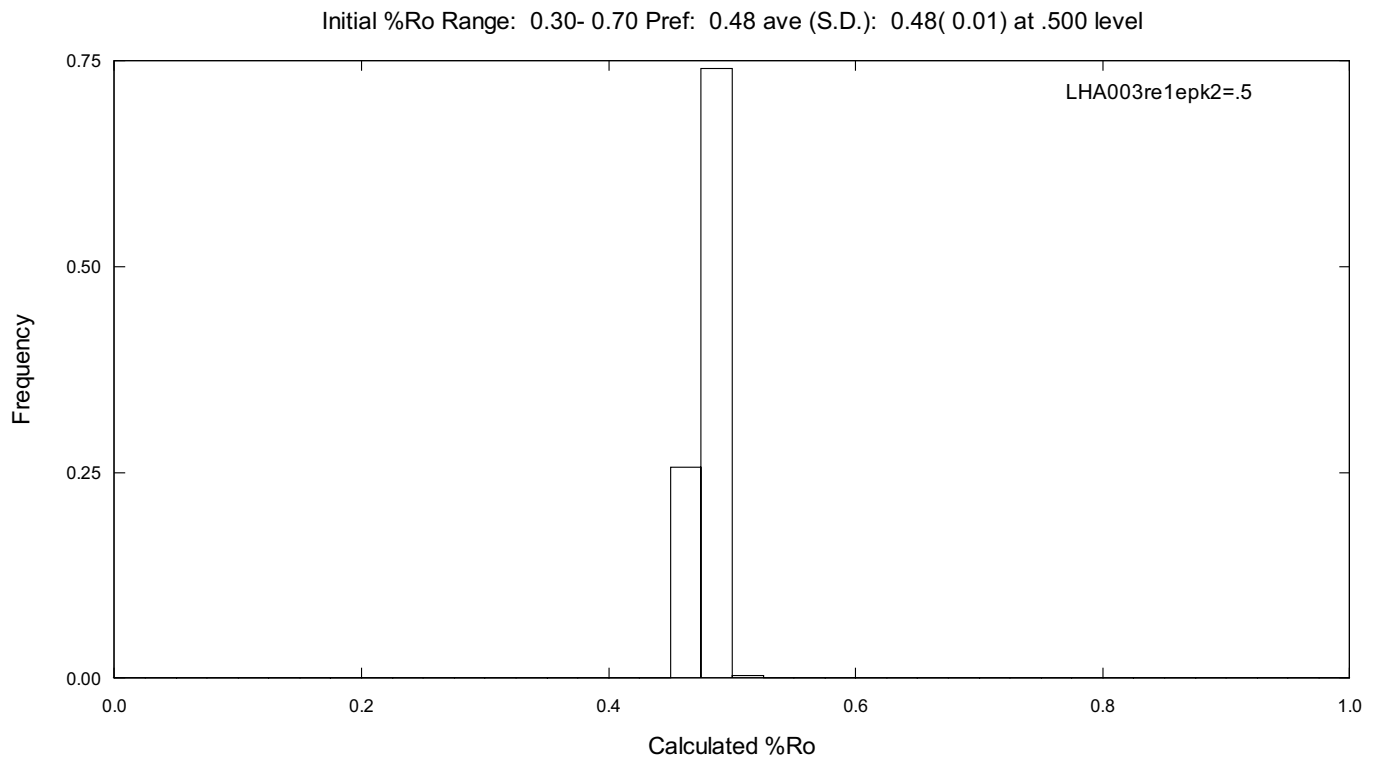
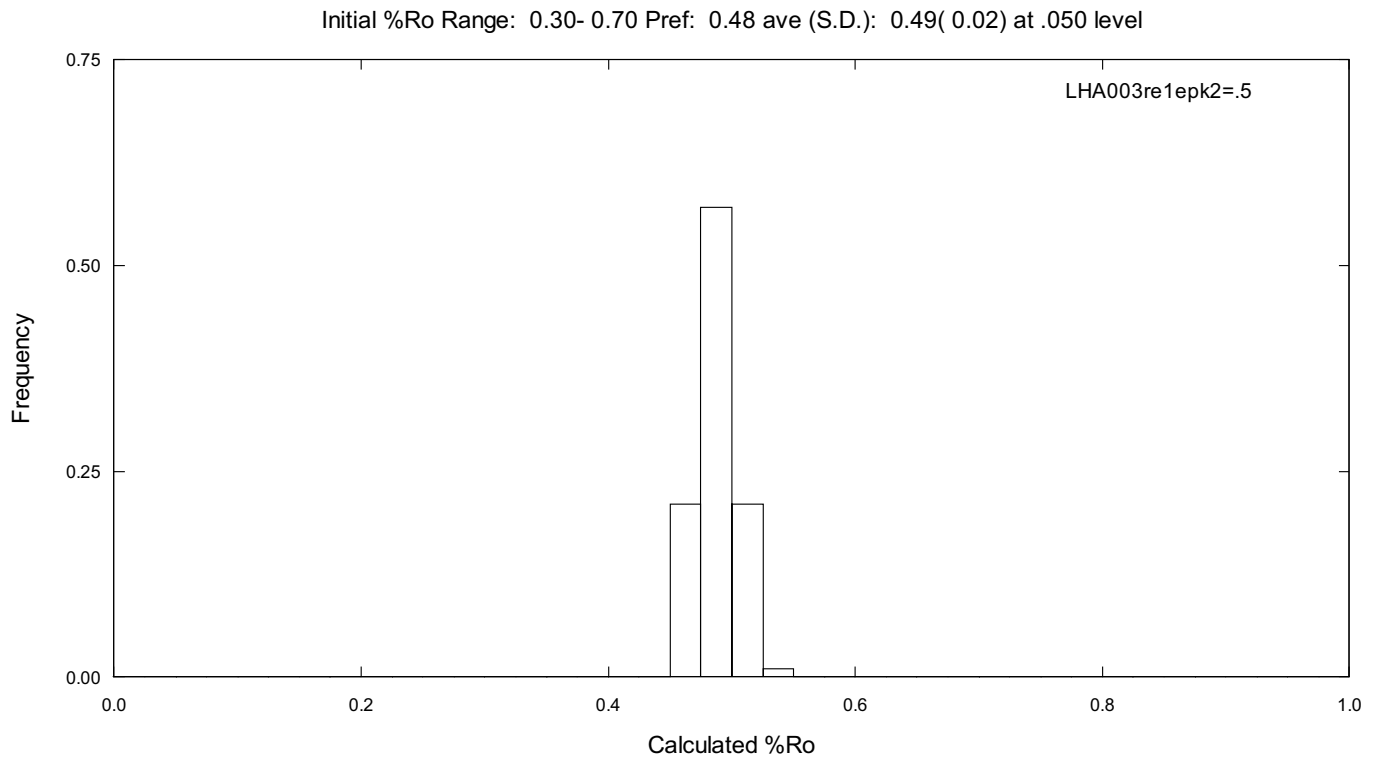


Figure E32. Upper panel shows distribution of calculated vitrinite reflectance values (basin%Ro model) for the post-thermal peak 2 history corresponding to the 300 MC thermal solutions in Figure E17. Calculations start after the onset of Cretaceous reburial (115-100 Ma). Lower panel shows distribution of calculated vitrinite reflectance values for the post-thermal peak 2 history corresponding to the thermal solutions that exceed the 0.5 significance level in Figure E17.

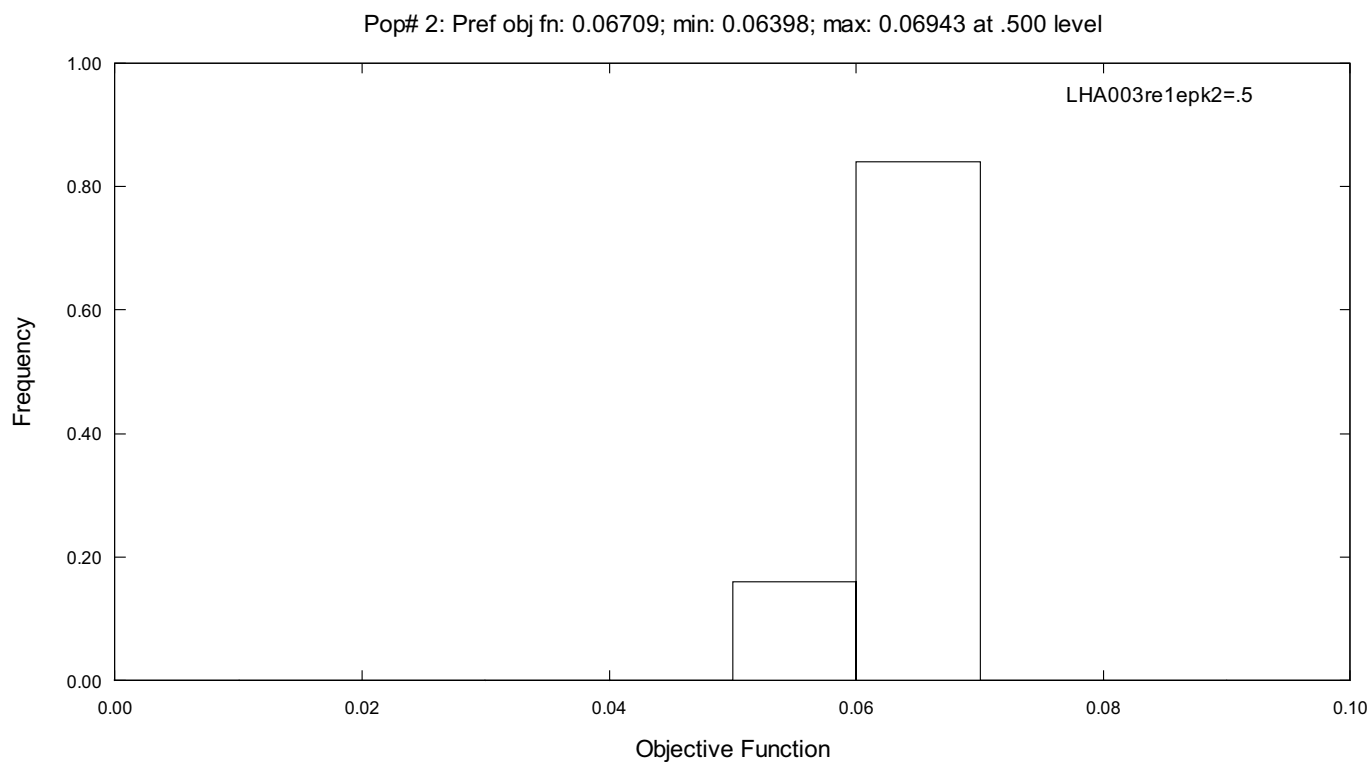
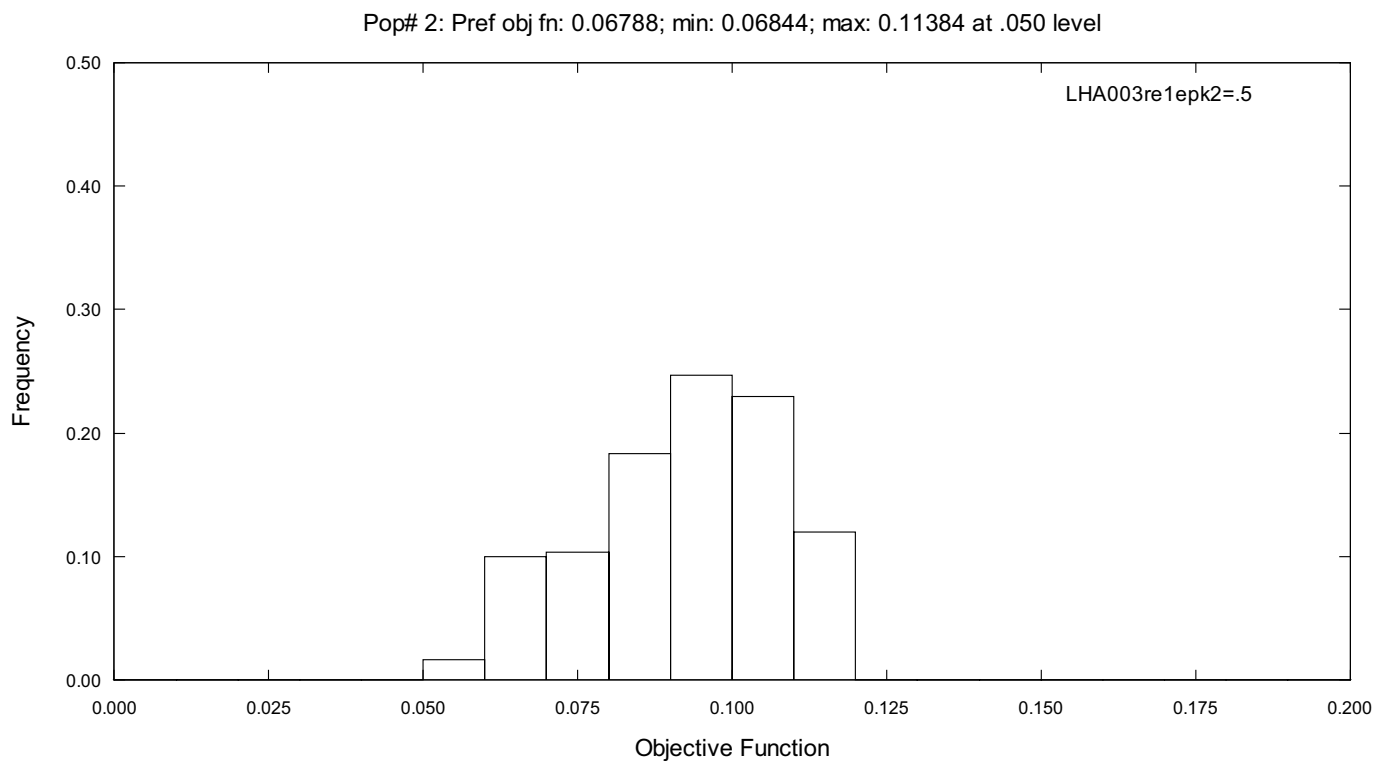


Figure E33. Upper panel shows distribution of objective function values for kinetic population #2 corresponding to the 300 MC thermal solutions in Figure E17 (0.05 significance level). Lower panel shows distribution of objective function values for kinetic population #2 corresponding to the thermal solutions that exceed the 0.5 significance level in Figure E17.

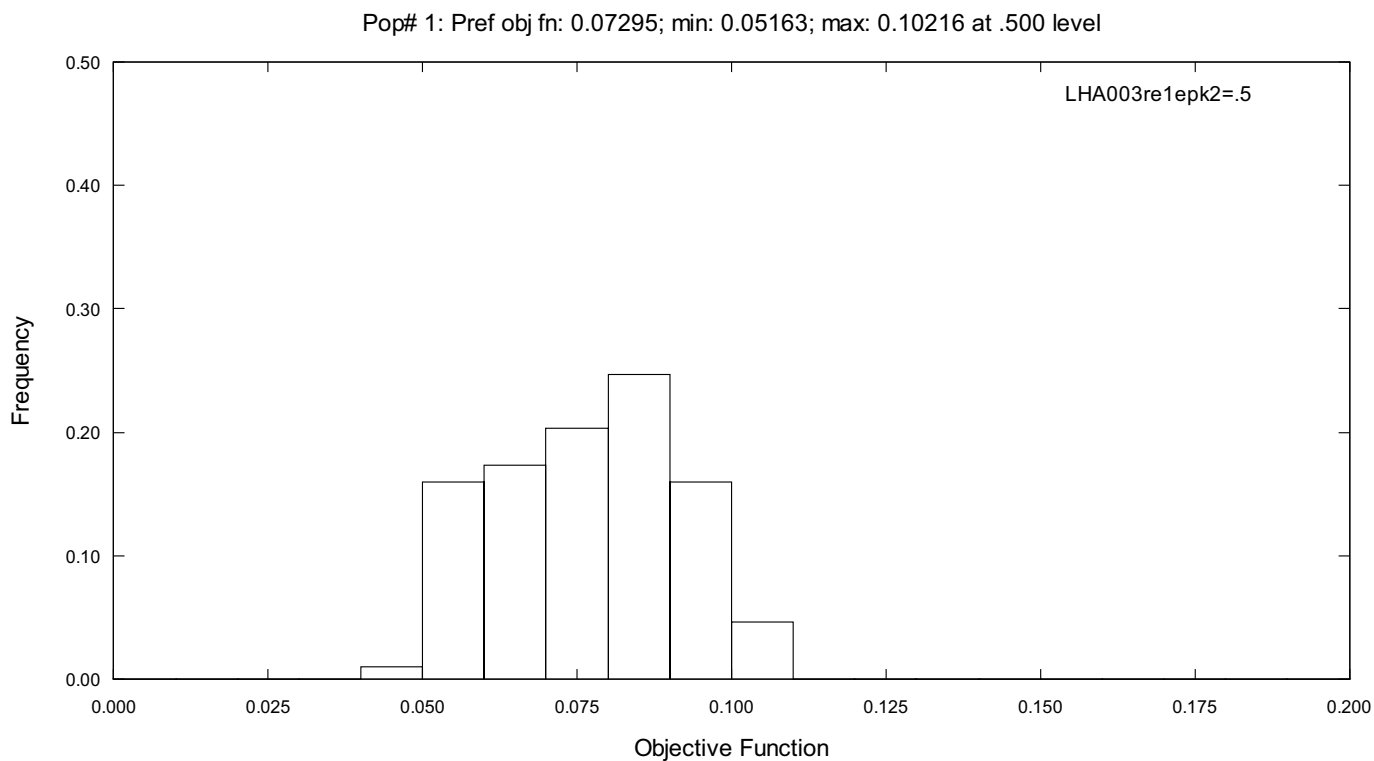
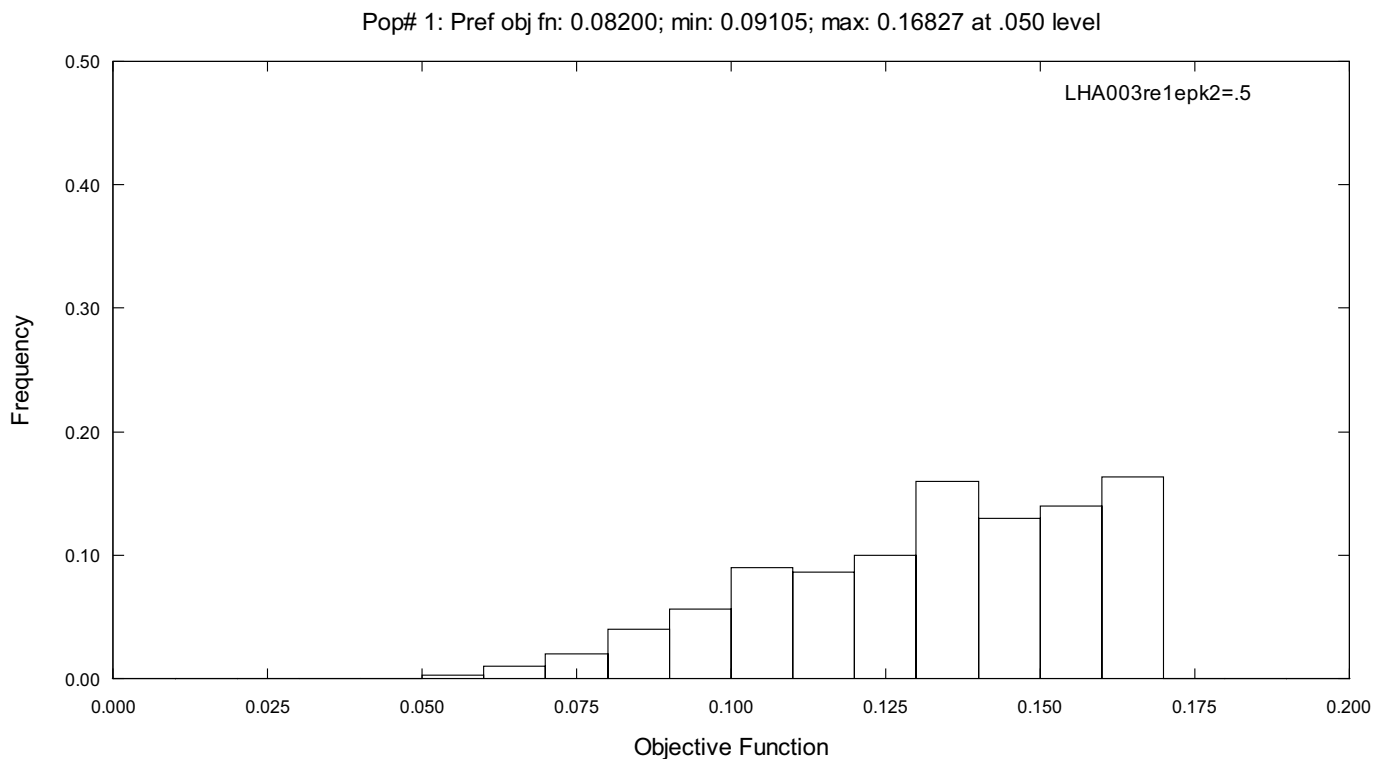


Figure E34. Upper panel shows distribution of objective function values for kinetic population #1 corresponding to the 300 MC thermal solutions in Figure E17 (0.05 significance level). Lower panel shows distribution of objective function values for kinetic population #1 corresponding to the thermal solutions that exceed the 0.5 significance level in Figure E17.