



Research Summary – Structural Performance Of TC-117 Tank Cars Under Derailment Conditions

Transportation of Dangerous Goods | Scientific Research Division

SUMMARY

This research evaluated the structural performance of TC-117 tank car designs in derailment scenarios, using a combination of derailment simulations, puncture performance evaluations, and considerations for cold weather material performance. TC-117 tank cars were predicted to have better performance than legacy TC-111 cars under derailment conditions; TC-117J tank cars (compliant with the new specifications) were found to have fewer punctures than several variants of TC-117R tank cars (retrofitted older cars). Model results suggest that tank car punctures could increase by up to 10% at -40°C compared to performance at an ambient temperature of 20°C.

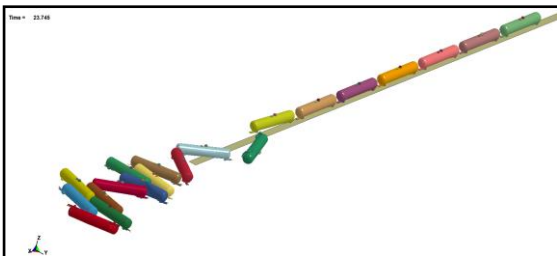


Figure 1 – A sample final pileup result from one of the derailment simulations

BACKGROUND

The current standard for rail tank cars carrying flammable liquids, TC-117, requires new cars (TC-117J) to have 9/16-inch-thick tank shells made from normalized TC-128B steel, 11-gauge

jackets, ½-inch-thick full-height head shields, and top fittings protection meeting Section 8.2.3.4.1 of Transport Canada Standard TP14877, Containers for Transport of Dangerous Goods by Rail. Older, existing tank cars can be retrofitted to the TC-117R design. While the modifications required by TC-117R are expected to improve crashworthiness performance, the level of improvement will depend on the specifications of the original tank car.

OBJECTIVES

The overall objective is to predict the crashworthiness performance of TC-117J tank cars and TC-117R variants and assess their safety benefits through their relative performance in 100-car unit trains, and when included in a mixed-good consist containing box cars. The performance metrics are the number of cars punctured and the number of failed top fittings in a range of different accident scenarios.

METHODS

The methodology for estimating the number of punctures started from prior work done for the US Department of Transportation (DOT) Federal Railroad Administration (FRA), with updates made to the model to consider:

- Failures of top fittings protection
- Inter-car connections that model how torque is transmitted between cars in derailments

- The effect of cold temperatures on tank car puncture resistance

The overall methodology for estimating puncture performance is as follows:

- Characterize the load environment associated with tank car derailments through multiple derailment simulations of unit trains of tank cars to derive a histogram of expected impact forces
- Quantify the puncture resistance of given tank car designs for a nominal range of impactor sizes and impact forces, based on prior research
- Combine the load environment histograms, the puncture resistance curves, and nominal impactor size distributions, to evaluate the probability of puncture for a set of designs and operating speeds

A similar methodology was also adopted for the estimation of fittings failure:

- Quantify the distribution of velocities with which fitting protective structures hit the ground through derailment simulations
- Characterize the strength of the protective structures through detailed finite element (FE) analysis of individual cars' protective structures hitting the ground at specified speeds
- Estimate the likelihood of fittings failure by combining the above two elements

The updated model was used in simulations of 100-car unit trains of TC-117 tank cars at a range of speeds from 5 to 60 mph (8-97 km/h). Eighteen simulations were performed at each speed to account for variations in force to initiate derailment, track conditions, and ground conditions. This resulted in a histogram of predicted impact forces, and resulting number of tank car punctures, at each speed. Outputs from the simulations also gave predicted impact velocities for top fittings in the derailments.

The challenge of the cold weather modelling effort was to develop a material model and methodology that reflected the change in material properties like the yield stress, ultimate stress, and elongation, while also reflecting the drastic reduction in Charpy energies under cold weather conditions. This was addressed by the following:

- Model the Charpy test using detailed, high-fidelity FE models of Charpy specimens
- Tune the material model so that Charpy results at low temperatures are reasonably simulated
- Transfer the corresponding material properties to a puncture model
- Use those results to estimate cold weather performance

RESULTS

The puncture and top fittings performance of several TC-117 variants were estimated using the approach described, for a variety of operating speeds and temperatures. An overview of the puncture performance and top fittings results is presented in Figures 2 and 3.

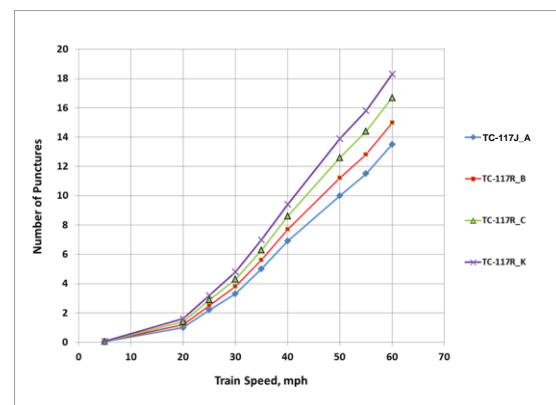


Figure 2 – Number of punctures vs. different speeds for 4 types of cars at 20°C

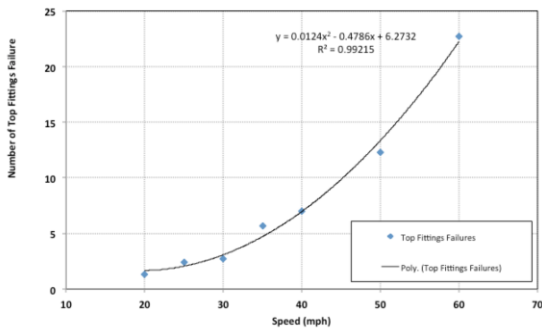


Figure 3 – Top fittings failure as a function of speed

Sample results of the cold weather performance evaluation are shown in Figure 4.

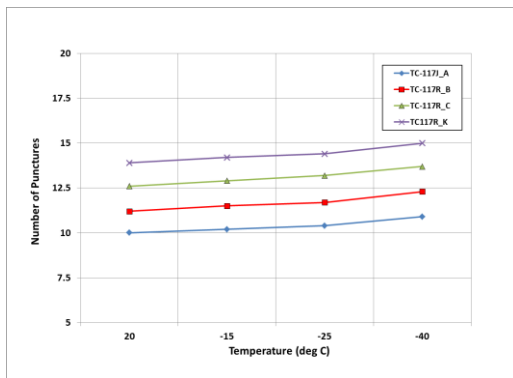


Figure 4 – Number of punctures vs. temperature for 4 types of cars at 50mph

CONCLUSIONS

Results showed that structural damage in derailments increases significantly with speed. The TC-117J tank car has fewer punctures than any of the TC-117R variants, and comparisons to prior work suggest that any of the TC-117 variants has better performance than the legacy TC-111 cars, with the TC-117J design offering the best performance. As expected, the two variants with non-normalized steel shells have slightly more punctures than the variants with normalized steel shells, and thinner shells experience more punctures when compared to thicker shells of the same material. An example comparison of the

difference in performance between a TC-117J and one (1) TC-117R variant at different speeds is shown in Table 1.

Table 1 – Selected Results @ 20°C

Tank Car Type	Most Likely Number of Punctures at 20° C		% Improvement Compared to TC-117R_K		% Improvement Due to Speed	
	30 mph	50 mph	30 mph	50 mph	50 to 30 mph	
TC-117J	9/16" TC128B 11 Gauge Jacket ½" Head Shield	3.3	10.0	31%	28%	67%
TC-117R_K	1/2" A516-70 11 Gauge Jacket ½" Head Shield	4.8	13.9	-	-	65%

Top fittings failures were found to increase significantly with speed in a similar way to tank punctures.

A material model was developed to account for the change in steel properties and failure mode with temperature. The model was calibrated by comparing simulations of Charpy impact tests with laboratory test results, and further extended to cover both normalized and non-normalized tank car steels. It was found that temperature has a slight effect on the number of punctures. In general, there is a 10% increase in the predicted number of punctures when temperature drops from 20 to -40 °C.

Comparisons to a limited set of available accident data suggest that the model predictions for tank punctures are consistent with field observations from derailments, while slightly overpredicting top fittings failures.

FUTURE ACTION

This project focused on the performance of tank cars in unit trains. Work is ongoing to evaluate the performance of TC-117 tank cars in a mixed consist, to see if differences in performance are magnified when tank cars interact with more rigid structures like box cars.

The methodology used to estimate change in performance of tank cars in cold temperatures used in this project was novel



work based on a theoretical construct. Puncture testing of tanks in cold temperature conditions may help validate this approach.

REFERENCES

1. TP 14877, Containers for Transport of Dangerous Goods by Rail, January 2018, Transport Canada.
2. Letter Report to the US DOT FRA titled, “Objective Evaluation of Risk Reduction from Tank Car Designs & Operations Improvements”, July 2014, Sharma & Associates, Inc.
3. Report to Transport Canada titled, “Risk Evaluation of Tank Car Breach”, June 2016, Sharma & Associates, Inc.
4. “Tank Car Top Fittings Protection – Evaluation of Derailment Failure Risks – A Conceptual Study”, ASME JRC2016-5821, April 2016.
5. “Full Scale Tank Car Rollover Test – Survivability of Top Fittings and Top Fittings Protective Structures”, Proceedings of the 2011 IEEE/ASME Joint Rail Conference JRC2011, March 16-18, 2011, Pueblo, Colorado, USA.

Report: Structural Performance of TC-117J Tank Cars and TC-117R Variants under Derailment Conditions (2022)

Author: A. Prabhakaran (Sharma & Associates)

ISBN: 978-0-660-46123-6

Catalogue Number: T44-3/32-2022E-PDF

TP Number: 15544E

ACKNOWLEDGEMENTS

This project was funded by Transport Canada and conducted by Sharma & Associates.

TC gratefully acknowledges the support and collaboration of the US DOT FRA Office of Research, Development, and Technology throughout the project, as well as the assistance of the US DOT Volpe Center in the review of research results.

CONTACT

To obtain a copy of the report, please contact us:

Transportation of Dangerous Goods
Scientific Research Division
[TC.TDGScientificResearch-
RecherchescientifiqueTMD.TC@tc.gc.
ca](mailto:TC.TDGScientificResearch-RecherchescientifiqueTMD.TC@tc.gc.ca)

KEYWORDS

Puncture, modelling, unit train, HAZMAT, dangerous goods, TC128B, A516-70, TC-117J, TC-117R, TC-111, tank car, flammable liquids, top fittings

