



National
Defence

Défense
nationale



LINK AVAILABILITY AND RAIN ATTENUATION EXCEEDANCE CHARACTERISTICS FOR EHF SATELLITE COMMUNICATIONS WITH ARBITRARY LINK PARAMETERS IN CANADA (U)

by

S.M. Khanna and D.M. Adams

DEFENCE RESEARCH ESTABLISHMENT OTTAWA
REPORT NO. 991

Canada

October 1988
Ottawa



National
Defence

Défense
nationale

**LINK AVAILABILITY AND RAIN ATTENUATION
EXCEEDANCE CHARACTERISTICS FOR EHF
SATELLITE COMMUNICATIONS WITH ARBITRARY
LINK PARAMETERS IN CANADA (U)**

by

S.M. Khanna and D.M. Adams
EHF Satcom Section
Electronics Division

DEFENCE RESEARCH ESTABLISHMENT OTTAWA
REPORT NO. 991

PCN
D6470-0459B

October 1988
Ottawa

ABSTRACT

//The rain attenuation exceedance and the corresponding link availability have been calculated for any location in Canada for a Satcom link in the 10-45 GHz range with arbitrary values of the link parameters. Contours, with arbitrary constant values, of these two parameters are also determined for any region in Canada. The effect of site diversity on these results can be studied. The results are presented in different formats to facilitate their use in a system design. The CCIR rain attenuation prediction model, Hodge site diversity model and long term rain statistics have been used for this work. Following a brief review of the subject, representative rain attenuation exceedance and link availability results are given for a Satcom link at 20, 30 and 44 GHz for a few selected values of the link parameters. From the point of view of rain attenuation, this study indicates the feasibility of a 20-44 GHz Satcom system for Canada with ~ 99.5% link availability//

RESUME

L'atténuation excédentaire due à la pluie ainsi que la disponibilité correspondante de liaison radio par satellite, opérant sur une plage de fréquences de 10 à 45 GHz et utilisant des paramètres de liaisons arbitraires, ont été calculés pour toutes les régions du Canada. Les contours de ces paramètres à valeurs constantes ont aussi été déterminés pour ces régions. Les effets de communications simultanées, utilisant la diversité d'emplacement sur ces résultats ont été étudiés. Les résultats sont présentés sous différents formats afin de faciliter leur utilisation pour la conception d'un système de communications par satellite. Le modèle du CCIR pour la prédiction de l'atténuation due à la pluie de même que le modèle de diversité d'emplacement de Hodge et les statistiques à long terme sur la pluie au Canada ont été utilisés pour ce travail. Après une brève revue du sujet, des résultats représentatifs de l'atténuation due à la pluie et de disponibilité de liaison par satellite au Canada, sont donnés pour un système de communications par satellite opérant aux fréquences de 20, 30 et 44 GHz pour certaines valeurs de paramètres de liaison. Du point de vue de l'atténuation due à la pluie, cette étude démontre qu'il est possible de concevoir un système de communications EHF par satellite au Canada ayant une disponibilité de liaison radio près de 99.5%.

EXECUTIVE SUMMARY

The purpose of this paper is to determine the feasibility of a 20-44 GHz satellite communications (SATCOM) system for Canada from the viewpoint of rain attenuation. The transmitted electromagnetic wave at frequencies above 10 GHz is severely attenuated by rain during its passage through the earth's atmosphere. Rain attenuation is a random process due to the unpredictability of rain occurrence. Hence, statistical methods are used to evaluate the problem.

A brief review of radio wave attenuation in an earth-space path is presented, followed with the details of the rain attenuation prediction method used for this work. Accurate rainfall rate statistics are important for the prediction of rain attenuation. Previously, Canada was divided into a small number of climate regions with a specific rainfall rate for each region. This gave rather poor attenuation statistics averaged over large areas for each zone. In the present work, experimental rain statistics of approximately 500 station years from 47 weather stations in various parts of Canada have been used. It should be noted that the high rainfall rates are limited to a few regions. In fact, rain statistics in Northern Canada are similar to those in a desert.

From the present work, one can calculate, for a wide range of probabilities, the rain attenuation statistics for an arbitrary location within most of the Canadian territory for any geostationary satellite link at any frequency in the 10-45 GHz frequency range. Representative results in the form of tables and contours of rain attenuation statistics are included for SATCOM links at 20, 30 and 44 GHz. Except for the few regions with high rainfall rates, rain attenuation is not a formidable problem for SATCOM in this frequency range. From the point of view of rain, this study indicates the feasibility of a 20-44 GHz SATCOM system for most of Canada with approximately 99.5% link availability.

TABLE OF CONTENTS

| | | |
|---|-------|-----|
| ABSTRACT/RESUME | | iii |
| EXECUTIVE SUMMARY | | v |
| LIST OF FIGURES AND TABLES | | ix |
| LIST OF SYMBOLS | | xi |
| 1.0 INTRODUCTION | | 1 |
| 2.0 FUNDAMENTALS OF RADIO WAVE PROPAGATION | | 2 |
| 2.1 Transmission Principles | | 2 |
| 3.0 HYDROMETEOR ATTENUATION IN SATELLITE COMMUNICATIONS | | 6 |
| 3.1 Slant Path and Elevation Angle Dependence | | 10 |
| 3.2 The CCIR Rain Attenuation Prediction Method | | 11 |
| 3.3 Site Diversity Gain Model | | 16 |
| 4.0 RAIN RATE STATISTICS FOR CANADA | | 17 |
| 5.0 RAIN ATTENUATION PREDICTION PROGRAMS | | 25 |
| 5.1 CANSLAM | | 26 |
| 5.2 CANSLAV | | 27 |
| 6.0 DISCUSSION AND CONCLUSIONS | | 28 |
| 7.0 ACKNOWLEDGEMENTS | | 30 |
| 8.0 REFERENCES | | 31 |
| Figures 1 to 93 | | |
| Tables 1 to 50 | | |

LIST OF FIGURES AND TABLES

| | | |
|---------|--|--------|
| Fig. 1 | Attenuation coefficients for oxygen and water vapor at a pressure of 1 atm., a temperature of 20° C and a water vapor density of 7.5 g/m ³ [3]. |3 |
| Fig. 2 | Total one-way zenith attenuation through the atmosphere with moderate humidity (7.5 g/m ³ at the surface) as a function of frequency [3]. |4 |
| Fig. 3 | Specific attenuation γ due to rain as a function of frequency for various rain rates [7]. |8 |
| Fig. 4 | Schematic presentation of an earth-space path for satellite communication. |14 |
| Fig. 5 | Map showing the locations of precipitation recording stations from which rain data have been used in this work. |18 |
| Fig. 6 | Long term average probability of exceeding a given rainfall rate at Ottawa, Ont. [11]. |19 |
| Fig. 7 | A typical rainfall distribution curve at one of the rain recording stations with log-log and log-normal approximations[11]. |20 |
| Fig. 8 | Contours of constant P_0 . The numerical value beside each curve equals $10^7 P_0$. The locations of the rain recording stations are indicated [11]. |22 |
| Fig. 9 | Contours of constant a . The numerical value beside each curve corresponds to $-100a$. The locations of the recording stations are indicated [11]. |23 |
| Fig. 10 | Unshaded region in this map indicates the part of Canada for which rain rate data and rain attenuation statistics are available. |24 |
| Table 1 | Values of the parameters P_0 and a for rainfall recording stations. |33 |
| Table 2 | Latitude, longitude and altitude of the rainfall recording stations. |34 |

| | | |
|-------------|---|---------|
| Figs. 11-19 | Rain attenuation exceedance contours for a major part of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the given values of P. |35 |
| Figs. 20-39 | Rain attenuation exceedance contours for four selected regions in Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the given values of P. |45 |
| Tables 3-50 | Tables of rain attenuation exceedance values for a major part of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the given values of P. |66 |
| Figs. 40-48 | Map of rain attenuation exceedance ranges of values over a region, 40°N-70°N in latitude and 55°W-145°W in longitude, in Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 for the given values of P. |115 |
| Figs. 49-63 | Rain attenuation exceedance values for selected sites in different regions of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for P = 0.1%. |125 |
| Figs. 64-66 | Link availability contours for a major part of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the given values of link margin LM to overcome rain fade. |141 |
| Figs. 67-78 | Link availability contours for selected regions in Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the given values of link margin LM to overcome rain fade. |145 |
| Figs. 79-93 | Link availability values for selected sites in different parts of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the given values of link margin LM to overcome rain fade. |158 |

LIST OF SYMBOLS

| | |
|------------------------|---|
| A | Rain attenuation of a radio wave; (dB) |
| a | A constant for each site in Equation (33) |
| A(R) | Rain attenuation over an "effective earth-satellite path" corresponding to a ground station location with rain rate R; (dB) |
| A_s | Free space attenuation of an electromagnetic wave; (dB) |
| A_v | Availability of a communication system expressed as a percentage of time of an average year; (%) |
| A_θ | Rain attenuation over an earth-space path at an elevation angle θ ; (dB) |
| $A_{0.01}$ (or A_P) | Rain attenuation value exceeded for 0.01% (or P%) of time of an average year; (dB) |
| $(A_{div})_P$ | Rain attenuation value exceeded jointly on two separated earth-space paths for P% of time of an average year; (dB) |
| a', b | A_P dependent factors in site diversity equation |
| d | Distance between two receiving stations in site diversity case; (km) |
| d' | Distance between the receiver and transmitter; (km) |
| f | Frequency of an electromagnetic wave; (sec^{-1}) |
| G_D | Diversity gain corresponding to a single site attenuation exceedance A_P ; (dB) |
| G_d | A_P dependent factor in diversity gain expression (Eqs. (31) and (32)); (dB) |
| G_f | f dependent constant in diversity gain expression (Eqs. (31) and (32)) |
| G_θ | θ dependent constant in diversity gain expression (Eqs. (31) and (32)) |

| | |
|------------------------|---|
| G_{Δ} | Δ dependent constant in diversity gain expression (Eqs. (31) and (32)) |
| H | Altitude of a geostationary satellite above equator; (km) |
| h_0 | Altitude of an earth station; (km) |
| h_R | Rain height for an earth station; (km) |
| k, k_h, k_v | Constants in the empirical expression rain attenuation (Eqs. (10), (13)) |
| L | Length of a radio wave path in a given rain volume; (km) |
| L' | Vertical extent of rain for an earth-satellite path; (km) |
| ℓ | Slant range of the satellite from the earth station; (km) |
| L_G | Horizontal projection of L_s ; (km) |
| L_s | Slant path length through rain for an earth-satellite path; (km) |
| $L(R)$ | "Effective path length" through rain for an earth-space path for an earth station location with rain rate R; (km) |
| LM | Link margin for a Satcom system; (dB) |
| m | Attenuation coefficient for a given rain volume; (km^{-1}) |
| $n(\epsilon)d\epsilon$ | Number of rain drops per unit volume with radius in the range $(\epsilon, \epsilon+d\epsilon)$; (km^{-3}) |
| N_0 | Empirical constant dependent on distribution; ($\text{km}^{-3} \text{ mm}^{-1}$) |
| P (or P') | Percentage (or probability) of time in an average year when the rain rate exceeds a specified value; (%) |
| P_0 | Probability of exceeding a reference rain rate R_0 |
| P_i | Power of electromagnetic radiation incident on a given medium; (watt) |

| | |
|------------------------------|---|
| P_t | Power of electromagnetic radiation after its transmission through a given medium; (watt) |
| P_{out} | Outage of a communication system expressed as a percentage of time of an average year; (%) |
| Q_a | Absorption cross-section of a rain drop; (km^2) |
| Q_s | Scattering cross-section of a rain drop; (km^2) |
| Q_t | Attenuation cross-section of a rain drop; (km^2) |
| R | Point rain rate at an earth station; (mm/hr) |
| R_e | Effective radius of the earth; (km) |
| R_0 | Reference rain rate; (mm/hr) |
| $R_{0.01}$ (or R_p) | Rain rate exceeded for 0.01% (or P%) of time of an average year; (mm/hr) |
| R' | Radius of the earth; (km) |
| $r_{0.01}$ | Reduction factor corresponding to rain attenuation exceedance for 0.01% of time of an average year |
| $\alpha, \alpha_h, \alpha_v$ | Constants in empirical relation for specific attenuation (Eqs. (10), (14)) |
| β | Angular distance between the ground station and sub-satellite point on the earth's surface; (degree) |
| γ | Specific attenuation of a rain volume; (dB/km) |
| $\gamma_{0.01}$ | Specific attenuation of a rain volume corresponding to $R_{0.01}$; (dB/km) |
| Δ | Angle between the line segment joining the two receiving terminals and the ground projection of the earth-space path [10]; (degree) |
| $\Delta\eta$ | Longitude difference between the earth station and sub-satellite point; (degree) |
| θ | Elevation angle for an earth satellite path; (degree) |
| Λ | A distribution dependent empirical constant; (mm^{-1}) |

| | |
|------------|--|
| λ | Wavelength of an electromagnetic wave; (km) |
| μ | Refractive index of water of the rain drop |
| ρ | Number of rain drops per unit volume; (km^{-3}) |
| ξ | Longitude of the earth station; (degree) |
| τ | Polarization tilt angle relative to the horizontal plane; (degree) |
| ϕ | Latitude of the earth station; (degree) |
| ϵ | Radius of the rain drop (mm) |

1.0 INTRODUCTION

The propagation characteristics of electromagnetic waves play an important role in the design of space communication systems. Attenuation due to hydrometeors, mainly rain, represents perhaps the most degrading influence suffered by the transmitted wave as it passes through the earth's atmosphere. This is particularly true for satellite communication systems which operate above ~ 10 GHz. Further, the rain attenuation increases with frequency in the 1-100 GHz range. On the other hand, spectral crowding at lower frequencies points out the desirability of moving to higher frequency bands. In particular, greater available bandwidths and the associated higher data rates with improved anti-jamming characteristics at Extremely High Frequencies (EHF) make this band extremely attractive for military satellite communications.

Clearly, it is necessary to make a compromise between the higher data rates and better anti-jamming characteristics and the reduction in link availability in EHF communication systems. Since rain will be the primary source of attenuation in most cases, an assessment of rain attenuation is mandatory in the planning stages of such a system. The randomness of rainfall adds further uncertainty and complexity in the radio wave propagation. Hence, statistical approaches are used to evaluate the problem. Thus, the statistical rain data is one of the key parameters in determining the rain attenuation statistics. The Department of National Defence is presently working towards the possible use of EHF satellite communications (Satcom) in the future. Before developing

such a system, it is therefore essential to determine radio wave attenuation due to rain in various parts of Canada at these frequencies. Preliminary work on this subject was done earlier by one of the authors [1].

From the present work, one can calculate the rain attenuation exceedance and the corresponding link availability values at an arbitrary location within most of the Canadian territory for any geostationary satellite link at any frequency in the 10-45 GHz range for a wide range of probabilities. Computer programs have also been developed to plot contours of constant rain attenuation exceedance or link availability with a given link margin for most of the Canadian territory for any combination of the relevant link parameters. In particular, rain attenuation exceedance and link availability data can be determined for 47 locations, with long term rain data records, in various parts of Canada. The results are presented in different formats to facilitate their use in a system design.

2.0 FUNDAMENTALS OF RADIO WAVE PROPAGATION

2.1 Transmission Principles

The power density of an electromagnetic wave at a point is inversely proportional to the square of the distance between the source and that point. Free space transmission loss expressed in decibels between two points in a radio link is given by

$$A_s = 20 \log \left(\frac{4\pi d'}{\lambda} \right) \quad (\text{dB}) \dots (1)$$

where A_s is the free-space attenuation in decibels, λ is the

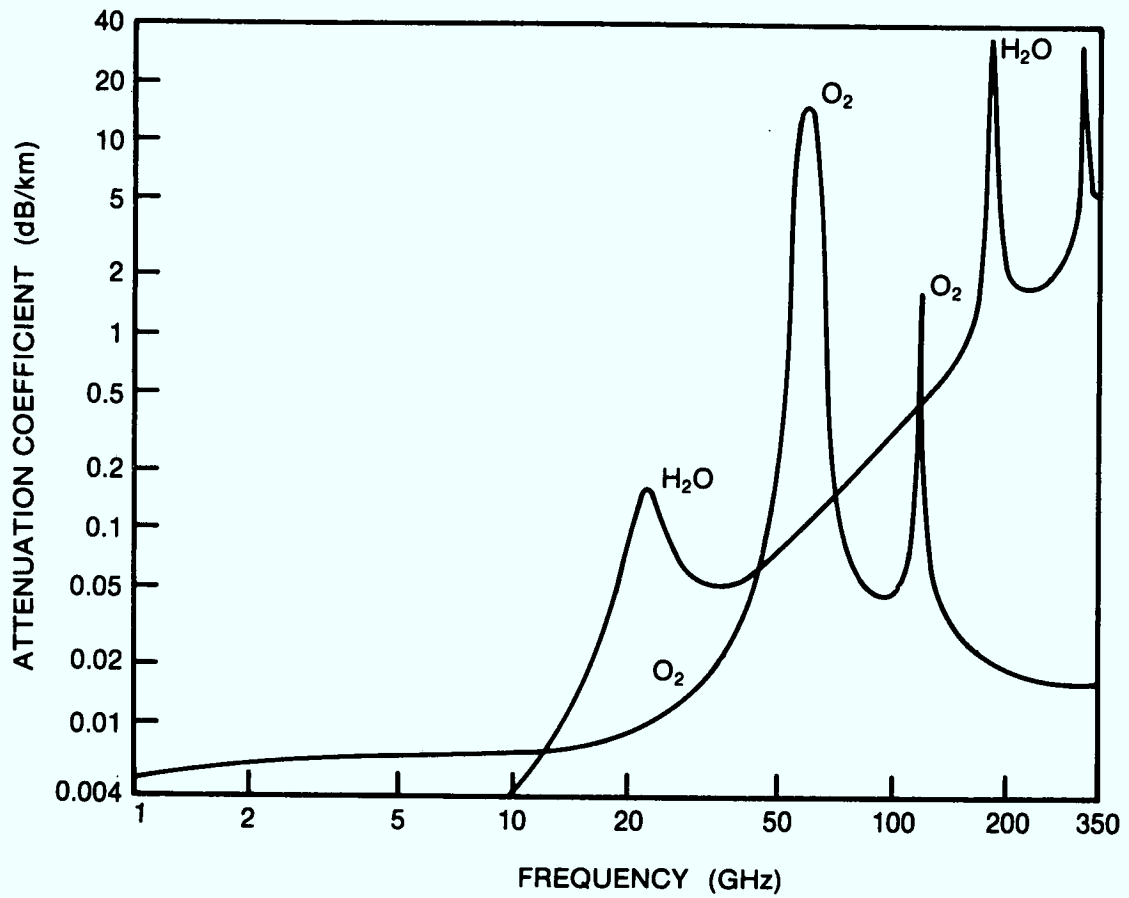


Fig. 1 Attenuation coefficients for oxygen and water vapor at a pressure of 1 atm., a temperature of 20° C and a water vapor density of 7.5 g/m³ [3].

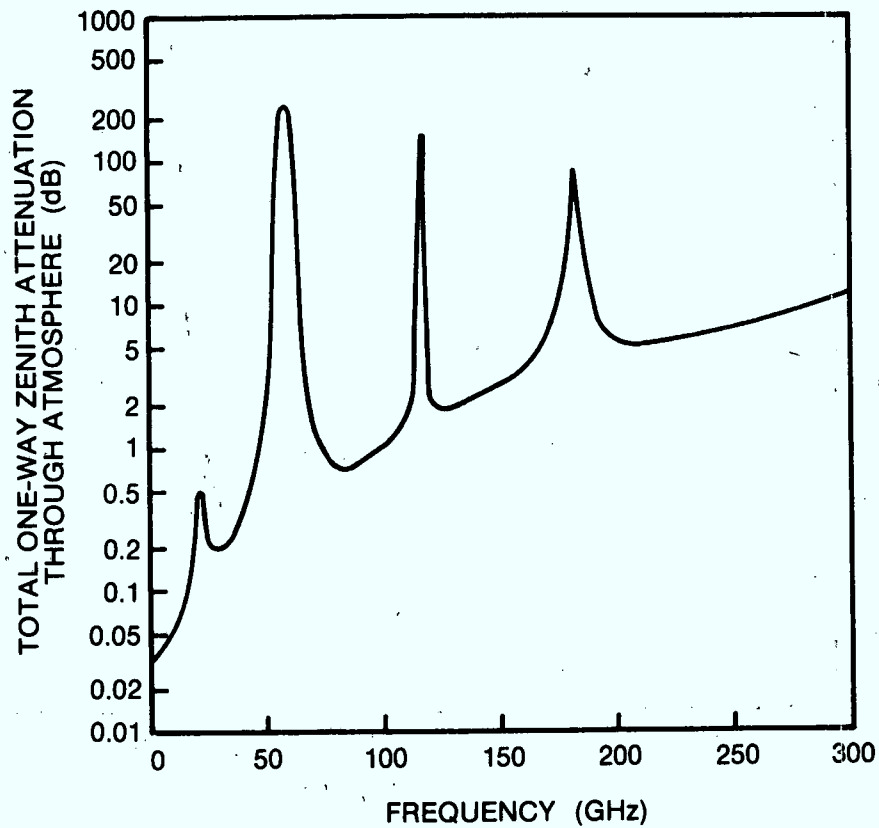


Fig. 2 Total one-way zenith attenuation through the atmosphere with moderate humidity (7.5 g/m^3 at the surface) as a function of frequency [3].

wavelength and d' is the distance between the receiver and the transmitter. This attenuation is always present when radio waves propagate in free space or in regions whose characteristics approximate the uniformity of free space such as the earth's atmosphere.

In addition, there are several other factors which influence radio wave propagation [2,3]. The frequency of the radio wave is a critical factor in determining the attenuation or modification of the radio wave. Ionospheric effects tend to become less significant as the frequency of the wave increases and above about 3 GHz the ionosphere is essentially transparent to space communications with some notable exceptions. On the other hand, gaseous constituents of the earth's atmosphere, primarily oxygen and water vapor, interact with the radio wave. This interaction is particularly intense over certain frequency bands corresponding to the absorption bands of oxygen and water vapor. Practical earth-space communication has been mainly developed in the atmospheric windows between these absorption bands. Fig. 1 shows the attenuation coefficient vs. frequency for oxygen and water vapor at a humidity of 7.5 g/m^3 , a pressure of 1 atmosphere and a temperature of 20° C . Fig. 2 shows the total one-way zenith attenuation through the atmosphere vs. frequency for a moderately humid atmosphere (7.5 g/m^3 water vapor density at the surface). For elevation angles in the range of 15° - 90° , the gaseous attenuation for a moderately humid atmosphere is below $\sim 2 \text{ dB}$ for frequencies up to 41 GHz. There are several other effects of the non-ionized atmosphere, the ionosphere and the extra terrestrial ionized media on the propagating radio wave.

Some of the factors affecting the radio wave propagation are:

- . Attenuation by hydrometeors and atmospheric gases;
- . Depolarisation by hydrometeors and Faraday rotation;
- . Noise emission due to gases and hydrometeors;
- . Scintillation of amplitude and phase caused by turbulence or refractive index irregularities;
- . Loss of signal due to beam-divergence of the earth-station antenna due to normal refraction in the atmosphere;
- . A decrease in effective antenna gain due to phase decorrelation across the antenna aperture;
- . Possible limitations in bandwidth due to multiple path effects or multiple scattering, specially in high data rate systems.

At EHF frequencies, hydrometeors are the dominant source of attenuation although other factors like scintillation fading at low angles of elevation may also be quite significant. Henceforth, this work deals only with hydrometeor attenuation in satellite communications.

3.0 HYDROMETEOR ATTENUATION IN SATELLITE COMMUNICATIONS

Hydrometeors in the radio wave path can produce major impairments to space communications. Hydrometeors refer to products of condensed water vapor in the atmosphere and include rain, hail, cloud, fog, ice or snow. Rain is the major source of impairment of the radio wave. Attenuation due to water cloud or fog can be calculated if the liquid water content is known. Except for clouds of high water content, attenuation due to clouds is generally equivalent to light rainfall attenuation. The effects of dry hail and dry snow

can be generally neglected at the EHF frequencies.

A brief description of the classical development for the determination of rain attenuation is provided next. The attenuation A of a radio wave propagating in a volume of rain of length L in the direction of wave propagation can be expressed as

$$A = \int_0^L \gamma \, dx \quad (\text{dB}) \dots (2)$$

where γ is the specific attenuation (dB/km) of the rain volume. In the classical development, it is assumed that the intensity of the wave decays exponentially as it propagates through the volume of rain. Thus, the incident power P_i of a wave incident on a volume of uniformly distributed water drops extending over the length L and the transmitted power P_t after its passage through the medium are given by

$$P_t = P_i e^{-mL} \quad (\text{watt}) \dots (3)$$

where m is the attenuation coefficient for the rain volume expressed in units of reciprocal length. The attenuation of the radio wave expressed as a positive decibel value is given by

$$A = 10 \log_{10} \left(\frac{P_i}{P_t} \right) = 4.343 \, mL \quad (\text{dB}) \dots (4)$$

The attenuation coefficient m can be expressed as

$$m = \rho Q_t \quad (\text{km}^{-1}) \dots (5)$$

where ρ is the number of drops per unit volume and Q_t , the attenuation cross-section of the drop, expressed in units of area, is the sum of a scattering cross-section Q_s and an absorption cross-section Q_a . Q_t is a function of drop radius

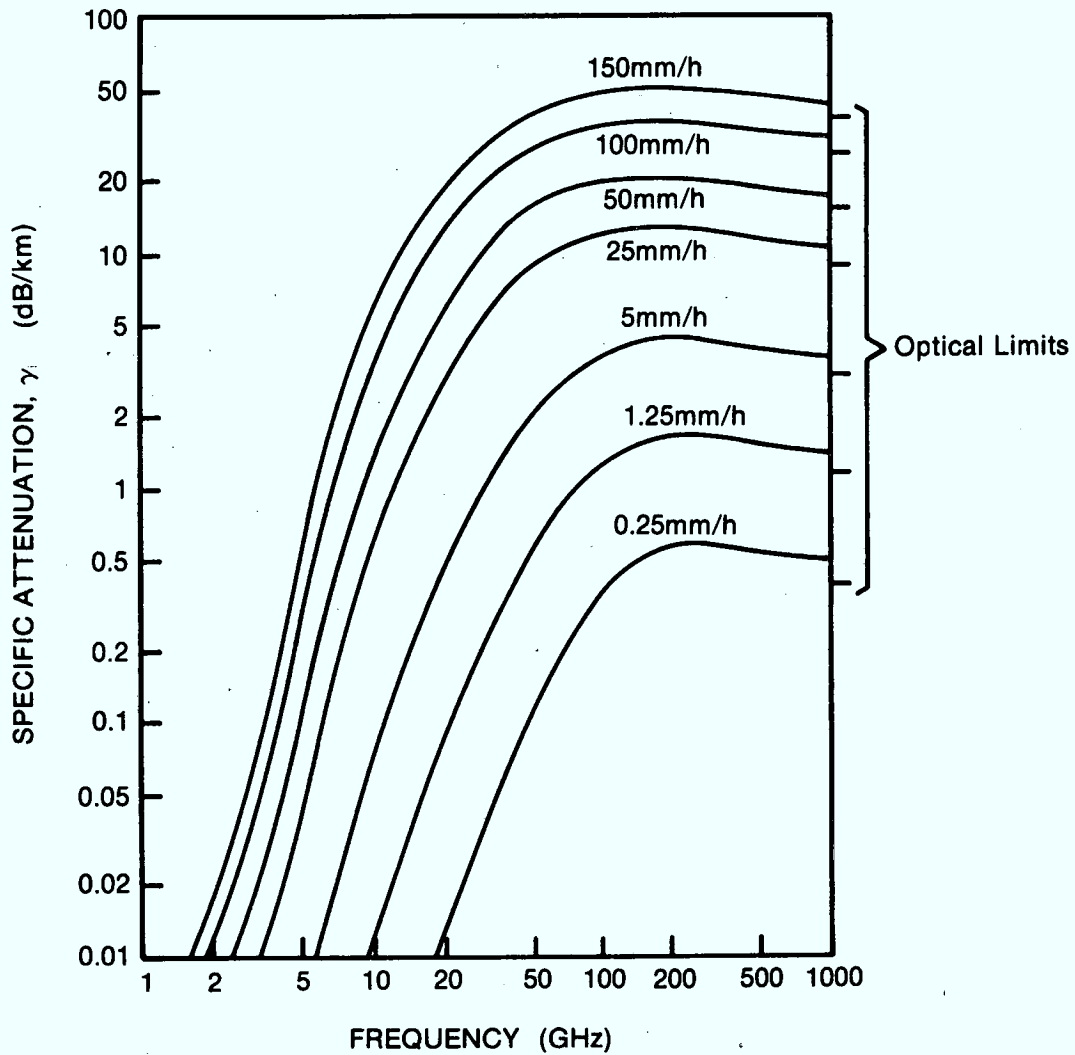


Fig. 3 Specific attenuation γ due to rain as a function of frequency for various rain rates [7].

ϵ , wavelength λ of the radio wave and complex refractive index μ of the water drop. If the drops do not have the same radius, the attenuation coefficient m is determined by integrating over all drop radii. Thus, Eq. (5) is modified to

$$m = \int Q_t(\epsilon, \lambda, \mu) n(\epsilon) d\epsilon \quad (\text{km}^{-1}) \dots (6)$$

where $n(\epsilon)d\epsilon$ gives the number of drops per unit volume with radius in the range $(\epsilon, \epsilon+d\epsilon)$. The specific attenuation γ , expressed in dB/km, is obtained from Eqns. (4) and (6) with $L = 1$ km. Thus,

$$\gamma = 4.343 m = 4.343 \int Q_t(\epsilon, \lambda, \mu) n(\epsilon) d\epsilon \quad (\text{dB/km}) \dots (7)$$

Thus, the specific attenuation γ depends on attenuation cross-section, rain drop size and drop size distribution. The latter two parameters are a function of rain structure only whereas Q_t depends on frequency and temperature also. All of these parameters are not directly predictable and hence statistical methods are used. Q_t can be obtained by employing the Mie classical scattering theory for a plane wave radiation on an absorbing sphere. The distribution of rain drop sizes $n(\epsilon)$ can be represented in terms of the drop radius ϵ (mm) and two empirical constants N_0 and Λ determined from the distribution. The constant Λ , in turn, is dependent on rain rate R (mm/hr). Thus, the specific attenuation γ is dependent on the physical properties of water as well as the characteristics of rain structure and is given by

$$\gamma = 4.343 N_0 \int Q_t(\epsilon, \lambda, \mu) e^{-\Lambda\epsilon} d\epsilon \quad (\text{dB/km}) \dots (8)$$

The specific attenuation γ can now be calculated as a function of frequency, refractive index and drop size distribution. Fig. 3 shows specific attenuation γ vs. frequency f at various rain rates for the drop size distribution of Laws

and Parsons [4] at a rain temperature of 20° C. The total rain attenuation A for a path of length L is obtained by using this value of γ in Eq.(2). Thus,

$$A = 4.343 \int_0^L \left(N_0 \int Q_t e^{-\Lambda \epsilon} d\epsilon \right) dx \quad (\text{dB}) \dots (9)$$

The relationship between specific attenuation γ and rain rate R at the ground station can be approximated by [5]

$$\gamma = kR^\alpha \quad (\text{dB/km}) \dots (10)$$

where k and α are frequency, temperature and polarization dependent constants. The parameters k, α and R represent approximately the complicated dependence of γ on frequency, temperature and drop size distribution. Eq.(10) is used in virtually all models for the prediction of path attenuation from rain rate at a point.

3.1 Slant Path and Elevation Angle Dependence

The rain attenuation A_θ over an earth-satellite slant path at an elevation angle θ is given by

$$A_\theta = \frac{L' \gamma}{\sin \theta} = \frac{L' k R^\alpha}{\sin \theta} \quad (\text{dB}) \dots (11)$$

where L' is the vertical extent of rain. The main problem in determining the slant path attenuation is in finding the extent of the slant path length and the rain rate profile along that path. The main effort in developing the attenuation prediction models has been to relate the attenuation along the path with measurable quantities such as the 0° C isotherm height and the rainfall rate at the ground station.

In general, the prediction models utilize the measured rain rate at the ground station as the statistical

variable and use Eq.(10) to calculate the specific attenuation. The attenuation from these prediction models can thus be expressed as

$$A(R) = kR^\alpha L(R) \text{ (dB)} \quad \dots\dots(12)$$

where $L(R)$ is an "effective path length" for the earth-space path. It is this $L(R)$ and γ which determine an attenuation distribution $A(R)$ from a specified rain rate distribution. The major difference between the various prediction methods is in their approach to determine an "effective path length" parameter $L(R)$.

3.2 The CCIR Rain Attenuation Prediction Method

The International Radio Consultative Committee (CCIR) has recommended a method to predict rain attenuation statistics for an earth-space path from point rain rate distribution [6]. This model has been used for the present work. In this model, the attenuation exceeded for 0.01% of an average year, $A_{0.01}$, is calculated first. The attenuation exceeded for other percentages of an average year, in the range of 0.001% to 1.0%, can then be calculated from $A_{0.01}$. The following input parameters are needed to calculate the slant-path rain attenuation statistics at a given location:

| | |
|----------------------|---|
| $R_{0.01}$ (mm/hr) : | the point rainfall rate that is exceeded for 0.01% of the average year at the location; |
| h_0 (km) : | the height of the earth station above sea level; |
| θ (degree) : | the elevation angle; |
| ϕ (degree) : | the latitude of the earth station; |
| ξ (degree) : | the longitude of the earth station. |

In addition, information regarding the satellite location and link frequency is also required.

As mentioned earlier, the specific attenuation depends on rain rate and is given by

$$\gamma = kR^\alpha \quad (\text{dB/km}) \quad \dots\dots(10)$$

For linear and circular polarization, the coefficients k and α can be calculated using the following equations [7]:

$$k = \frac{1}{2} \left[k_h + k_v + (k_h - k_v) \cos^2 \theta \cos 2\tau \right] \quad \dots\dots(13)$$

$$\alpha = \frac{1}{2k} \left[k_h \alpha_h + k_v \alpha_v + (k_h \alpha_h - k_v \alpha_v) \cos^2 \theta \cos 2\tau \right] \dots\dots(14)$$

where τ is the polarization tilt angle relative to the horizontal. $\tau = 45^\circ$ for circular polarization. Thus, for circular polarization, the above equations simplify to

$$k = \frac{1}{2} \left[k_h + k_v \right] \quad \dots\dots(15)$$

$$\alpha = \frac{1}{2k} \left[k_h \alpha_h + k_v \alpha_v \right] \quad \dots\dots(16)$$

The constants k_h , k_v , α_h and α_v are tabulated as a function of frequency in the 1-400 GHz range in a CCIR Report [7]. At intermediate frequencies, logarithmic scaling is used for frequency, k_h and k_v whereas a linear scaling is used for frequency, α_h and α_v . Knowing k and α at the link frequency, one can calculate

$$\gamma_{0.01} = kR_{0.01}^\alpha \quad (\text{dB/km}) \quad \dots\dots(17)$$

where $\gamma_{0.01}$ is the specific attenuation that is exceeded for 0.01% of an average year.

The elevation angle θ is given by [8]

$$\cos \theta = \left[\frac{(R' + H)}{\ell} \right] \sin \beta \quad \dots\dots(18)$$

where R' is the radius of the earth (6370 km), H (35816 km) is the altitude of a geostationary satellite above the equator, β is the angular distance between the ground station and the sub-satellite point on the earth's surface and ℓ is the slant range of the satellite from the earth station. β and ℓ can be obtained from the following equations:

$$\cos \beta = \cos \phi \cos \Delta\eta \quad \dots\dots(19)$$

$$\ell = \left[R'^2 + (R' + H)^2 - 2R'(R' + H)\cos \beta \right]^{1/2} \text{ (km)} \dots\dots(20)$$

where $\Delta\eta$ is the longitude difference between the earth station and the sub-satellite point.

Next, the "effective path length" for the earth-space path through rain has to be calculated. Fig. 4 gives a schematic presentation of such a path. In the present method, the "effective path length" can be calculated through the following steps:

The rain height h_R (km) for a given earth station at latitude ϕ is given by

$$h_R = \begin{cases} 4.0 & 0 < \phi < 36^\circ \\ 4.0 - 0.075 (\phi - 36) & \phi \geq 36^\circ \end{cases} \text{ (km)} \dots\dots(21)$$

For $\theta < 10^\circ$, the slant-path length L_s below the rain height is obtained from the equation

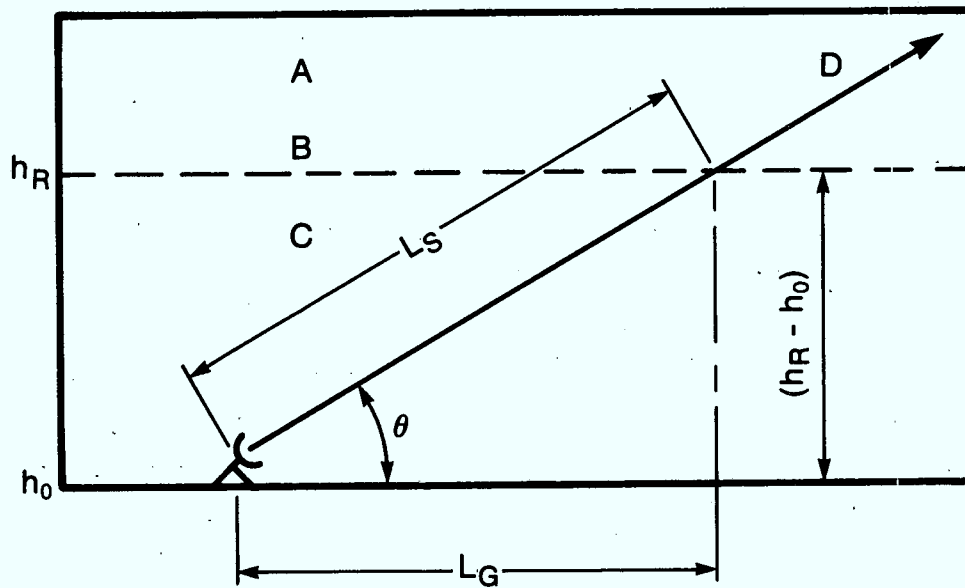


Fig. 4 Schematic presentation of an Earth-space path for satellite communication.

- A : Frozen precipitation;
- B : Rain level;
- C : Rain region;
- D : Earth-space path from a ground station to a satellite;
- $(h_R - h_0)$: Rain height above the ground station.

$$L_s = \frac{2(h_R - h_0)}{\left(\sin^2 \theta + \frac{2(h_R - h_0)}{R_e} \right)^{1/2} + \sin \theta} \quad (\text{km}) \dots (22)$$

where R_e is the effective radius of the earth (8500 km). For $\theta \geq 10^\circ$, this equation simplifies to

$$L_s = \frac{(h_R - h_0)}{\sin \theta} \quad (\text{km}) \dots (23)$$

The horizontal projection, L_G , of the slant-path length is found from (see Fig. 4)

$$L_G = L_s \cos \theta \quad (\text{km}) \dots (24)$$

For 0.01% of the year, the reduction factor $r_{0.01}$, which takes into account the nonuniformity of rain rate along the slant path, can be obtained from

$$r_{0.01} = \frac{90}{90 + 4L_G} \quad \dots (25)$$

The attenuation $A_{0.01}$ exceeded for 0.01% of an average year is then calculated from

$$A_{0.01} = \gamma_{0.01} L_s r_{0.01} \quad (\text{dB}) \dots (26)$$

The attenuation A_P exceeded for other percentages P of an average year, in the range of 0.001% to 1.0%, may be estimated from $A_{0.01}$ by using the following equation

$$\frac{A_P}{A_{0.01}} = 0.12 P^{-(0.546 + 0.043 \log P)} \quad \dots (27)$$

The above equation can be rearranged to yield yearly outage times P_{out} given as percentage of a year. For a given link margin LM (dB), the yearly outage time expressed as a

percentage of an average year is given by

$$P_{\text{out}}=10 \left(-6.349 + \left(40.308 - 23.256 \log \left(\frac{LM}{0.12 A_{0.01}} \right) \right)^{1/2} \right) (\%) \dots (28)$$

Hence, the availability A_v expressed as a percentage of time of an average year is

$$A_v = 100 - P_{\text{out}} (\%) \dots (29)$$

For latitudes above 30° , this CCIR method has been reported to predict $A_{0.01}$ to within 10% with a standard deviation of 30% when simultaneous rain rate measurements were used [6]. As far as is known to the authors, this model has not yet been tested at EHF frequencies for the Canadian conditions.

3.3 Site Diversity Gain Model

Hodge [9] has proposed a diversity gain model to calculate the diversity gain G_D using a number of parameters. This model was incorporated into the CCIR prediction model to provide an option of calculating the rain attenuation statistics with space diversity. The diversity gain G_D is given by

$$G_D(A_P) = A_P - (A_{\text{div}})_P \quad (\text{dB}) \dots (30)$$

where A_P and $(A_{\text{div}})_P$ are the attenuation values exceeded on a single path and that exceeded jointly on separated paths respectively for a given percentage of time. According to this model,

$$G_D = G_d G_f G_\theta G_\Delta \quad (\text{dB}) \dots (31)$$

where each factor contains the dependence of the variable de-

noted by its subscript. Here d is the separation distance between the two earth stations, A_p is the single-site attenuation, f is the link frequency, θ is the elevation angle and Δ is the earth terminals baseline to path angle which is defined as the positive angle made between the line segment joining the two receiving terminals and the ground projection of the earth-space path [10]. Δ is measured in such a way that it is always less than 90° . The factors in Eq. (31) are given by

$$\left. \begin{aligned} G_d &= a(1 - e^{-bd}) && \text{(dB)} \\ a &= 0.64A_p - 1.6(1 - e^{-0.11A_p}) && \text{(dB)} \\ b &= 0.585(1 - e^{-0.98A_p}) && \text{(km}^{-1}\text{)} \\ G_f &= 1.64 e^{-0.025f} \\ G_\theta &= 0.00492 \theta + 0.834 \\ G_\Delta &= 0.00177 \Delta + 0.887 \end{aligned} \right\} \dots(32)$$

Here d is in km, A_p is in dB, f is in GHz and θ and Δ are in degrees. This model gives good agreement with experimental measurements when single site attenuation is below ~ 11 dB. For higher values of A_p , the agreement is not so good.

4.0 RAIN RATE STATISTICS FOR CANADA

There are two databases which provide information on probability vs. rainfall rate exceedance for use in the present work. Details of these databases are described in this Section.

Segal [11] analysed the tipping-bucket rain gauge data of ~ 500 station years from 47 stations in various parts of Canada. Fig. (5) gives the locations of these precipita-

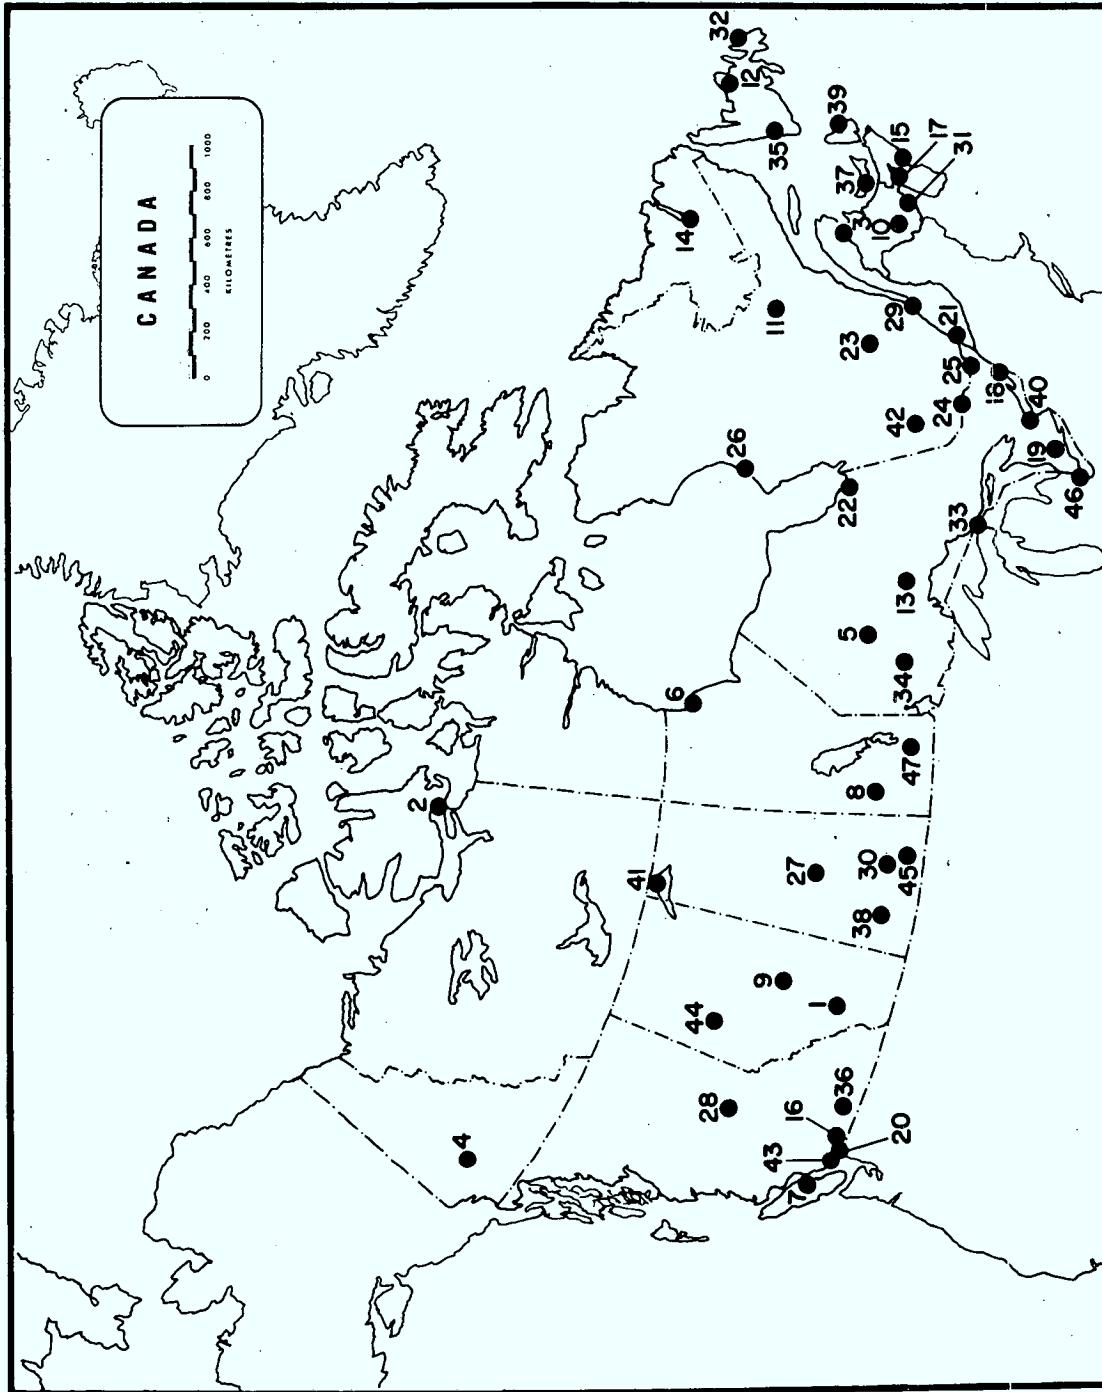


Fig. 5 Map showing the locations of precipitation recording stations from which rain data have been used in this work. The numbers correspond to the station listings in Tables 1 and 2 [11].

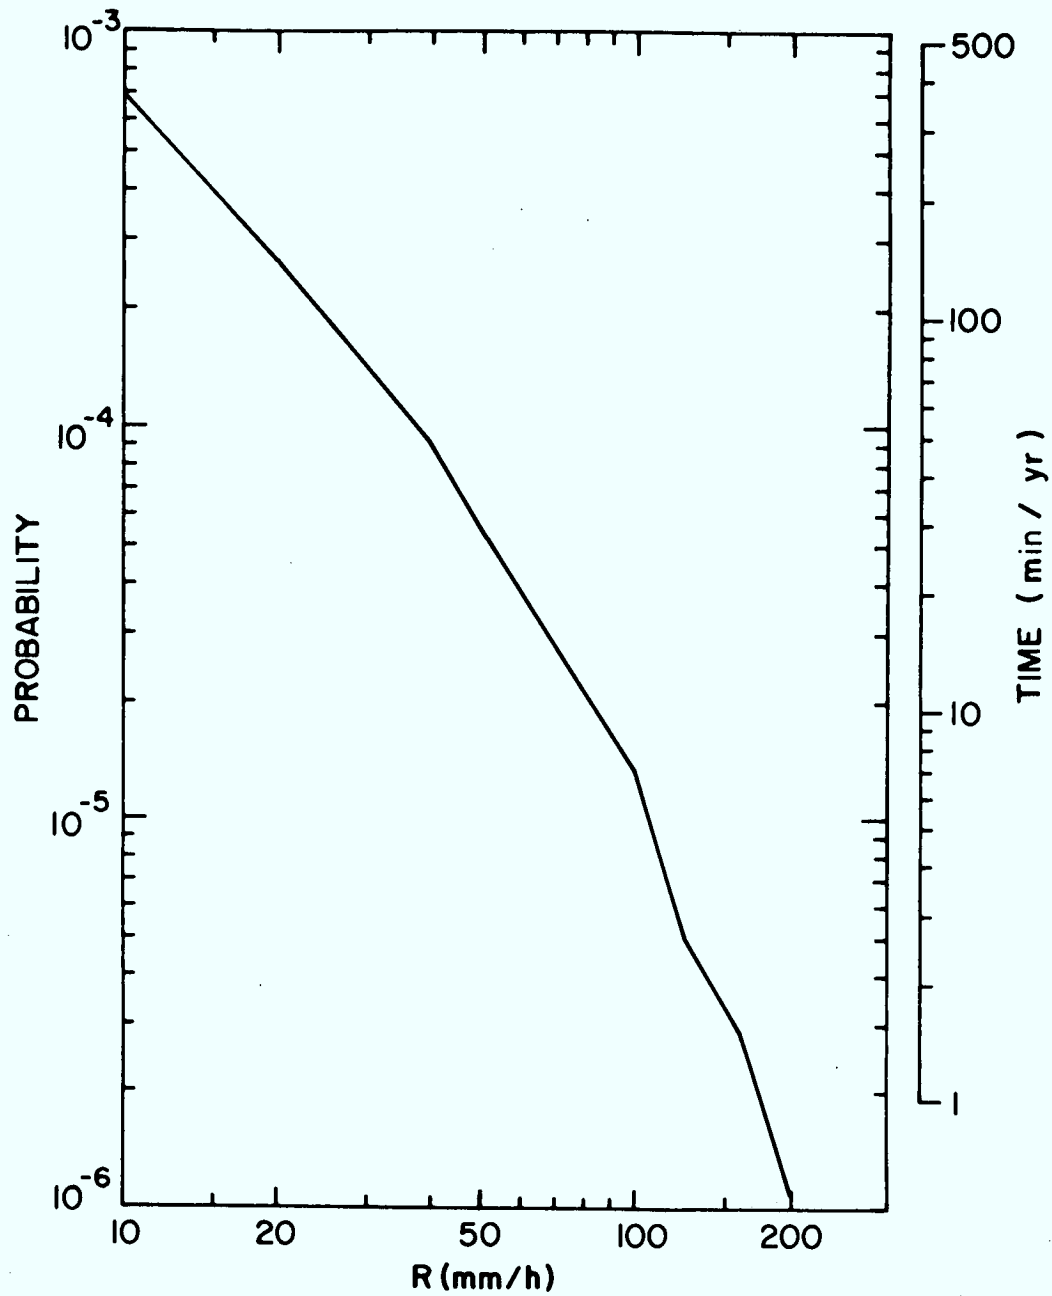


Fig. 6 Long term average probability of exceeding a given rainfall rate at Ottawa, Ont. [11].

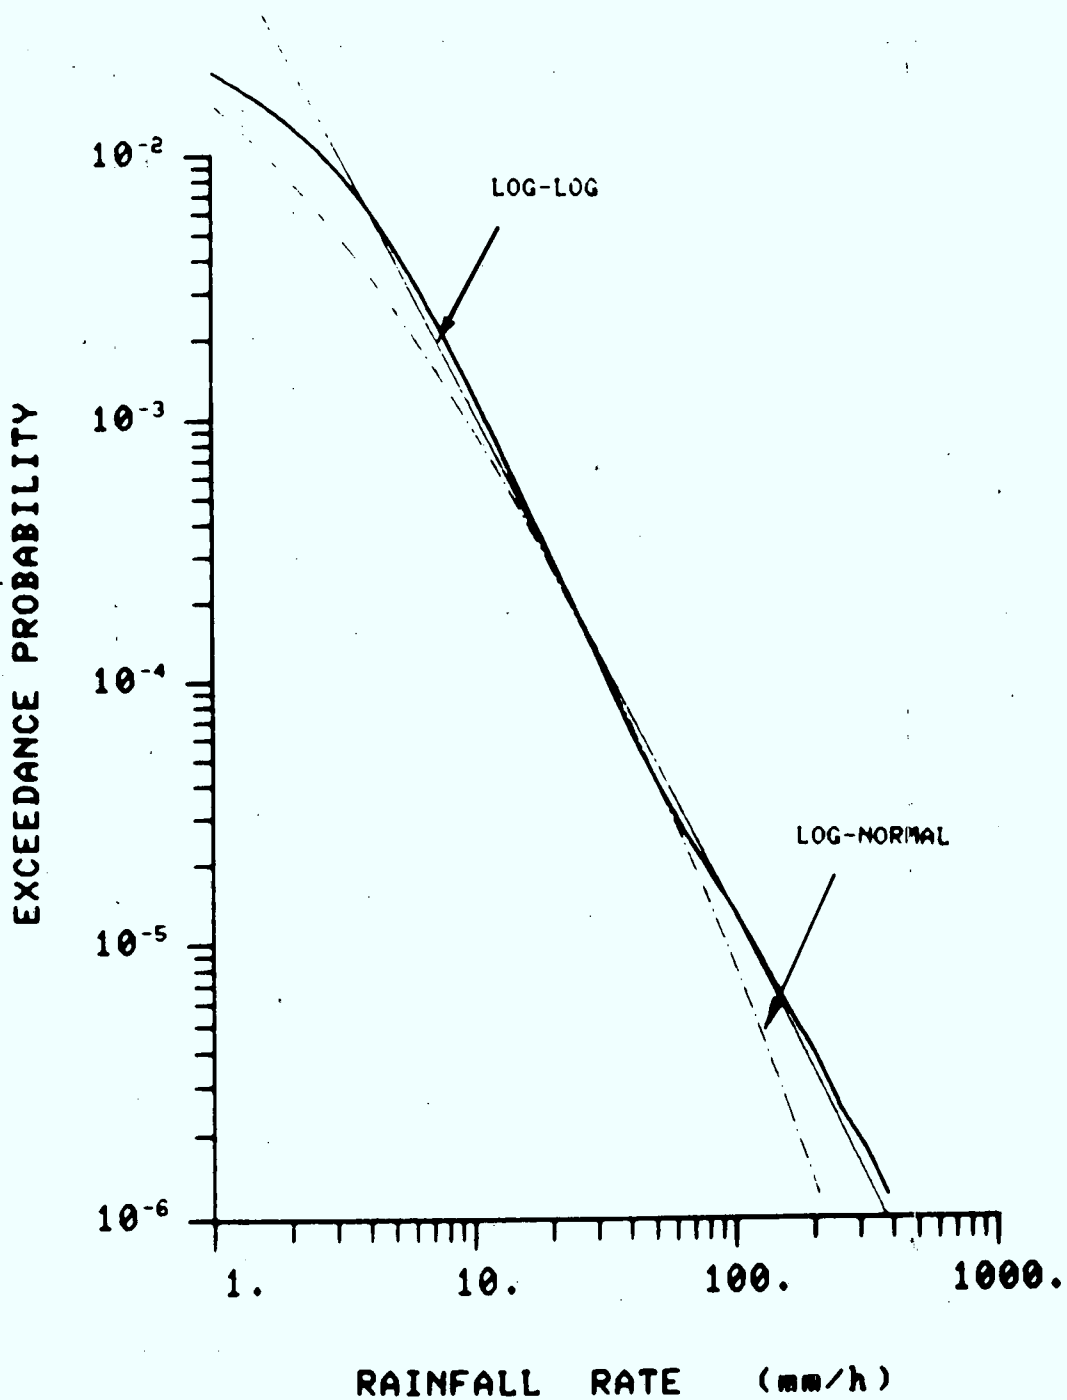


Fig. 7 A typical rainfall distribution curve at one of the rain recording stations with log-log and log-normal approximations [11].

tion recording stations. An example of the typical experimental results of probability of exceeding a given rainfall rate at one of these stations is given in Fig. (6).

Segal noted that the probability P' that a given rain rate R is exceeded at a site can be approximated by a power law relationship

$$P' = P_0 \left(\frac{R}{R_0} \right)^a \quad \dots\dots(33)$$

where P_0 is the probability of exceeding a reference rain rate R_0 . This power law is in good agreement with the experimental results for values of R exceeding $\sim 2-3$ mm/hr. Fig. 7 shows an example of such a power law fit to the experimental rainfall rate data. Knowing a , P_0 and R_0 , the rainfall rate exceedance at the site can be calculated as a function of P' . Thus, P_0 and a are important parameters for any location.

Segal [12] calculated a and P_0 values for the 47 locations for $R_0 = 100$ mm/hr from experimental rainfall rate data at these sites. This data is identified as the "city database" and is used in the rain attenuation prediction programs for these locations. For ready reference, this data is also included in Table 1. The altitude, latitude and longitude for these stations are given in Table 2 [11]. Using the calculated values of the parameters a and P_0 for the 47 sites, Segal [11] determined contours of a and P_0 for various values of these parameters for most parts of Canada (Figs. 8-9). The contours do not extend into the far North or into the Atlantic or Pacific ocean due to lack of reliable data. Lack of data in the West Coast region is due to uncertainty and rapid variations in precipitation characteristics in mountainous regions.

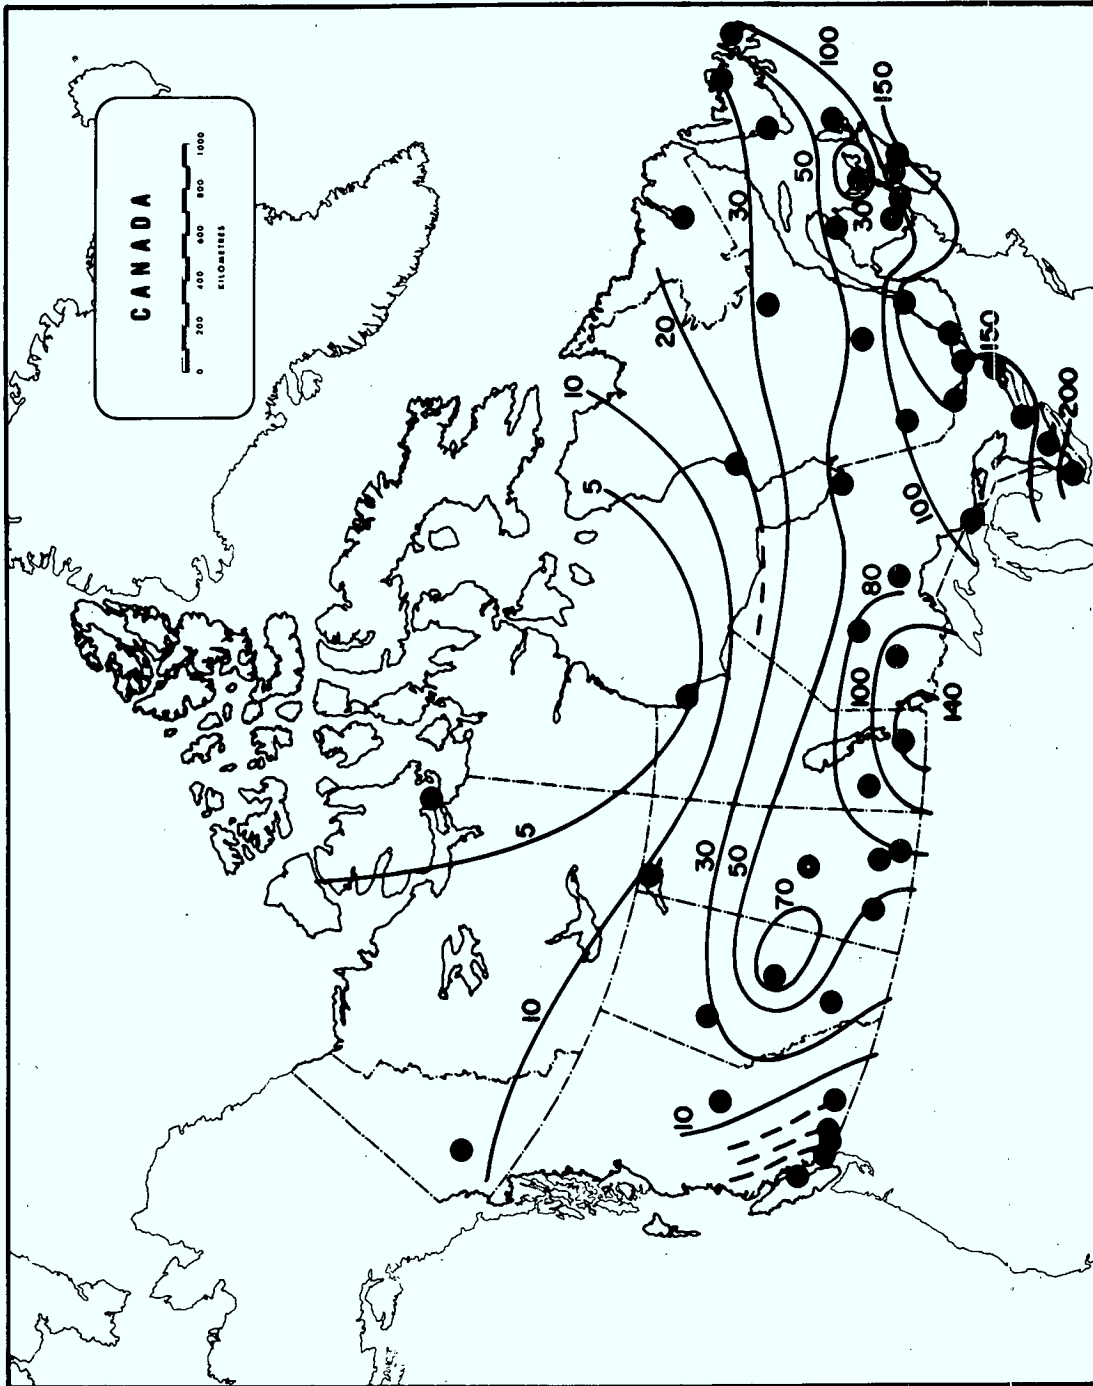


Fig. 8 Contours of constant P_0 . The numerical value beside each curve equals $10^7 P_0$. The locations of the rain recording stations are indicated [11].

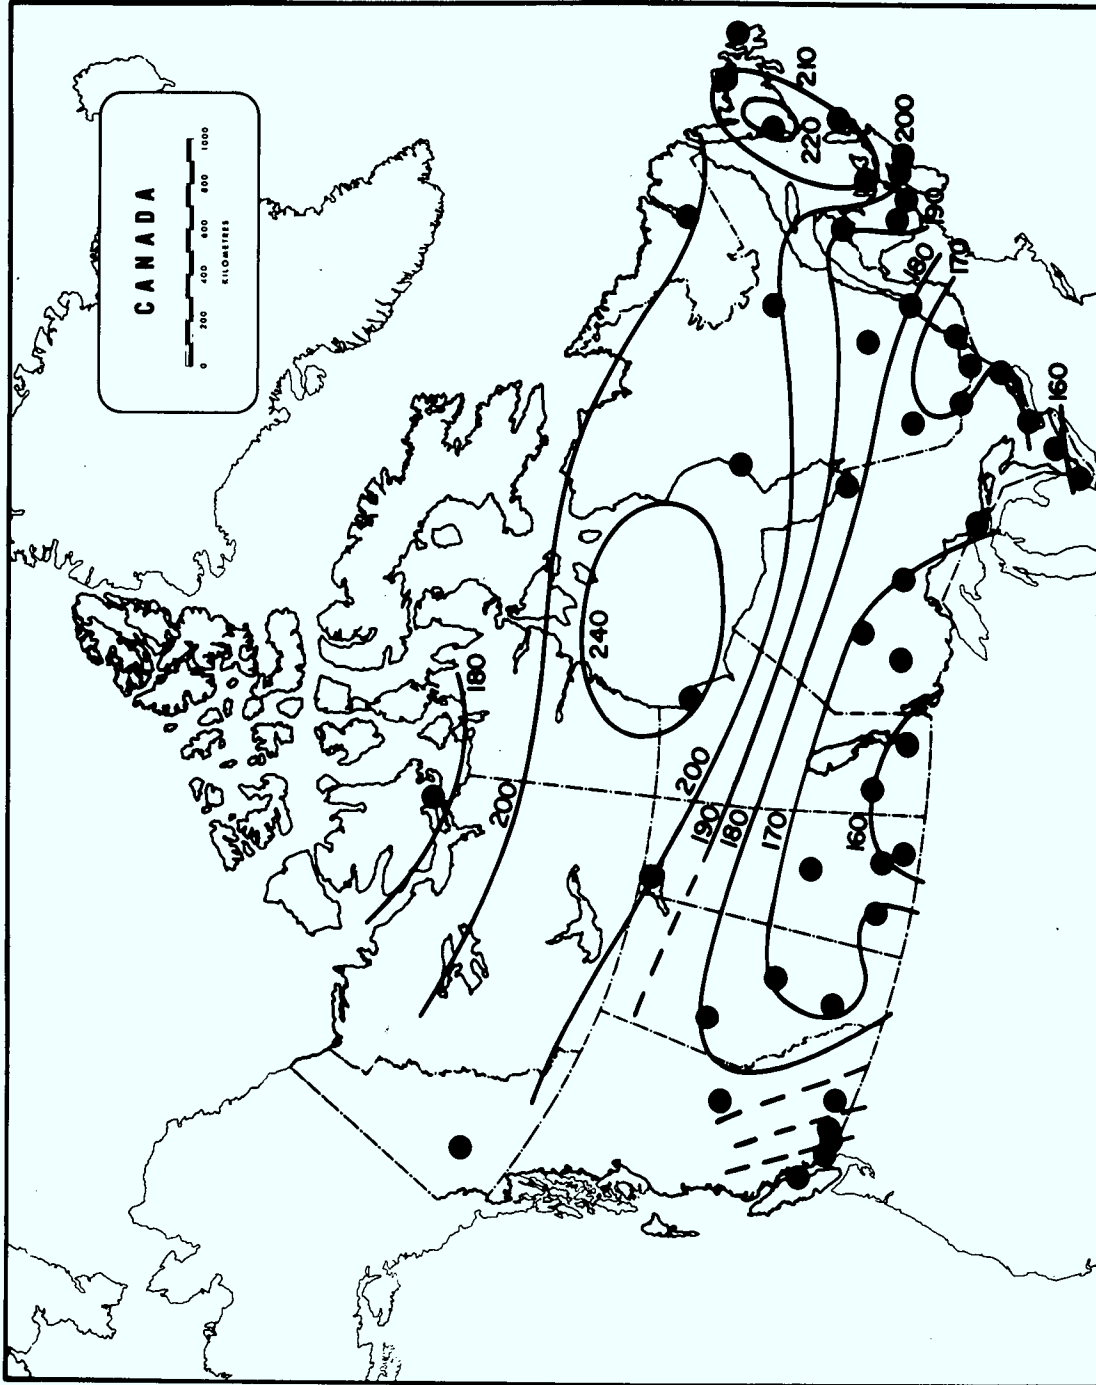


Fig.9 Contours of constant a. The numerical value beside each curve corresponds to -100a. The locations of the recording stations are indicated [11].

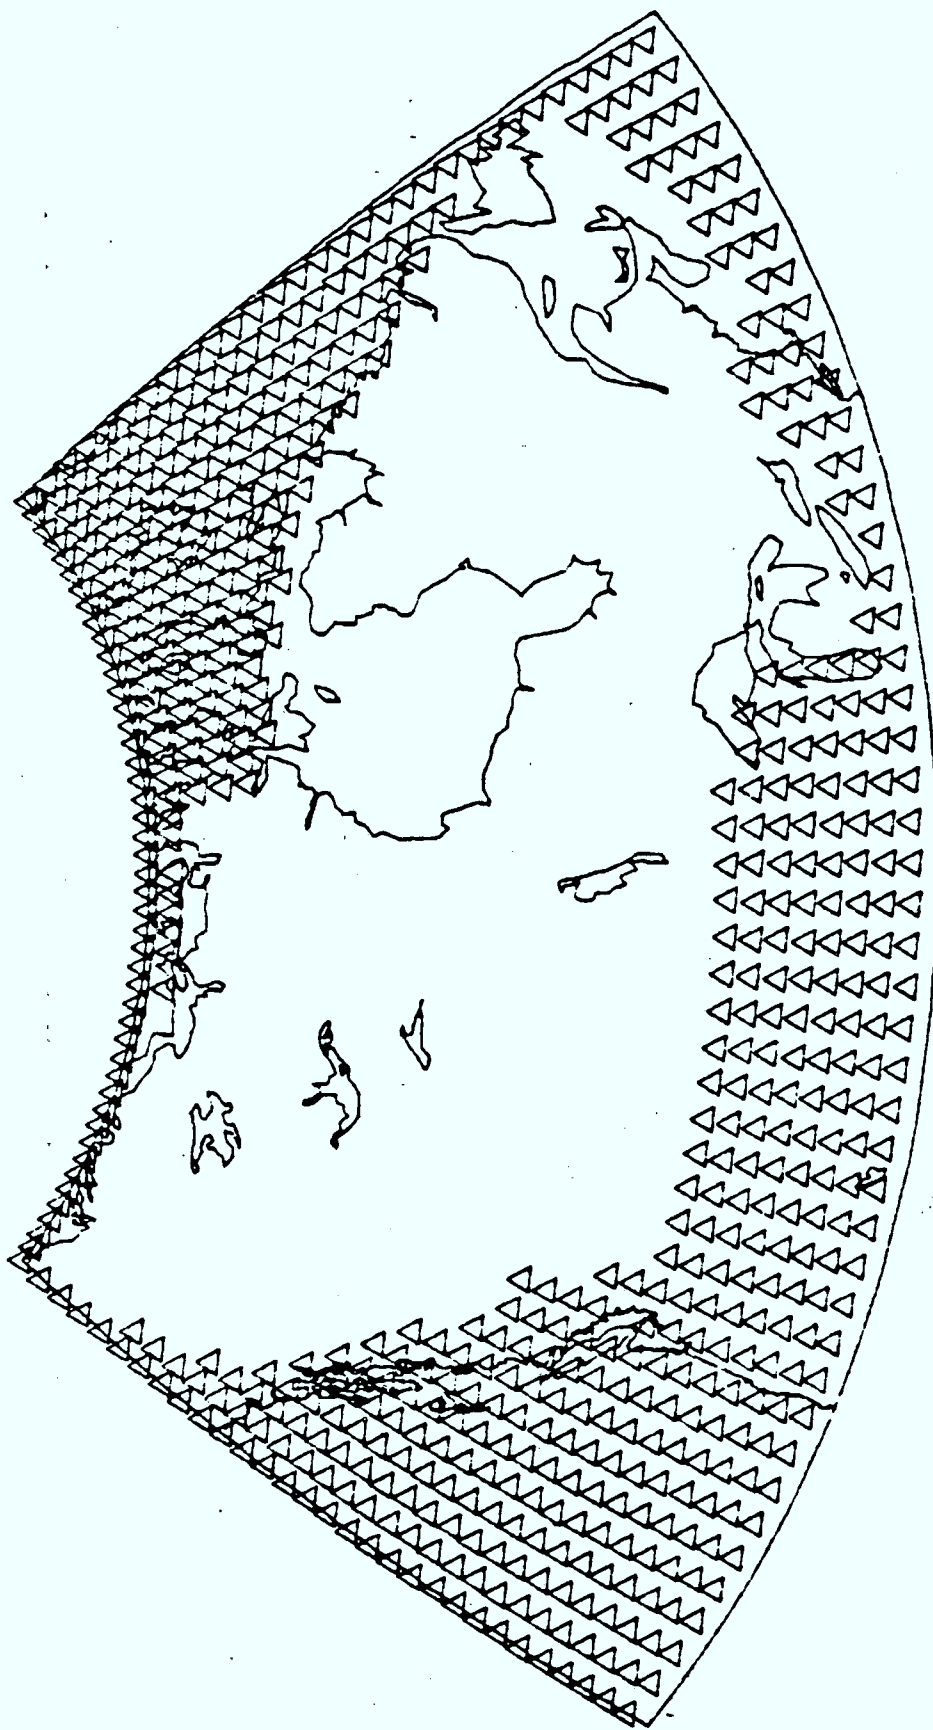


Fig. 10 Unshaded region in this map indicates the part of Canada for which rain rate data and rain attenuation statistics are available.

For rainfall rate distribution at an arbitrary location in Canada, Strickland [13] digitized the above-mentioned contours of a and P_0 (see Figs. 8-9) at intervals of 1° in latitude and 2° in longitude. The data were digitized from 42° to 70° in latitude and 143°W to 55°W in longitude and the parameters a and P_0 were determined for all points on the grid. These data were stored in a subroutine and constitute the second of the two databases. This database is used in the prediction programs to determine rain attenuation at an arbitrary location in Canada. The unshaded area in Fig. (10) indicates the part of Canada where rainfall rate statistics are available in this manner.

5.0 RAIN ATTENUATION PREDICTION PROGRAMS

In the present work, prediction programs have been developed and results for (i) rain attenuation exceedance for any P and (ii) link availability for any link margin are now available over an earth-satellite path in an EHF geostationary satellite link for most locations in Canada below 70°N (Fig. 10). The CCIR model and the Hodge Site Diversity model have been used for this purpose. The two data bases discussed earlier provide the required rain rate distribution. Details of the two programs developed in the present work are described now in terms of user input and sample outputs.

For the sample results included in this report, the satellite longitude has been arbitrarily set at 100°W . The altitude, h_0 , of the ground station site is assumed to be zero except for the locations in the "city database". In the latter cases, the altitude of the site has been taken into account. All of the results can be calculated with or without site diversity. The sample results included in this report correspond to the no site diversity case.

5.1 CANSLAM

"CANSLAM" stands for Canadian Satellite Link Attenuation Mapper. This program generates attenuation maps in three different styles for any input values assigned to the following satellite and network parameters:

- . Probability P, expressed as a percentage of an average year in 0.001% to 1.0% range, of exceedance of the calculated attenuation;
- . Link frequency f in the 10-45 GHz range;
- . Satellite longitude in 40°W- 150°W range;
- . Site diversity characteristics.

The results are available in following three formats:

In one format, contours over which attenuation exceeds the given values are plotted on a map of Canada. Figs. 11-19 give rain attenuation exceedance contours for Canada at 20, 30 and 44 GHz for three values of P. Five arbitrary attenuation exceedance values can be specified for these contours on one map. These contours can be plotted for the whole or a part of Canada. It is also possible to determine such contours either for a user specified region or for a preselected region. For convenience, three regions, Eastern Canada, Central Canada and the Prairie Provinces, have been defined. Figs. 20-39 show attenuation exceedance contours for such regions at 20, 30 and 44 GHz for the indicated values of P.

In an alternate presentation, the attenuation exceedance results are displayed in a latitude/longitude table without displaying any geographical boundaries. Two sub-styles are available: (1) Numerical Table, (2) Symbol Map. In a Numerical Table, attenuation exceeded for a specified percentage of time of an average year is displayed at every degree of latitude and at every two degrees of longitude for a region which is 14 degrees wide in latitude and 18 degrees

wide in longitude. The user specifies the central point of the region through its latitude/longitude coordinates and the program builds a data table around that point. Tables 3-50 give attenuation exceedance results for two values of P at 20, 30 and 44 GHz. Attenuation values of -1 or 0 are displayed for locations for which rain information is not available.

Alternatively, cross-Canada coverage, in contrast to a limited region coverage, giving attenuation exceeded values is available through a Symbol Map. Data presentation capability is however limited in this mode. Here, each symbol represents a range of attenuation values in contrast to the actual attenuation exceeded value depicted in the Numerical Tables. Figs. 40-48 give attenuation exceedance map for Canada for three values of P at 20, 30 and 44 GHz.

In the third format, the attenuation levels exceeded for a specified percentage of time are calculated for the locations included in the "city database" (see Table 1) in five different regions in Canada. Simplified coarse maps are produced which give the approximate location of each site and the corresponding attenuation exceedance value for the specified percentage of time. Figs. 49-63 give attenuation exceedance values for such locations in different regions in Canada at $P = 0.1\%$ of an average year at 20, 30 and 44 GHz.

5.2 CANSLAV

"CANSLAV" is a program that generates one way link availability A_v contours with a given link margin LM to overcome rain fade for an earth-satellite path in an EHF geostationary link. These contours can be plotted in two different formats for most of Canada for any combination of the following parameters:

- . Link Margin LM in 0-100 dB range to overcome rain fade;
- . Link Frequency in the 10-45 GHz range;
- . Satellite Longitude in 40°W-150°W range.

In one format, contours with constant values of system availability A_v are displayed for the whole or a part of Canada. Figs. 64-66 give link availability for Canada at 20, 30 and 44 GHz for the indicated values of link margin. Up to five different availability values can be specified on one map. As in Canslam, it is also possible to determine such results for a user specified region or for a preselected region. For convenience, three regions, Eastern Canada, Central Canada and the Prairie Provinces, have been selected. Figs. 67-78 show link availability contours for such regions at 20, 30 and 44 GHz for the indicated values of link margin.

In an alternate presentation, probability of system availability is calculated for the locations in five regions in Canada which are included in the "city database". Simplified coarse maps with no geographical boundaries are produced and approximate location of each site is indicated on the map. Figs. 79-93 show link availability for these locations at 20, 30 and 44 GHz for the indicated values of link margin.

6.0 DISCUSSION AND CONCLUSIONS

The main purpose of this work was to assess the extent of rain attenuation for EHF Satcom in Canada. This goal led to the development of a method to determine rain attenuation statistics at most locations below 70° N in Canada for an EHF Satcom system with arbitrary values of the link parameters. Geostationary orbits are assumed for all results in this work. This method is applicable to a system with non geostationary orbits also provided the elevation angle is calculated independently for each position of the satellite. The present work is directly applicable to the EHF Satcom system which is being studied currently for the

Department of National Defence. The representative results included in this report are only meant to give an idea of the range of attenuation levels encountered in various parts of the country.

It is clear from these results that an EHF Satcom system is quite feasible for Canada from the point of rain attenuation. This is because the high rainfall rates are limited to the Eastern region and a part of the Central region of the country. As a result, in general, the rain attenuation is high in parts of Eastern and Central Canada and gradually decreases as one moves to Western and Northern Canada. The rainfall rates and rain attenuation are particularly low in Northern Canada.

The system availability values range from low values in parts of Eastern and Central Canada, medium values in Western and most of Central Canada and high values in Northern Canada. For example, with a satellite at 100° W longitude and a link margin of 16 dB, system availability at 44 GHz (see Figs. 66, 75-78) is better than 99.9% of the time of an average year in all regions of the country except in some Eastern and Central areas. In Eastern and Central Canada, maximum attenuation level at 99.5% availability is ~ 11 dB (see Table 35). There is insufficient data for such results for the Western mountains. Similarly, at 20 GHz and a satellite at 100° W, the attenuation exceedance for $P = 0.1\%$ is higher than 6 dB in only some parts of Eastern and Central Canada (see Fig.12 and Tables 3,4). Thus, although the rain attenuation increases with frequency at a high rate, it is overall within a manageable range for most of Canada. For high rain rate regions, system diversity would be necessary to achieve higher link availability with feasible values of link margin. Reduction in rain attenuation in such regions can also be obtained by placing the satellite as far to the East as is permitted by other system considerations.

The attenuation exceedance and system availability results for the locations included in the "city database" are relatively more accurate than the corresponding results mentioned elsewhere in the report. This is due to the fact that a and P_0 for these sites were calculated from the experimental rain rate data at those locations rather than from the contours of a and P_0 for the whole country. Further, the altitude of the site is taken into account in the calculations. The calculated rain rate exceedance and the corresponding attenuation results at such sites may, however, still include a small error resulting from the use of the power law approximation to the actual rain rate distribution (see Eq.(33) and Fig.7). Further work is also needed to calculate worst month rain attenuation statistics from these results [14,15].

Using the present work, it is planned to develop a program which will calculate attenuation statistics for a network consisting of a limited number of stations at arbitrary locations in Canada. It would be useful to determine attenuation statistics for the whole network as a function of various system parameters such as satellite longitude, site diversity characteristics, frequency etc. This may be of particular interest in some special applications. Further, it may be possible to determine the rain rate exceedance at any probability for the stations with rain records more accurately than from the power law approximation used in this work. Worst month rain attenuation statistics can also be calculated for these stations.

7.0 ACKNOWLEDGEMENTS

The authors would like to thank Dr. B. Segal, Mr. J.J. Schlesak and Mr. C. Brochu for many helpful discussions pertaining to this work.

8.0 REFERENCES

1. S. M. Khanna, "Rain Attenuation Characteristics for Satellite Communications in 4 to 44 GHz Range for Different Regions in Canada", Proc. 12th Biennial Symposium on Communications", Queen's University, Kingston, Canada, (1984).
2. L.J. Ippolito, R.D. Kaul and R.G. Wallace, "Propagation Effects Handbook for Satellite Systems Design", NASA Reference Publication 1082 (03), 3rd ed., (1983).
3. L.J. Ippolito, "Radio Propagation for Space Communications Systems", Proc. IEEE, Vol. 69 ,p. 697 (1981).
4. J.O. Laws and D.A. Parsons, "The Relation of Raindrop-Size to Intensity", Trans. Amer. Geophys. Union, Vol 24, p.452 (1943).
5. R.L. Olsen, D.V. Rogers and D.B. Hodge, "The aR^b Relation in the Calculation of Rain Attenuation", IEEE Trans. Antennas Propagat., Vol. AP-26, p. 318, (1978).
6. CCIR Report 564-3, "Propagation Data and Prediction Required for earth Space Telecommunication Systems", (1986).
7. CCIR Report 721-1, "Attenuation by Hydrometeors, in particular, Precipitation, and other Atmospheric Particles", (1982).
8. K. Miya, (Ed.), "Satellite Communications Technology", Publisher: KDD Engineering and Consulting Inc., Tokyo, Japan, (1982).
9. D.B. Hodge, "An Improved Model for Diversity Gain on earth-Space Propagation Paths", Radio Science, Vol. 17, No. 6, p. 1393, (1982).
10. L.J. Ippolito, R.D. Kaul and R.G. Wallace, "Propagation Effects Handbook for Satellite Systems Design", NASA Reference Publication 1082 (03), 3rd ed., Fig. 6.5.1, p.282, (1983).
11. B. Segal, "High-Intensity Rainfall Statistics for Canada", CRC Report No. 1329-E, Department of Communications, Government of Canada, (1979).
12. B. Segal, Private Communication, Communications Research Center, Department of Communications, Government of Canada.

13. J. I. Strickland, Private Communication, Communications Research Center, Department of Communications, Government of Canada.
14. B. Segal, "The Estimation of Worst-Month Precipitation Attenuation Probabilities in Microwave Systems Design", Ann. Telecommunic., Vol. 35, p. 429, (1980).
15. CCIR Report 723-1, Worst-Month Statistics, (1986).

TABLE 1

VALUES OF THE PARAMETERS P_0 AND a
FOR THE RAINFALL RECORDING STATIONS

| | Location | (-a) | ($10^7 P_0$) | Data Years |
|----|--------------------------|-------|----------------|------------|
| 1 | Calgary, ALTA | 1.68 | 48.02 | 10 |
| 2 | Cambridge Bay, NWT | 1.760 | 3.926 | 5 |
| 3 | Caplan, QUE | 1.815 | 67.40 | 9 |
| 4 | Carmacks, YT | 2.11 | 6.026 | 10 |
| 5 | Central Patricia, ONT | 1.69 | 83.34 | 9 |
| 6 | Churchill, MAN | 2.49 | 4.764 | 10 |
| 7 | Comox, BC | 2.72 | 4.655 | 10 |
| 8 | Dauphin, MAN | 1.60 | 83.92 | 10 |
| 9 | Edmonton, ALTA | 1.70 | 69.67 | 10 |
| 10 | Fredericton, NB | 1.695 | 61.28 | 10 |
| 11 | Gagnon, QUE | 2.03 | 33.53 | 9 |
| 12 | Gander, NFLD | 2.14 | 26.24 | 10 |
| 13 | Geraldton, ONT | 1.70 | 52.15 | 10 |
| 14 | Goose Bay, NFLD | 1.91 | 27.24 | 9 |
| 15 | Halifax, NS | 1.995 | 148.4 | 18 |
| 16 | Hope, BC | 3.045 | 2.764 | 10 |
| 17 | Kentville, NS | 1.945 | 97.91 | 10 |
| 18 | Kingston, ONT | 1.75 | 104.4 | 10 |
| 19 | London, ONT | 1.69 | 187.6 | 20 |
| 20 | Mission, BC | 2.40 | 19.02 | 10 |
| 21 | Montreal, QUE | 1.663 | 158.6 | 10 |
| 22 | Moosonee, ONT | 1.84 | 62.68 | 6 |
| 23 | Normandin, QUE | 1.87 | 50.04 | 10 |
| 24 | North Bay, ONT | 1.70 | 163.2 | 10 |
| 25 | Ottawa, ONT | 1.675 | 151.9 | 10 |
| 26 | Poste de la Baleine, QUE | 2.115 | 18.84 | 5 |
| 27 | Prince Albert, SASK | 1.67 | 52.56 | 10 |
| 28 | Prince George, BC | 1.875 | 28.45 | 10 |
| 29 | Quebec, QUE | 1.79 | 160.4 | 10 |
| 30 | Regina, SASK | 1.65 | 75.18 | 20 |
| 31 | Saint John, NB | 1.915 | 127.2 | 10 |
| 32 | St. John's, NFLD | 2.075 | 95.57 | 10 |
| 33 | Sault Ste. Marie, ONT | 1.71 | 127.4 | 10 |
| 34 | Sioux Lookout, ONT | 1.695 | 118.1 | 10 |
| 35 | Stephenville, NFLD | 2.21 | 31.56 | 7 |
| 36 | Summerland, BC | 2.290 | 3.288 | 4 |
| 37 | Summerside, PEI | 2.15 | 22.05 | 9 |
| 38 | Swift Current, SASK | 1.74 | 46.36 | 10 |
| 39 | Sydney, NS | 2.15 | 58.14 | 10 |
| 40 | Toronto, ONT | 1.633 | 140.9 | 10 |
| 41 | Uranium City, SASK | 2.00 | 10.80 | 10 |
| 42 | Val d'Or, QUE | 1.705 | 105.4 | 10 |
| 43 | Vancouver, BC | 2.713 | 4.818 | 10 |
| 44 | Watino, ALTA | 1.775 | 22.83 | 9 |
| 45 | Weyburn, SASK | 1.51 | 85.95 | 10 |
| 46 | Windsor, ONT | 1.50 | 300.0 | 10 |
| 47 | Winnipeg, MAN | 1.59 | 142.0 | 10 |

TABLE 2

**LATITUDE, LONGITUDE AND ALTITUDE
OF THE RAINFALL RECORDING STATIONS**

| | Location | Lat deg min | Long deg min | Altitude (m) |
|----|--------------------------|----------------|-----------------|-----------------|
| 1 | Calgary, ALTA | 51 06 | 114 01 | 1079 |
| 2 | Cambridge Bay, NWT | 69 06 | 105 07 | 23 |
| 3 | Caplan, QUE | 48 06 | 065 39 | 37 |
| 4 | Carmacks, YT | 62 06 | 136 18 | |
| 5 | Central Patricia, ONT | 51 30 | 090 09 | 373 |
| 6 | Churchill, MAN | 58 45 | 094 04 | 35 |
| 7 | Comox, BC | 49 43 | 124 54 | 24 |
| 8 | Dauphin, MAN | 51 06 | 100 03 | 305 |
| 9 | Edmonton, ALTA | 53 34 | 113 31 | 677 |
| 10 | Fredericton, NB | 45 55 | 066 37 | 40 |
| 11 | Gagnon, QUE | 51 57 | 068 08 | 572 |
| 12 | Gander, NFLD | 48 57 | 054 34 | 147 |
| 13 | Geraldton, ONT | 49 41 | 086 57 | 330 |
| 14 | Goose Bay, NFLD | 53 19 | 060 25 | 44 |
| 15 | Halifax, NS | 44 38 | 063 30 | 41 |
| 16 | Hope, BC | 49 23 | 121 26 | 39 |
| 17 | Kentville, NS | 45 04 | 064 29 | 31 |
| 18 | Kingston, ONT | 44 14 | 076 29 | 104 |
| 19 | London, ONT | 43 02 | 081 09 | 278 |
| 20 | Mission, BC | 49 09 | 122 16 | 56 |
| 21 | Montreal, QUE | 45 28 | 073 45 | 30 |
| 22 | Moosonee, ONT | 51 16 | 080 39 | 10 |
| 23 | Normandin, QUE | 48 51 | 072 32 | 137 |
| 24 | North Bay, ONT | 46 22 | 079 25 | 369 |
| 25 | Ottawa, ONT | 45 23 | 075 43 | 126 |
| 26 | Poste de la Baleine, QUE | 55 17 | 077 46 | 26 |
| 27 | Prince Albert, SASK | 53 13 | 105 41 | 431 |
| 28 | Prince George, BC | 53 53 | 122 40 | 676 |
| 29 | Quebec, QUE | 46 48 | 071 23 | 75 |
| 30 | Regina, SASK | 50 26 | 104 40 | 573 |
| 31 | Saint John, NB | 45 19 | 065 53 | 107 |
| 32 | St. John's, NFLD | 47 37 | 052 45 | 141 |
| 33 | Sault Ste. Marie, ONT | 46 29 | 084 30 | 347 |
| 34 | Sioux Lookout, ONT | 50 07 | 091 54 | 374 |
| 35 | Stephenville, NFLD | 48 32 | 058 33 | 13 |
| 36 | Summerland, BC | 49 34 | 119 39 | 454 |
| 37 | Summerside, PEI | 46 26 | 063 50 | 24 |
| 38 | Swift Current, SASK | 50 16 | 107 44 | 816 |
| 39 | Sydney, NS | 46 10 | 060 03 | 60 |
| 40 | Toronto, ONT | 43 41 | 079 38 | 176 |
| 41 | Uranium City, SASK | 59 34 | 108 29 | 312 |
| 42 | Val d'Or, QUE | 48 03 | 077 47 | 338 |
| 43 | Vancouver, BC | 49 11 | 123 10 | 3 |
| 44 | Watino, ALTA | 55 43 | 117 37 | |
| 45 | Weyburn, SASK | 49 40 | 103 51 | 567 |
| 46 | Windsor, ONT | 42 16 | 082 58 | 194 |
| 47 | Winnipeg, MAN | 49 54 | 097 14 | 240 |

Figs. 11-19
(pages 36-44)

Rain attenuation exceedance contours for a major part of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the following values of P.


The legend gives the attenuation exceedance values for the contours. The longitude of the satellite is 100° W and there is no site diversity. The latitude and longitude of the boundaries are indicated. The min. and max. attenuation exceedance values over the region are also shown.

Frequency

Percentage P of time of an average year when the rain attenuation exceeds the value corresponding to a contour.

| | |
|--------|-----------------|
| 20 GHz | (1) P = 0.5% ; |
| | (2) P = 0.1% ; |
| | (3) P = 0.01% . |
| 30 GHz | (1) P = 1.0% ; |
| | (2) P = 0.5% ; |
| | (3) P = 0.1% . |
| 44 GHz | (1) P = 1.0% ; |
| | (2) P = 0.5% ; |
| | (3) P = 0.1% . |


| LEGEND | |
|--------|----------|
| 0 | = 1.0 dB |
| X | = 1.5 dB |
| △ | = 2.0 dB |
| □ | = 2.5 dB |
| * | = 3.5 dB |

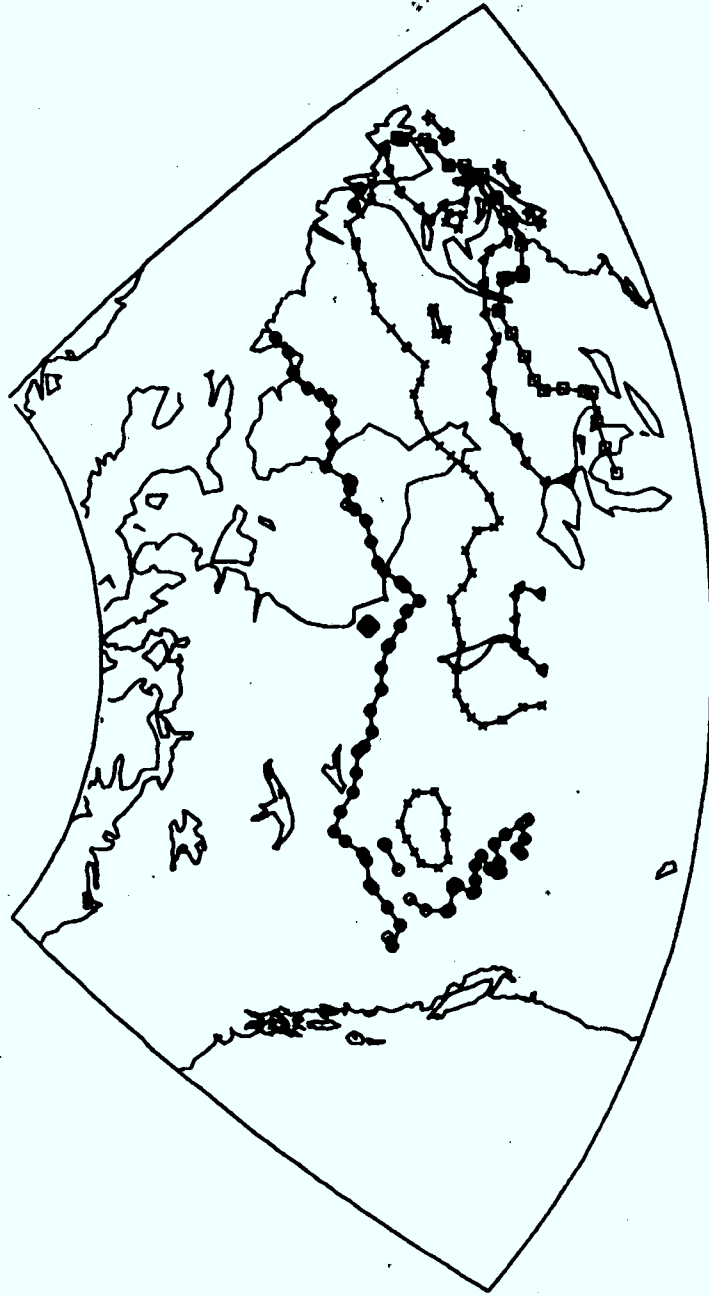

CANSLAM; S LONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 0.23, 3.87 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 11


| LEGEND | |
|--------|----------|
| 0 | = 2.0 dB |
| X | = 3.0 dB |
| △ | = 4.0 dB |
| □ | = 6.0 dB |
| * | = 8.0 dB |

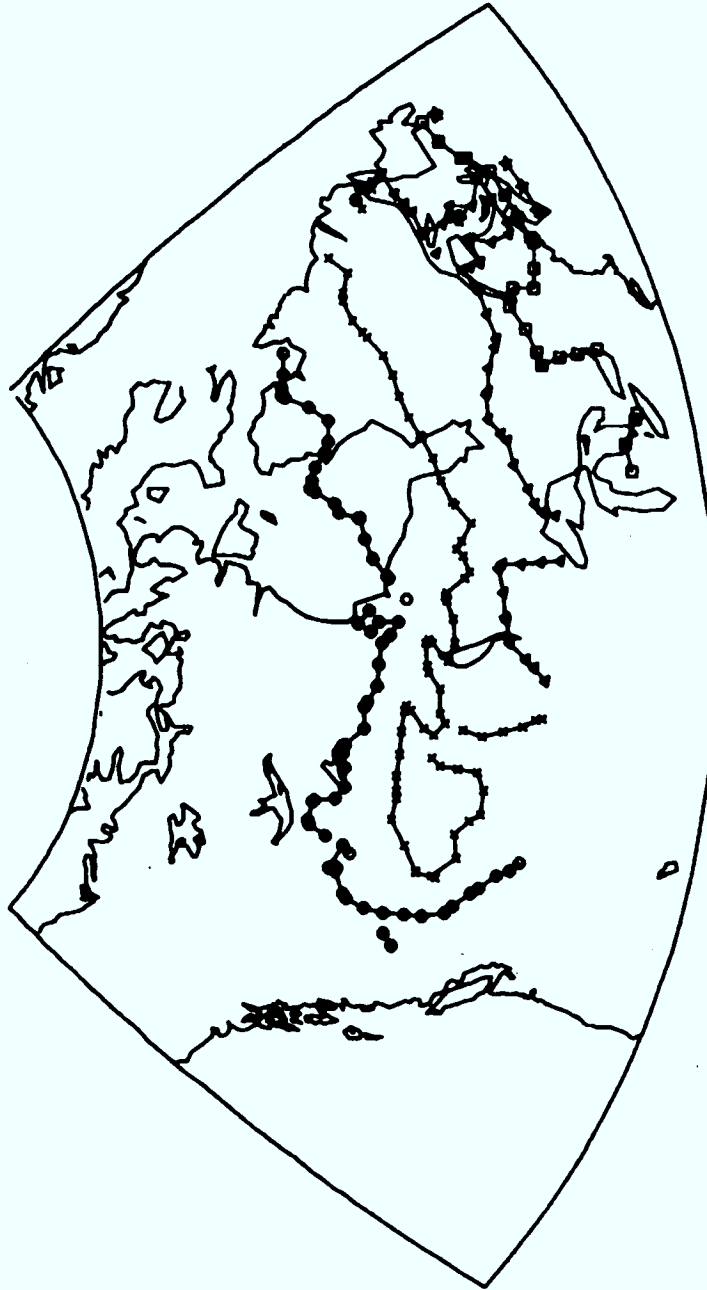

CANSLAM, SLONG: 100.0 DEG, FREQ.: 20.0 GHz, SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 0.51, 8.51 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 12

| LEGEND | |
|--------|-----------|
| 0 | = 4.0 dB |
| X | = 8.0 dB |
| △ | = 12.0 dB |
| □ | = 16.0 dB |
| * | = 20.0 dB |

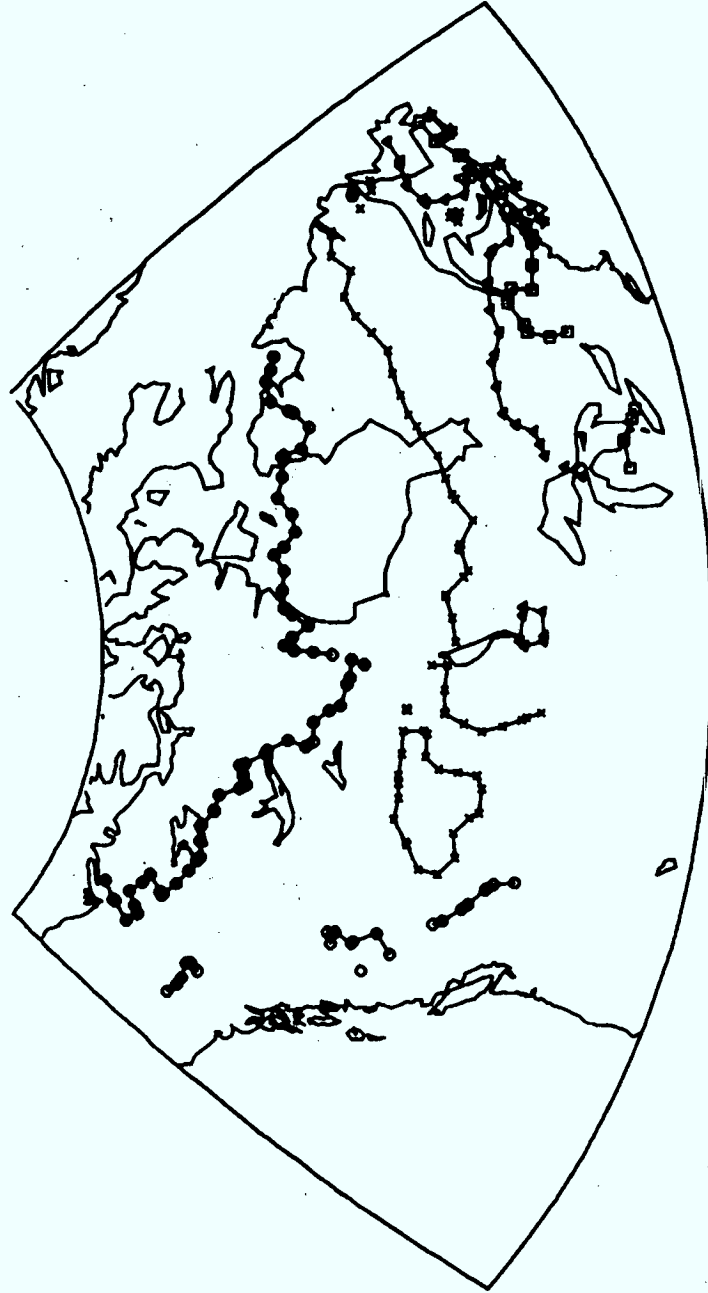

CANSLAM; SLONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.010% OF YR MIN, MAX: 1.32, 22.22 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 13

| LEGEND | |
|--------|----------|
| 0 | = 1.0 dB |
| X | = 2.0 dB |
| △ | = 3.0 dB |
| □ | = 4.0 dB |
| * | = 5.0 dB |



CANSLAM; SLONG: 100.0 FREQ.: 30.0 GHz SITE DIV.: N
EXCEEDANCE FOR 1.000X OF YR MIN, MAX: 0.36, 5.05 dB
CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 14

| LEGEND | |
|--------|----------|
| 0 | = 1.0 dB |
| X | = 2.5 dB |
| △ | = 4.0 dB |
| □ | = 5.5 dB |
| * | = 7.0 dB |



CANSLAM; S LONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
EXCEEDANCE FOR 0.500X OF YR MIN, MAX: 0.52, 7.30 dB
CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 15


| LEGEND | |
|--------|-----------|
| O | = 3.0 dB |
| X | = 6.0 dB |
| △ | = 9.0 dB |
| □ | = 12.0 dB |
| # | = 15.0 dB |



CANSLAM; S LONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
EXCEEDANCE FOR 0.100% OF YR MIN; MAX: 1.14, 16.07 dB
CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 16


| LEGEND | |
|--------|----------|
| 0 | = 2.5 dB |
| X | = 3.5 dB |
| △ | = 4.5 dB |
| □ | = 5.5 dB |
| * | = 7.0 dB |

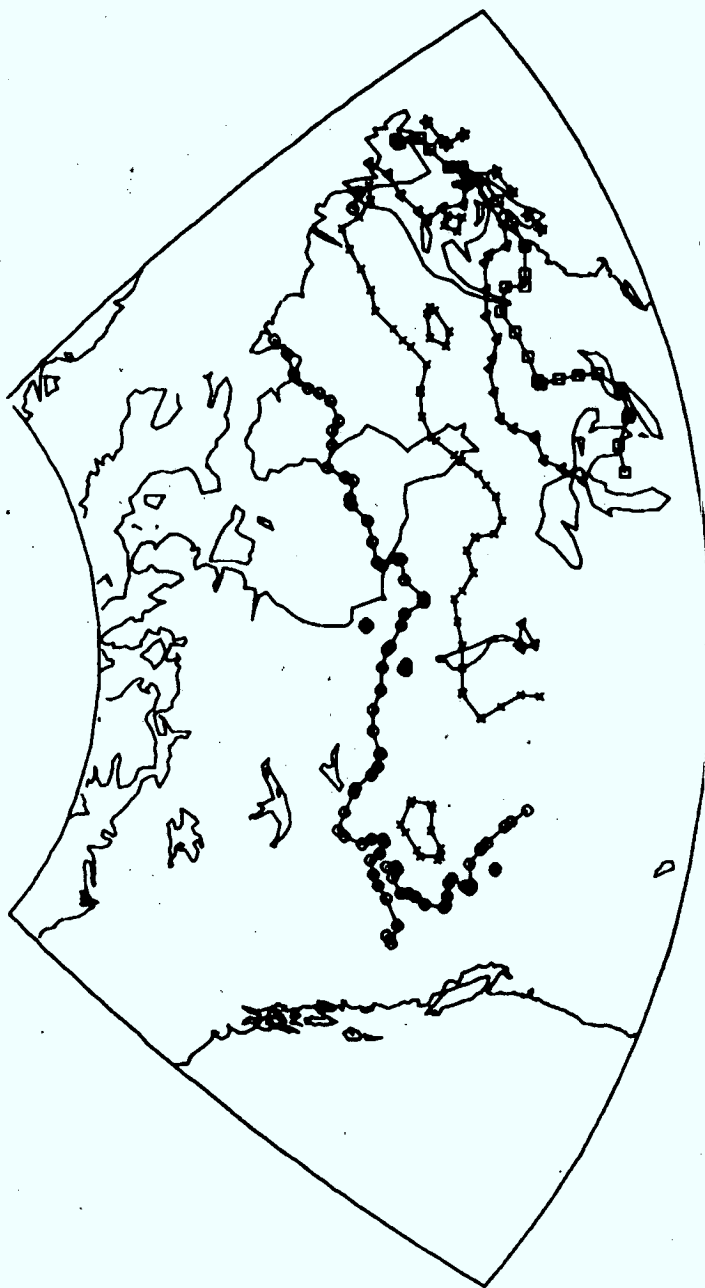

CANSLAM; SLONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 1.000% OF YR MIN, MAX: 0.72, 7.76 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 17


| LEGEND | |
|--------|-----------|
| 0 | = 3.0 dB |
| X | = 4.5 dB |
| △ | = 6.0 dB |
| □ | = 8.0 dB |
| * | = 10.0 dB |

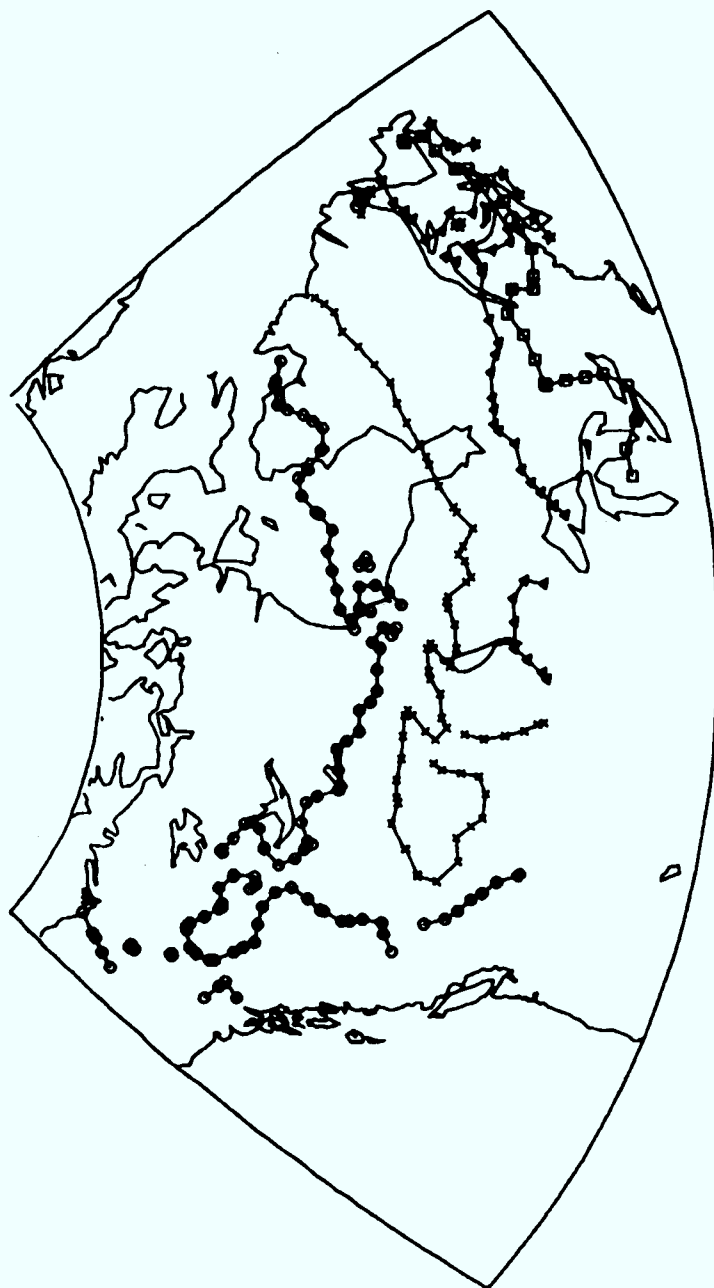

CANSLAM; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIU.: N
 EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 1.04, 11.23 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 18

| LEGEND | |
|--------|-----------|
| 0 | = 6.0 dB |
| X | = 10.0 dB |
| △ | = 14.0 dB |
| □ | = 18.0 dB |
| * | = 22.0 dB |

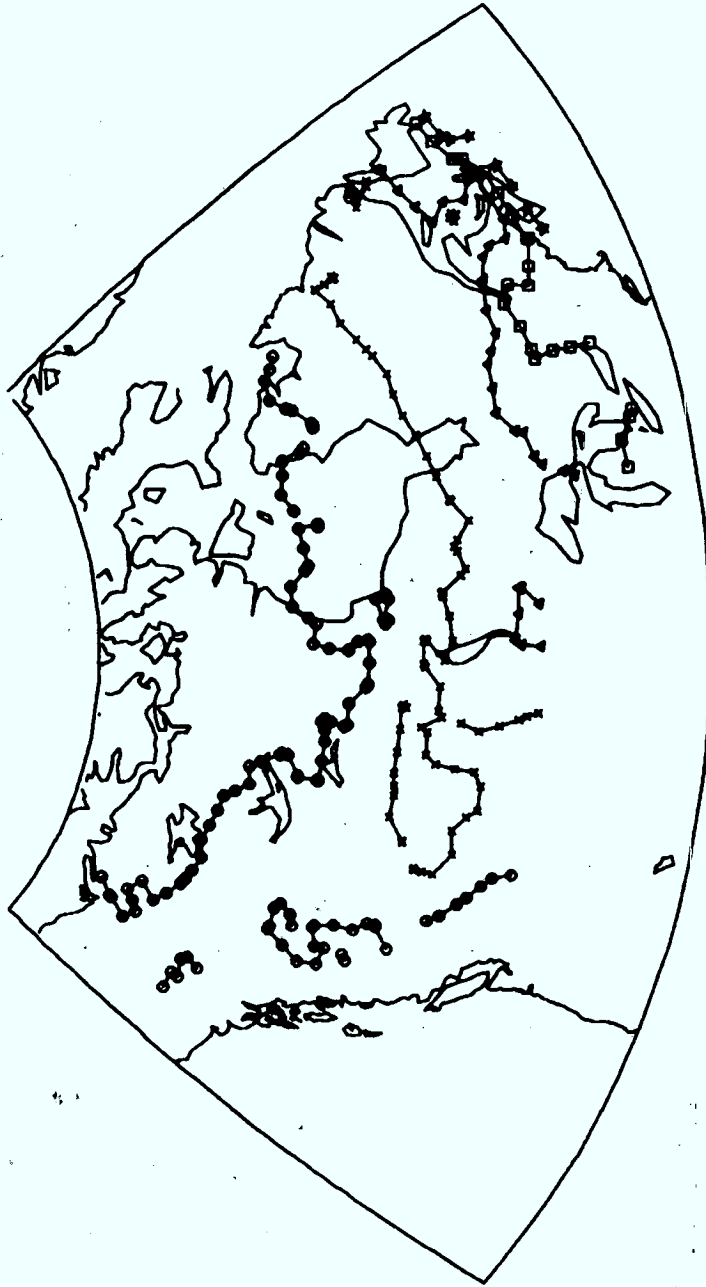

CANSLAM; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 2.28, 24.72 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 19

Figs. 20-39
(pages 46-65)

Rain attenuation exceedance contours for four selected regions in Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the following values of P.


The legend gives the attenuation exceedance values for the contours. The longitude of the satellite is 100° W and there is no site diversity. The latitude and longitude of the boundaries are indicated. The min. and max. attenuation exceedance values over the region are also shown.

Frequency

Percentage P of time of an average year when the rain attenuation exceeds the value corresponding to a contour.

| | |
|--------|----------------|
| 20 GHz | (1) P = 0.5% ; |
| | (2) P = 0.1% . |
| 30 GHz | (1) P = 0.1% ; |
| 44 GHz | (1) P = 0.5% ; |
| | (2) P = 0.1% . |


| LEGEND | |
|--------|--------|
| ○ | 1.5 dB |
| X | 2.0 dB |
| △ | 2.5 dB |
| □ | 3.0 dB |
| * | 3.5 dB |

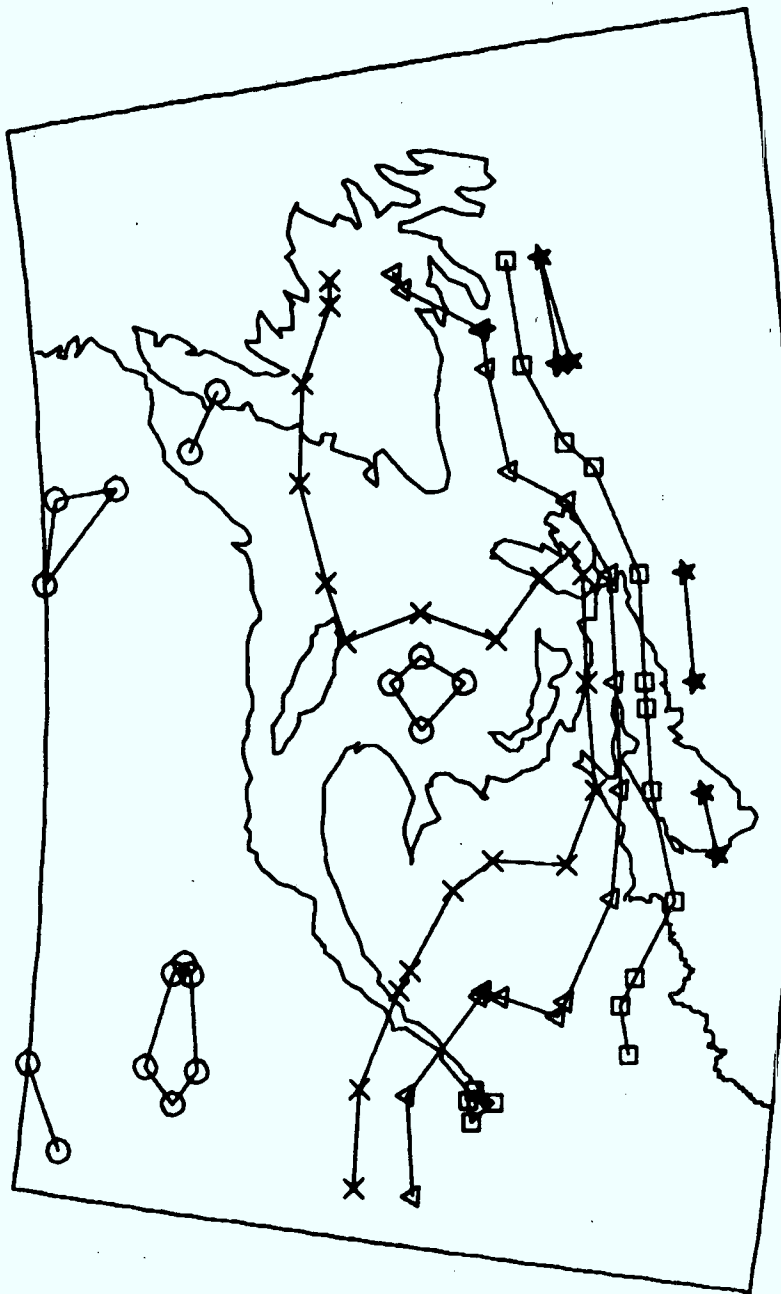

CANSLAM; S LONG: 100.0 FREQ.: 20.0 GHz SITE DIV.: N
EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 0.51, 3.87 dB
EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 20


| LEGEND | |
|--------|--------|
| • | 1.7 dB |
| X | 2.1 dB |
| △ | 2.5 dB |
| □ | 2.9 dB |
| * | 3.1 dB |

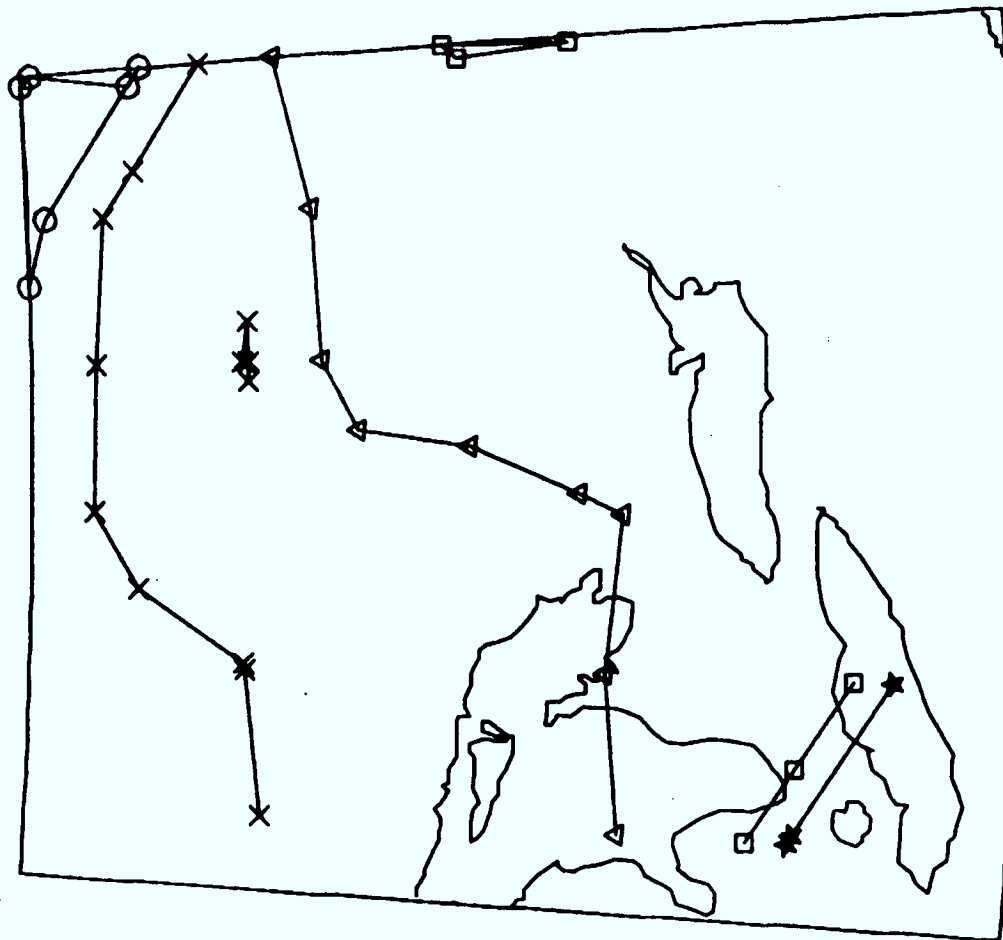

CANSLAM; S LONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 1.59, 3.16 dB
 CENTRAL CAN. LONMN 84 LONMX 73 LATMN 41 LATMX 50

Fig. 21


| LEGEND | |
|--------|--------|
| 0 | 0.6 dB |
| X | 1.0 dB |
| △ | 1.5 dB |
| □ | 2.0 dB |

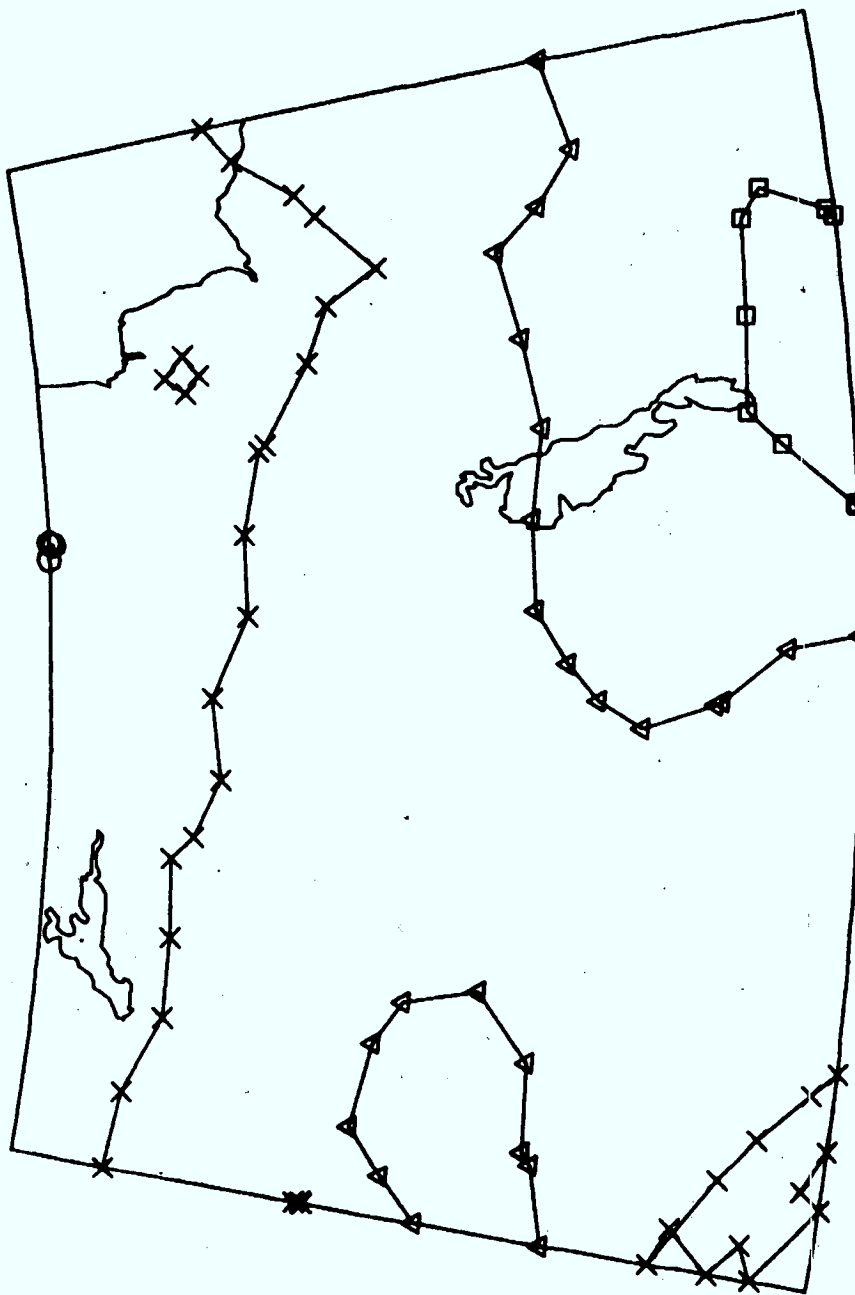

CANSLAM, SLONG: 100.0 FREQ.: 20.0 GHz SITE DIV.: N
 EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 0.59, 2.20 dB
 PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 22


| LEGEND | |
|--------|--------|
| ○ | 1.5 dB |
| × | 2.0 dB |
| △ | 2.5 dB |
| □ | 3.0 dB |
| * | 3.5 dB |

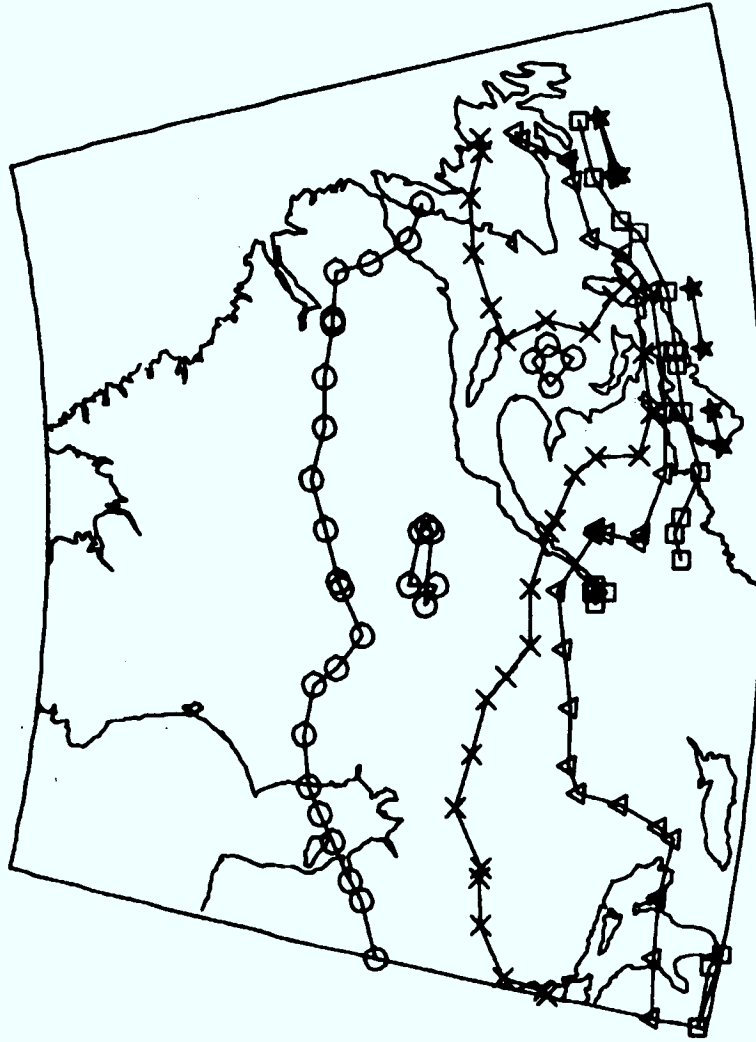

CANSLAM; SLONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 0.51, 3.87 dB
 USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 23


| LEGEND | |
|--------|--------|
| 0 | 2.5 dB |
| X | 3.5 dB |
| △ | 4.5 dB |
| □ | 6.0 dB |
| * | 8.0 dB |

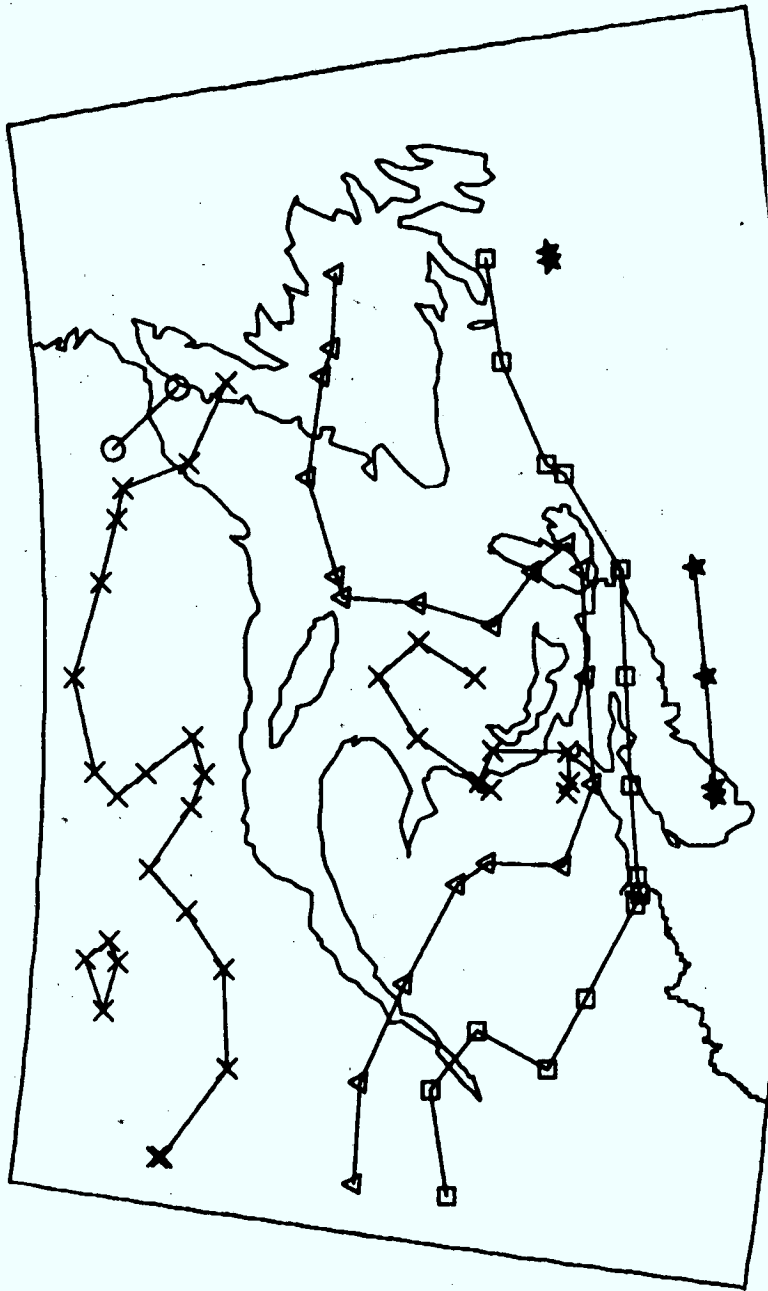

CANSLAM, SLONG: 100.0 FREQ.: 20.0 GHz SITE DIV.: N
EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 1.12, 8.51 dB
EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 24


| LEGEND | |
|--------|----------|
| ○ | = 4.5 dB |
| X | = 5.0 dB |
| △ | = 5.5 dB |
| □ | = 6.0 dB |
| * | = 6.5 dB |

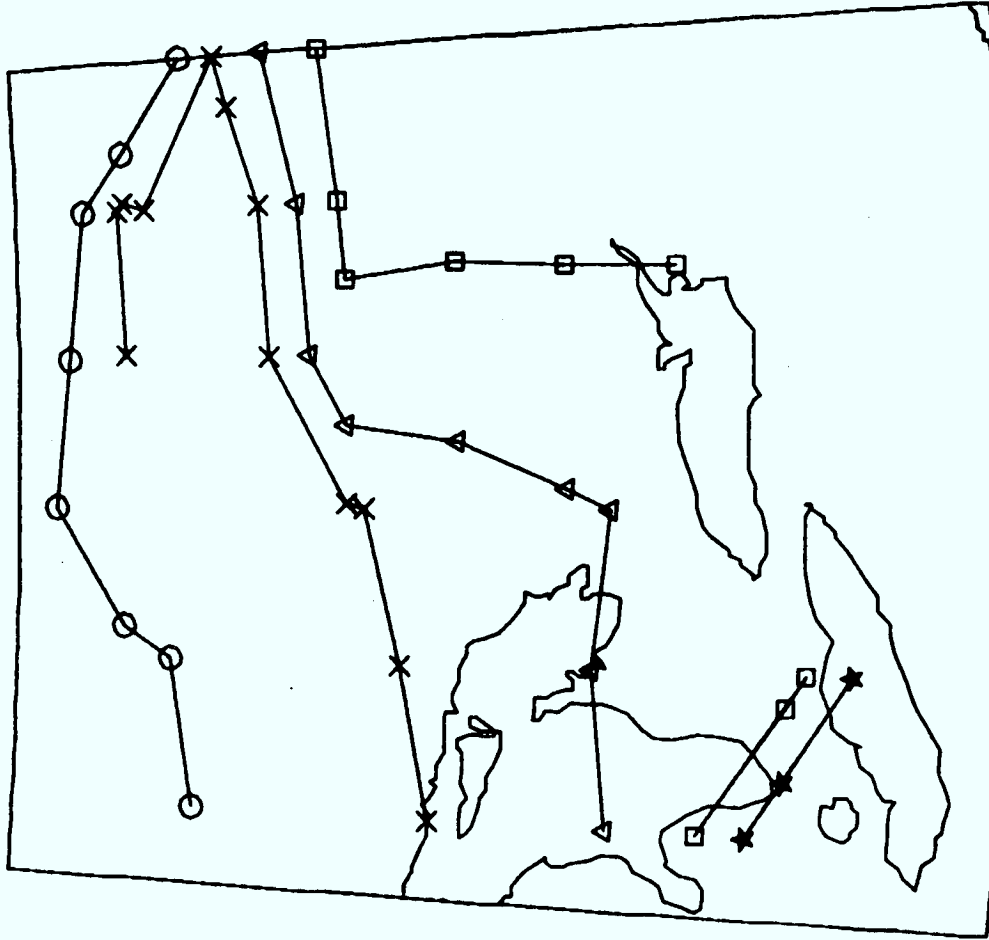

CANSLAM; S LONG: 100.0 DEG; FREQ.: 20.0 GHz; SITE DIV.: N
EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 3.49, 6.96 dB
CENTRAL CAN. LONMN 84 LONMX 73 LATMN 41 LATMX 50

Fig. 25


| LEGEND | |
|--------|--------|
| ○ | 2.0 dB |
| X | 2.5 dB |
| △ | 3.0 dB |
| □ | 3.5 dB |
| * | 4.5 dB |

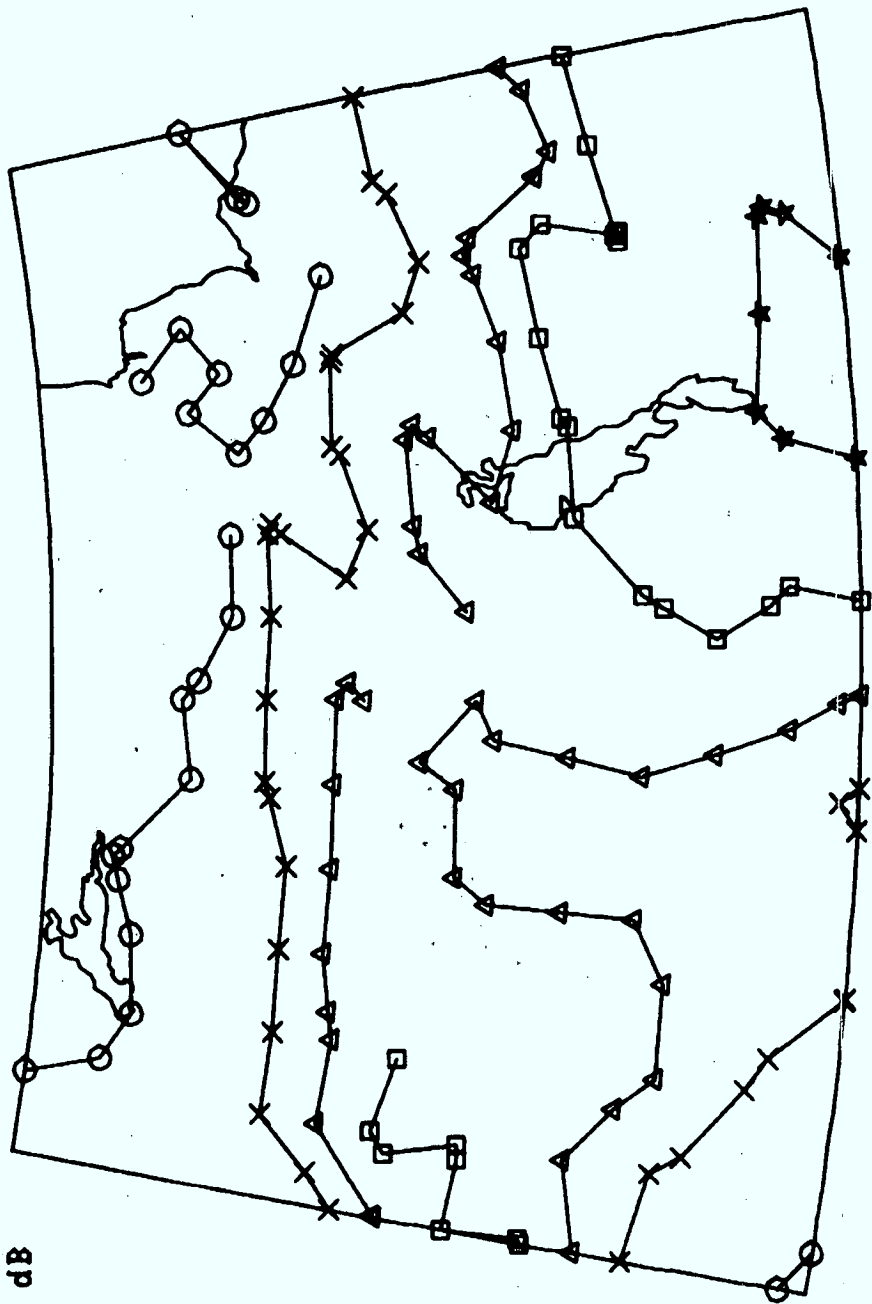

CANSLAM; S LONG: 100.0 FREQ.: 20.0 GHZ SITE DIU.: N
 EXCEEDANCE FOR 0.100% OF YR MIN. MAX: 1.31, 4.84 dB
 PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 26


| LEGEND | |
|--------|----------|
| ○ | = 2.5 dB |
| × | = 3.5 dB |
| △ | = 4.5 dB |
| □ | = 6.0 dB |
| * | = 8.0 dB |

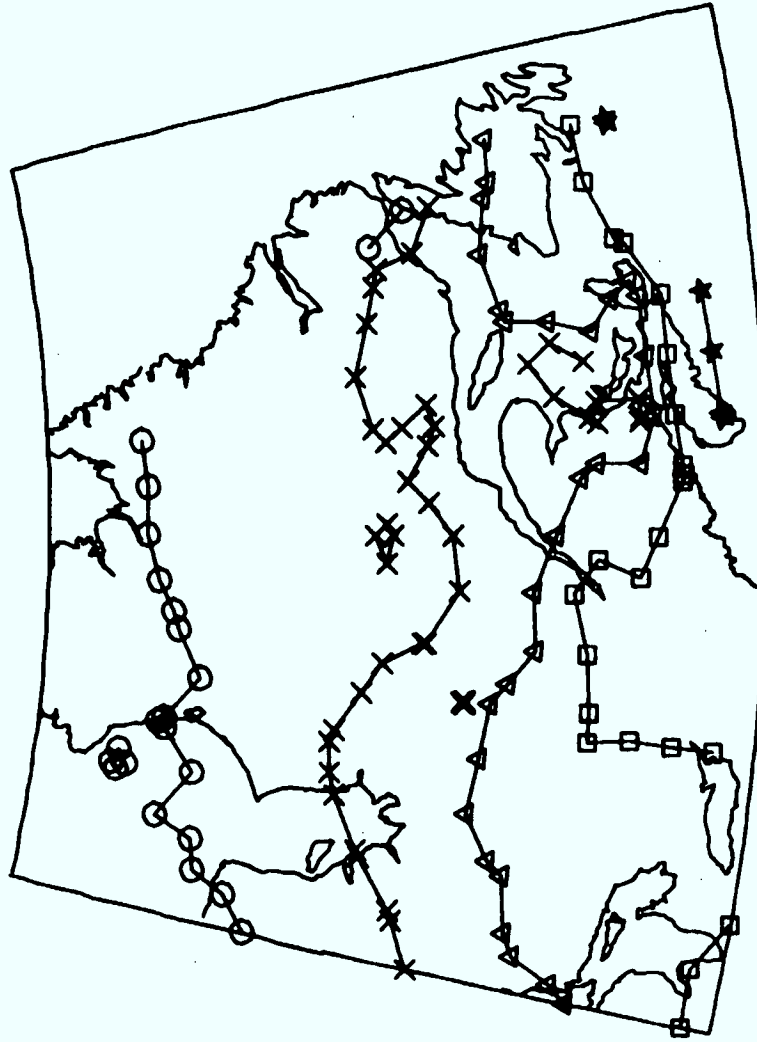

CANSLAM; SLONG: 100.0 FREQ.: 20.0 GHz SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 1.12, 8.51 dB
 USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 27


| LEGEND | |
|--------|---------|
| ○ | 3.0 dB |
| X | 6.0 dB |
| △ | 9.0 dB |
| □ | 12.0 dB |
| * | 16.0 dB |

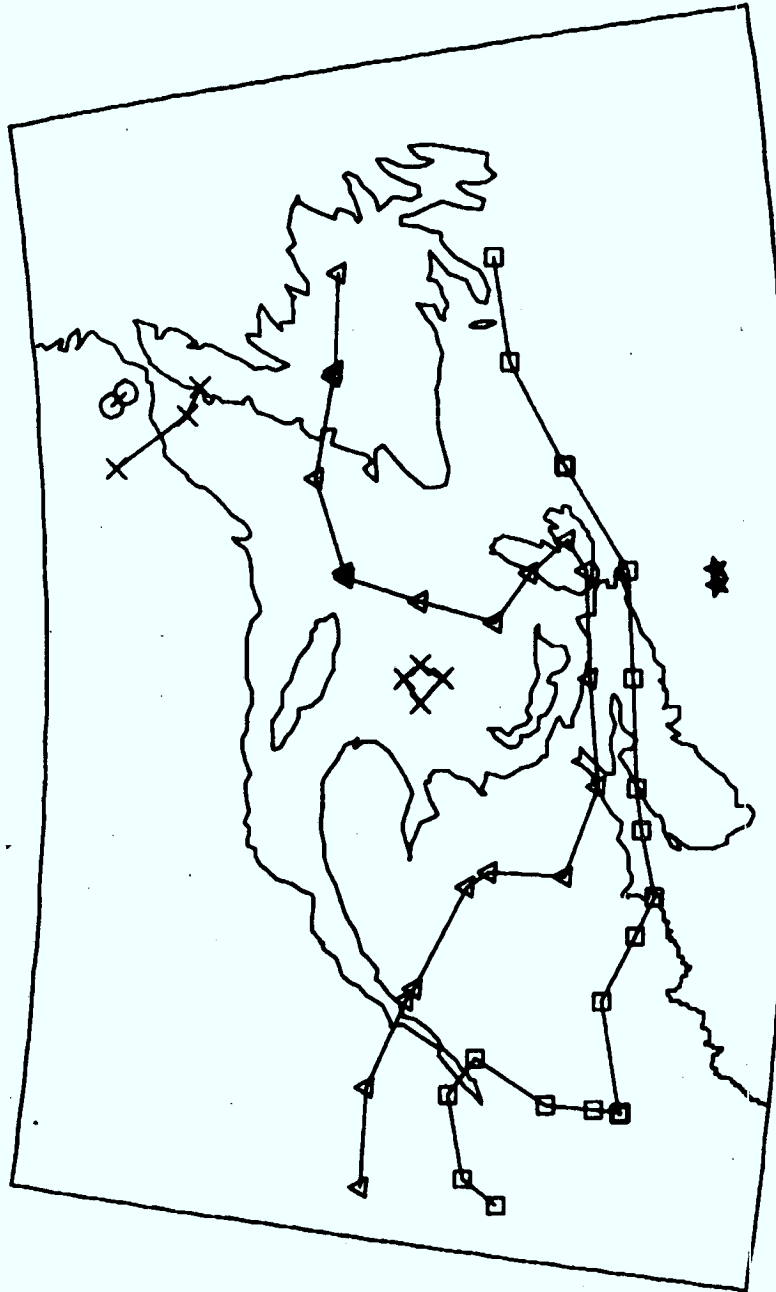

CANSLAM; S LONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
EXCEEDANCE FOR 0.100% OF YR MIN; MAX: 2.43, 16.07 dB
EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 28


| LEGEND | |
|--------|---------|
| ○ | 7.0 dB |
| x | 8.5 dB |
| △ | 10.0 dB |
| □ | 11.5 dB |
| * | 13.0 dB |

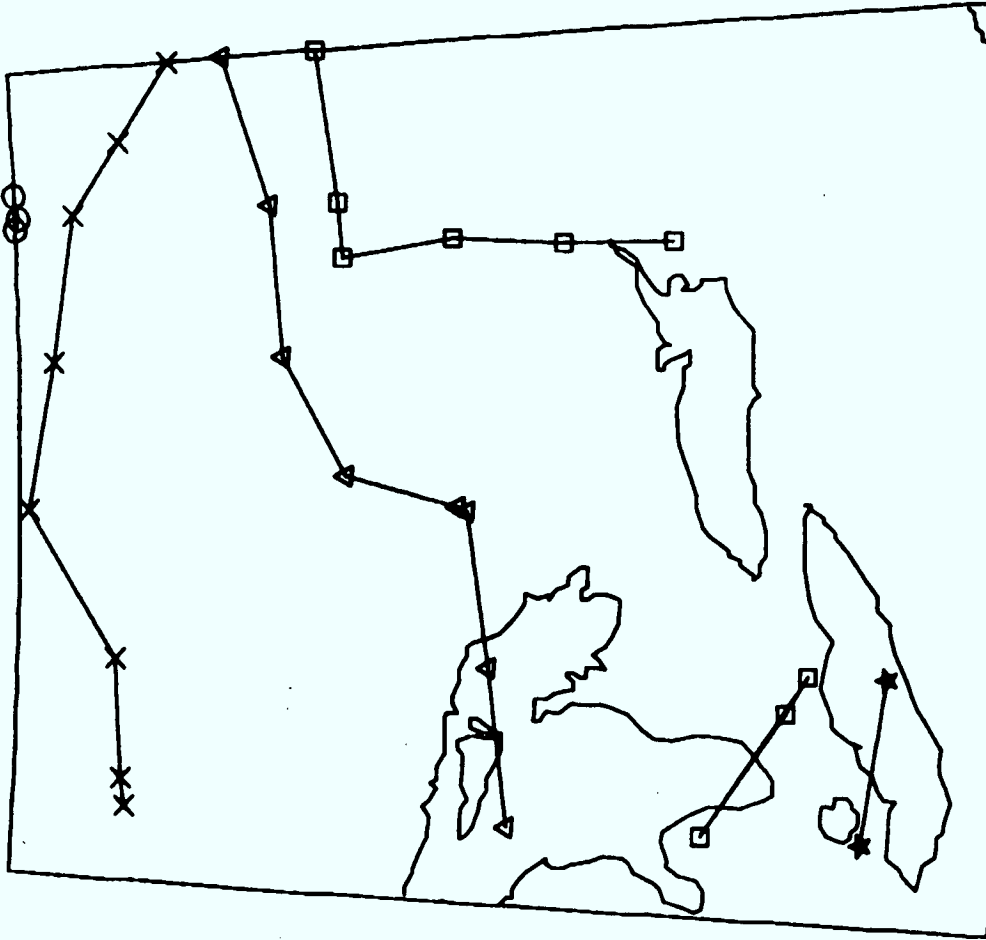

CANSLAM; S LONG: 100.0 DEG; FREQ.: 30.0 GHZ; SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 6.92, 13.16 dB
 CENTRAL CAN. LONMX 84 LONMN 73 LATMX 41 LATMN 50

Fig. 29


| LEGEND | |
|--------|--------|
| ○ | 4.0 dB |
| X | 5.0 dB |
| △ | 6.0 dB |
| □ | 7.0 dB |
| * | 9.0 dB |

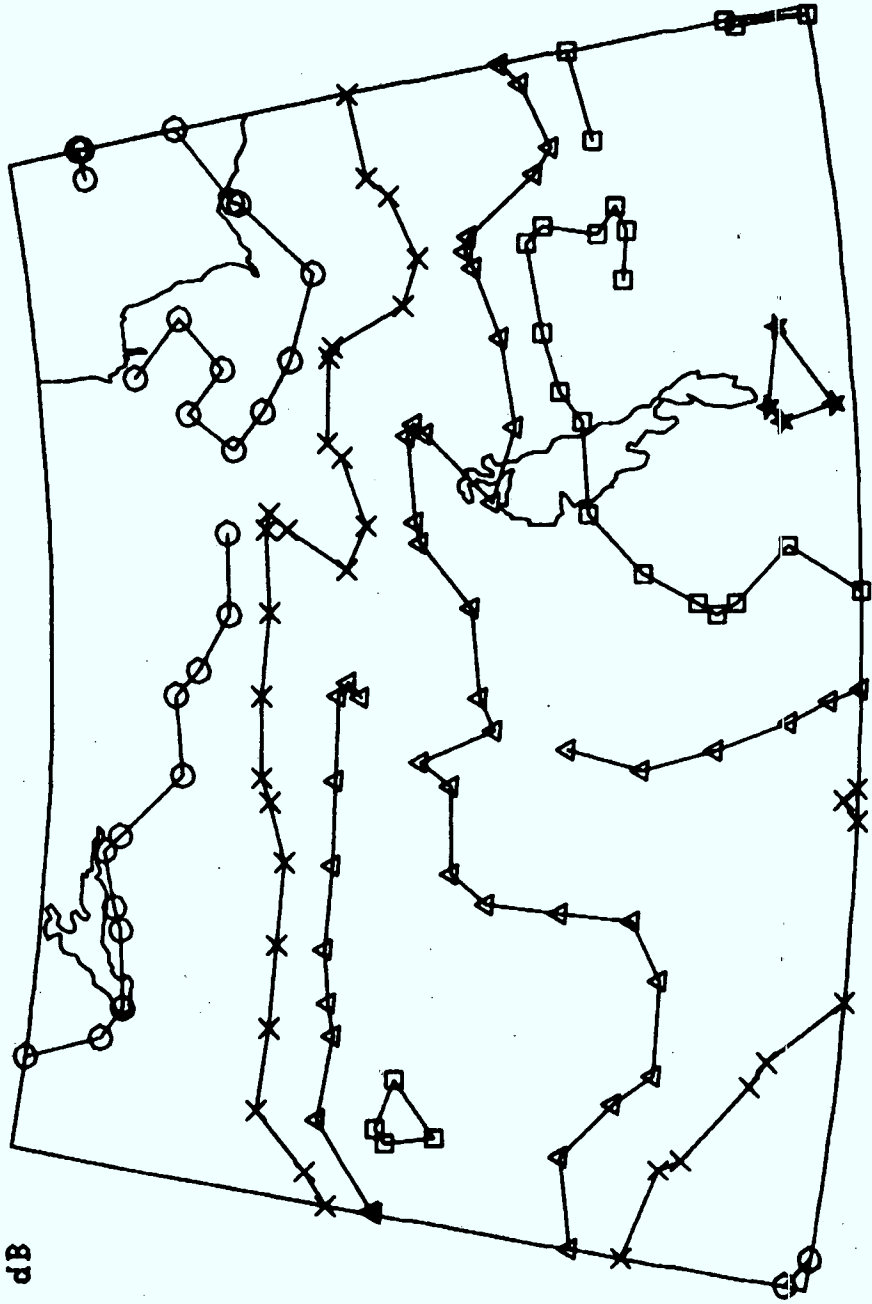

CANSLAM; SLONG: 100.0 DEG; 30.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 2.76, 9.33 dB
 PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 30


| LEGEND | |
|--------|-----------|
| ○ | - 3.0 dB |
| × | - 6.0 dB |
| △ | - 9.0 dB |
| □ | - 12.0 dB |
| * | - 16.0 dB |

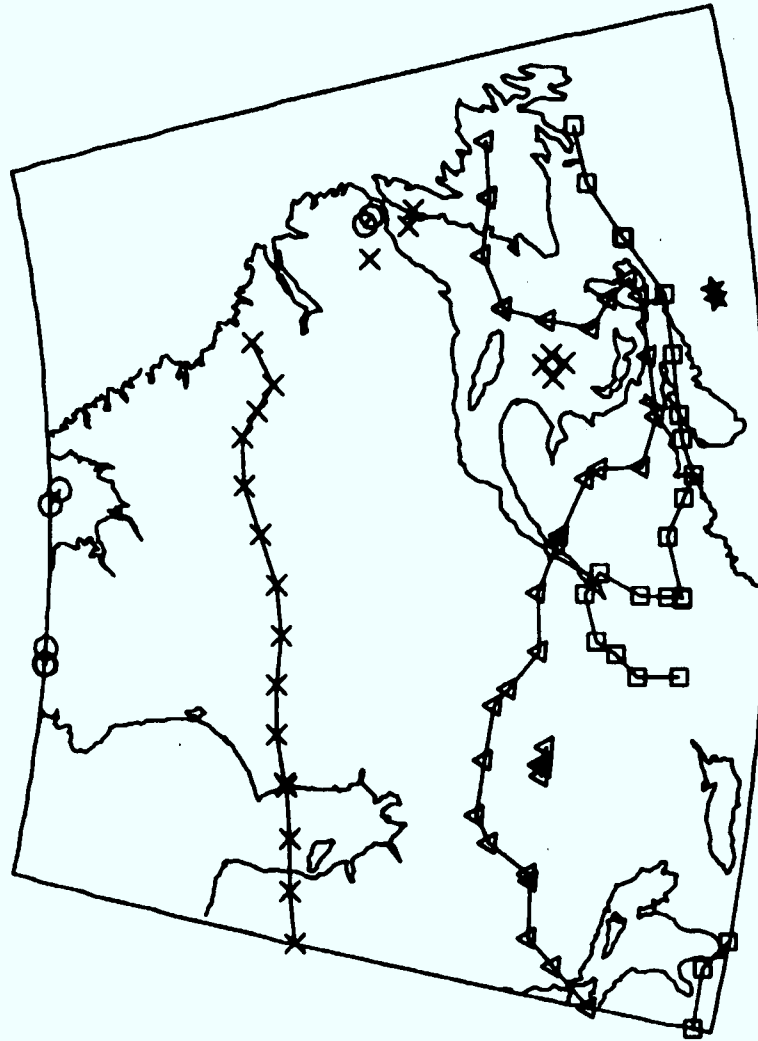

CANSLAM; SLONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
EXCEEDANCE FOR 0.10% OF YR MIN, MAX: 2.43, 16.07 dB
USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 31


| LEGEND | |
|--------|----------|
| O | = 5.0 dB |
| X | = 6.0 dB |
| △ | = 7.0 dB |
| □ | = 8.0 dB |
| * | = 9.0 dB |

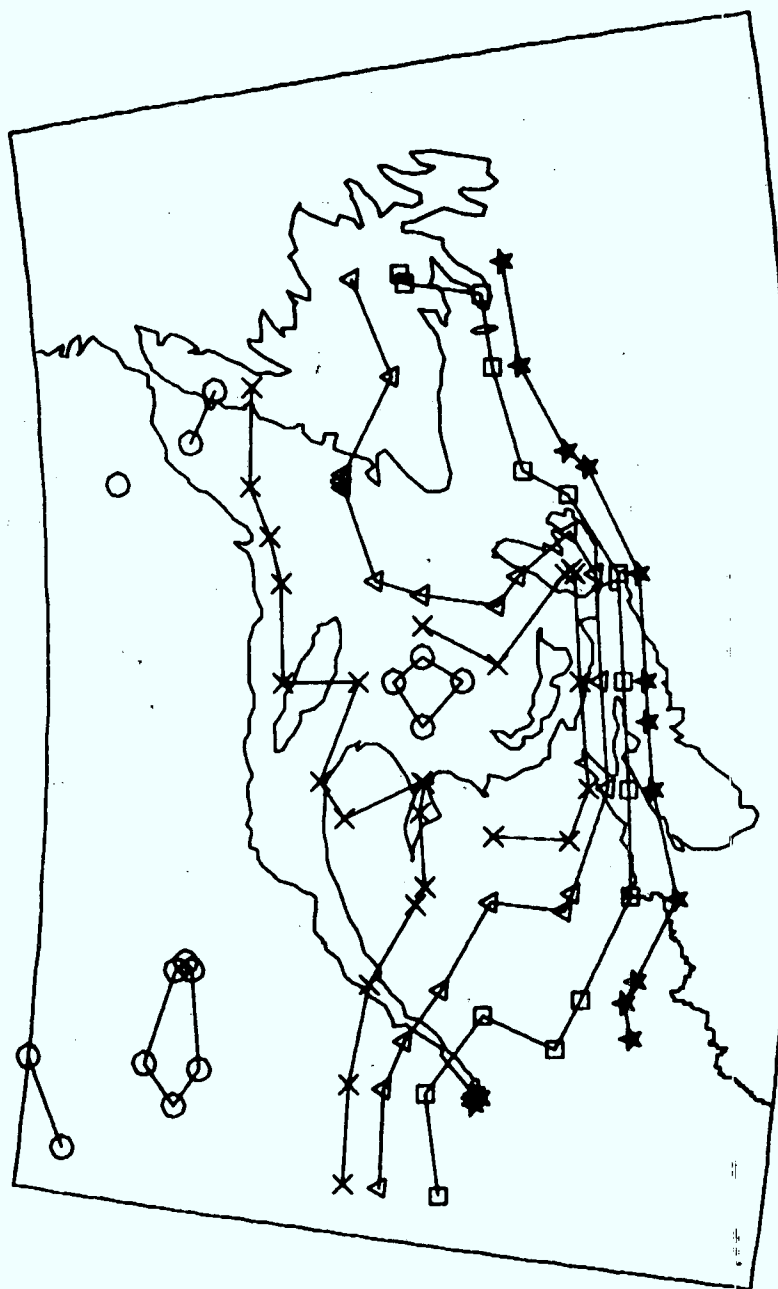

CANSLAM; SLONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
EXCEEDANCE FOR 0.50% OF YR MIN, MAX: 2.08, 11.23 dB
EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 32


| LEGEND | |
|--------|----------|
| ○ | = 6.0 dB |
| X | = 6.5 dB |
| △ | = 7.0 dB |
| □ | = 7.5 dB |
| * | = 8.0 dB |

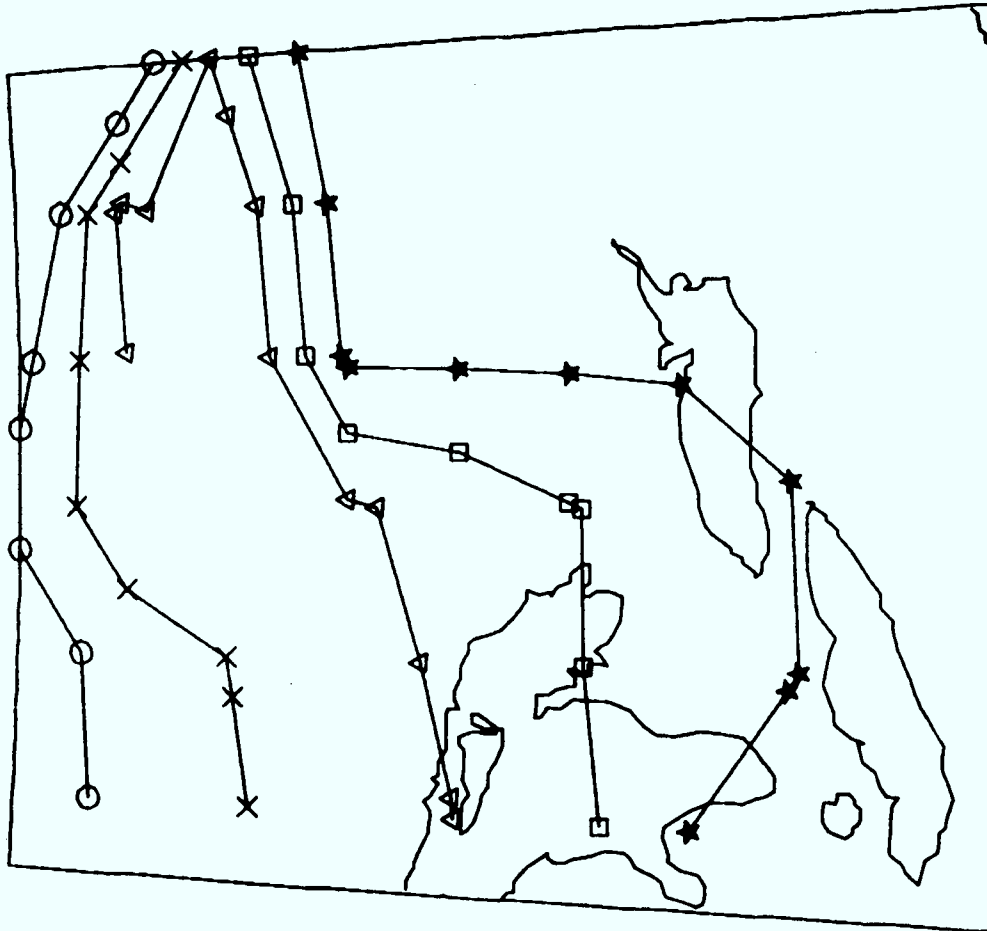

CANSLAM; SLONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 5.19, 9.19 dB
 CENTRAL CAN. LONMN 84 LONMX 73 LATMN 41 LATMX 50

Fig. 33


| LEGEND | |
|--------|----------|
| O | = 3.0 dB |
| X | = 3.5 dB |
| △ | = 4.0 dB |
| □ | = 4.5 dB |
| * | = 5.0 dB |

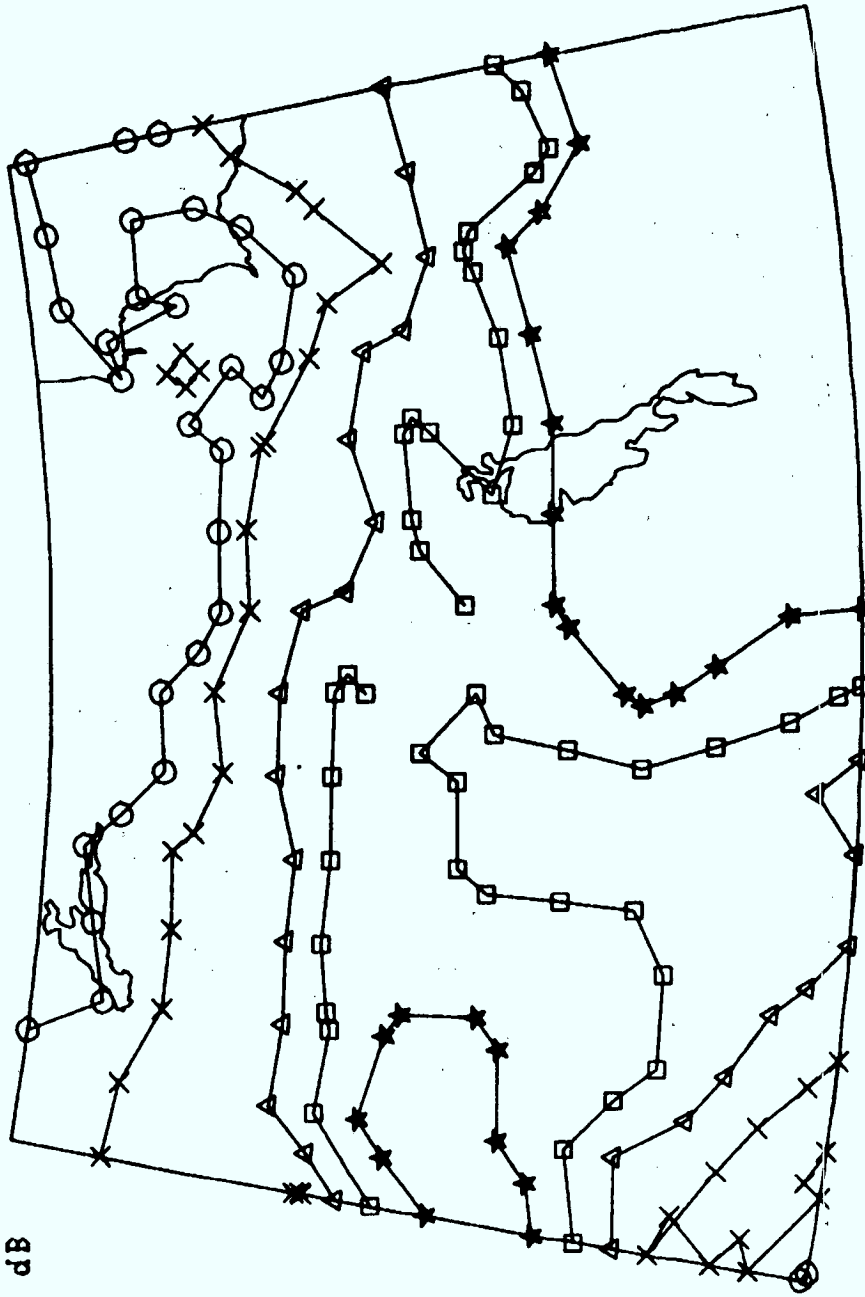

CANSLAM; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 2.26, 6.71 dB
 PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 34


| LEGEND | |
|--------|----------|
| ○ | = 5.0 dB |
| X | = 6.0 dB |
| △ | = 7.0 dB |
| □ | = 8.0 dB |
| * | = 9.0 dB |

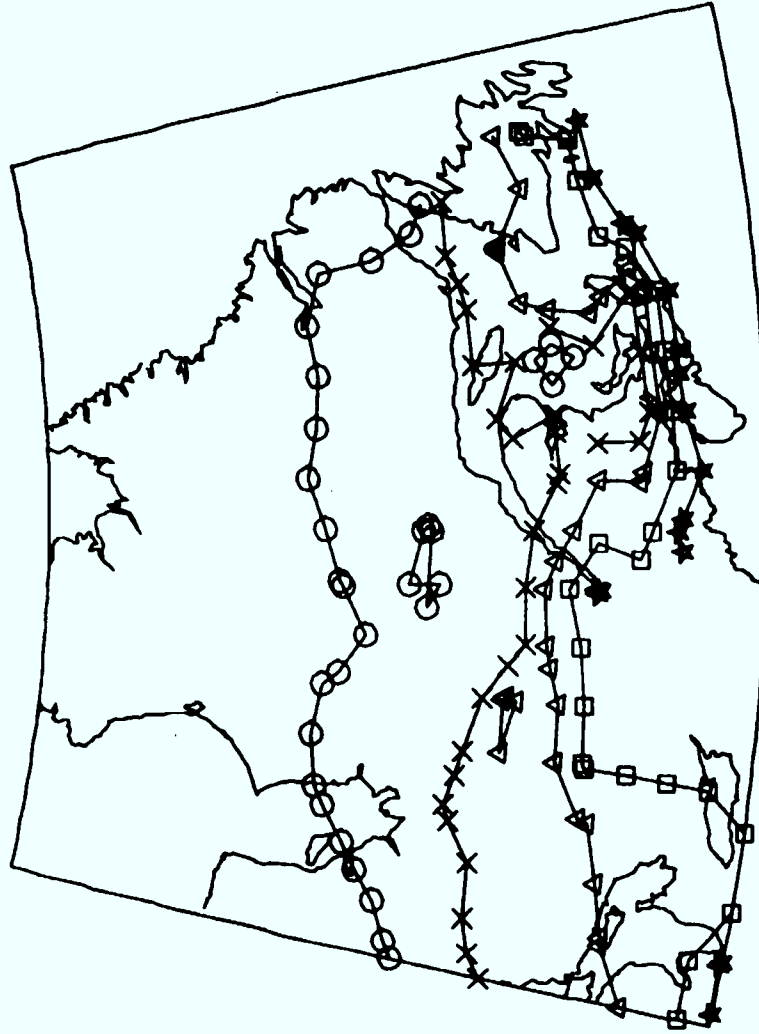

CANSLAM; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
EXCEEDANCE FOR 0.500% OF YR MIN, MAX: 2.08, 11.23 dB
USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 35


| LEGEND | |
|--------|-----------|
| 0 | = 5.0 dB |
| X | = 9.5 dB |
| △ | = 14.0 dB |
| □ | = 18.5 dB |
| * | = 23.0 dB |

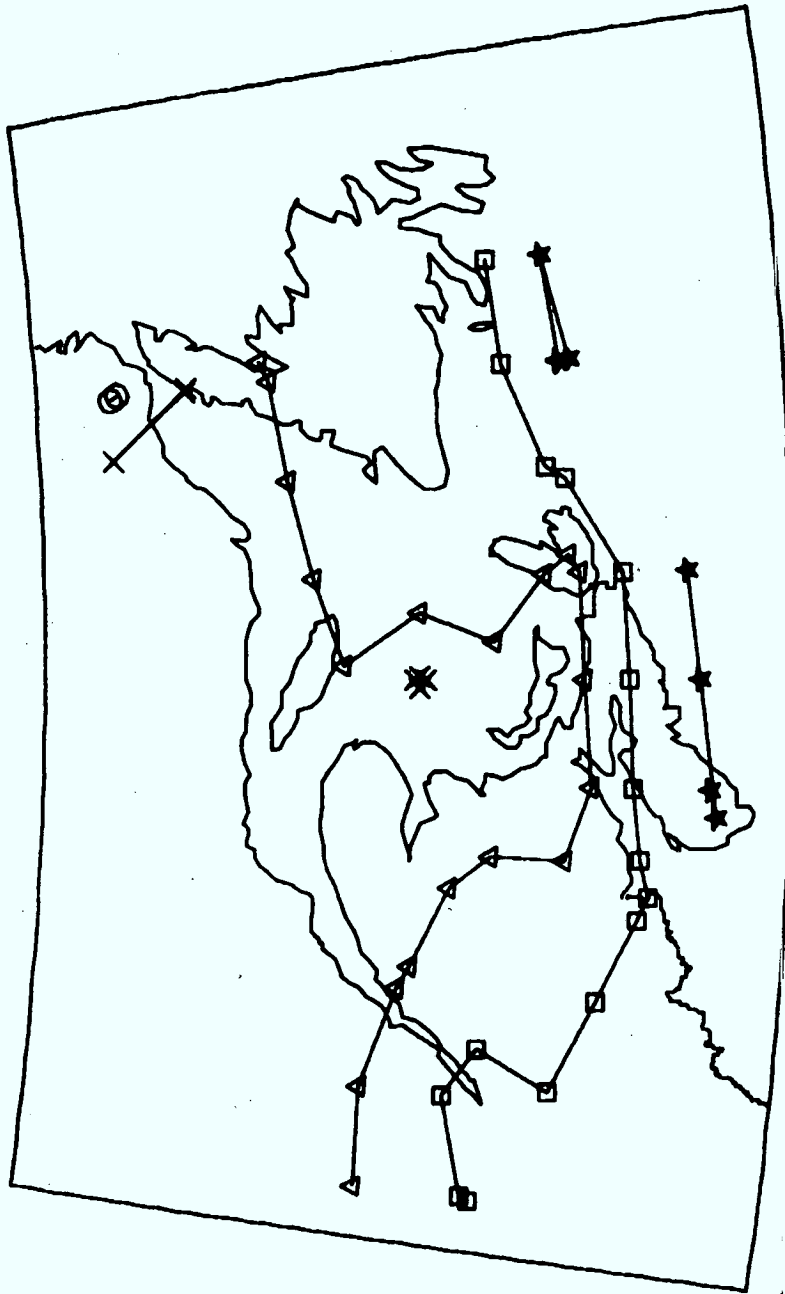

CANSLAM, S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 4.57, 24.72 dB
 EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 36


| LEGEND | |
|--------|-----------|
| ○ | = 12.0 dB |
| X | = 14.0 dB |
| △ | = 16.0 dB |
| □ | = 18.0 dB |
| * | = 20.0 dB |

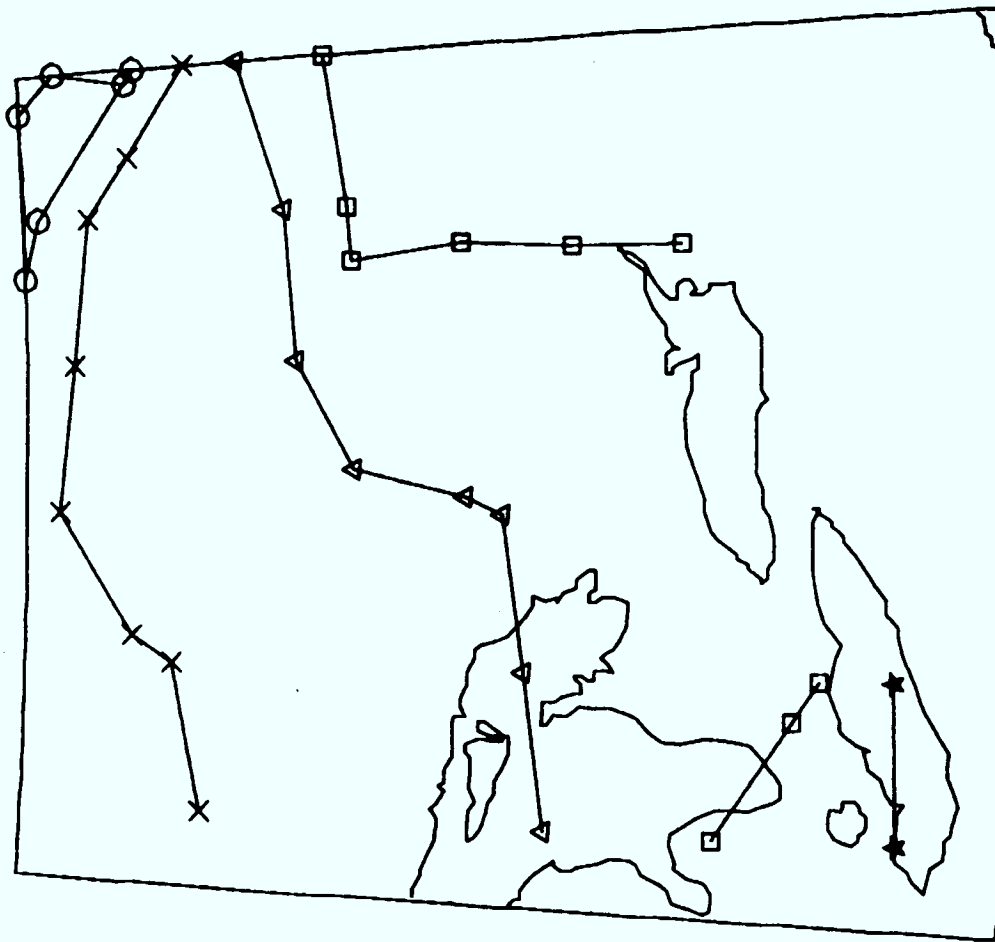

CANSLAM; SLONG: 100.0 DEG. 44.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 11.43, 20.23 dB
 CENTRAL CAN. LONMN 84 LONMX 73 LATMN 41 LATMX 50

Fig. 37


| LEGEND | |
|--------|-----------|
| ○ | = 5.0 dB |
| X | = 8.0 dB |
| △ | = 10.0 dB |
| □ | = 12.0 dB |
| * | = 14.0 dB |

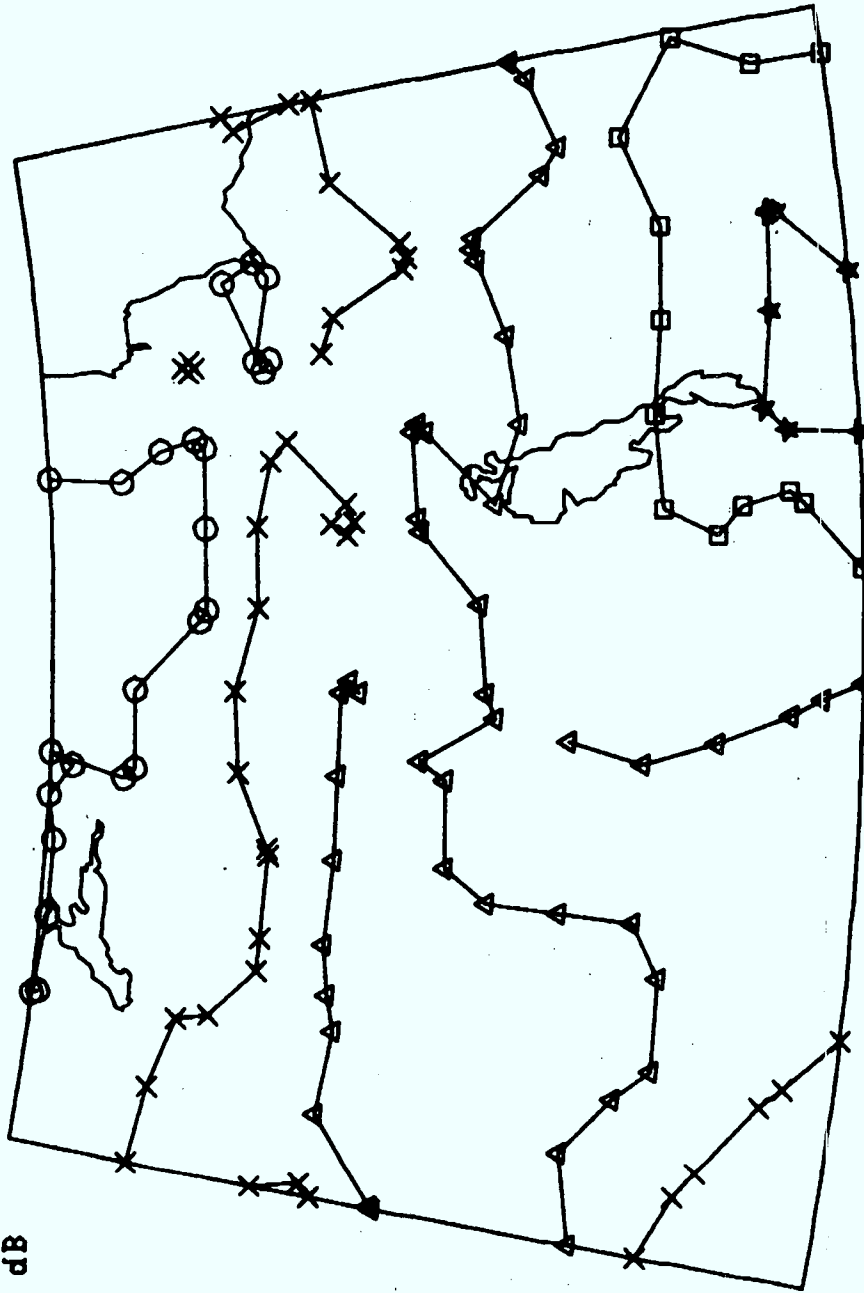

CANSLAM; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
EXCEEDANCE FOR 0.100% OF YR MIN; MAX: 4.97, 14.78 dB
PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 38

| LEGEND | |
|--------|---------|
| 0 | 5.0 dB |
| X | 9.5 dB |
| △ | 14.0 dB |
| □ | 18.5 dB |
| * | 23.0 dB |

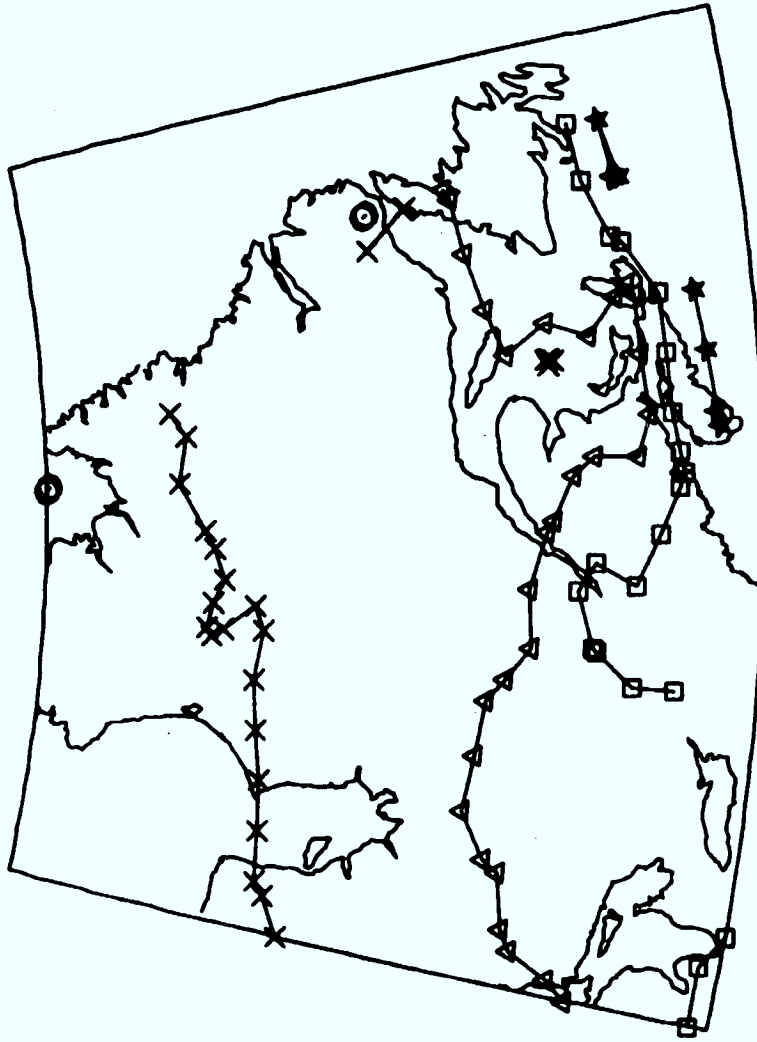

CANSLAM; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 EXCEEDANCE FOR 0.100% OF YR MIN, MAX: 4.57, 24.72 dB
 USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 39

Tables 3-50
(pages 67-114)

Rain attenuation exceedance values for a major part of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the following values of P.

Attenuation exceedance values have been calculated at every degree of latitude in 41°N-70°N range and at every two degrees of longitude in 55°W-141°W range. Values of -1 or 0 indicate a lack of data at that point.

The longitude of the satellite is 100° W and there is no site diversity. The min. and max. attenuation exceedance values over the region are also shown.

Frequency

Percentage P of time of an average year when the rain attenuation exceeds the calculated attenuation value.

| | |
|--------|-----------------------------------|
| 20 GHz | (1) P = 0.1% ; (2) P = 0.01% . |
| 30 GHz | (1) P = 0.5% ; (2) P = 0.1% . |
| 44 GHz | (1) P = 0.5% ; (2) P = 0.1% . |

Table 3

```

*****
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X Site diversity: N; site separation dist. = 0.0 km X
X Baseline to path angle = 0.0 deg X
***** Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 1.16, 8.506 (dB) X
*****

*****
X
55-X 2.65 2.91 2.98 3.05 3.06 2.87 2.96 -1.00 -1.00 -1.00 X
X
54-X 3.27 3.09 3.16 3.24 3.19 3.08 3.18 3.04 -1.00 -1.00 X
X
53-X 3.13 3.32 3.40 3.48 3.38 3.40 3.30 3.26 -1.00 -1.00 X
X
52-X 3.45 3.46 3.54 3.34 3.55 3.66 3.56 3.47 1.12 -1.00 X
X
LAT 51-X 3.50 3.19 3.26 3.67 3.41 3.64 3.75 3.73 2.65 -1.00 X
T 50-X 3.76 3.61 3.69 3.73 3.97 4.00 3.94 4.07 4.21 4.37 X
I 49-X 3.55 3.62 3.77 4.00 4.11 4.29 4.56 4.82 4.55 4.35 X
T 48-X 5.17 5.35 4.50 4.00 4.10 2.62 5.25 5.30 4.85 5.64 X
U 47-X 6.16 6.72 5.54 4.83 3.38 3.80 5.24 5.25 5.43 5.63 X
D 46-X 6.41 6.28 5.37 4.83 3.37 3.79 3.90 6.23 7.74 8.02 X
E 45-X 6.39 6.27 6.85 5.91 6.47 6.64 6.84 7.22 7.46 -1.00 X
G 44-X -1.00 -1.00 6.85 7.44 8.05 8.27 8.51 -1.00 -1.00 -1.00 X
( 43-X -1.00 -1.00 -1.00 7.44 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
) 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
*****
73 71 69 67 65 63 61 59 57 55
LONGITUDE (DEG.)

```

Table 4

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 2.268, 6.964 (dB) X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

L
A
T
I
T
U
D
E
(
D
E
G
.
)

          XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          X
          X 55-X  2.27  2.55  2.57  2.30  2.32  2.59  2.63  2.66  2.71  2.76 X
          X
          X 54-X  3.07  2.70  2.72  2.58  2.60  2.91  2.94  2.99  3.15  3.20 X
          X
          X 53-X  3.71  2.77  3.10  2.73  3.05  3.09  3.13  3.48  3.53  3.39 X
          X
          X 52-X  3.49  3.72  3.75  3.12  3.15  3.18  3.54  3.59  3.65  3.58 X
          X
          X 51-X  4.04  4.06  3.74  3.14  3.30  3.54  3.58  3.63  3.64  3.70 X
          X
          X 50-X  4.55  4.05  3.52  3.76  3.63  3.81  3.85  4.31  4.04  3.49 X
          X
          X 49-X  4.38  4.05  3.52  3.94  4.09  4.36  4.41  4.85  5.00  5.08 X
          X
          X 48-X  -1.00  4.04  3.51  4.11  4.37  4.57  4.62  4.76  4.60  4.62 X
          X
          X 47-X  -1.00 -1.00 -1.00  4.33  4.37  4.84  4.90  4.97  5.95  6.05 X
          X
          X 46-X  -1.00 -1.00 -1.00 -1.00  4.64  5.03  5.10  5.16  5.95  6.04 X
          X
          X 45-X  -1.00 -1.00 -1.00 -1.00  5.16  5.34  5.41  5.43  5.95  6.05 X
          X
          X 44-X  -1.00 -1.00 -1.00 -1.00  5.66  5.72  5.79  5.61  5.95  6.05 X
          X
          X 43-X  -1.00 -1.00 -1.00 -1.00  6.80  6.87  5.79  5.87  5.95 -1.00 X
          X
          X 42-X  -1.00 -1.00 -1.00 -1.00 -1.00  6.88  6.96 -1.00 -1.00 -1.00 X
          X
          X 41-X  0.00  0.00  0.00  0.00  0.00  0.00  0.00  0.00  0.00  0.00 X
          X
          XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          |          |          |          |          |          |          |          |
          93        91        89        87        85        83        81        79        77        75
          |          |          |          |          |          |          |
LONGITUDE (DEG.)

```

Table 5

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X Baseline to path angle = 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X      X Attenuation extrema: Min, Max = 2.015, 4.841 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X 3.65 3.48 3.13 3.12 3.10 2.75 2.87 3.06 3.06 2.69 X
X
54-X 3.49 3.47 3.23 2.91 2.89 3.08 3.08 3.08 2.74 2.75 X
X
53-X 3.27 3.25 3.22 2.90 2.88 3.18 3.47 3.47 3.48 3.70 X
X
52-X 2.61 3.24 3.22 2.89 2.88 3.47 3.46 3.74 3.75 3.61 X
X
51-X 2.43 2.77 2.75 2.74 2.74 3.32 3.59 3.86 3.86 4.02 X
L
A
T
I
T
U
D
E
X
50-X 2.02 2.40 2.69 2.74 2.74 3.10 3.47 3.62 4.84 4.62 X
X
49-X 2.28 2.10 2.50 2.73 2.42 2.95 3.47 4.42 4.59 4.61 X
X
48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
(
X
46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
)
X
44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |         |         |         |         |         |         |         |         |         |
      113      111      109      107      105      103      101      99       97       95
LONGITUDE (DEG.)

```


Table 6

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 1.201, 3.528 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X -1.00 -1.00 -1.00 1.53 1.37 1.56 2.12 2.40 2.20 2.99 X
X
54-X -1.00 -1.00 -1.00 -1.00 1.29 2.64 2.01 2.22 3.01 3.53 X
X
53-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.89 2.38 3.00 3.52 X
X
52-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.24 2.37 2.17 2.83 X
X
L 51-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.24 1.22 2.33 2.04 X
A 50-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.22 1.20 2.30 X
T 49-X -1.00 -1.00 -1.00 -1.00 -1.00 2.09 -1.00 1.23 1.20 1.80 X
I 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
U 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
| | | | | | | | | |
133 131 129 127 125 123 121 119 117 115
LONGITUDE (DEG.)

```

Table 7

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X      X Attenuation extrema: Min, Max = 0.738, 2.893 (dB) X
X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
69-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
68-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
67-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
L 66-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
A 65-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 64-X 0.74 0.75 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
I 63-X 0.99 0.92 0.94 0.77 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 62-X 1.51 1.21 1.25 0.94 0.77 0.99 -1.00 -1.00 -1.00 -1.00 X
U 61-X 1.71 1.73 1.57 1.08 1.11 1.28 1.17 -1.00 -1.00 -1.00 X
D 60-X 2.06 1.90 1.55 1.42 1.42 2.08 1.89 1.18 -1.00 -1.00 X
E 59-X 2.04 2.19 1.82 1.57 2.02 2.06 2.17 2.12 2.18 -1.00 X
( 58-X 2.14 2.55 2.37 2.19 2.09 2.34 2.42 2.38 2.44 -1.00 X
D 57-X 2.50 2.32 2.52 2.33 2.45 2.59 2.65 2.72 2.67 2.75 X
E 56-X 2.51 2.55 2.67 2.57 2.82 2.72 2.78 2.85 2.81 2.89 X
G )
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |      |      |      |      |      |      |      |      |      |
      81      79      77      75      73      71      69      67      65      63
LONGITUDE (DEG.)

```

Table 8

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

```

| | 101 | 99 | 97 | 95 | 93 | 91 | 89 | 87 | 85 | 83 |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 70-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 69-X | -1.00 | -1.00 | -1.00 | 0.52 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 68-X | 0.65 | 0.51 | 0.65 | 0.51 | 0.51 | 0.51 | -1.00 | -1.00 | -1.00 | -1.00 |
| 67-X | 0.71 | 0.71 | 0.71 | 0.56 | 0.56 | 0.57 | -1.00 | -1.00 | -1.00 | -1.00 |
| 66-X | 0.94 | 0.80 | 0.80 | 0.64 | 0.81 | 0.65 | -1.00 | -1.00 | -1.00 | -1.00 |
| 65-X | 1.02 | 1.02 | 1.02 | 0.87 | 0.88 | 0.88 | 0.71 | 0.72 | -1.00 | -1.00 |
| 64-X | 1.06 | 1.06 | 1.22 | 1.15 | 1.15 | 1.16 | 0.96 | 0.71 | 0.72 | 0.73 |
| 63-X | 1.28 | 1.14 | 1.43 | 1.44 | 1.44 | 1.45 | 1.22 | 1.48 | 1.24 | 1.26 |
| 62-X | 1.43 | 1.28 | 1.61 | 1.42 | 1.59 | 1.59 | 1.61 | 1.62 | 1.37 | 1.24 |
| 61-X | 1.25 | 1.42 | 1.60 | 1.56 | 1.78 | 1.79 | 1.59 | 1.61 | 1.62 | 1.64 |
| 60-X | 1.37 | 1.31 | 1.75 | 1.76 | 1.76 | 1.77 | 1.79 | 1.80 | 1.61 | 1.84 |
| 59-X | 1.57 | 1.47 | 1.74 | 1.74 | 1.93 | 1.94 | 1.95 | 1.97 | 1.99 | 2.01 |
| 58-X | 1.56 | 1.56 | 1.56 | 2.37 | 1.74 | 1.75 | 1.76 | 1.96 | 1.98 | 2.31 |
| 57-X | 2.54 | 2.54 | 2.25 | 1.55 | 1.56 | 1.97 | 2.39 | 2.41 | 2.44 | 2.47 |
| 56-X | 2.69 | 2.26 | 2.53 | 2.54 | 2.02 | 2.27 | 2.29 | 2.80 | 2.45 | 2.48 |

LONGITUDE (DEG.)

Table 9

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 0.647, 3.115 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X 0.99 0.97 0.95 0.94 0.93 0.92 -1.00 0.79 -1.00 -1.00 X
X
68-X 1.07 1.17 1.15 1.13 1.01 1.00 0.99 0.77 0.77 0.65 X
X
67-X 1.31 1.29 1.27 1.25 1.12 1.11 1.10 1.03 0.90 0.90 X
X
LAT 66-X 1.40 1.50 1.48 1.46 1.33 1.19 1.18 1.17 1.04 1.03 X
TIT 65-X 1.58 1.55 1.53 1.51 1.31 1.37 1.23 1.22 1.22 1.02 X
UDE 64-X 1.80 1.77 1.74 1.72 1.48 1.58 1.34 1.21 1.20 1.20 X
E 63-X 1.88 1.86 1.83 1.70 1.68 1.67 1.55 1.42 1.29 1.28 X
( 62-X 1.83 1.81 1.78 1.66 1.77 1.63 1.64 1.52 1.40 1.44 X
DEG 61-X 1.91 1.66 1.68 1.66 1.64 1.63 1.60 1.50 1.49 1.38 X
: 60-X 1.91 1.88 1.78 2.05 2.03 1.61 1.60 1.59 1.67 1.47 X
) 59-X 1.95 1.98 1.89 2.12 2.10 1.84 1.91 2.04 1.57 1.57 X
X 58-X 1.92 2.01 1.88 2.39 2.37 2.30 2.28 2.27 2.03 2.12 X
X 57-X 2.03 2.17 2.14 2.36 2.34 2.32 2.30 2.29 2.55 2.54 X
X 56-X 2.13 2.21 2.38 2.18 2.97 2.95 3.12 3.10 3.08 3.08 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
121 119 117 115 113 111 109 107 105 103
LONGITUDE (DEG.)

```

Table 10

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X           X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X           X           Baseline to path angle = 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X           X Attenuation extrema: Min, Max = 1.005, 1.937 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X           X           X           X           X           X           X           X           X           X           X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X           X           X           X           X           X           X           X           X           X           X
69-X 1.83 1.75 1.68 1.62 1.57 1.52 1.48 1.45 1.41 1.00 X
X           X           X           X           X           X           X           X           X           X           X
68-X 1.77 1.70 1.63 1.58 1.53 1.48 1.44 1.41 1.38 1.09 X
X           X           X           X           X           X           X           X           X           X           X
67-X 1.72 1.65 1.59 1.54 1.49 1.60 1.56 1.52 1.49 1.34 X
X           X           X           X           X           X           X           X           X           X           X
L 66-X 1.68 1.61 1.72 1.66 1.61 1.57 1.53 1.49 1.46 1.43 X
A 65-X -1.00 1.58 1.68 1.63 1.58 1.67 1.63 1.59 1.56 1.53 X
T 64-X -1.00 1.55 1.56 1.74 1.69 1.77 1.72 1.68 1.73 1.70 X
I 63-X -1.00 1.52 1.53 1.49 1.79 1.85 1.81 1.77 1.82 1.79 X
T 62-X -1.00 -1.00 1.63 1.58 1.74 1.94 1.89 1.85 1.81 1.78 X
U 61-X -1.00 -1.00 1.83 1.77 1.72 1.68 1.87 1.83 1.79 1.85 X
D 60-X -1.00 -1.00 -1.00 1.75 1.70 1.66 1.62 1.59 1.55 1.69 X
E 59-X -1.00 -1.00 -1.00 -1.00 1.69 1.65 1.61 1.57 1.63 1.76 X
( 58-X -1.00 -1.00 -1.00 -1.00 -1.00 1.63 1.59 1.56 1.61 1.82 X
) 57-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.58 1.63 1.46 1.88 X
X           X           X           X           X           X           X           X           X           X           X
56-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.62 1.53 1.70 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

141 139 137 135 133 131 129 127 125 123
LONGITUDE (DEG.)

```

Table 11

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N; site separation dist. = 0.0 km X
X      X      X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.010 X
X      X      X Attenuation extrema: Min, Max = 2.915, 22.218 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X      X      X      X      X      X      X      X      X      X      X
55-X 6.91 7.60 7.78 7.97 8.00 7.51 7.74 -1.00 -1.00 -1.00 X
X      X      X      X      X      X      X      X      X      X      X      X
54-X 8.53 8.07 8.26 8.46 8.33 8.05 8.30 7.95 -1.00 -1.00 X
X      X      X      X      X      X      X      X      X      X      X      X
53-X 8.18 8.67 8.87 9.09 8.82 8.89 8.63 8.53 -1.00 -1.00 X
X      X      X      X      X      X      X      X      X      X      X      X
52-X 9.00 9.05 9.25 8.72 9.29 9.55 9.31 9.06 2.92 -1.00 X
X      X      X      X      X      X      X      X      X      X      X      X
L 51-X 9.15 8.33 8.52 9.59 8.91 9.51 9.80 9.75 6.93 -1.00 X
A 50-X 9.82 9.43 9.64 9.75 10.38 10.44 10.30 10.63 11.00 11.41 X
T 49-X 9.27 9.45 9.85 10.46 10.73 11.20 11.91 12.58 11.90 11.36 X
I 48-X 13.50 13.98 11.76 10.44 10.70 6.84 13.71 13.85 12.67 14.74 X
T 47-X 16.09 17.55 14.48 12.62 8.82 9.92 13.68 13.71 14.18 14.69 X
U 46-X 16.75 16.40 14.04 12.61 8.81 9.91 10.20 16.28 20.22 20.96 X
D 45-X 16.70 16.39 17.90 15.44 16.90 17.35 17.85 18.87 19.50 -1.00 X
E 44-X -1.00 -1.00 17.90 19.44 21.03 21.60 22.22 -1.00 -1.00 -1.00 X
( 43-X -1.00 -1.00 -1.00 19.45 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |      |      |      |      |      |      |      |      |      |
      73      71      69      67      65      63      61      59      57      55
LONGITUDE (DEG.)

```

Table 12

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.010 X
X Attenuation extrema: Min, Max = 5.924, 18.192 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X 5.92 6.66 6.70 6.00 6.06 6.77 6.86 6.96 7.07 7.20 X
X
54-X 8.02 7.05 7.10 6.73 6.80 7.60 7.69 7.80 8.23 8.37 X
X
53-X 9.70 7.23 8.10 7.14 7.98 8.07 8.17 9.08 9.22 8.87 X
X
52-X 9.12 9.73 9.79 8.14 8.22 8.31 9.25 9.38 9.53 9.36 X
X
L 51-X 10.55 10.60 9.77 8.20 8.63 9.25 9.36 9.49 9.50 9.66 X
A 50-X 11.88 10.59 9.20 9.83 9.48 9.94 10.07 11.26 10.55 9.12 X
T 49-X 11.45 10.57 9.18 10.28 10.68 11.38 11.52 12.66 13.05 13.27 X
I 48-X -1.00 10.56 9.18 10.72 11.41 11.93 12.08 12.44 12.02 12.22 X
T 47-X -1.00 -1.00 -1.00 11.30 11.41 12.65 12.81 12.98 15.54 15.80 X
U 46-X -1.00 -1.00 -1.00 -1.00 12.12 13.15 13.31 13.49 15.54 15.77 X
D 45-X -1.00 -1.00 -1.00 -1.00 13.48 13.96 14.13 14.19 15.54 15.79 X
E 44-X -1.00 -1.00 -1.00 -1.00 14.78 14.94 15.11 14.66 15.54 15.79 X
( 43-X -1.00 -1.00 -1.00 -1.00 17.77 17.96 15.13 15.33 15.55 -1.00 X
D 42-X -1.00 -1.00 -1.00 -1.00 -1.00 17.98 18.19 -1.00 -1.00 -1.00 X
E 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          93      91      89      87      85      83      81      79      77      75
LONGITUDE (DEG.)

```

Table 13

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      * Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE * Site diversity: N ; site separation dist. = 0.0 km X
X      * Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.010 X
X      Attenuation extrema: Min, Max = 5.265, 12.644 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X 55-X 9.53 9.09 8.18 8.14 8.10 7.20 7.51 7.99 8.00 7.01 X
X
X 54-X 9.13 9.05 8.45 7.59 7.56 8.05 8.04 8.04 7.17 7.19 X
X
X 53-X 8.55 8.48 8.42 7.57 7.53 8.32 9.07 9.07 9.09 9.66 X
X
X 52-X 6.83 8.46 8.40 7.54 7.51 9.06 9.05 9.78 9.79 9.44 X
X
LAT 51-X 6.34 7.24 7.20 7.16 7.16 8.67 9.38 10.07 10.09 10.51 X
TIT 50-X 5.26 6.27 7.03 7.14 7.15 8.10 9.06 9.46 12.64 12.06 X
UDE 49-X 5.95 5.49 6.52 7.14 8.31 7.72 9.05 11.54 11.99 12.04 X
E 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
DEG 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
: 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
) 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          |         |         |         |         |         |         |         |         |         |
        113      111      109      107      105      103      101       99       97       95
LONGITUDE (DEG.)

```


Table 14

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.010 X
X      X Attenuation extrema: Min, Max = 3.136, 9.217 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X -1.00 -1.00 -1.00 4.00 3.59 4.08 5.55 6.26 5.74 7.80 X
X
54-X -1.00 -1.00 -1.00 -1.00 3.37 6.89 5.24 5.79 7.86 9.22 X
X
53-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 4.93 6.21 7.83 9.18 X
X
52-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 3.24 6.19 5.68 7.39 X
L 51-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 3.23 3.19 6.09 5.32 X
A 50-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 3.18 3.14 6.02 X
T 49-X -1.00 -1.00 -1.00 -1.00 -1.00 5.45 -1.00 3.21 3.14 4.71 X
I 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
U 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
. 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
E 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
| 133 131 129 127 125 123 121 119 117 115
LONGITUDE (DEG.)

```

Table 15

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.010 X
X      X Attenuation extrema: Min, Max = 1.927, 7.555 (dB) X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
69-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
68-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
67-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
66-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
65-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
64-X 1.93 1.96 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
63-X 2.58 2.41 2.45 2.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
62-X 3.95 3.16 3.26 2.46 2.02 2.57 -1.00 -1.00 -1.00 -1.00 X
X      X
61-X 4.46 4.52 4.09 2.83 2.89 3.35 3.04 -1.00 -1.00 -1.00 X
X      X
60-X 5.37 4.96 4.05 3.70 3.72 5.44 4.95 3.09 -1.00 -1.00 X
X      X
59-X 5.33 5.72 4.74 4.09 5.27 5.39 5.67 5.55 5.71 -1.00 X
X      X
58-X 5.59 6.67 6.19 5.71 5.47 6.12 6.33 6.21 6.38 -1.00 X
X      X
57-X 6.53 6.05 6.59 6.08 6.40 6.76 6.92 7.09 6.98 7.19 X
X      X
56-X 6.56 6.66 6.98 6.71 7.38 7.10 7.27 7.45 7.34 7.56 X
X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |      |      |      |      |      |      |      |      |      |
      81      79      77      75      73      71      69      67      65      63
LONGITUDE (DEG.)

```

Table 16

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X Baseline to path angle = 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.010 X
X      X Attenuation extrema: Min, Max = 1.321, 7.305 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
69-X -1.00 -1.00 -1.00 1.36 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
68-X 1.69 1.32 1.69 1.33 1.33 1.34 -1.00 -1.00 -1.00 -1.00 X
X      X
67-X 1.85 1.85 1.85 1.47 1.48 1.49 -1.00 -1.00 -1.00 -1.00 X
X      X
LAT 66-X 2.46 2.09 2.09 1.68 2.11 1.69 -1.00 -1.00 -1.00 -1.00 X
ITI 65-X 2.65 2.65 2.66 2.28 2.29 2.31 1.87 1.88 -1.00 -1.00 X
TUD 64-X 2.77 2.77 3.19 2.99 3.01 3.03 2.50 1.86 1.88 1.00 X
E   63-X 3.34 2.98 3.74 3.75 3.77 3.79 3.18 3.86 3.25 3.29 X
(   62-X 3.75 3.36 4.22 3.71 4.14 4.17 4.20 4.23 3.59 3.25 X
D   61-X 3.28 3.71 4.17 4.08 4.65 4.67 4.16 4.19 4.24 4.29 X
E   60-X 3.58 3.42 4.58 4.59 4.61 4.63 4.67 4.71 4.20 4.01 X
G   59-X 4.09 3.83 4.54 4.56 5.03 5.06 5.10 5.14 5.20 5.26 X
.   58-X 4.07 4.07 4.07 6.19 4.54 4.57 4.60 5.11 5.16 6.04 X
)   57-X 6.63 6.63 5.89 4.06 4.08 5.14 6.25 6.31 6.37 6.44 X
    56-X 7.02 5.90 6.60 6.62 5.28 5.93 5.97 7.30 6.40 6.48 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |         |         |         |         |         |         |         |         |         |
      101      99      97      95      93      91      89      87      85      83
LONGITUDE (DEG.)

```

Table 17

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
x      x      x      x      x      x      x      x      x      x      x
x ATT. TABLE x Site diversity: N ; site separation dist. = 0.0 km x
x      x      x      x      x      x      x      x      x      x      x
x      x      x      x      x      x      x      x      x      x      x
x      x      x      x      x      x      x      x      x      x      x
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      Percentage of year that values are exceeded: 0.010
      Attenuation extrema: Min, Max = 1.689, 8.137 (dB)
x
x
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
x
x      x      x      x      x      x      x      x      x      x      x
70-x -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 x
x
x      x      x      x      x      x      x      x      x      x      x
69-x 2.57 2.53 2.49 2.46 2.43 2.40 -1.00 2.07 -1.00 -1.00 x
x
x      x      x      x      x      x      x      x      x      x      x
68-x 2.78 3.04 3.00 2.96 2.63 2.60 2.58 2.02 2.01 1.69 x
x
x      x      x      x      x      x      x      x      x      x      x
67-x 3.43 3.37 3.32 3.28 2.93 2.90 2.88 2.68 2.35 2.35 x
x
L 66-x 3.66 3.92 3.86 3.81 3.47 3.11 3.09 3.07 2.71 2.70 x
A 65-x 4.13 4.06 4.00 3.85 3.41 3.57 3.22 3.20 3.18 2.66 x
T 64-x 4.70 4.62 4.56 4.50 3.86 4.12 3.49 3.15 3.14 3.13 x
I 63-x 4.92 4.85 4.78 4.44 4.40 4.36 4.04 3.71 3.36 3.35 x
T 62-x 4.79 4.72 4.65 4.35 4.62 4.26 4.28 3.97 3.65 3.75 x
U 61-x 4.98 4.33 4.39 4.33 4.29 4.25 4.19 3.91 3.90 3.60 x
D 60-x 4.99 4.92 4.66 5.35 5.30 4.21 4.18 4.16 4.35 3.85 x
E 59-x 5.08 5.18 4.94 5.55 5.49 4.79 5.00 5.32 4.11 4.10 x
( 58-x 5.01 5.25 4.92 6.25 6.19 6.00 5.96 5.92 5.32 5.55 x
D 57-x 5.29 5.66 5.59 6.17 6.11 6.06 6.02 5.98 6.66 6.64 x
E 56-x 5.56 5.77 6.21 5.71 7.77 7.70 8.14 8.09 8.06 8.04 x
. )
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |      |      |      |      |      |      |      |      |      |
      121    119    117    115    113    111    109    107    105    103
      LONGITUDE (DEG.)
  
```

Table 18

```

*****
X      X Satellite located at 100.0 deg long; Freq: 20.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X Baseline to path angle: 0.0 deg X
***** Percentage of year that values are exceeded: 0.010 X
X      X Attenuation extrema: Min, Max = 2.624, 5.060 (dB) X
*****
X
X *****
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X 4.77 4.57 4.40 4.24 4.10 3.98 3.87 3.78 3.69 2.62 X
X
68-X 4.62 4.43 4.27 4.12 3.99 3.88 3.77 3.68 3.60 2.84 X
X
67-X 4.49 4.31 4.16 4.02 3.90 4.18 4.07 3.97 3.88 3.49 X
X
66-X 4.38 4.21 4.49 4.34 4.21 4.09 3.98 3.89 3.80 3.73 X
L
A
T
I
T
U
D
E
65-X -1.00 4.13 4.40 4.26 4.13 4.36 4.25 4.15 4.06 3.99 X
X
64-X -1.00 4.05 4.08 4.55 4.41 4.61 4.50 4.39 4.63 4.44 X
X
63-X -1.00 3.98 4.01 3.88 4.67 4.84 4.72 4.62 4.75 4.66 X
X
62-X -1.00 -1.00 4.26 4.13 4.56 5.06 4.94 4.83 4.73 4.64 X
(
D
E
G
.
)
61-X -1.00 -1.00 4.78 4.63 4.50 4.39 4.88 4.77 4.68 4.83 X
X
60-X -1.00 -1.00 -1.00 4.58 4.45 4.34 4.24 4.14 4.06 4.42 X
X
59-X -1.00 -1.00 -1.00 -1.00 4.41 4.30 4.20 4.11 4.25 4.59 X
X
58-X -1.00 -1.00 -1.00 -1.00 -1.00 4.26 4.16 4.07 4.22 4.75 X
X
57-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 4.13 4.27 3.83 4.91 X
X
56-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 4.24 3.99 4.44 X
X
*****
141 139 137 135 133 131 129 127 125 123
LONGITUDE (DEG.)

```

Table 19

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 1.102, 7.303 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X 2.44 2.67 2.73 2.80 2.81 2.65 2.73 -1.00 -1.00 -1.00 X
X
54-X 2.96 2.82 2.88 2.95 2.91 2.83 2.92 2.81 -1.00 -1.00 X
X
53-X 2.85 3.01 3.08 3.16 3.07 3.10 3.03 3.00 -1.00 -1.00 X
X
52-X 3.11 3.13 3.20 3.04 3.23 3.32 3.24 3.17 1.10 -1.00 X
X
L 51-X 3.16 2.90 2.96 3.32 3.10 3.30 3.40 3.40 2.47 -1.00 X
A 50-X 3.38 3.26 3.33 3.37 3.58 3.60 3.56 3.68 3.81 3.95 X
T 49-X 3.20 3.26 3.39 3.60 3.69 3.85 4.08 4.30 4.10 3.93 X
I 48-X 4.54 4.70 4.00 3.59 3.68 2.43 4.65 4.71 4.34 5.01 X
T 47-X 5.35 5.81 4.86 4.28 3.07 3.43 4.64 4.66 4.82 5.00 X
D 46-X 5.56 5.45 4.72 4.28 3.07 3.43 3.53 5.47 6.72 6.96 X
E 45-X 5.54 5.45 5.93 5.17 5.63 5.79 5.95 6.28 6.49 -1.00 X
( 44-X -1.00 -1.00 5.93 6.41 6.91 7.10 7.30 -1.00 -1.00 -1.00 X
D 43-X -1.00 -1.00 -1.00 6.41 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
G 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          73      71      69      67      65      63      61      59      57      55
LONGITUDE (DEG.)

```

Table 20

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 2.092, 5.979 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
L
A
T
I
T
U
D
E
(
D
E
G
.
)
55-X 2.09 2.33 2.35 2.12 2.14 2.38 2.41 2.44 2.48 2.53 X
54-X 2.78 2.46 2.48 2.36 2.38 2.64 2.68 2.72 2.86 2.81 X
53-X 3.31 2.52 2.80 2.49 2.77 2.80 2.83 3.13 3.18 3.07 X
52-X 3.13 3.32 3.35 2.82 2.84 2.87 3.18 3.22 3.27 3.22 X
51-X 3.58 3.60 3.34 2.84 2.97 3.18 3.22 3.26 3.27 3.32 X
50-X 4.00 3.59 3.15 3.36 3.25 3.40 3.44 3.82 3.60 3.15 X
49-X 3.87 3.59 3.15 3.50 3.63 3.85 3.90 4.26 4.39 4.47 X
48-X -1.00 3.59 3.15 3.64 3.86 4.03 4.08 4.20 4.07 4.13 X
47-X -1.00 -1.00 -1.00 3.82 3.86 4.26 4.31 4.37 5.17 5.26 X
46-X -1.00 -1.00 -1.00 -1.00 4.08 4.41 4.46 4.52 5.17 5.25 X
45-X -1.00 -1.00 -1.00 -1.00 4.51 4.66 4.72 4.74 5.17 5.25 X
44-X -1.00 -1.00 -1.00 -1.00 4.92 4.97 5.03 4.89 5.17 5.25 X
43-X -1.00 -1.00 -1.00 -1.00 5.84 5.90 5.03 5.10 5.17 -1.00 X
42-X -1.00 -1.00 -1.00 -1.00 -1.00 5.91 5.98 -1.00 -1.00 -1.00 X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
93 91 89 87 85 83 81 79 77 75
LONGITUDE (DEG.)

```

Table 21

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N; site separation dist. = 0.0 km X
X Baseline to path angle = 0.0 deg X
XXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X Attenuation extremes: Min, Max = 1.874, 4.240 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X 3.26 3.12 2.83 2.81 2.80 2.51 2.61 2.76 2.77 2.45 X
X
54-X 3.14 3.11 2.91 2.64 2.63 2.78 2.78 2.78 2.50 2.50 X
X
53-X 2.95 2.92 2.90 2.63 2.62 2.87 3.11 3.11 3.12 3.30 X
X
52-X 2.39 2.92 2.90 2.62 2.61 3.11 3.10 3.34 3.34 3.23 X
X
L 51-X 2.23 2.52 2.51 2.49 2.49 2.98 3.21 3.43 3.43 3.57 X
A 50-X 1.87 2.21 2.45 2.49 2.49 2.80 3.11 3.23 4.24 4.06 X
T 49-X 2.10 1.95 2.29 2.49 2.22 2.67 3.10 3.89 4.04 4.05 X
I 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
. 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
113 111 109 107 105 103 101 99 97 95
LONGITUDE (DEG.)

```


Table 22

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X  Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X  ATT. TABLE X  Site diversity: N ; site separation dist. = 0.0 km X
X      X  Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X      X  Attenuation extremes: Min, Max = 1.157, 3.166 (dB) X
X      X  XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X
X      X
55-X -1.00 -1.00 -1.00 1.46 1.32 1.48 1.98 2.21 2.04 2.71 X
X      X
54-X -1.00 -1.00 -1.00 -1.00 1.24 2.42 1.87 2.05 2.73 3.17 X
X      X
53-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.77 2.19 2.72 3.15 X
X      X
52-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.20 2.18 2.02 2.57 X
X      X
L  51-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.19 1.18 2.15 1.90 X
A  X
T  50-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.17 1.16 2.12 X
I  X
T  49-X -1.00 -1.00 -1.00 -1.00 -1.00 1.94 -1.00 1.18 1.16 1.69 X
U  X
D  48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E  X
D  47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E  X
G  46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
:  X
)  45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
)  44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
)  43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
)  42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
)  41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          | 133  131  129  127  125  123  121  119  117  115
LONGITUDE (DEG.)
    
```

Table 23

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X      X Attenuation extrema: Min, Max = 0.739, 2.669 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
69-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
68-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
67-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
L 66-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
A 65-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 64-X 0.74 0.75 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
I 63-X 0.97 0.91 0.93 0.77 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 62-X 1.44 1.17 1.21 0.93 0.77 0.97 -1.00 -1.00 -1.00 -1.00 X
U 61-X 1.61 1.64 1.49 1.06 1.08 1.25 1.14 -1.00 -1.00 -1.00 X
D 60-X 1.92 1.78 1.48 1.36 1.37 1.95 1.79 1.16 -1.00 -1.00 X
E 59-X 1.90 2.04 1.71 1.49 1.89 1.94 2.03 2.00 2.05 -1.00 X
( 58-X 1.99 2.35 2.19 2.04 1.96 2.18 2.25 2.22 2.28 -1.00 X
D 57-X 2.30 2.14 2.32 2.16 2.27 2.39 2.45 2.51 2.48 2.55 X
E 56-X 2.31 2.34 2.45 2.37 2.59 2.50 2.56 2.62 2.59 2.67 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      81      79      77      75      73      71      69      67      65      63
LONGITUDE (DEG.)

```

Table 24

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X  Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      Baseline to path angle = 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X      X      Attenuation extrema: Min, Max = 0.520, 2.548 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X      X      X      X      X      X      X      X      X      X      X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
69-X -1.00 -1.00 -1.00 0.53 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X      X
68-X 0.65 0.52 0.65 0.52 0.52 0.53 -1.00 -1.00 -1.00 -1.00 X
X      X
67-X 0.71 0.71 0.71 0.57 0.58 0.58 -1.00 -1.00 -1.00 -1.00 X
X      X
LAT 66-X 0.92 0.80 0.80 0.65 0.80 0.65 -1.00 -1.00 -1.00 -1.00 X
TIT 65-X 0.99 0.99 0.99 0.86 0.87 0.87 0.72 0.72 -1.00 -1.00 X
UDE 64-X 1.03 1.03 1.18 1.11 1.12 1.12 0.94 0.71 0.72 0.73 X
E   63-X 1.23 1.11 1.37 1.37 1.38 1.39 1.18 1.41 1.20 1.21 X
(   62-X 1.37 1.23 1.53 1.36 1.50 1.51 1.52 1.54 1.32 1.20 X
DEG 61-X 1.21 1.35 1.51 1.48 1.67 1.68 1.51 1.52 1.54 1.55 X
.   60-X 1.31 1.25 1.65 1.65 1.66 1.67 1.68 1.69 1.52 1.73 X
)   59-X 1.48 1.39 1.63 1.64 1.80 1.81 1.82 1.84 1.86 1.88 X
X   58-X 1.47 1.47 1.47 2.18 1.63 1.64 1.66 1.83 1.84 2.14 X
X   57-X 2.32 2.32 2.08 1.47 1.48 1.83 2.20 2.22 2.24 2.27 X
X   56-X 2.45 2.08 2.31 2.32 1.88 2.10 2.11 2.55 2.25 2.28 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |  |  |  |  |  |  |  |  |  |  |
      101 99 97 95 93 91 89 87 85 83
LONGITUDE (DEG.)

```

Table 25

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 0.654, 2.815 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X 70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
X 69-X 0.98 0.96 0.94 0.93 0.92 0.91 -1.00 0.79 -1.00 -1.00 X
X
X 68-X 1.05 1.14 1.12 1.11 0.99 0.98 0.97 0.77 0.77 0.65 X
X
X 67-X 1.27 1.25 1.23 1.22 1.09 1.08 1.07 1.01 0.89 0.89 X
X
L 66-X 1.35 1.44 1.42 1.40 1.28 1.16 1.15 1.14 1.01 1.01 X
A 65-X 1.51 1.48 1.46 1.44 1.26 1.31 1.19 1.18 1.18 0.99 X
T 64-X 1.70 1.67 1.65 1.63 1.41 1.50 1.28 1.17 1.16 1.16 X
I 63-X 1.78 1.75 1.72 1.61 1.59 1.58 1.47 1.36 1.24 1.23 X
T 62-X 1.73 1.70 1.68 1.58 1.67 1.54 1.55 1.44 1.33 1.37 X
U 61-X 1.79 1.57 1.59 1.57 1.55 1.54 1.52 1.48 1.42 1.32 X
D 60-X 1.80 1.77 1.68 1.91 1.89 1.59 1.52 1.51 1.57 1.40 X
E 59-X 1.82 1.86 1.77 1.97 1.95 1.72 1.79 1.90 1.49 1.48 X
. 58-X 1.80 1.88 1.77 2.21 2.19 2.12 2.11 2.09 1.89 1.97 X
) 57-X 1.89 2.01 1.99 2.18 2.16 2.14 2.12 2.11 2.33 2.33 X
56-X 1.98 2.05 2.19 2.02 2.70 2.68 2.82 2.80 2.79 2.78 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
| 121 | 119 | 117 | 115 | 113 | 111 | 109 | 107 | 105 | 103
LONGITUDE (DEG.)

```

Table 26

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 0.995, 1.833 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X 1.77 1.70 1.63 1.57 1.52 1.48 1.44 1.40 1.37 0.95 X
X
68-X 1.72 1.65 1.58 1.53 1.48 1.44 1.40 1.37 1.33 1.07 X
X
67-X 1.67 1.60 1.54 1.49 1.45 1.54 1.50 1.46 1.43 1.29 X
X
L 66-X 1.63 1.56 1.66 1.60 1.55 1.51 1.47 1.43 1.40 1.38 X
A 65-X -1.00 1.53 1.62 1.57 1.52 1.60 1.56 1.52 1.49 1.46 X
T 64-X -1.00 1.50 1.51 1.67 1.62 1.68 1.64 1.60 1.65 1.62 X
I 63-X -1.00 1.48 1.48 1.44 1.70 1.76 1.72 1.68 1.72 1.69 X
T 62-X -1.00 -1.00 1.57 1.52 1.67 1.83 1.79 1.75 1.71 1.68 X
D 61-X -1.00 -1.00 1.75 1.69 1.64 1.60 1.77 1.73 1.69 1.74 X
E 60-X -1.00 -1.00 -1.00 1.67 1.63 1.59 1.55 1.51 1.48 1.60 X
( 59-X -1.00 -1.00 -1.00 -1.00 1.61 1.57 1.53 1.50 1.55 1.66 X
D 58-X -1.00 -1.00 -1.00 -1.00 -1.00 1.56 1.52 1.49 1.54 1.71 X
E 57-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.51 1.55 1.40 1.77 X
. 56-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 1.54 1.46 1.61 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
141 139 137 135 133 131 129 127 125 123
LONGITUDE (DEG.)

```

Table 27

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X X Site diversity: N ; site separation dist. = 0.0 km X
X X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 2.425, 16.070 (dB) X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X
55-X 5.36 5.87 6.00 6.15 6.18 5.83 6.02 -1.00 -1.00 -1.00 X
X
54-X 6.52 6.20 6.34 6.50 6.41 6.22 6.42 6.18 -1.00 -1.00 X
X
53-X 6.27 6.63 6.78 6.94 6.77 6.83 6.66 6.59 -1.00 -1.00 X
X
52-X 6.85 6.89 7.05 6.68 7.10 7.30 7.14 6.98 2.43 -1.00 X
X
LAT 51-X 6.96 6.38 6.52 7.30 6.83 7.27 7.49 7.47 5.45 -1.00 X
TIT 50-X 7.43 7.17 7.32 7.41 7.87 7.93 7.84 8.10 8.38 8.69 X
UDE 49-X 7.04 7.18 7.47 7.91 8.12 8.47 8.98 9.47 9.01 8.65 X
E 48-X 10.00 10.34 8.81 7.90 8.10 5.34 10.24 10.36 9.56 11.03 X
( 47-X 11.78 12.79 10.70 9.43 6.76 7.56 10.22 10.26 10.61 11.00 X
DEG 46-X 12.23 12.00 10.40 9.42 6.75 7.55 7.77 12.05 14.78 15.32 X
. 45-X 12.20 12.00 13.05 11.38 12.40 12.73 13.10 13.82 14.29 -1.00 X
) 44-X -1.00 -1.00 13.04 14.11 15.21 15.62 16.07 -1.00 -1.00 -1.00 X
X 43-X -1.00 -1.00 -1.00 14.12 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X
73 71 69 67 65 63 61 59 57 55
LONGITUDE (DEG.)

```

Table 28

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X      X      X      X      X      X      X      X      X      X
55-X 4.60 5.13 5.17 4.66 4.71 5.23 5.30 5.37 5.46 5.56 X
X      X      X      X      X      X      X      X      X      X      X
54-X 6.11 5.42 5.46 5.19 5.24 5.82 5.89 5.98 6.29 6.40 X
X      X      X      X      X      X      X      X      X      X      X
53-X 7.29 5.54 6.16 5.48 6.09 6.16 6.23 6.89 7.00 6.75 X
X      X      X      X      X      X      X      X      X      X      X
52-X 6.88 7.31 7.36 6.20 6.26 6.32 7.00 7.10 7.21 7.09 X
X      X      X      X      X      X      X      X      X      X      X
L 51-X 7.88 7.92 7.34 6.24 6.55 6.99 7.08 7.18 7.19 7.31 X
A  X      X      X      X      X      X      X      X      X      X      X
T 50-X 8.80 7.91 6.94 7.39 7.15 7.48 7.57 8.42 7.93 6.92 X
I  X      X      X      X      X      X      X      X      X      X      X
T 49-X 8.51 7.90 6.93 7.70 7.99 8.48 8.59 9.39 9.67 9.83 X
U  X      X      X      X      X      X      X      X      X      X      X
D 48-X -1.00 7.89 6.92 8.01 8.50 8.87 8.97 9.24 8.95 9.10 X
E  X      X      X      X      X      X      X      X      X      X      X
( 47-X -1.00 -1.00 -1.00 8.42 8.49 9.36 9.48 9.61 11.38 11.57 X
D  X      X      X      X      X      X      X      X      X      X      X
E 46-X -1.00 -1.00 -1.00 -1.00 8.99 9.71 9.82 9.96 11.37 11.54 X
C  X      X      X      X      X      X      X      X      X      X      X
. 45-X -1.00 -1.00 -1.00 -1.00 9.93 10.26 10.39 10.44 11.37 11.56 X
)  X      X      X      X      X      X      X      X      X      X      X
44-X -1.00 -1.00 -1.00 -1.00 10.82 10.93 11.06 10.76 11.38 11.56 X
X      X      X      X      X      X      X      X      X      X      X
43-X -1.00 -1.00 -1.00 -1.00 12.85 12.99 11.07 11.22 11.38 -1.00 X
X      X      X      X      X      X      X      X      X      X      X
42-X -1.00 -1.00 -1.00 -1.00 -1.00 13.00 13.16 -1.00 -1.00 -1.00 X
X      X      X      X      X      X      X      X      X      X      X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          93      91      89      87      85      83      81      79      77      75
LONGITUDE (DEG.)

```

Table 29

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X X Site diversity: N; site separation dist. = 0.0 km X
X X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 4.124, 9.331 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X 7.18 6.87 6.22 6.19 6.17 5.52 5.74 6.08 6.09 5.39 X
X
54-X 6.90 6.84 6.41 5.80 5.78 6.12 6.12 6.12 5.50 5.51 X
X
53-X 6.49 6.44 6.39 5.78 5.76 6.31 6.85 6.85 6.86 7.26 X
X
52-X 5.26 6.42 6.37 5.77 5.74 6.84 6.83 7.34 7.35 7.10 X
X
LAT 51-X 4.90 5.55 5.52 5.49 5.49 6.56 7.06 7.55 7.56 7.85 X
TIT 50-X 4.12 4.85 5.40 5.48 5.48 6.16 6.84 7.12 9.33 8.93 X
UDE 49-X 4.62 4.29 5.03 5.47 4.87 5.88 6.83 8.57 8.88 8.92 X
DE 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
DE 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
G 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
. 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
) 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
113 111 109 107 105 103 101 99 97 95
LONGITUDE (DEG.)

```


Table 30

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 2.546, 6.967 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X 55-X -1.00 -1.00 -1.00 3.21 2.90 3.27 4.35 4.86 4.48 5.97 X
X
X 54-X -1.00 -1.00 -1.00 -1.00 2.74 5.33 4.12 4.52 6.01 6.97 X
X
X 53-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 3.89 4.82 5.99 6.94 X
X
X 52-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.63 4.81 4.44 5.67 X
X
L 51-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.62 2.59 4.74 4.17 X
A 50-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.58 2.55 4.67 X
T 49-X -1.00 -1.00 -1.00 -1.00 -1.00 4.28 -1.00 2.60 2.55 3.72 X
I 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
U 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
133 131 129 127 125 123 121 119 117 115
LONGITUDE (DEG.)

```

Table 31

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extremes: Min, Max = 1.627, 5.874 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
68-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
67-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
L 66-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
A 65-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 64-X 1.63 1.65 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
I 63-X 2.14 2.00 2.04 1.69 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 62-X 3.18 2.58 2.66 2.05 1.71 2.14 -1.00 -1.00 -1.00 -1.00 X
U 61-X 3.55 3.60 3.29 2.33 2.38 2.74 2.51 -1.00 -1.00 -1.00 X
D 60-X 4.22 3.92 3.26 2.99 3.01 4.30 3.94 2.55 -1.00 -1.00 X
E 59-X 4.19 4.48 3.77 3.29 4.17 4.26 4.47 4.39 4.52 -1.00 X
( 58-X 4.38 5.17 4.83 4.48 4.31 4.79 4.95 4.88 5.01 -1.00 X
D 57-X 5.06 4.72 5.11 4.75 4.99 5.26 5.38 5.52 5.45 5.61 X
E 56-X 5.08 5.16 5.40 5.21 5.70 5.50 5.63 5.77 5.71 5.87 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      81      79      77      75      73      71      69      67      65      63
LONGITUDE (DEG.)

```

Table 32

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X                               X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X                               X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
Percentage of year that values are exceeded: 0.100 X
Attenuation extrema: Min, Max = 1.143, 5.607 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X                               X                               X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X                               X                               X
69-X -1.00 -1.00 -1.00 1.17 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X                               X                               X
68-X 1.44 1.14 1.44 1.15 1.15 1.16 -1.00 -1.00 -1.00 -1.00 X
X                               X                               X
67-X 1.56 1.56 1.57 1.26 1.27 1.28 -1.00 -1.00 -1.00 -1.00 X
X                               X                               X
LAT 66-X 2.03 1.75 1.75 1.42 1.77 1.44 -1.00 -1.00 -1.00 -1.00 X
TIT 65-X 2.18 2.18 2.19 1.90 1.91 1.92 1.57 1.59 -1.00 -1.00 X
UDE 64-X 2.28 2.28 2.59 2.44 2.46 2.47 2.07 1.57 1.58 1.60 X
( 63-X 2.71 2.43 3.00 3.02 3.03 3.05 2.59 3.10 2.64 2.67 X
DEG 62-X 3.01 2.71 3.38 2.98 3.31 3.33 3.35 3.38 2.90 2.64 X
. 61-X 2.65 2.98 3.33 3.26 3.68 3.70 3.32 3.35 3.38 3.42 X
) 60-X 2.88 2.76 3.62 3.63 3.65 3.67 3.69 3.73 3.35 3.81 X
59-X 3.26 3.07 3.60 3.61 3.96 3.98 4.01 4.05 4.09 4.13 X
X 58-X 3.24 3.24 3.24 4.80 3.60 3.62 3.64 4.02 4.06 4.70 X
X 57-X 5.11 5.11 4.58 3.23 3.25 4.04 4.85 4.89 4.94 5.00 X
X 56-X 5.39 4.59 5.09 5.11 4.13 4.61 4.64 5.61 4.96 5.02 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
|         |         |         |         |         |         |         |         |         |         |
101      99      97      95      93      91      89      87      85      83
LONGITUDE (DEG.)

```

Table 33

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X           X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X           X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X           X Attenuation extrema: Min, Max = 1.438, 6.195 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

          XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
          X
69-X  2.15  2.11  2.08  2.05  2.03  2.01 -1.00  1.74 -1.00 -1.00 X
          X
68-X  2.31  2.50  2.47  2.43  2.18  2.16  2.14  1.70  1.70  1.44 X
          X
67-X  2.80  2.75  2.71  2.67  2.40  2.38  2.36  2.22  1.96  1.95 X
          X
LAT 66-X  2.97  3.16  3.12  3.08  2.81  2.54  2.52  2.51  2.23  2.22 X
ITI 65-X  3.32  3.27  3.22  3.18  2.77  2.89  2.62  2.60  2.59  2.19 X
TUD 64-X  3.74  3.68  3.63  3.59  3.10  3.30  2.83  2.57  2.55  2.55 X
E   63-X  3.91  3.85  3.79  3.54  3.50  3.47  3.23  2.98  2.72  2.71 X
    62-X  3.81  3.75  3.70  3.47  3.67  3.40  3.41  3.18  2.94  3.01 X
    61-X  3.94  3.45  3.50  3.45  3.42  3.39  3.34  3.13  3.12  2.90 X
    60-X  3.95  3.89  3.70  4.20  4.16  3.36  3.33  3.32  3.46  3.08 X
    59-X  4.01  4.08  3.90  4.34  4.30  3.79  3.93  4.17  3.28  3.27 X
    58-X  3.96  4.13  3.89  4.86  4.81  4.67  4.63  4.61  4.16  4.33 X
    57-X  4.16  4.43  4.38  4.79  4.75  4.71  4.67  4.65  5.13  5.12 X
    56-X  4.36  4.51  4.82  4.46  5.94  5.89  6.19  6.16  6.14  6.12 X
          X
          XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          |           |           |           |           |           |           |           |           |
          | 121     | 119     | 117     | 115     | 113     | 111     | 109     | 107     | 105     | 103     |
          |-----|-----|-----|-----|-----|-----|-----|-----|
          LONGITUDE (DEG.)

```

Table 34

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 30.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 2.190, 4.033 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X 3.90 3.74 3.59 3.46 3.35 3.25 3.16 3.08 3.01 2.19 X
X
68-X 3.77 3.62 3.49 3.37 3.26 3.17 3.08 3.01 2.94 2.35 X
X
67-X 3.67 3.52 3.40 3.29 3.19 3.39 3.30 3.22 3.15 2.05 X
X
L 66-X 3.58 3.44 3.65 3.52 3.42 3.32 3.23 3.16 3.09 3.03 X
A 65-X -1.00 3.37 3.57 3.45 3.35 3.52 3.43 3.35 3.28 3.22 X
T 64-X -1.00 3.31 3.32 3.67 3.56 3.71 3.61 3.53 3.63 3.66 X
I 63-X -1.00 3.25 3.27 3.16 3.75 3.88 3.78 3.69 3.79 3.72 X
T 62-X -1.00 -1.00 3.46 3.35 3.66 4.03 3.93 3.85 3.77 3.70 X
U 61-X -1.00 -1.00 3.84 3.72 3.62 3.53 3.89 3.80 3.73 3.84 X
D 60-X -1.00 -1.00 -1.00 3.68 3.58 3.49 3.41 3.33 3.26 3.63 X
E 59-X -1.00 -1.00 -1.00 -1.00 3.54 3.45 3.37 3.30 3.40 3.65 X
( 58-X -1.00 -1.00 -1.00 -1.00 -1.00 3.43 3.35 3.27 3.38 3.77 X
D 57-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 3.32 3.42 3.08 3.09 X
E 56-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 3.40 3.20 3.54 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
141 139 137 135 133 131 129 127 125 123
LONGITUDE, (DEG.)

```

Table 35

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X X Site diversity: N ; site separation dist. = 0.0 km X
X X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 2.078, 11.232 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X 4.14 4.50 4.61 4.72 4.75 4.53 4.67 -1.00 -1.00 -1.00 X
X
54-X 4.94 4.73 4.84 4.96 4.91 4.80 4.95 4.80 -1.00 -1.00 X
X
53-X 4.77 5.02 5.13 5.26 5.15 5.21 5.11 5.08 -1.00 -1.00 X
X
52-X 5.16 5.20 5.31 5.08 5.37 5.53 5.44 5.34 2.08 -1.00 X
X
LAT 51-X 5.23 4.85 4.96 5.49 5.19 5.50 5.67 5.68 4.29 -1.00 X
TIT 50-X 5.54 5.38 5.50 5.57 5.89 5.95 5.91 6.10 6.31 6.55 X
UDE 49-X 5.28 5.39 5.59 5.90 6.06 6.31 6.67 7.02 6.74 6.52 X
E 48-X 7.23 7.47 6.48 5.89 6.04 4.17 7.50 7.60 7.10 8.10 X
( 47-X 8.38 9.04 7.72 6.91 5.14 5.69 7.49 7.54 7.80 8.08 X
DEG 46-X 8.66 8.54 7.52 6.90 5.13 5.69 5.85 8.70 10.49 10.87 X
. 45-X 8.64 8.53 9.22 8.17 8.85 9.09 9.35 9.84 10.17 -1.00 X
) 44-X -1.00 -1.00 9.22 9.92 10.63 10.92 11.23 -1.00 -1.00 -1.00 X
X
43-X -1.00 -1.00 -1.00 9.92 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
73 71 69 67 65 63 61 59 57 55
LONGITUDE (DEG.)

```

Table 36

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      * Satellite located at 100.0 deg long; Freq: 44.0 GHz *
X ATT. TABLE * Site diversity: N ; site separation dist. = 0.0 km *
X      *      *      *      *      *      *      *      *      *      *
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 *
X      *      *      *      *      *      *      *      *      *      *
X      *      *      *      *      *      *      *      *      *      *
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

```

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X
55-X 3.57 3.94 3.97 3.62 3.65 4.02 4.07 4.13 4.20 4.27 X
X
54-X 4.60 4.13 4.16 3.98 4.02 4.42 4.48 4.54 4.76 4.84 X
X
53-X 5.39 4.22 4.64 4.18 4.60 4.65 4.71 5.16 5.24 5.08 X
X
52-X 5.12 5.40 5.44 4.67 4.71 4.76 5.22 5.29 5.38 5.31 X
L 51-X 5.78 5.81 5.43 4.69 4.91 5.21 5.27 5.36 5.36 5.45 X
A 50-X 6.38 5.80 5.16 5.46 5.31 5.53 5.60 6.17 5.85 5.16 X
T 49-X 6.19 5.79 5.15 5.67 5.86 6.19 6.27 6.80 6.99 7.11 X
I 48-X -1.00 5.78 5.15 5.87 6.20 6.44 6.52 6.70 6.52 6.63 X
T 47-X -1.00 -1.00 -1.00 6.14 6.19 6.77 6.85 6.94 8.09 8.23 X
U 46-X -1.00 -1.00 -1.00 -1.00 6.52 6.99 7.07 7.17 8.09 8.21 X
D 45-X -1.00 -1.00 -1.00 -1.00 7.12 7.35 7.43 7.48 8.09 8.22 X
E 44-X -1.00 -1.00 -1.00 -1.00 7.70 7.78 7.87 7.68 8.09 8.22 X
G 43-X -1.00 -1.00 -1.00 -1.00 8.93 9.07 7.88 7.98 8.10 -1.00 X
. 42-X -1.00 -1.00 -1.00 -1.00 -1.00 9.09 9.19 -1.00 -1.00 -1.00 X
) 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
          93      91      89      87      85      83      81      79      77      75
LONGITUDE (DEG.)

```

Table 37

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      ATT. TABLE X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X      X Site diversity: N ; site separation dist. = 0.0 km X
X      X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X      Attenuation extrema: Min, Max = 3.237, 6.714 (dB) X
X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
  
```

| XX | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|
| X | | | | | | | | | | |
| 55-X 5.33 5.12 4.68 4.66 4.64 4.20 4.35 4.58 4.59 4.11 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 54-X 5.14 5.10 4.81 4.39 4.37 4.61 4.60 4.60 4.18 4.19 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 53-X 4.86 4.82 4.79 4.38 4.36 4.73 5.09 5.09 5.10 5.37 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 52-X 4.03 4.81 4.78 4.36 4.35 5.08 5.08 5.42 5.42 5.26 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 51-X 3.78 4.22 4.20 4.17 4.17 4.90 5.23 5.55 5.56 5.75 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 50-X 3.24 3.74 4.11 4.17 4.16 4.62 5.08 5.27 6.71 6.46 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 49-X 3.59 3.35 3.86 4.16 3.75 4.44 5.07 6.22 6.42 6.45 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X | | | | | | | | | | |
| X | | | | | | | | | | |
| XX | | | | | | | | | | |
| 113 111 109 107 105 103 101 99 97 95 | | | | | | | | | | |
| LONGITUDE (DEG.) | | | | | | | | | | |

Table 38

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X Site diversity: N ; site separation dist. = 0.0 km X
X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 2.104, 5.191 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X 55-X -1.00 -1.00 -1.00 2.62 2.39 2.65 3.42 3.77 3.50 4.52 X
X
X 54-X -1.00 -1.00 -1.00 -1.00 2.26 4.10 3.26 3.53 4.55 5.19 X
X
X 53-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 3.09 3.74 4.53 5.17 X
X
X 52-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.17 3.73 3.46 4.31 X
X
L 51-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.17 2.14 3.67 3.27 X
A 50-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.13 2.11 3.63 X
T 49-X -1.00 -1.00 -1.00 -1.00 -1.00 3.36 -1.00 2.15 2.10 2.95 X
I 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
U 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
D 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
133 131 129 127 125 123 121 119 117 115
LONGITUDE (DEG.)

```

Table 39

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
* ATT. TABLE * Satellite located at 100.0 deg long; Freq: 44.0 GHz *
* Site diversity: N ; site seperation dist. = 0.0 km *
* Baseline to path angle= 0.0 deg *
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 *
* Attenuation extrema: Min, Max = 1.423, 4.559 (dB) *
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
*
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
*
69-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
*
68-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
*
67-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
*
L 66-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
A 65-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
T 64-X 1.42 1.45 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
I 63-X 1.81 1.71 1.74 1.48 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 *
T 62-X 2.59 2.15 2.21 1.76 1.49 1.83 -1.00 -1.00 -1.00 -1.00 *
U 61-X 2.86 2.90 2.67 1.97 2.01 2.29 2.12 -1.00 -1.00 -1.00 *
D 60-X 3.34 3.13 2.65 2.46 2.48 3.42 3.17 2.15 -1.00 -1.00 *
E 59-X 3.31 3.52 3.02 2.67 3.32 3.39 3.55 3.50 3.60 -1.00 *
( 58-X 3.44 4.00 3.77 3.53 3.41 3.77 3.89 3.84 3.95 -1.00 *
D 57-X 3.91 3.68 3.96 3.72 3.89 4.09 4.18 4.29 4.25 4.38 *
E 56-X 3.93 3.98 4.16 4.03 4.38 4.26 4.35 4.46 4.43 4.56 *
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      81      79      77      75      73      71      69      67      65      63
LONGITUDE (DEG.)

```

Table 40

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

```

| L A T I T U D E (D E G .) | XX | | | | | | | | | |
|--|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 101 | 99 | 97 | 95 | 93 | 91 | 89 | 87 | 85 | 83 |
| 70-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 69-X | -1.00 | -1.00 | -1.00 | 1.07 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 68-X | 1.27 | 1.04 | 1.27 | 1.04 | 1.05 | 1.05 | -1.00 | -1.00 | -1.00 | -1.00 |
| 67-X | 1.37 | 1.37 | 1.37 | 1.13 | 1.14 | 1.14 | -1.00 | -1.00 | -1.00 | -1.00 |
| 66-X | 1.73 | 1.51 | 1.52 | 1.26 | 1.53 | 1.27 | -1.00 | -1.00 | -1.00 | -1.00 |
| 65-X | 1.84 | 1.84 | 1.85 | 1.63 | 1.63 | 1.64 | 1.38 | 1.39 | -1.00 | -1.00 |
| 64-X | 1.91 | 1.91 | 2.15 | 2.04 | 2.05 | 2.06 | 1.76 | 1.37 | 1.39 | 1.40 |
| 63-X | 2.23 | 2.02 | 2.45 | 2.46 | 2.47 | 2.48 | 2.15 | 2.52 | 2.19 | 2.22 |
| 62-X | 2.45 | 2.23 | 2.70 | 2.43 | 2.67 | 2.68 | 2.70 | 2.73 | 2.38 | 2.19 |
| 61-X | 2.18 | 2.42 | 2.68 | 2.63 | 2.93 | 2.95 | 2.67 | 2.70 | 2.73 | 2.76 |
| 60-X | 2.35 | 2.26 | 2.89 | 2.89 | 2.91 | 2.92 | 2.94 | 2.97 | 2.70 | 3.04 |
| 59-X | 2.62 | 2.49 | 2.87 | 2.87 | 3.13 | 3.14 | 3.17 | 3.19 | 3.23 | 3.26 |
| 58-X | 2.61 | 2.61 | 2.61 | 3.71 | 2.87 | 2.88 | 2.90 | 3.17 | 3.20 | 3.66 |
| 57-X | 3.92 | 3.92 | 3.55 | 2.60 | 2.61 | 3.18 | 3.75 | 3.78 | 3.82 | 3.86 |
| 56-X | 4.11 | 3.56 | 3.91 | 3.92 | 3.24 | 3.58 | 3.61 | 4.27 | 3.83 | 3.88 |

LONGITUDE (DEG.)

Table 41

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X X Site diversity: N; site separation dist. = 0.0 km X
X X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 1.274, 4.665 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X 1.85 1.82 1.79 1.76 1.74 1.72 -1.00 1.52 -1.00 -1.00 X
X
68-X 1.96 2.11 2.08 2.05 1.86 1.84 1.82 1.48 1.48 1.27 X
X
67-X 2.33 2.29 2.26 2.23 2.02 2.00 1.99 1.88 1.68 1.67 X
X
66-X 2.46 2.59 2.55 2.52 2.33 2.12 2.10 2.09 1.88 1.88 X
X
L 65-X 2.71 2.66 2.63 2.59 2.29 2.37 2.17 2.16 2.15 1.85 X
A 64-X 3.01 2.96 2.92 2.88 2.53 2.67 2.32 2.13 2.12 2.11 X
T 63-X 3.12 3.08 3.03 2.85 2.82 2.79 2.62 2.43 2.24 2.23 X
I 62-X 3.05 3.00 2.96 2.79 2.93 2.74 2.74 2.57 2.40 2.45 X
T 61-X 3.14 2.79 2.81 2.78 2.75 2.73 2.69 2.54 2.53 2.37 X
U 60-X 3.15 3.10 2.95 3.31 3.28 2.70 2.68 2.67 2.77 2.50 X
D 59-X 3.19 3.23 3.10 3.41 3.37 3.01 3.11 3.28 2.64 2.63 X
E 58-X 3.14 3.26 3.09 3.76 3.73 3.62 3.60 3.58 3.27 3.38 X
( 57-X 3.29 3.47 3.43 3.72 3.68 3.65 3.63 3.60 3.94 3.93 X
D 56-X 3.43 3.53 3.74 3.48 4.50 4.46 4.66 4.64 4.62 4.61 X
E
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
| 121 | 119 | 117 | 115 | 113 | 111 | 109 | 107 | 105 | 103
LONGITUDE (DEG.)

```

Table 42

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X X Site diversity: N ; site separation dist. = 0.0 km X
X X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.500 X
X Attenuation extrema: Min, Max = 1.883, 3.253 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X 3.25 3.12 3.00 2.89 2.80 2.71 2.64 2.57 2.51 1.88 X
X
68-X 3.15 3.02 2.91 2.81 2.72 2.64 2.57 2.51 2.45 2.00 X
X
67-X 3.06 2.94 2.83 2.74 2.66 2.80 2.73 2.66 2.60 2.37 X
X
L 66-X 2.98 2.87 3.01 2.91 2.82 2.74 2.67 2.61 2.55 2.50 X
A 65-X -1.00 2.81 2.95 2.85 2.77 2.89 2.81 2.75 2.69 2.64 X
T 64-X -1.00 2.76 2.76 3.01 2.92 3.02 2.94 2.87 2.94 2.88 X
I 63-X -1.00 2.71 2.71 2.63 3.05 3.14 3.06 2.99 3.05 2.99 X
T 62-X -1.00 -1.00 2.85 2.76 2.99 3.25 3.17 3.10 3.03 2.98 X
U 61-X -1.00 -1.00 3.13 3.03 2.95 2.87 3.13 3.06 3.00 3.07 X
D 60-X -1.00 -1.00 -1.00 3.00 2.92 2.84 2.78 2.71 2.66 2.85 X
E 59-X -1.00 -1.00 -1.00 -1.00 2.89 2.82 2.75 2.69 2.76 2.94 X
( 58-X -1.00 -1.00 -1.00 -1.00 -1.00 2.79 2.73 2.67 2.74 3.02 X
D 57-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.71 2.77 2.52 3.10 X
E 56-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 2.76 2.61 2.85 X
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
141 139 137 135 133 131 129 127 125 123
LONGITUDE (DEG.)

```

Table 43

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X ATT. TABLE X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X X Site diversity: N ; site separation dist. = 0.0 km X
X X Baseline to path angle = 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extremes: Min, Max = 4.573, 24.716 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
L 55-X 9.12 9.91 10.14 10.39 10.46 9.97 10.28 -1.00 -1.00 -1.00 X
A 54-X 10.87 10.41 10.65 10.91 10.81 10.55 10.88 10.56 -1.00 -1.00 X
T 53-X 10.49 11.05 11.30 11.57 11.34 11.47 11.24 11.18 -1.00 -1.00 X
I 52-X 11.35 11.44 11.69 11.17 11.83 12.16 11.96 11.76 4.57 -1.00 X
T 51-X 11.50 10.67 10.91 12.09 11.42 12.11 12.48 12.50 9.44 -1.00 X
U 50-X 12.20 11.83 12.09 12.25 12.97 13.09 13.00 13.42 13.89 14.41 X
D 49-X 11.62 11.85 12.30 12.99 13.32 13.88 14.67 15.45 14.82 14.35 X
E 48-X 15.91 16.44 14.27 12.96 13.29 9.18 16.51 16.73 15.62 17.83 X
( 47-X 18.43 19.89 16.99 15.20 11.31 12.53 16.48 16.59 17.15 17.78 X
D 46-X 19.07 18.79 16.55 15.18 11.29 12.51 12.88 19.15 23.09 23.93 X
E 45-X 19.02 18.78 20.29 17.99 19.48 20.00 20.58 21.66 22.39 -1.00 X
. 44-X -1.00 -1.00 20.28 21.82 23.40 24.02 24.72 -1.00 -1.00 -1.00 X
) 43-X -1.00 -1.00 -1.00 21.82 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
73 71 69 67 65 63 61 59 57 55
LONGITUDE (DEG.)

```

Table 44

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      93      91      89      87      85      83      81      79      77      75
LONGITUDE (DEG.)

```

Table 45

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X      X      X Attenuation extrema: Min, Max = 7.123, 14.776 (dB) X
X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
55-X 11.74 11.27 10.30 10.25 10.21 9.23 9.57 10.08 10.09 9.04 X
X
54-X 11.31 11.22 10.58 9.66 9.62 10.14 10.12 10.12 9.20 9.22 X
X
53-X 10.70 10.62 10.54 9.63 9.59 10.42 11.20 11.20 11.21 11.81 X
X
52-X 8.86 10.59 10.51 9.60 9.56 11.18 11.17 11.92 11.94 11.58 X
X
LAT 51-X 8.32 9.30 9.23 9.18 9.18 10.78 11.51 12.21 12.23 12.66 X
IT 50-X 7.12 8.24 9.05 9.17 9.16 10.18 11.18 11.59 14.78 14.21 X
UD 49-X 7.89 7.37 8.50 9.16 8.25 9.77 11.16 13.68 14.13 14.19 X
DE 48-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
E 47-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
( 46-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
DE 45-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
G 44-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
. 43-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
) 42-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
41-X 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |         |         |         |         |         |         |         |         |         |
      113      111      109      107      105      103      101      99      97      95
LONGITUDE (DEG.)

```


Table 46

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
X      X      X      X      X      X      X      X      X      X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

```

| | 133 | 131 | 129 | 127 | 125 | 123 | 121 | 119 | 117 | 115 |
|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 55-X | -1.00 | -1.00 | -1.00 | 5.76 | 5.25 | 5.82 | 7.52 | 8.30 | 7.71 | 9.95 |
| 54-X | -1.00 | -1.00 | -1.00 | -1.00 | 4.98 | 9.03 | 7.17 | 7.77 | 10.02 | 11.42 |
| 53-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | 6.80 | 8.23 | 9.98 | 11.38 |
| 52-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | 4.78 | 8.20 | 7.62 | 9.48 |
| 51-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | 4.77 | 4.70 | 8.08 | 7.20 |
| 50-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | 4.69 | 4.64 | 7.98 |
| 49-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | 7.40 | -1.00 | 4.73 | 4.63 | 6.49 |
| 48-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 47-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 46-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 45-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 44-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 43-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 42-X | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 | -1.00 |
| 41-X | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

LONGITUDE (DEG.)

Table 47

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      X Baseline to path angle = 0.0 deg X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Percentage of year that values are exceeded: 0.100 X
X      X Attenuation extrens: Min, Max = 3.132, 10.033 (dB) X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
68-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
67-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
66-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
L 65-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
A 64-X 3.13 3.18 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
T 63-X 3.99 3.77 3.84 3.26 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
I 62-X 5.70 4.74 4.87 3.87 3.28 4.04 -1.00 -1.00 -1.00 -1.00 X
T 61-X 6.29 6.38 5.89 4.33 4.42 5.03 4.66 -1.00 -1.00 -1.00 X
U 60-X 7.34 6.88 5.83 5.42 5.46 7.53 6.98 4.73 -1.00 -1.00 X
D 59-X 7.28 7.74 6.64 5.89 7.30 7.46 7.81 7.71 7.92 -1.00 X
E 58-X 7.57 8.80 8.29 7.77 7.51 8.29 8.55 8.45 8.69 -1.00 X
. 57-X 8.61 8.10 8.72 8.18 8.56 9.00 9.21 9.44 9.36 9.64 X
( 56-X 8.64 8.76 9.15 8.87 9.64 9.37 9.58 9.82 9.75 10.03 X
D 63
E G . )
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |      |      |      |      |      |      |      |      |      |
      81      79      77      75      73      71      69      67      65      63
LONGITUDE (DEG.)
    
```

Table 48

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      * Satellite located at 100.0 deg long; Freq: 44.0 GHz *
X ATT. TABLE * Site diversity: N ; site separation dist. = 0.0 km *
X      * Baseline to path angle= 0.0 deg *
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 *
X      * Attenuation extrema: Min, Max = 2.282, 9.401 (dB) *
X      *
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

L
A
T
I
T
U
D
E
(
D
E
G
)
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
69-X -1.00 -1.00 -1.00 2.34 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
68-X 2.80 2.28 2.80 2.29 2.30 2.32 -1.00 -1.00 -1.00 -1.00 X
67-X 3.02 3.02 3.02 2.49 2.50 2.52 -1.00 -1.00 -1.00 -1.00 X
66-X 3.81 3.33 3.34 2.77 3.36 2.80 -1.00 -1.00 -1.00 -1.00 X
65-X 4.06 4.06 4.06 3.58 3.59 3.62 3.03 3.06 -1.00 -1.00 X
64-X 4.20 4.20 4.72 4.48 4.50 4.53 3.86 3.02 3.05 3.09 X
63-X 4.91 4.46 5.39 5.41 5.43 5.46 4.72 5.56 4.82 4.88 X
62-X 5.39 4.91 5.95 5.35 5.87 5.90 5.94 6.00 5.23 4.82 X
61-X 4.81 5.33 5.89 5.78 6.45 6.49 5.89 5.94 6.00 6.07 X
60-X 5.17 4.97 6.35 6.37 6.39 6.43 6.48 6.53 5.95 6.68 X
59-X 5.78 5.47 6.30 6.32 6.88 6.92 6.97 7.03 7.10 7.18 X
58-X 5.74 5.74 5.75 8.16 6.31 6.34 6.39 6.98 7.05 8.06 X
57-X 8.63 8.63 7.82 5.73 5.75 6.99 8.25 8.32 8.40 8.50 X
56-X 9.05 7.83 8.60 8.62 7.14 7.88 7.93 8.40 8.43 8.53 X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      101      99      97      95      93      91      89      87      85      83
LONGITUDE (DEG.)

```

Table 49

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X                               X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X                               X Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X Attenuation extrema: Min, Max = 2.804, 10.265 (dB) X
X                               X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

```

| XX | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|--|--|--|--|--|--|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 69-X 4.06 3.99 3.93 3.88 3.83 3.80 -1.00 3.34 -1.00 -1.00 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 68-X 4.32 4.65 4.58 4.52 4.08 4.04 4.01 3.27 3.25 2.80 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 67-X 5.13 5.04 4.97 4.90 4.45 4.41 4.37 4.13 3.69 3.68 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 66-X 5.41 5.70 5.62 5.55 5.12 4.67 4.63 4.60 4.14 4.13 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 65-X 5.96 5.86 5.78 5.71 5.04 5.22 4.78 4.75 4.73 4.06 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 64-X 6.62 6.52 6.43 6.35 5.57 5.87 5.11 4.68 4.66 4.65 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 63-X 6.88 6.77 6.68 6.27 6.20 6.15 5.76 5.36 4.93 4.91 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 62-X 6.71 6.60 6.51 6.14 6.45 6.02 6.03 5.66 5.27 5.39 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 61-X 6.92 6.13 6.19 6.12 6.05 6.00 5.92 5.59 5.56 5.21 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60-X 6.92 6.82 6.50 7.29 7.21 5.95 5.90 5.87 6.09 5.50 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 59-X 7.02 7.12 6.82 7.50 7.42 6.62 6.84 7.21 5.80 5.78 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 58-X 6.92 7.18 6.79 8.28 8.20 7.97 7.92 7.87 7.19 7.45 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 57-X 7.24 7.64 7.55 8.18 8.10 8.03 7.98 7.93 8.67 8.65 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 56-X 7.54 7.76 8.23 7.66 9.90 9.81 10.26 10.21 10.17 10.14 X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| XX | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="0" style="width: 100%; text-align: center;"> <tr> <td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td><td style="width: 10%;"> </td> </tr> <tr> <td>121</td><td>119</td><td>117</td><td>115</td><td>113</td><td>111</td><td>109</td><td>107</td><td>105</td><td>103</td><td></td> </tr> </table> | | | | | | | | | | | | | | | | | | | | | | 121 | 119 | 117 | 115 | 113 | 111 | 109 | 107 | 105 | 103 | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 121 | 119 | 117 | 115 | 113 | 111 | 109 | 107 | 105 | 103 | | | | | | | | | | | | | | | | | | | | | | | |
| LONGITUDE (DEG.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Table 50

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X      X Satellite located at 100.0 deg long; Freq: 44.0 GHz X
X ATT. TABLE X Site diversity: N ; site separation dist. = 0.0 km X
X      X      Baseline to path angle= 0.0 deg X
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.100 X
X      X      Attenuation extrema: Min, Max = 4.145, 7.159 (dB) X
X      X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X
70-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 X
X
69-X 7.16 6.86 6.59 6.36 6.15 5.96 5.80 5.66 5.53 4.14 X
X
68-X 6.93 6.65 6.40 6.18 5.98 5.82 5.66 5.52 5.39 4.41 X
X
67-X 6.73 6.47 6.23 6.04 5.85 6.17 6.00 5.86 5.73 5.22 X
X
L 66-X 6.57 6.31 6.63 6.41 6.21 6.04 5.88 5.74 5.62 5.50 X
A 65-X -1.00 6.19 6.49 6.28 6.09 6.35 6.19 6.05 5.92 5.80 X
T 64-X -1.00 6.08 6.07 6.62 6.42 6.64 6.47 6.32 6.46 6.34 X
I 63-X -1.00 5.97 5.97 5.79 6.72 6.90 6.73 6.58 6.72 6.59 X
T 62-X -1.00 -1.00 6.27 6.08 6.57 7.14 6.97 6.81 6.67 6.55 X
U 61-X -1.00 -1.00 6.89 6.68 6.49 6.32 6.89 6.74 6.60 6.76 X
D 60-X -1.00 -1.00 -1.00 6.60 6.42 6.25 6.11 5.97 5.85 6.27 X
E 59-X -1.00 -1.00 -1.00 -1.00 6.36 6.20 6.05 5.92 6.07 6.46 X
G 58-X -1.00 -1.00 -1.00 -1.00 -1.00 6.14 6.00 5.87 6.03 6.64 X
. 57-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 5.96 6.10 5.55 6.82 X
) 56-X -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 -1.00 6.06 5.74 6.26 X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
      |         |         |         |         |         |         |         |         |         |         |
      141      139      137      135      133      131      129      127      125      123
LONGITUDE (DEG.)

```

Figs. 40-48
(pages 116-124)

Rain attenuation exceedance ranges over a region, 40°N-70°N latitude and 55°W-145°W in longitude, in Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the following values of P. The legend gives the ranges of attenuation exceedance values corresponding to the symbols in the map.

The longitude of the satellite is 100° W and there is no site diversity. The min. and max. attenuation exceedance values over the region are also shown.

Frequency

Percentage P of time of an average year when the rain attenuation exceeds a range of values.

| | |
|--------|-----------------|
| 20 GHz | (1) P = 0.5% ; |
| | (2) P = 0.1% ; |
| | (3) P = 0.01% . |

| | |
|--------|----------------|
| 30 GHz | (1) P = 1.0% ; |
| | (2) P = 0.5% ; |
| | (3) P = 0.1% . |

| | |
|--------|----------------|
| 44 GHz | (1) P = 1.0% ; |
| | (2) P = 0.5% ; |
| | (3) P = 0.1% . |

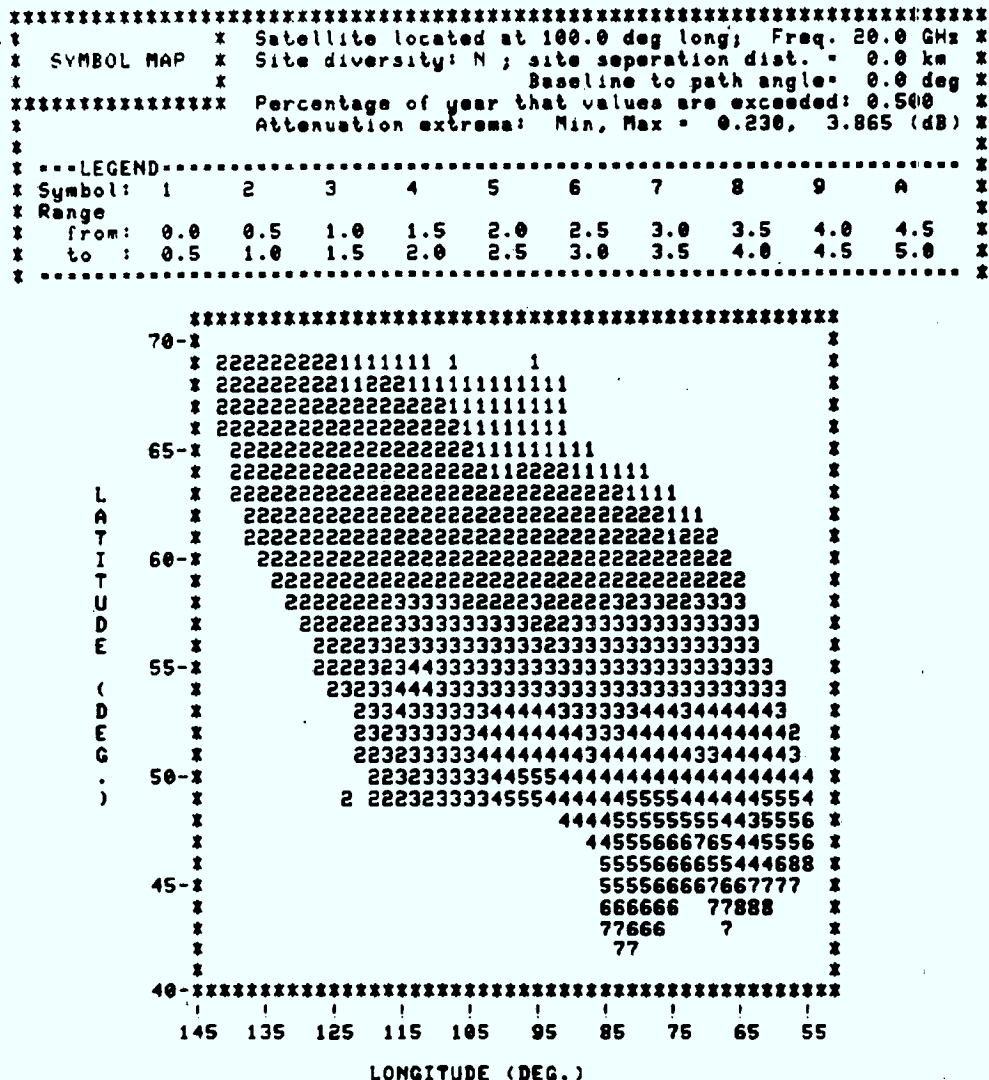


Fig. 40

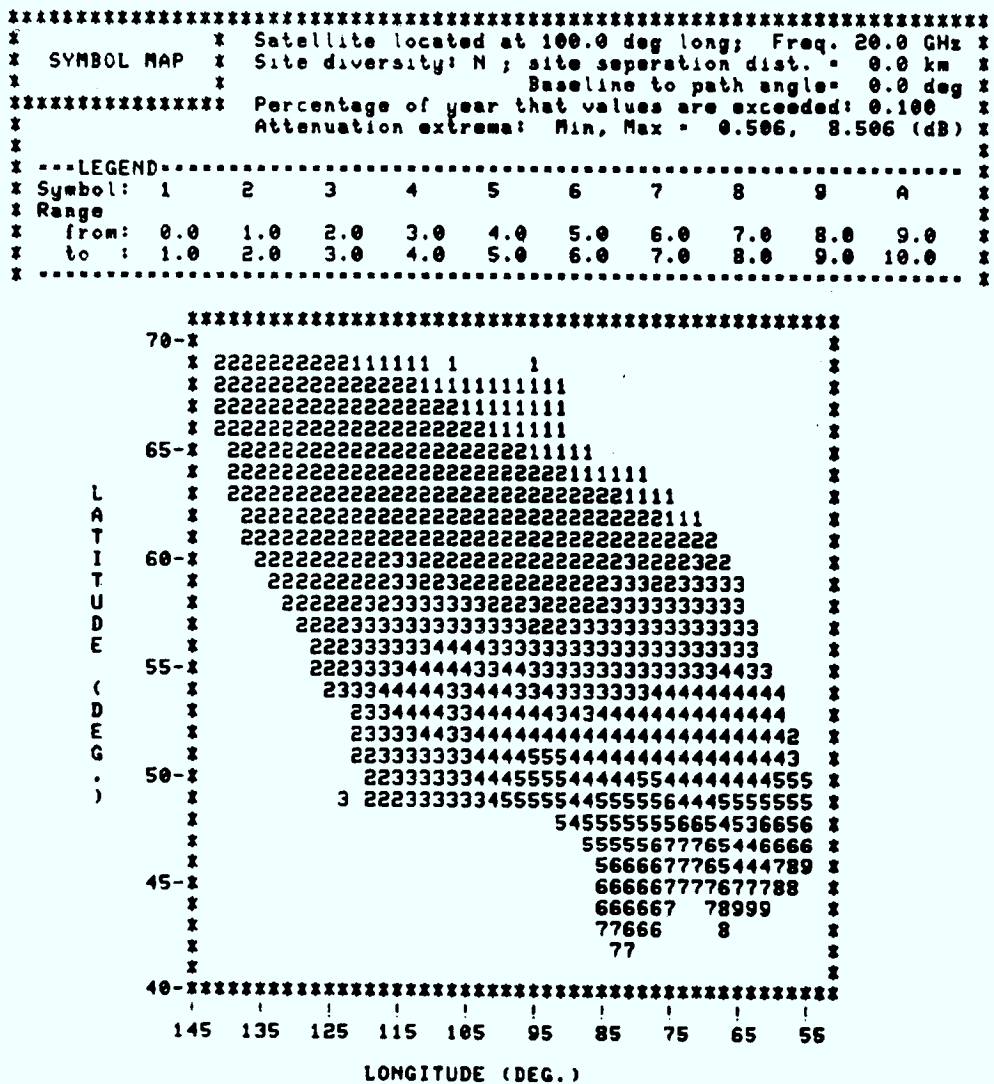


Fig. 41


```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
x          x  Satellite located at 100.0 deg long; Freq. 20.0 GHz x
x SYMBOL MAP x  Site diversity: N ; site separation dist. = 0.0 km x
x          x          Baseline to path angle = 0.0 deg x
XXXXXXXXXXXXXXXXXXXX Percentage of year that values are exceeded: 0.010 x
x          x          Attenuation extrema: Min, Max = 1.321, 22.218 (dB) x
x          x
x ---LEGEND-----x
x Symbol: 1 2 3 4 5 6 7 8 9 A x
x Range
x from: 1.0 3.5 6.0 8.5 11.0 13.5 16.0 18.5 21.0 23.5 x
x to : 3.5 6.0 8.5 11.0 13.5 16.0 18.5 21.0 23.5 26.0 x
x -----x

```

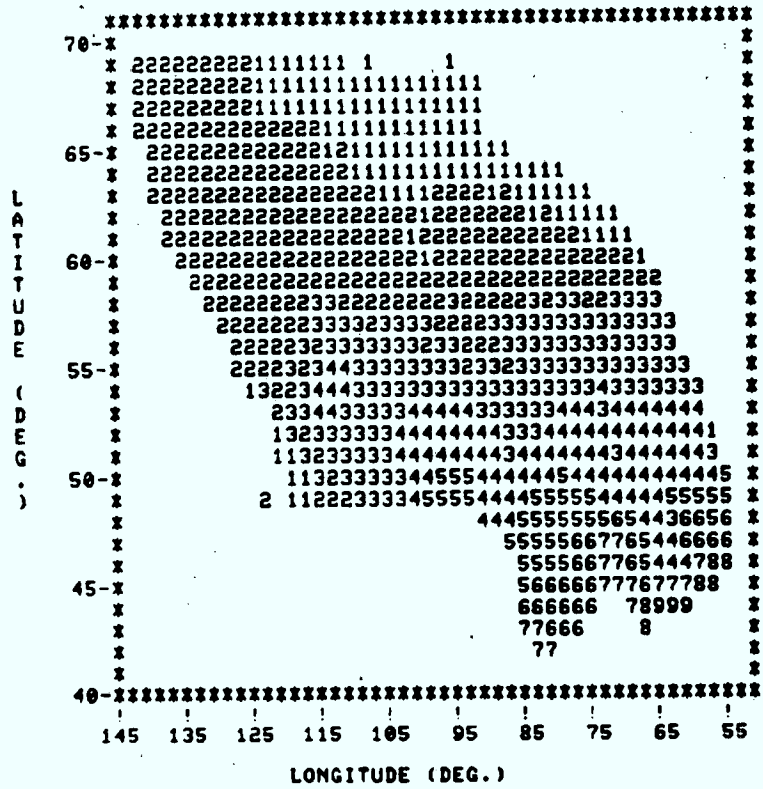


Fig. 42

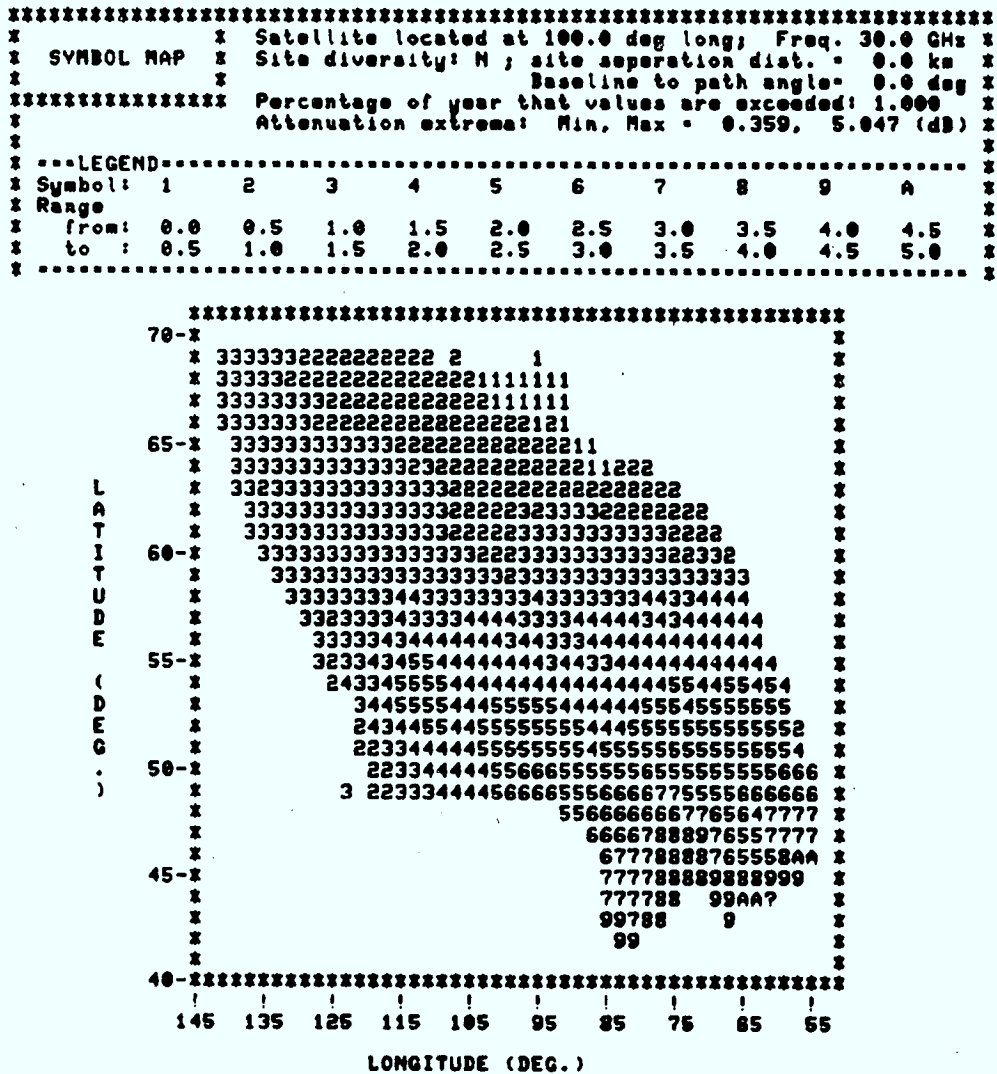


Fig. 43

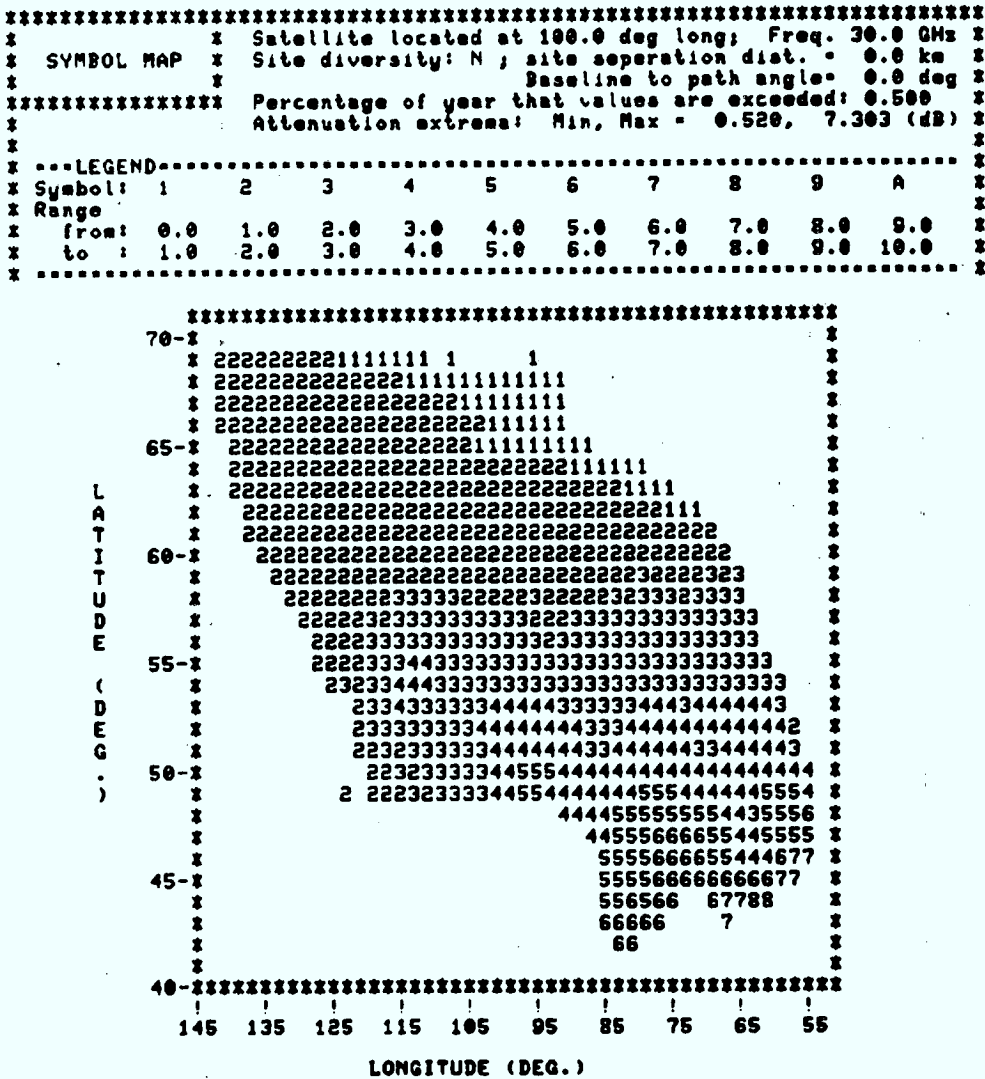


Fig. 44

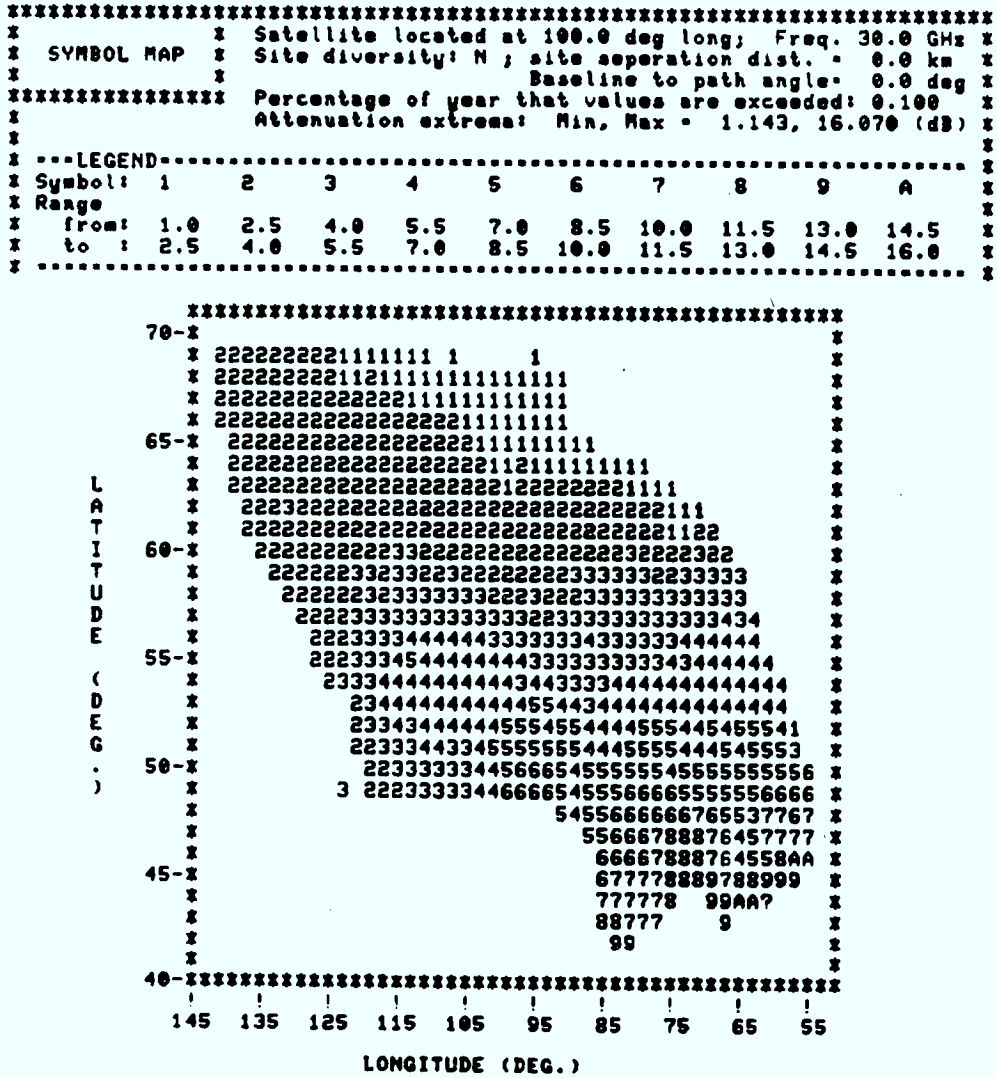


Fig. 45

```

*****
*                               x Satellite located at 100.0 deg long; Freq. 44.0 GHz x
* SYMBOL MAP x Site diversity: N ; site separation dist. = 0.0 km x
*                               x Baseline to path angle= 0.0 deg x
*****
* Percentage of year that values are exceeded: 1.000 x
* Attenuation extrema: Min, Max = 0.717, 7.762 (dB) x
*
* ---LEGEND-----*
* Symbol: 1 2 3 4 5 6 7 8 9 A x
* Range x
* from: 0.0 1.0 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 x
* to : 1.0 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 x
* -----*

```

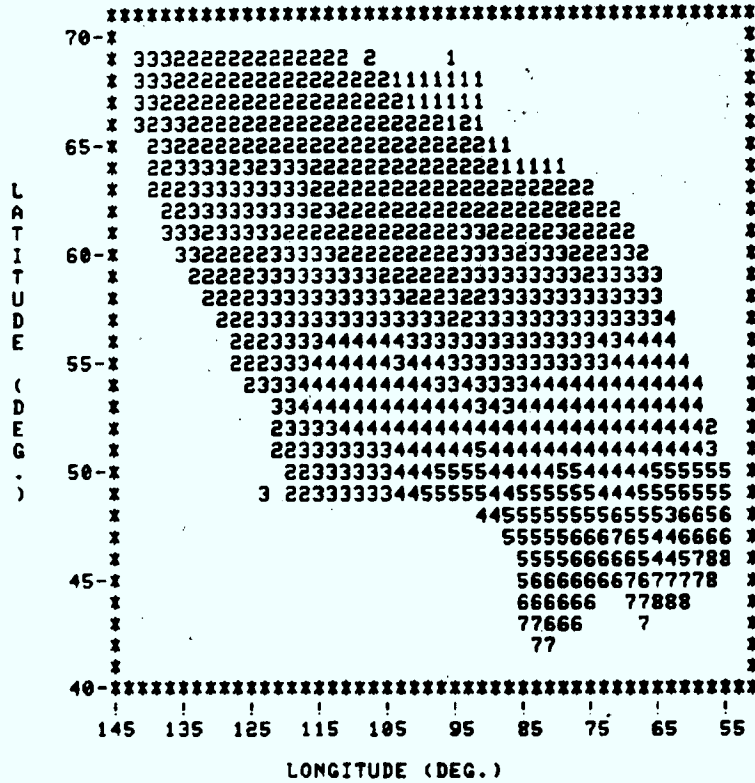


Fig. 46

```

*****
*                               *
*   * Satellite located at 100.0 deg long; Freq. 44.0 GHz *
* SYMBOL MAP * Site diversity: N ; site separation dist. = 0.0 km *
*                               * Baseline to path angle= 0.0 deg *
*                               *
* Percentage of year that values are exceeded: 0.500 *
* Attenuation extrema: Min, Max = 1.037, 11.232 (dB) *
*                               *
* ---LEGEND---
* Symbol: 1 2 3 4 5 6 7 8 9 A *
* Range *
* from: 1.0 2.5 4.0 5.5 7.0 8.5 10.0 11.5 13.0 14.5 *
* to : 2.5 4.0 5.5 7.0 8.5 10.0 11.5 13.0 14.5 16.0 *
*                               *

```

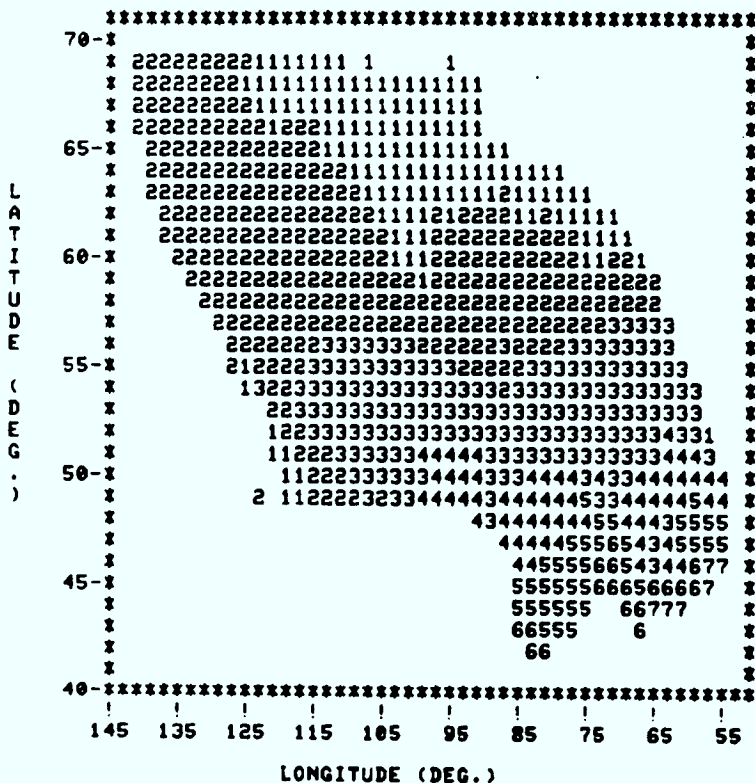


Fig. 47

* Satellite located at 100.0 deg long; Freq. 44.0 GHz *
* SYMBOL MAP * Site diversity: N ; site separation dist. = 0.0 km *
* * * * * Baseline to path angle= 0.0 deg *
* ***** Percentage of year that values are exceeded: 0.100 *
* * * * * Attenuation extrema: Min, Max = 2.282, 24.716 (dB) *
* * * * *
* ---LEGEND-----
* Symbol: 1 2 3 4 5 6 7 8 9 A *
* Range *
* from: 2.0 4.5 7.0 9.5 12.0 14.5 17.0 19.5 22.0 24.5 *
* to : 4.5 7.0 9.5 12.0 14.5 17.0 19.5 22.0 24.5 27.0 *
* * * * *

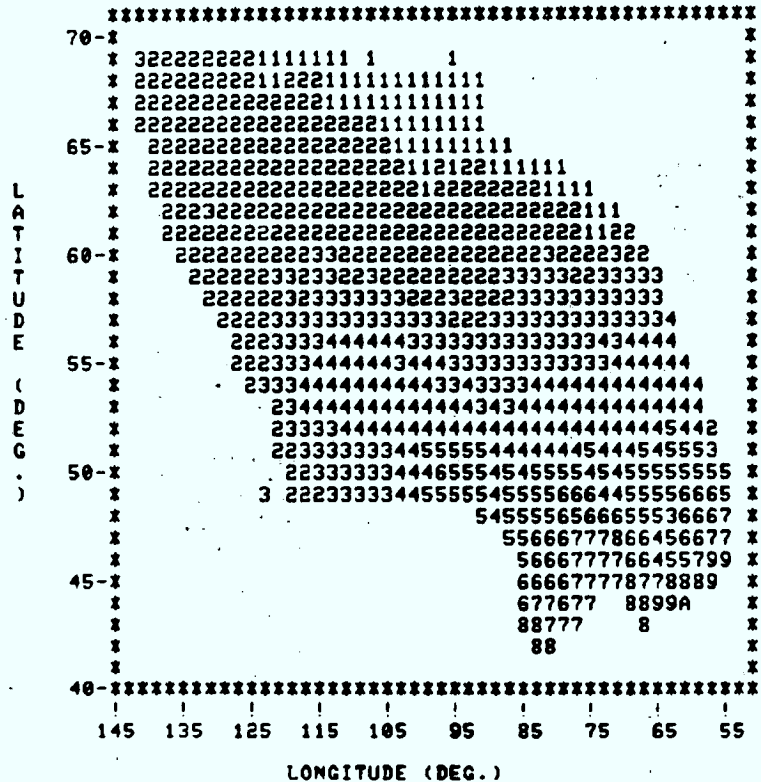


Fig. 48

Figs. 49-63
(pages 126-140)

Rain attenuation exceedance values for selected sites in different regions of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for $P = 0.1\%$.

The longitude of the satellite is 100° W and there is no site diversity. The approximate position of the site is shown on a coarse map.

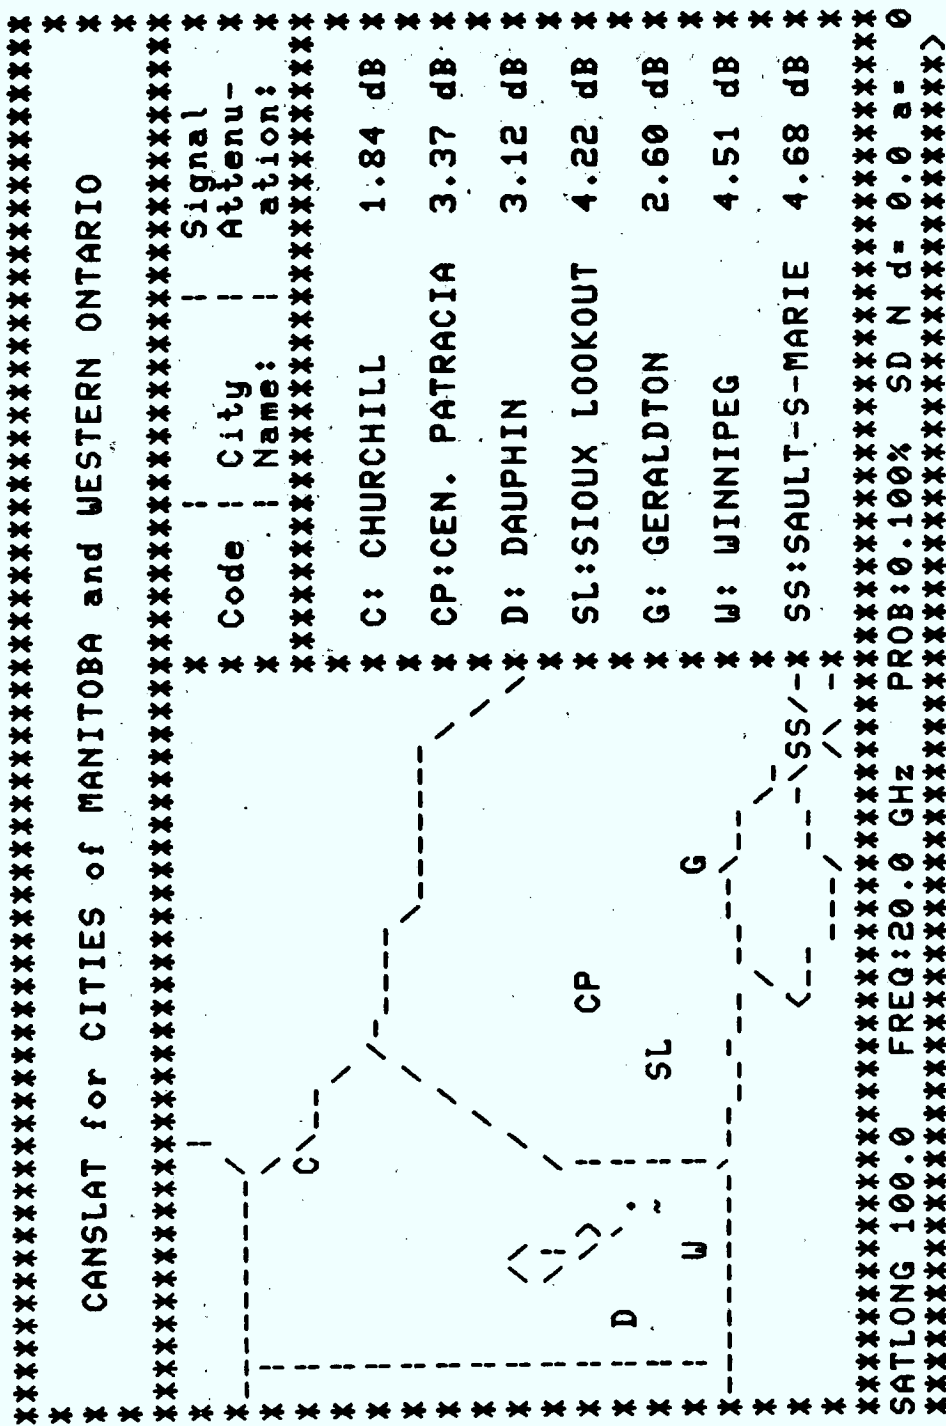


Fig. 51

(b) (c) (d) (e) (f)


```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X          CANSLAT for CITIES of ALBERTA and SASKATCHEWAN          X
X          \--/\ X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X          Code | City | Name: | Signal |
X          -----|-----|-----|-----|
X          U: URANIUM CITY | 5.38 dB X
X          Wa: WATINO+ | 7.00 dB X
X          E: EDMONTON | 8.86 dB X
X          P: PRINCE ALBERT | 7.96 dB X
X          C: CALGARY | 6.05 dB X
X          S: SWIFT CURRENT | 6.95 dB X
X          R: REGINA | 9.06 dB X
X          W: WEYBURN | 8.63 dB X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
SATLONG 100.0 FREQ: 44.0 GHz PROB: 0.100% SD N d= 0.0 a= 0
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

```

Fig. 62


Figs. 64-66
(pages 142-144)

Link availability A_v contours for a major part of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the following values of link margin LM to overcome rain fade.

The legend gives the link availability values for the contours. The longitude of the satellite is 100° W and there is no site diversity. The latitude and longitude of the boundaries are indicated.

| Frequency | Link Margin for Rain Fade |
|-----------|---------------------------|
| 20 GHz | 6 dB |
| 30 GHz | 10 dB |
| 44 GHz | 16 dB |


| LEGEND | |
|--------|-------------|
| 0 | = 99.9000 % |
| X | = 99.9300 % |
| △ | = 99.9500 % |
| □ | = 99.9700 % |
| * | = 99.9900 % |

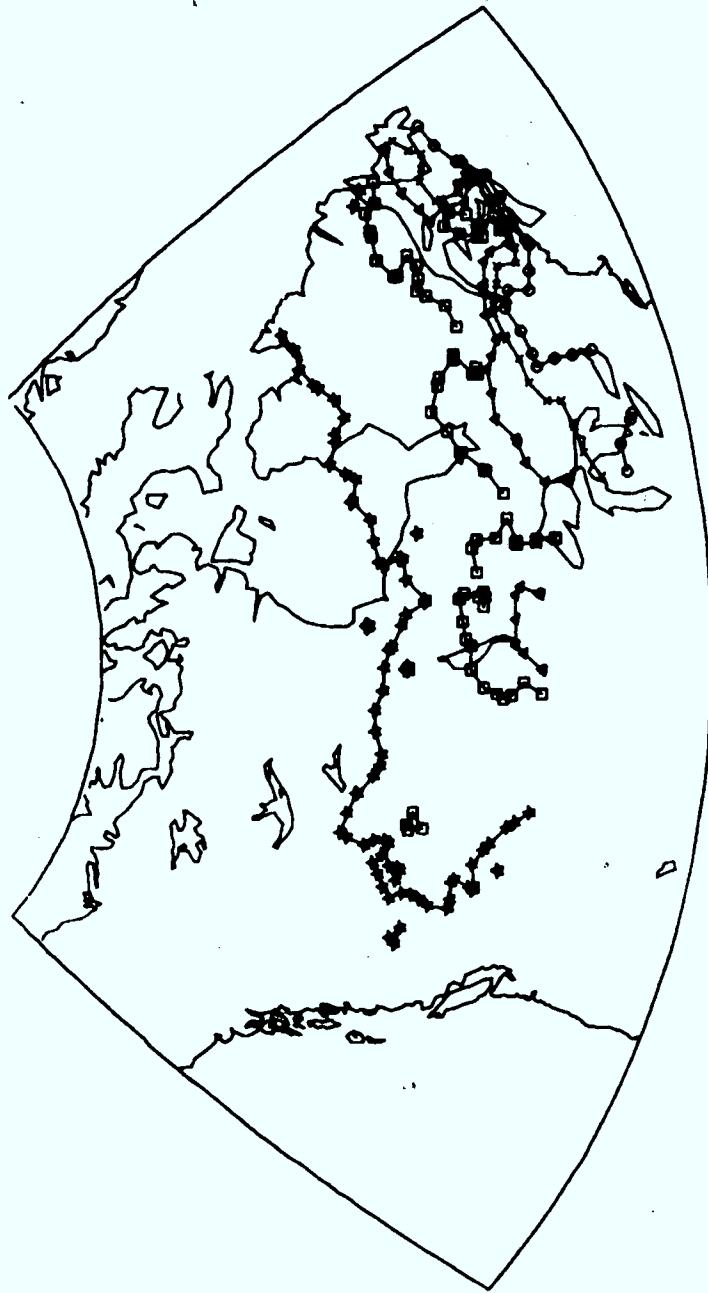

CANSLAV; SLONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 LINK MARGIN IS 6.00 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 64


| LEGEND | |
|--------|-------------|
| 0 | = 99.5000 X |
| X | = 99.9000 X |
| △ | = 99.9500 X |
| □ | = 99.9700 X |
| * | = 99.9900 X |

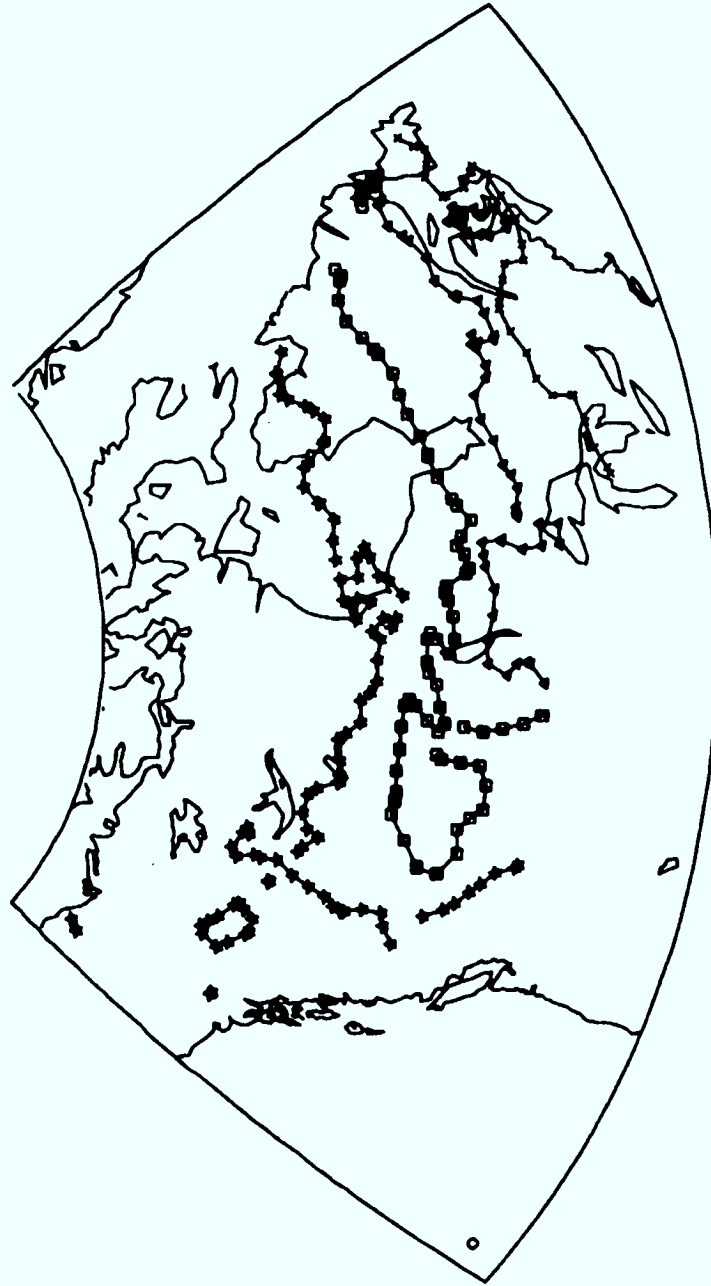

CANSLAV; SLONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
 LINK MARGIN IS 10.00 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 65

| LEGEND | |
|--------|-------------|
| 0 | = 99.8500 % |
| X | = 99.9000 % |
| △ | = 99.9500 % |
| □ | = 99.9900 % |
| * | = 99.9950 % |

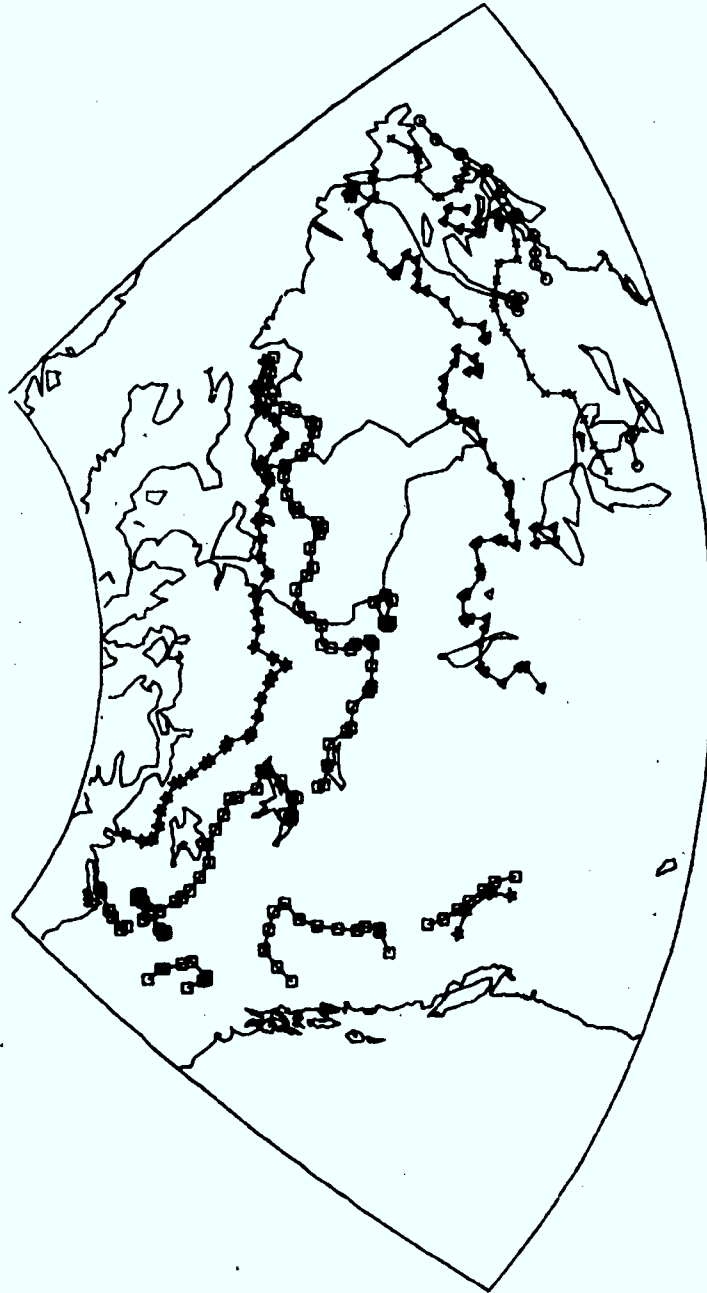

CANSLAV; SLONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 LINK MARGIN IS 16.00 dB
 CANADA MAP: LONMN 145 LONMX 50 LATMN 40 LATMX 72

Fig. 66

Figs. 67-78
(pages 146-157)

Link availability contours for selected regions in Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the following values of link margin LM to overcome rain fade.


The legend gives the link availability values for the contours. The longitude of the satellite is 100° W and there is no site diversity. The latitude and longitude of the boundaries are indicated.

Frequency

Link Margin for Rain Fade

| | |
|--------|-------|
| 20 GHz | 6 dB |
| 30 GHz | 10 dB |
| 44 GHz | 16 dB |


| LEGEND | |
|--------|-------------|
| 0 | = 99.9000 % |
| X | = 99.9200 % |
| △ | = 99.9400 % |
| □ | = 99.9600 % |
| * | = 99.9900 % |

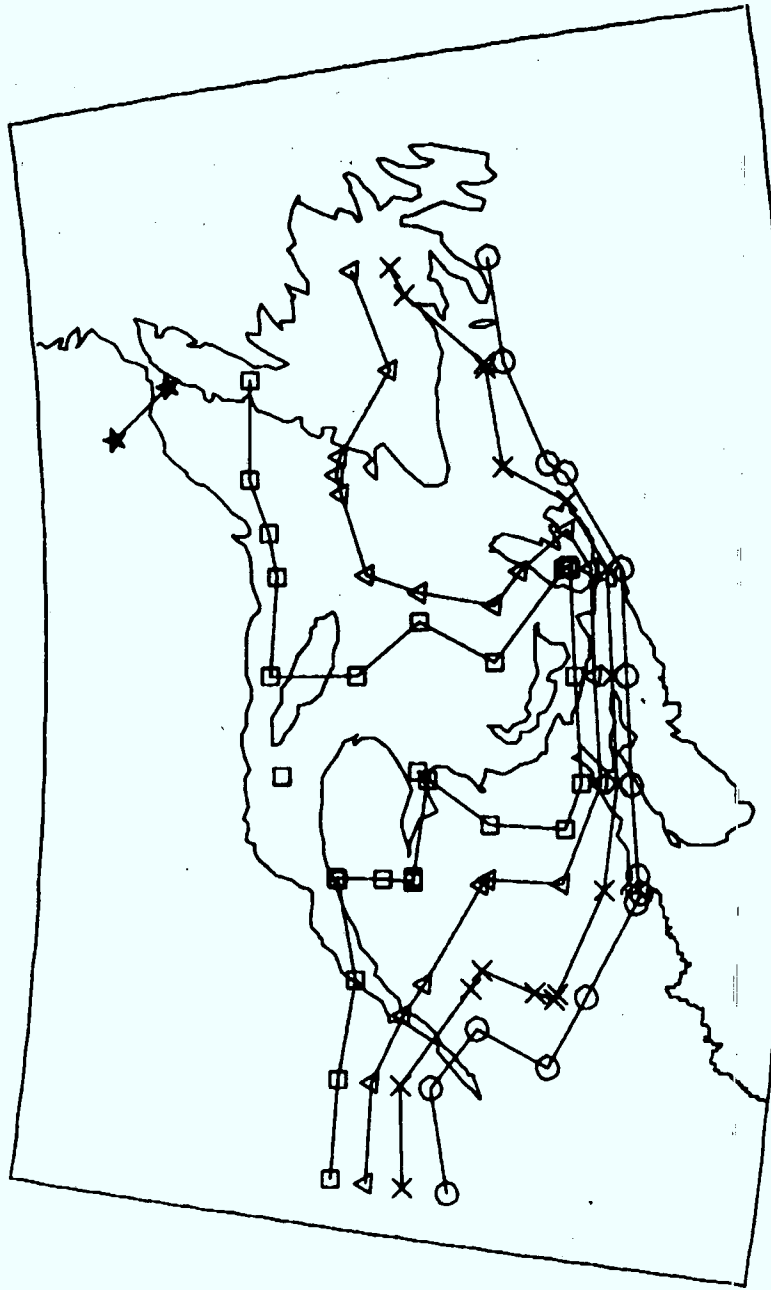

CANSLAU; S LONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 LINK MARGIN IS 6.00 DB
 EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 67


| LEGEND | |
|--------|-------------|
| 0 | = 99.8700 % |
| X | = 99.8900 % |
| △ | = 99.9100 % |
| □ | = 99.9300 % |
| * | = 99.9500 % |

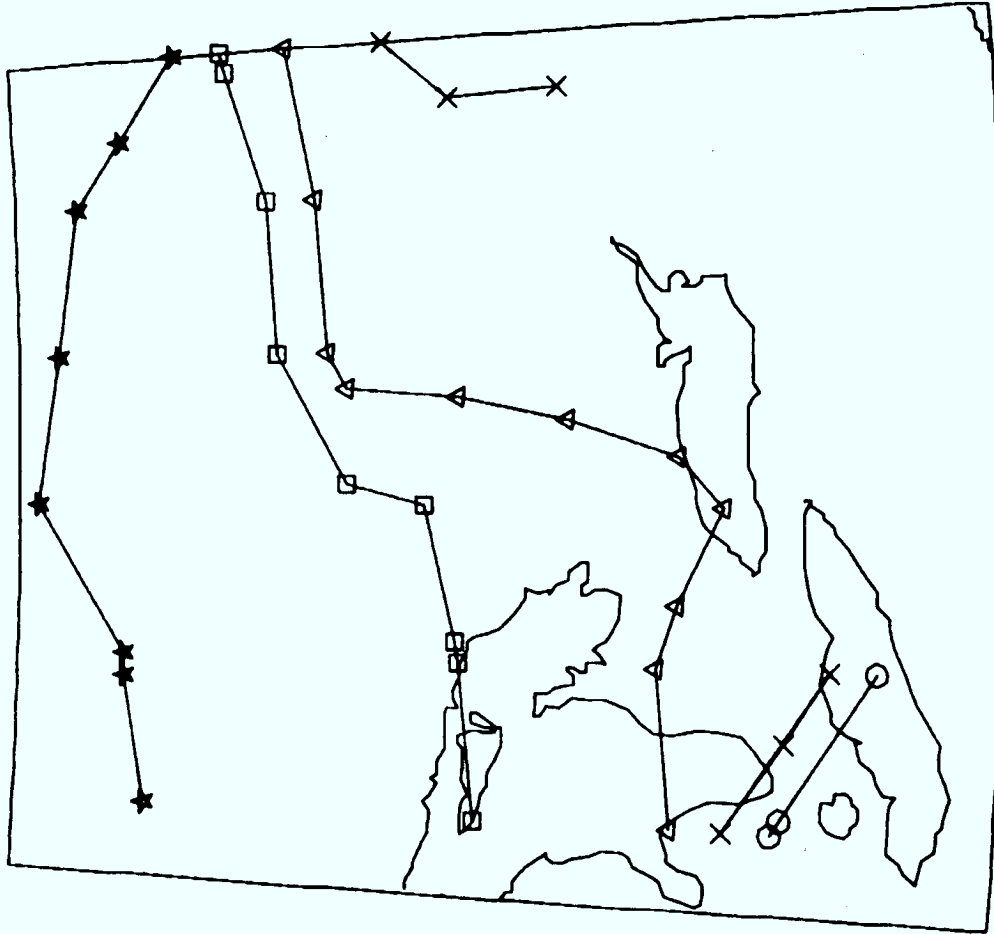

CANSLAU; SLONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 LINK MARGIN IS 6.00 dB
 CENTRAL CAN. LONMN 84 LONMX 73 LATMN 41 LATMX 50

Fig. 68


| LEGEND | |
|--------|-------------|
| ○ | = 99.9400 X |
| X | = 99.9600 X |
| △ | = 99.9800 X |
| ◻ | = 99.9900 X |
| * | = 99.9950 X |

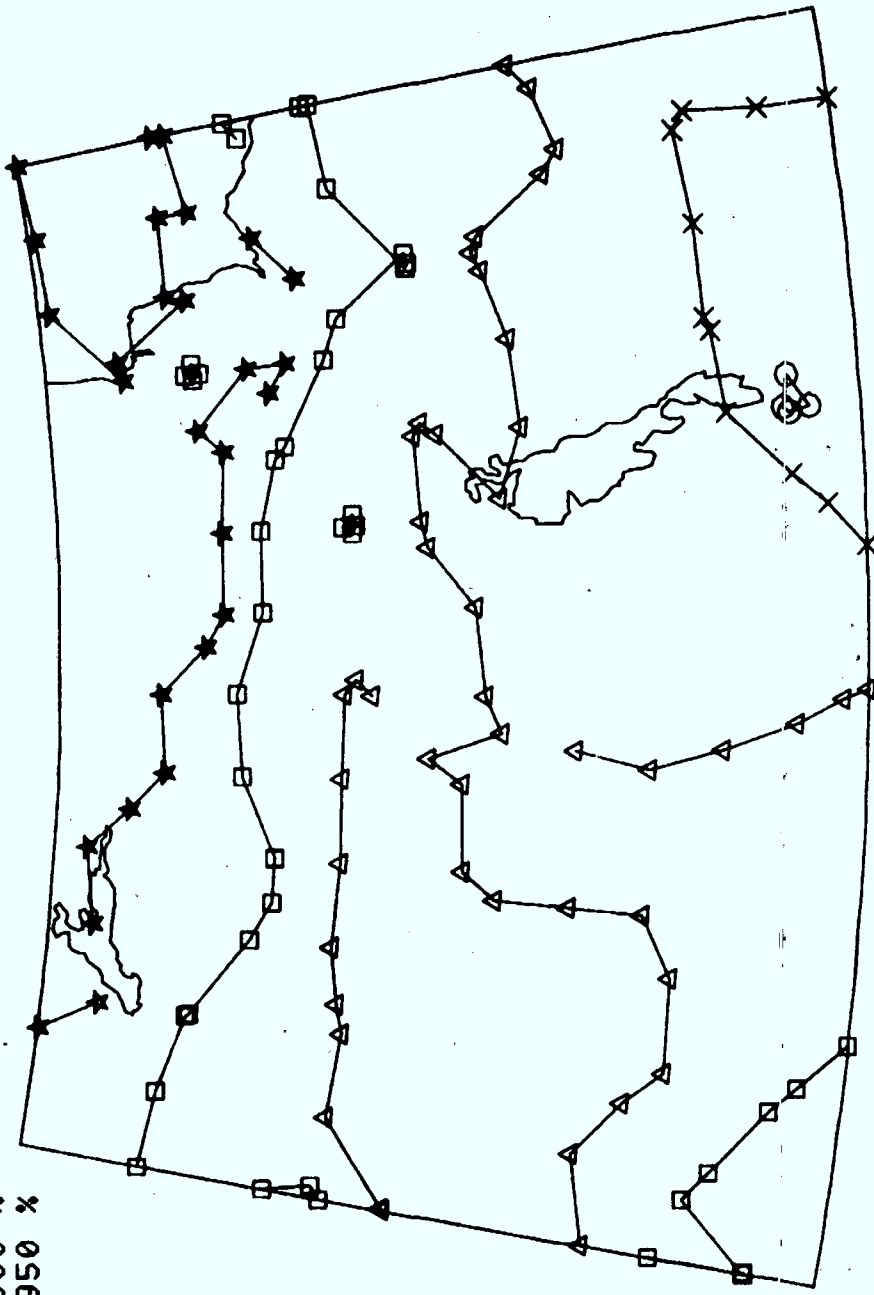

CANSLAU; S LONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 LINK MARGIN IS 6.00 dB
 PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 69


| LEGEND | |
|--------|-------------|
| 0 | = 99.9000 % |
| X | = 99.9200 % |
| △ | = 99.9400 % |
| □ | = 99.9600 % |
| * | = 99.9900 % |

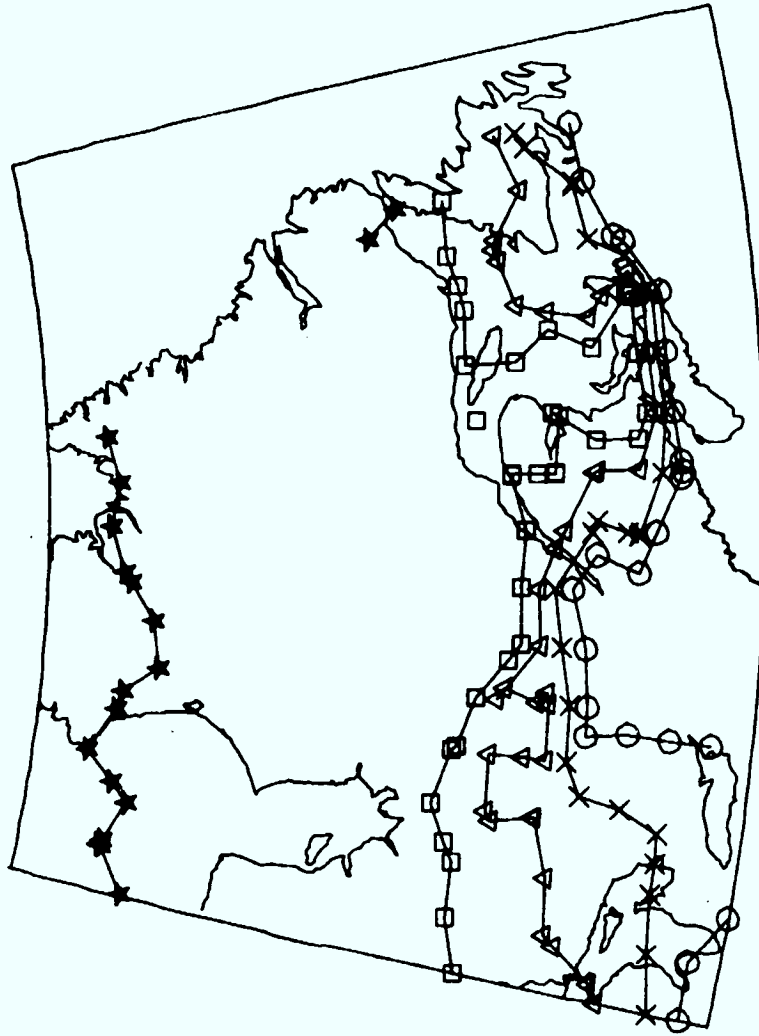

CANSLAU; SLONG: 100.0 FREQ.: 20.0 GHZ SITE DIV.: N
 LINK MARGIN IS 6.00 dB
 USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 70


| LEGEND | |
|--------|-------------|
| O | = 99.7000 % |
| X | = 99.8000 % |
| △ | = 99.8500 % |
| □ | = 99.9000 % |
| * | = 99.9500 % |

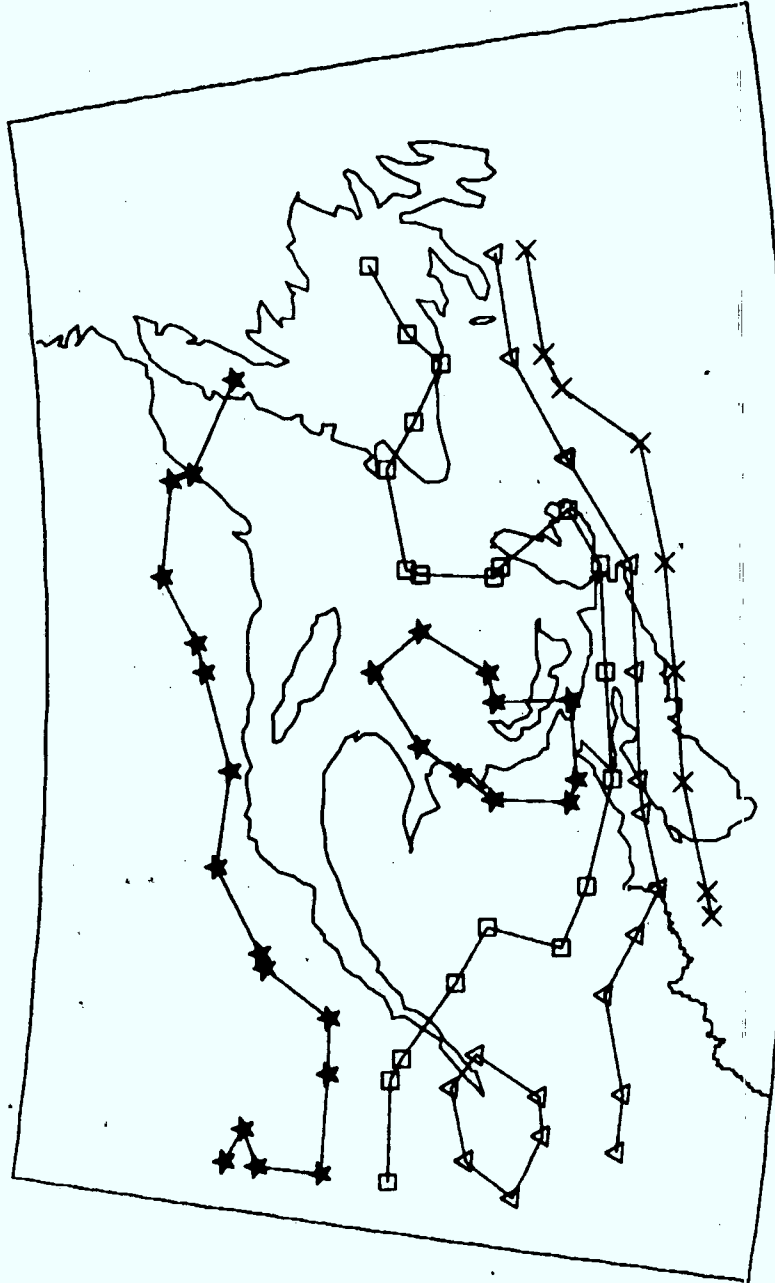

CANSLAU; SLONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
LINK MARGIN IS 10.00 dB
EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 71


| LEGEND | |
|--------|-------------|
| 0 | = 99.8700 % |
| X | = 99.8900 % |
| △ | = 99.9100 % |
| □ | = 99.9300 % |
| * | = 99.9500 % |

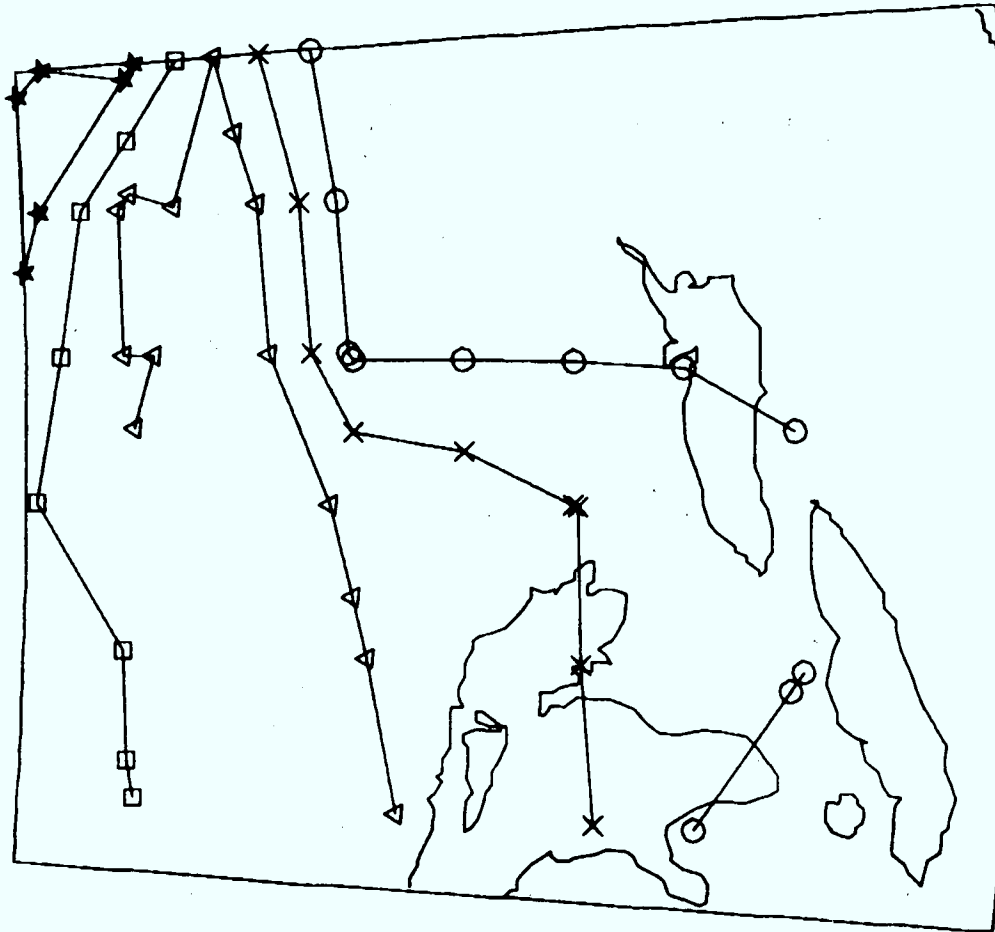

CANSLAV; S LONG: 100.0 FREQ.: 30.0 GHz SITE DIV.: N
 LINK MARGIN IS 10.00 dB
 CENTRAL CAN. LONMN 84 LONMX 73 LATMN 41 LATMX 50

Fig. 72


| LEGEND | |
|--------|-------------|
| 0 | = 99.9500 % |
| X | = 99.9700 % |
| △ | = 99.9900 % |
| □ | = 99.9930 % |
| * | = 99.9950 % |

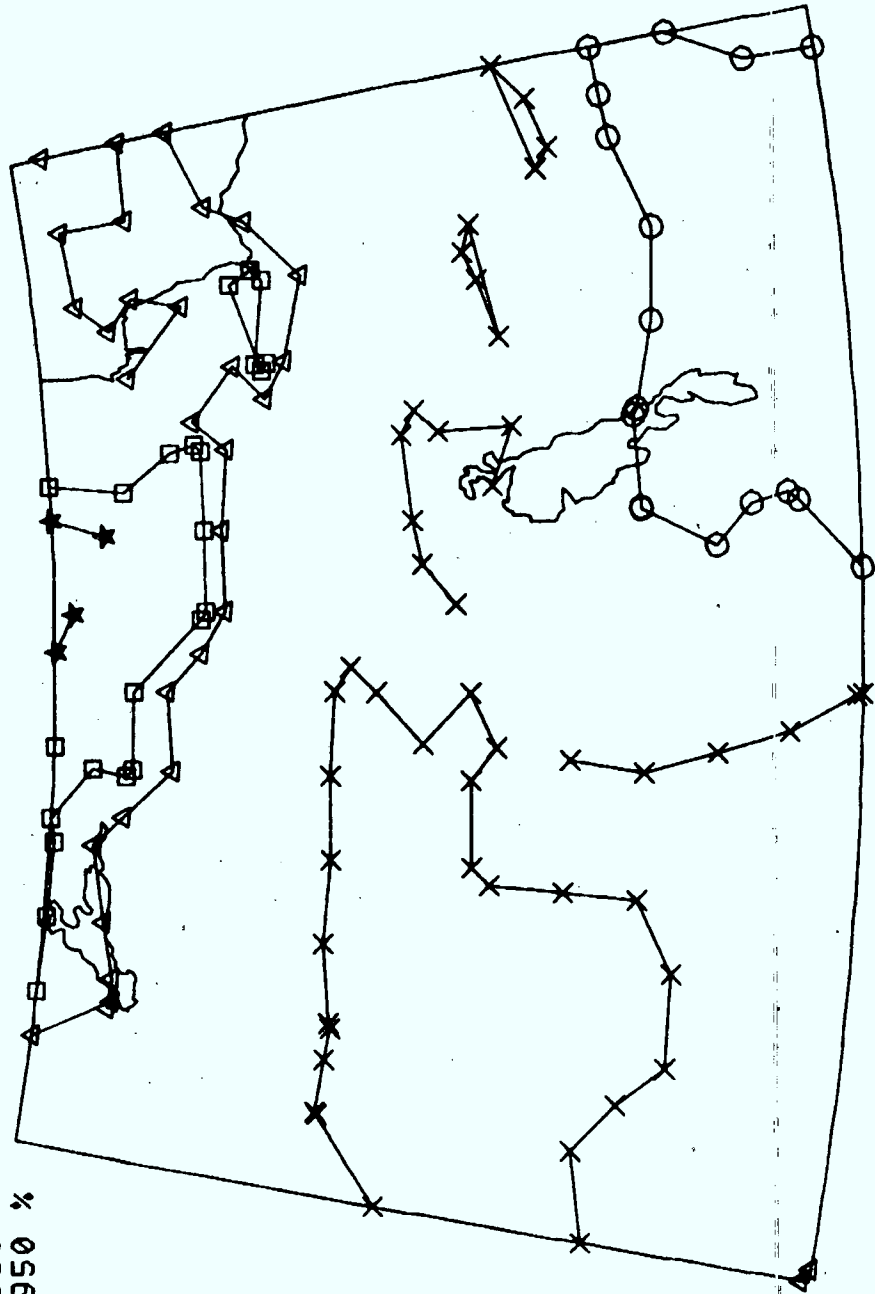

CANSLAV; S LONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
 LINK MARGIN IS 10.00 dB
 PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 73


| LEGEND | |
|--------|-------------|
| O | = 99.8000 % |
| X | = 99.8500 % |
| △ | = 99.9000 % |
| □ | = 99.9500 % |
| * | = 99.9900 % |

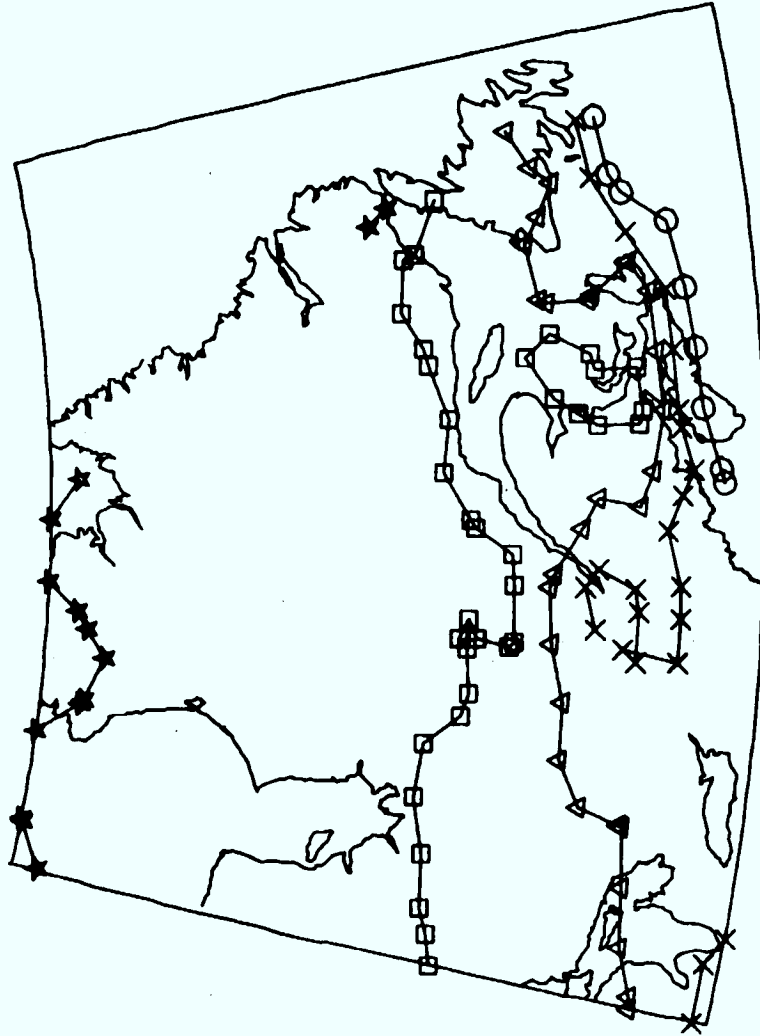

CANSLAU; SLONG: 100.0 FREQ.: 30.0 GHZ SITE DIV.: N
 LINK MARGIN IS 10.00 dB
 USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 74


| LEGEND | |
|--------|-------------|
| 0 | = 99.8000 X |
| X | = 99.8500 X |
| △ | = 99.9000 X |
| □ | = 99.9500 X |
| * | = 99.9700 X |

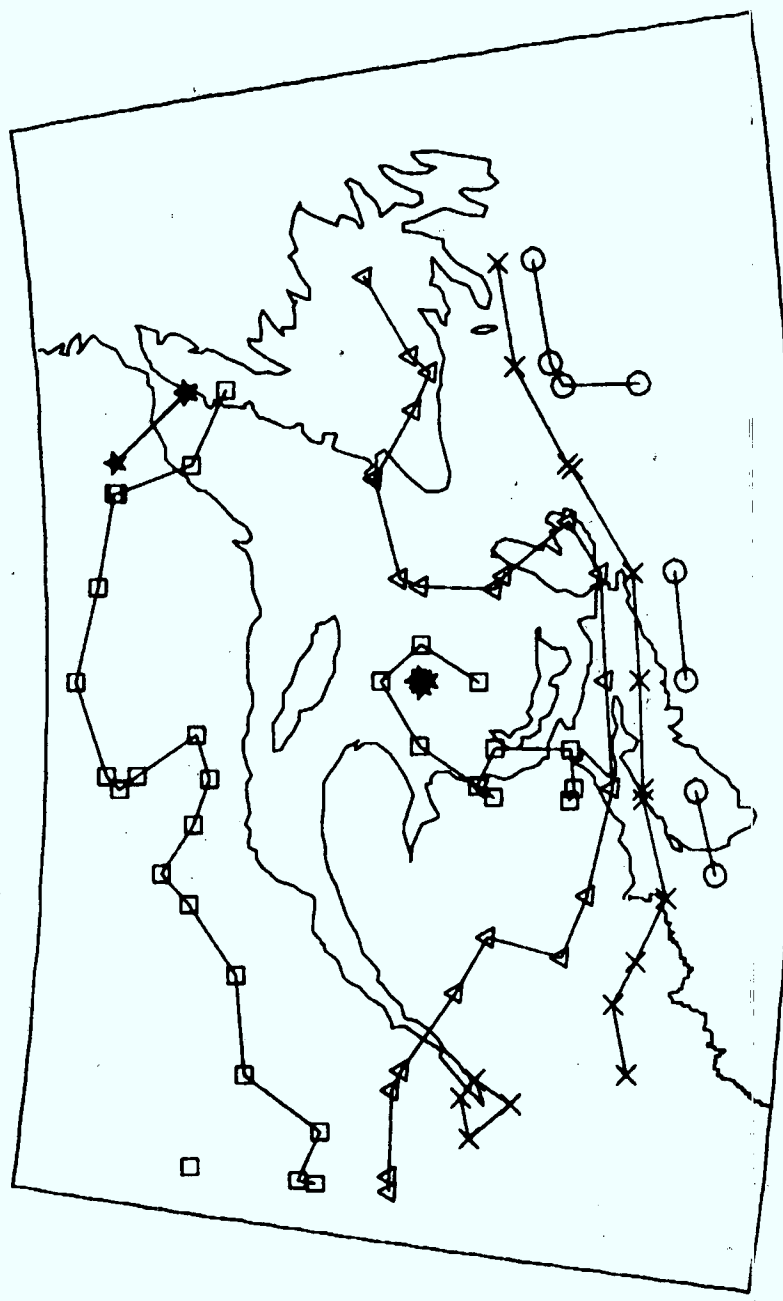

CANSLAU; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 LINK MARGIN IS 16.00 dB
 EAST COAST: LONMN 74 LONMX 51 LATMN 43 LATMX 53

Fig. 75


| LEGEND | |
|--------|-------------|
| O | = 99.8500 % |
| X | = 99.8700 % |
| △ | = 99.8900 % |
| □ | = 99.9100 % |
| * | = 99.9300 % |

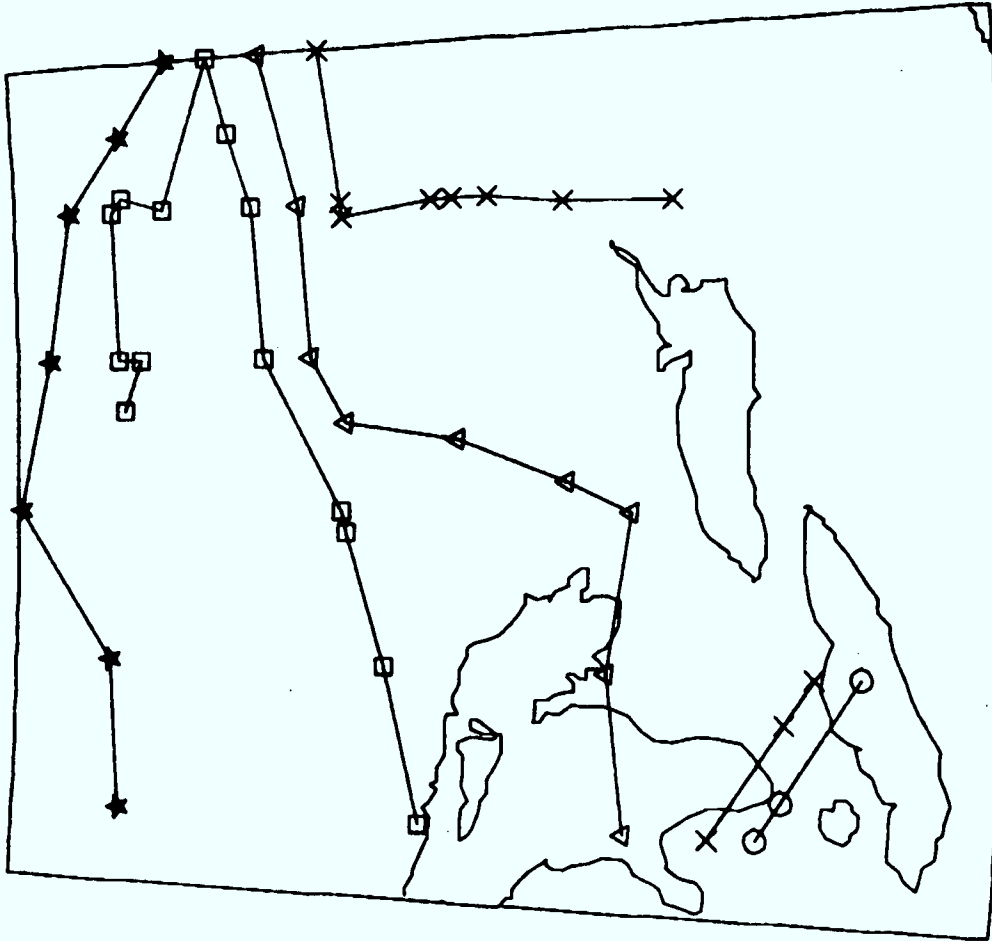

CANSLAU; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 LINK MARGIN IS 16.00 dB
 CENTRAL CAN. LONMN 84 LONMX 73 LATMN 41 LATMX 50

Fig. 76


| LEGEND | |
|--------|-------------|
| 0 | = 99.9100 % |
| X | = 99.9300 % |
| △ | = 99.9500 % |
| □ | = 99.9700 % |
| * | = 99.9900 % |

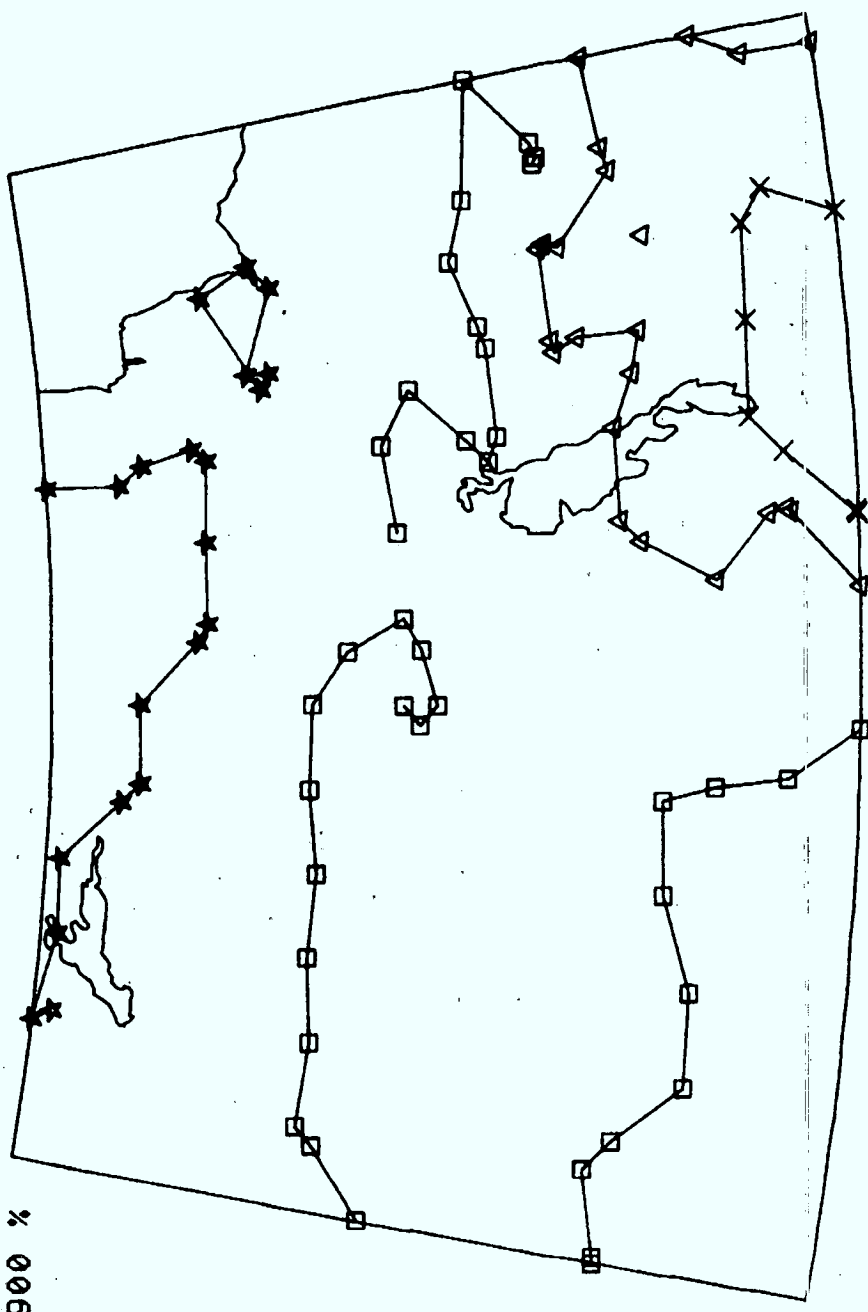

CANSLAV; S LONG: 100.0 FREQ.: 44.0 GHz SITE DIV.: N
 LINK MARGIN IS 16.00 dB
 PRAIRIE CAN. LONMN 115 LONMX 89 LATMN 49 LATMX 60

Fig. 77

| LEGEND | |
|--------|-------------|
| ○ | = 99.8000 X |
| X | = 99.8500 X |
| △ | = 99.9000 X |
| □ | = 99.9500 X |
| * | = 99.9700 X |

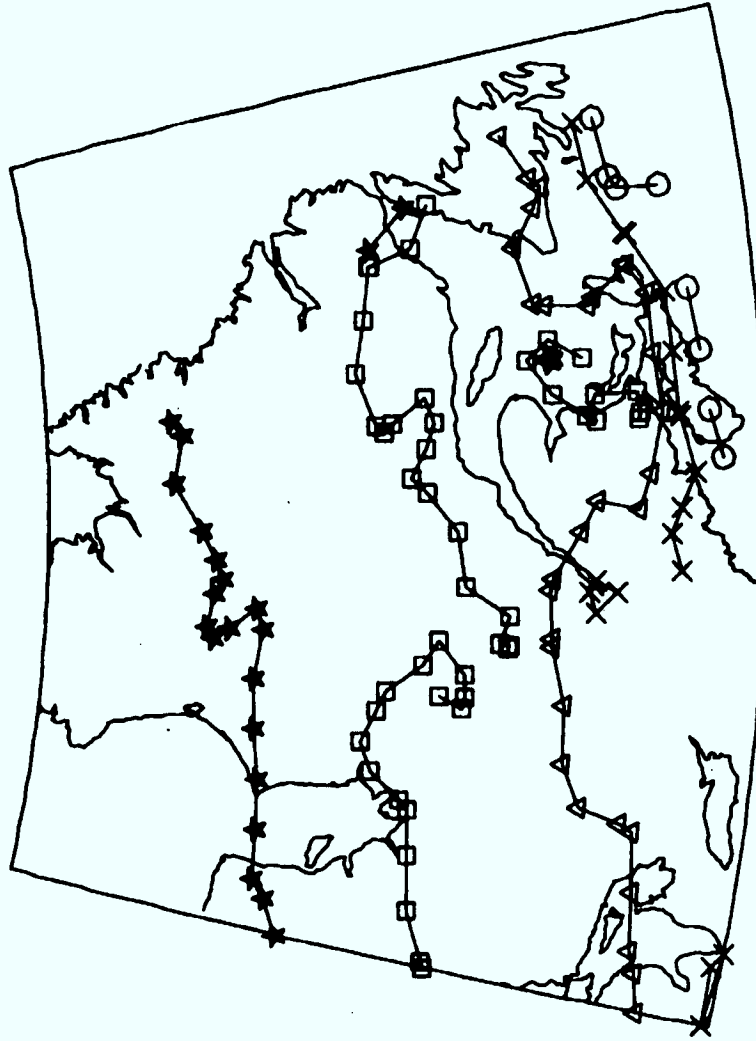

CANSLAV; S LONG: 100.0 FREQ.: 44.0 GHZ SITE DIV.: N
 LINK MARGIN IS 16.00 dB
 USER SPECIF. LONMN 85 LONMX 52 LATMN 43 LATMX 60

Fig. 78

Figs. 79-93
(pages 159-173)

Link availability values for selected sites in different parts of Canada for an earth-satellite path in a geostationary link at 20, 30 and 44 GHz for the following values of link margin LM to overcome rain fade.

The longitude of the satellite is 100° W and there is no site diversity. Approximate position of the site is shown on a coarse map.

| Frequency | Link Margin for Rain Fade |
|-----------|---------------------------|
| 20 GHz | 6 dB |
| 30 GHz | 10 dB |
| 44 GHz | 16 dB |


```

*****
***** CANSLAT for CITIES on THE WEST COAST *****
*****
*****
***** Ca ----- Code | City | Availabi-
***** |-----|-----| lity:
***** |-----|-----| *****
***** Ca: CARMACKS+ 99.995%
***** P: PR GEORGE 99.993%
***** C: COMOX 99.989%
***** U: VANCOUVER 99.989%
***** M: MISSION 99.975%
***** H: HOPE 99.989%
***** S: SUMMERLAND 99.999%
*****
***** <C> U-----M_H_S-----
*****
***** SLONG: 100.0 FREQ: 20.0 GHz LINMAR 6.00 dB SD N d= 0.0 a= 0
*****
*****

```

Fig. 83

```

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X CANSLAT for CITIES of the MARATIME PROVINCES
X
X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X GB Code City Name Availability
X
X GB:GOOSE BAY 99.964%
X C: CAPLAN 99.926%
X
X G \-^,S X
X / \ / \ X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X Su:STEVENVILLE 99.921%
X G: GANDER 99.936%
X S: ST-JOHN'S 99.765%
X Su:SUMMERSIDE 99.960%
X Sy:SYDNEY 99.876%
X F:FREDERICTON 99.951%
X SJ:SAINT JOHN 99.828%
X K: KENTVILLE 99.856%
X H: HALIFAX 99.757%
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
S LONG: 100.0 FREQ: 30.0 GHZ LINMAR 10.00 dB SD N d= 0.0 a= 0
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

```

Fig. 84

DOCUMENT CONTROL DATA

(Security classification of title, body of abstract and indexing annotation must be entered when the overall document is classified)

| | | | |
|--|---|---|--|
| 1. ORIGINATOR (the name and address of the organization preparing the document. Organizations for whom the document was prepared, e.g. Establishment sponsoring a contractor's report, or tasking agency, are entered in section 8.) Defence Research Establishment Ottawa Department of National Defence Ottawa, Ontario K1A 0Z4 | | 2. SECURITY CLASSIFICATION (overall security classification of the document including special warning terms if applicable) UNCLASSIFIED | |
| 3. TITLE (the complete document title as indicated on the title page. Its classification should be indicated by the appropriate abbreviation (S,C,R or U) in parentheses after the title.) Link Availability and Rain Attenuation Exceedance Characteristics for EHF Satellite Communications with Arbitrary Link Parameters in Canada (U) | | | |
| 4. AUTHORS (Last name, first name, middle initial) Khanna, Shyam, and Adams, David M. | | | |
| 5. DATE OF PUBLICATION (month and year of publication of document) October 1988 | 6a. NO. OF PAGES (total containing information. Include Annexes, Appendices, etc.) 183 | 6b. NO. OF REFS (total cited in document) 15 | |
| 7. DESCRIPTIVE NOTES (the category of the document, e.g. technical report, technical note or memorandum. If appropriate, enter the type of report, e.g. interim, progress, summary, annual or final. Give the inclusive dates when a specific reporting period is covered.) DREO Report | | | |
| 8. SPONSORING ACTIVITY (the name of the department project office or laboratory sponsoring the research and development. Include the address.) PM EHF SATCOM Defence Research Establishment Ottawa Department of National Defence Ottawa, Ontario K1A 0Z4 | | | |
| 9a. PROJECT OR GRANT NO. (if appropriate, the applicable research and development project or grant number under which the document was written. Please specify whether project or grant) D6470-0459B | | 9b. CONTRACT NO. (if appropriate, the applicable number under which the document was written) N/A | |
| 10a. ORIGINATOR'S DOCUMENT NUMBER (the official document number by which the document is identified by the originating activity. This number must be unique to this document.) DREO REPORT 991 | | 10b. OTHER DOCUMENT NOS. (Any other numbers which may be assigned this document either by the originator or by the sponsor) | |
| 11. DOCUMENT AVAILABILITY (any limitations on further dissemination of the document, other than those imposed by security classification) <input checked="" type="checkbox"/> Unlimited distribution <input type="checkbox"/> Distribution limited to defence departments and defence contractors; further distribution only as approved <input type="checkbox"/> Distribution limited to defence departments and Canadian defence contractors; further distribution only as approved <input type="checkbox"/> Distribution limited to government departments and agencies; further distribution only as approved <input type="checkbox"/> Distribution limited to defence departments; further distribution only as approved <input type="checkbox"/> Other (please specify): | | | |
| 12. DOCUMENT ANNOUNCEMENT (any limitation to the bibliographic announcement of this document. This will normally correspond to the Document Availability (11). However, where further distribution (beyond the audience specified in 11) is possible, a wider announcement audience may be selected.) No limitation to the announcement. | | | |

13. ABSTRACT (a brief and factual summary of the document. It may also appear elsewhere in the body of the document itself. It is highly desirable that the abstract of classified documents be unclassified. Each paragraph of the abstract shall begin with an indication of the security classification of the information in the paragraph (unless the document itself is unclassified) represented as (S), (C), (R), or (U). It is not necessary to include here abstracts in both official languages unless the text is bilingual).

(U) The rain attenuation exceedance and the corresponding link availability have been calculated for any location in Canada for a Satcom link in the 10-45 GHz range with arbitrary values of the link parameters. Contours, with arbitrary constant values, of these two parameters are also determined for any region in Canada. The effect of site diversity on these results can be studied. The results are presented in different formats to facilitate their use in a system design. The CCIR rain attenuation prediction model, Hodge site diversity model and long term rain statistics have been used for this work. Following a brief review of the subject, representative rain attenuation exceedance and link availability results are given for a Satcom link at 20, 30 and 44 GHz for a few selected values of the link parameters. From the point of view of rain attenuation, this study indicates the feasibility of a 20-44 GHz Satcom system for Canada with ~ 99.5% link availability.


14. KEYWORDS, DESCRIPTORS or IDENTIFIERS (technically meaningful terms or short phrases that characterize a document and could be helpful in cataloguing the document. They should be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location may also be included. If possible keywords should be selected from a published thesaurus. e.g. Thesaurus of Engineering and Scientific Terms (TEST) and that thesaurus-identified. If it is not possible to select indexing terms which are Unclassified, the classification of each should be indicated as with the title.)

Extremely High Frequencies
Satellite Communication
Rain
Attenuation

FEB 23 1989
FEV 23 1989

| | | |
|-----------------------------------|----------------------|--|
| NO. OF COPIES NOMBRE DE COPIES | COPY NO. COPIE N° | INFORMATION SCIENTIST'S INITIALS INITIALES DE L'AGENT D'INFORMATION SCIENTIFIQUE |
| I | I | J D.A.C. |
| AQUISITION ROUTE FOURNI PAR | DREO | |
| DATE | 18-1-89 | |
| DSIS ACCESSION NO. NUMÉRO DSIS | 89-00986 | |

DND 1158 (6-87)



**PLEASE RETURN THIS DOCUMENT
TO THE FOLLOWING ADDRESS:**

DIRECTOR
SCIENTIFIC INFORMATION SERVICES
NATIONAL DEFENCE
HEADQUARTERS
OTTAWA, ONT. - CANADA K1A 0K2

**PRIÈRE DE RETOURNER CE DOCUMENT
À L'ADRESSE SUIVANTE:**

DIRECTEUR
SERVICES D'INFORMATION SCIENTIFIQUES
QUARTIER GÉNÉRAL
DE LA DÉFENSE NATIONALE
OTTAWA, ONT. - CANADA K1A 0K2