




NATIONAL AIR ABSORBED DOSE RATE

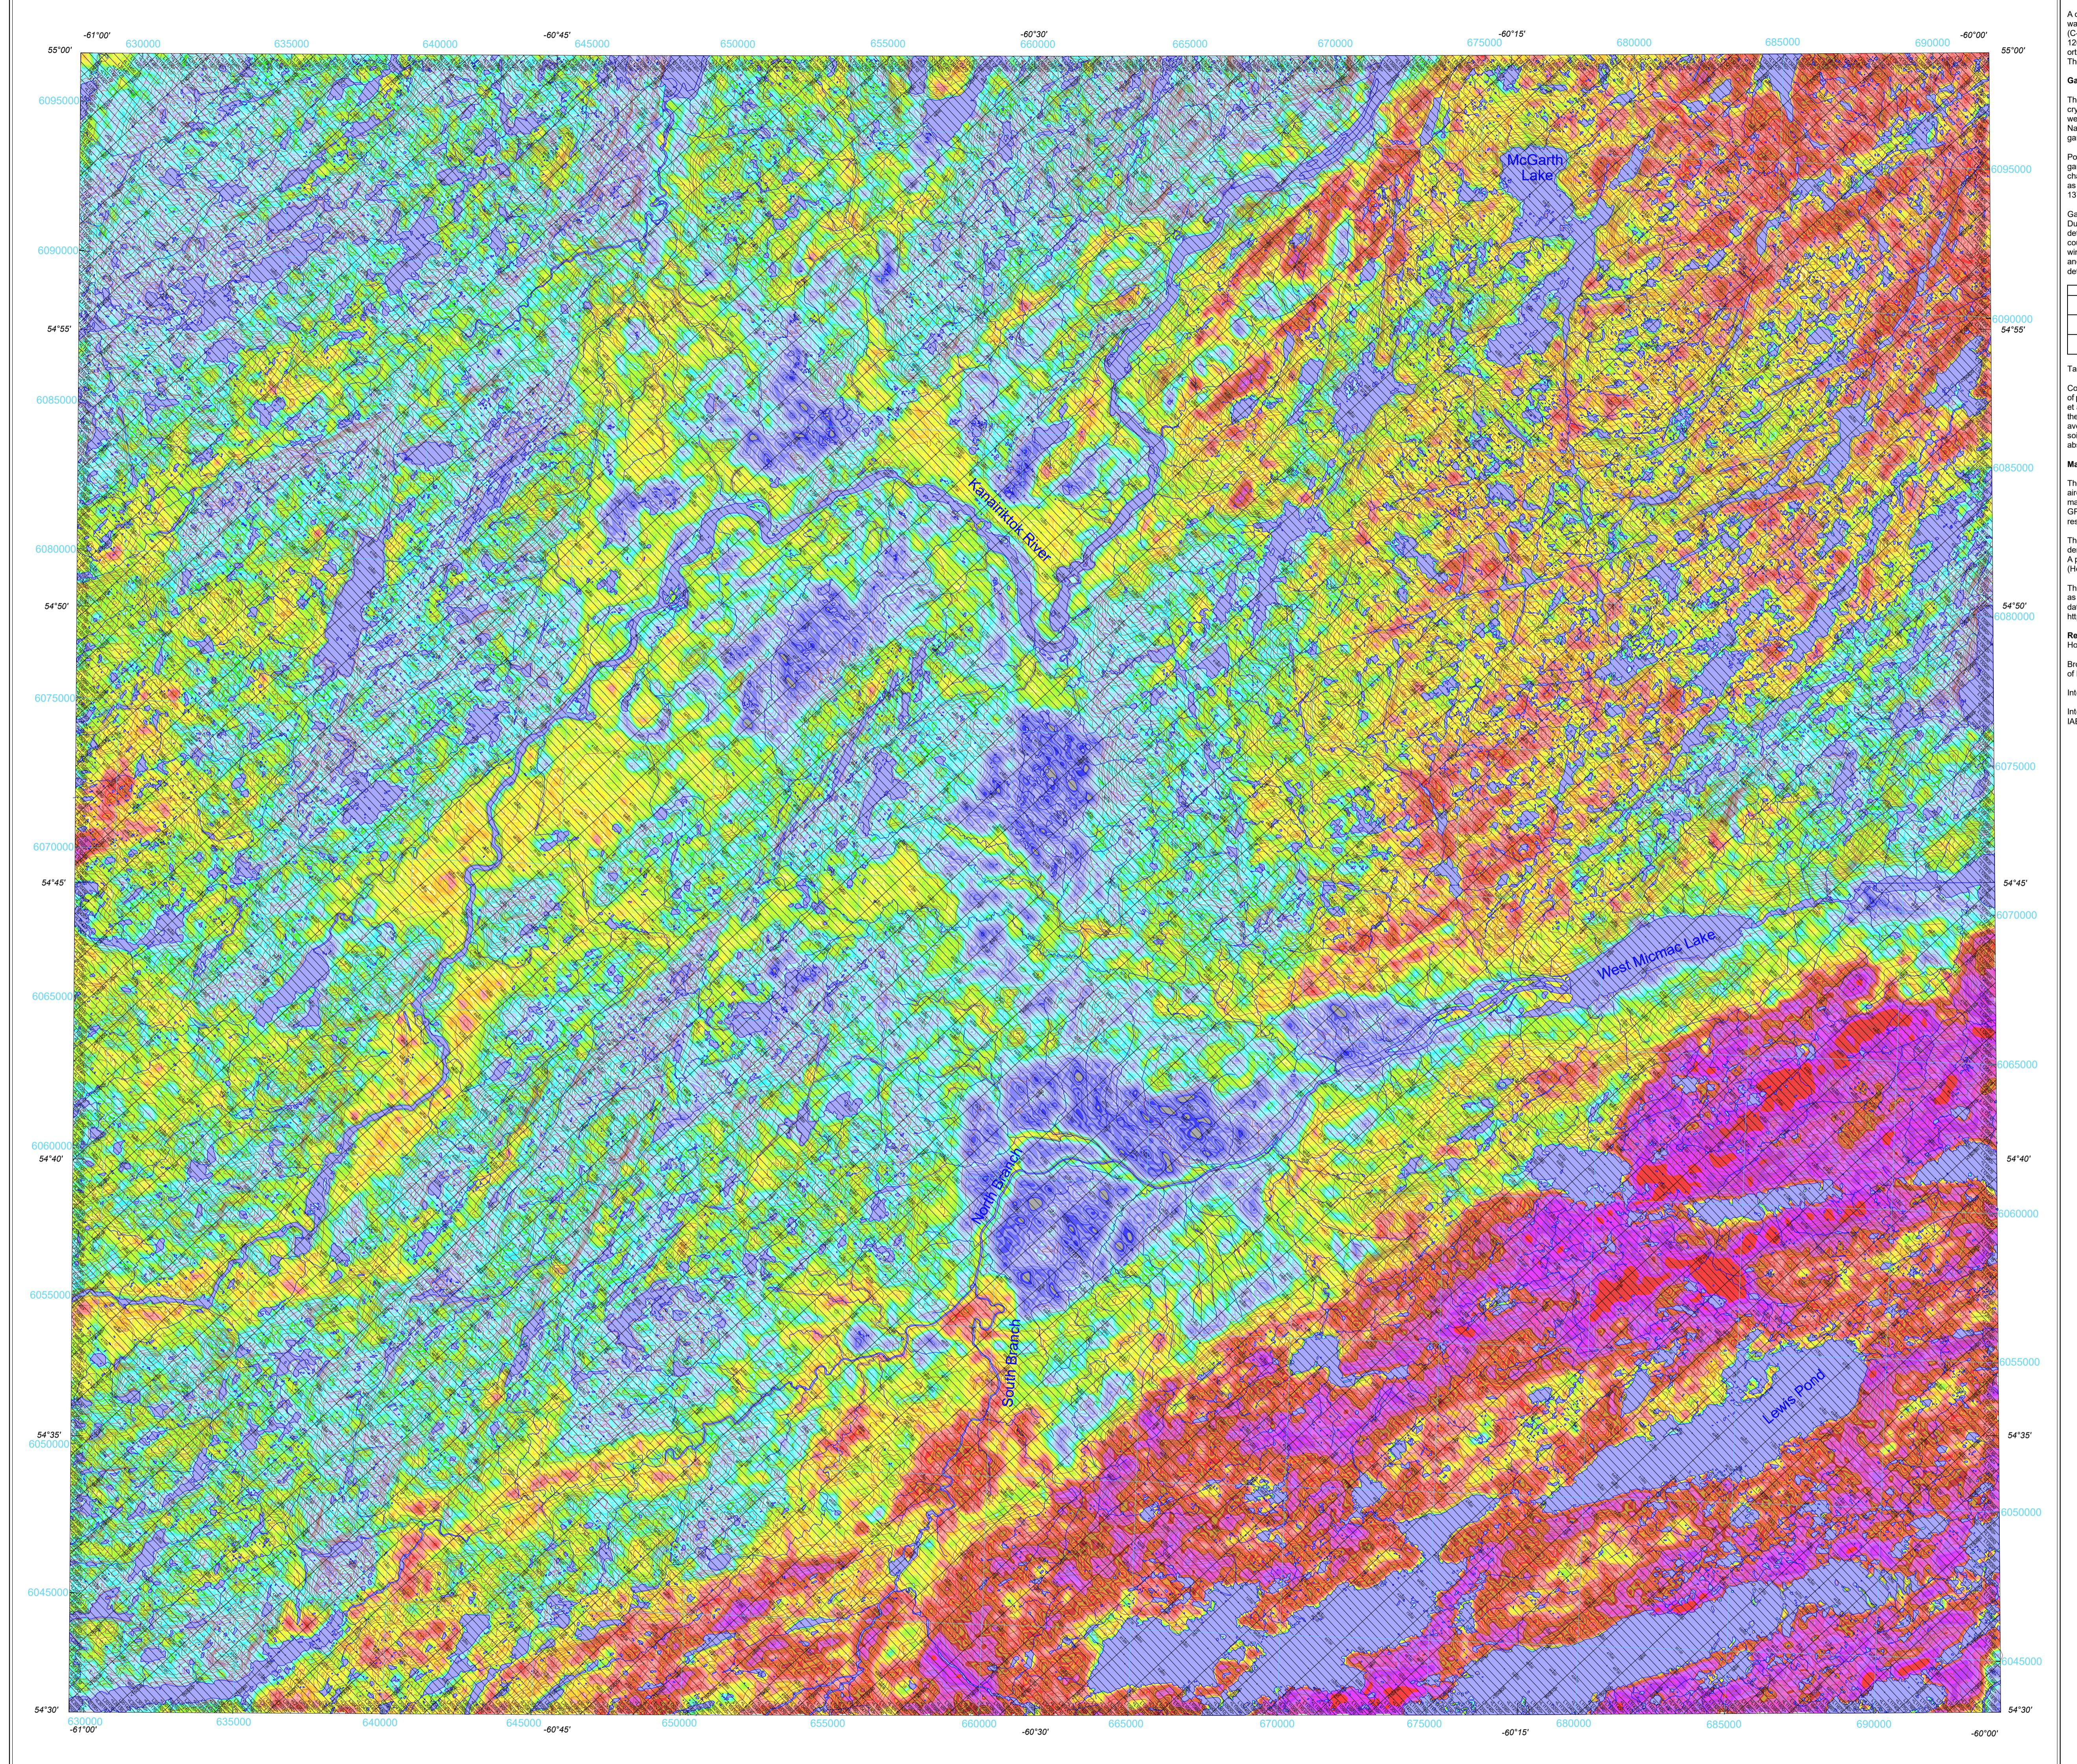

Introduction

A airborne gamma-ray spectrometric and aeromagnetic airborne geophysical survey of the Makovik River West area, Newfoundland and Labrador, was completed by Geo Data Solutions GDS Inc. The survey was flown from August 1st to October 3rd, 2022, using three Piper PA-31 Navajo aircraft (C-GPTB, C-FYW, C-FYL) and a Beechcraft King Air 100 (C-FLRB). The nominal traverse and control line spacings were, respectively, 200 m and 1200 m, and the aircraft flew at a nominal terrain clearance of 80 m at an average airspeed of 269 km/h. Traverse lines were oriented N45°W with orthogonal control lines. The flight path was recovered following post-flight differential corrections to raw data recorded by a Global Positioning System. The survey was flown on a pre-determined flight surface to minimize differences in magnetic values at the intersections of control and traverse lines.

Gamma-ray Spectrometric Data

The airborne gamma-ray measurements were made with a Radiation Solutions RS-500 gamma-ray spectrometer, using ten 102x102x406 mm NaI (Tl) crystals. The main detector array consisted of eight crystals (total volume 33.6 litres). Two crystals (total volume 8 litres) shielded by the main array, and one crystal (volume 3.2 litres) located in the background radiation shielded by atmospheric radon. The system assembles 1024 channel spectra from the individual NaI (Tl) detectors with no loss of Poisson statistics. Spectrum stabilization is accomplished by matching the recorded spectra with several natural gamma-ray peaks.

Potassium is measured directly from the 1460 keV gamma-ray photons emitted by K^{40} whereas uranium and thorium are measured indirectly from gamma-ray photons emitted by daughter products (U^{238} , Th^{232}) and K^{40} . Although these daughter products are far less radioactive than their parent elements, they are used to calculate the total gamma-ray spectra. The energy windows used to measure potassium, uranium and thorium are, respectively, 1370-1570 keV, 1660-1860 keV, and 2410-2810 keV.

Gamma-ray spectra were recorded at one-second intervals. Data processing followed standard procedures as described in IAEA, 1991 and IAEA, 2003. During the survey, the spectra with low energy calibration errors were collected. Counts from the background radiation shielded by atmospheric radon detectors were removed. The time interval of 1 s was chosen because greater than 3000 counts was recorded in the window. The detector counts were corrected for dead time, background activity from cosmic radiation, radioactivity of the aircraft, and atmospheric radon decay products. The window data were then corrected for spectral scattering in the ground, air, and detectors. Corrections for deviations from the planned terrain clearance and for variation of temperature and pressure were made prior to conversion to ground concentrations of potassium, uranium, and thorium, using factors determined from flights over the Breckenridge test site. The results for potassium, uranium, and thorium are listed in Table 1.

Table 1: Gamma Ray Spectrometric Sensitivities for each aircraft.			
Corrected data were binned and interpolated to a 50 m grid interval. A ternary colour-composite image was created in which the relative concentrations of potassium, equivalent uranium, and equivalent thorium determined the colour hue, and the total radioactivity determined the colour saturation (Bromley et al., 1987). Data points that were acquired over water bodies or where the effective height above ground was higher than 300 m were masked out in the map due to their poor accuracy statistics and possible terrain effect. The results of an airborne gamma-ray spectrometric survey represent the distribution of the three elements of interest over the area. The presence of outcrops, vegetation cover, soil moisture, and surface water. As a result, the measured concentrations are usually lower than the actual bedrock concentrations. The total air absorbed dose rate in nanograys per hour was produced from measured counts between 400 and 2810 keV.			
C-GPTB	C-FYW	C-FYL	C-FIB
Potassium (cps%)	50.45	43.85	47.84
Uranium (cps%)	5.23	5.21	6.04
Thorium (cps/ppm)	3.34	2.93	3.28

Table 1: Gamma Ray Spectrometric Sensitivities for each aircraft.

Corrected data were binned and interpolated to a 50 m grid interval. A ternary colour-composite image was created in which the relative concentrations of potassium, equivalent uranium, and equivalent thorium determined the colour hue, and the total radioactivity determined the colour saturation (Bromley et al., 1987). Data points that were acquired over water bodies or where the effective height above ground was higher than 300 m were masked out in the map due to their poor accuracy statistics and possible terrain effect. The results of an airborne gamma-ray spectrometric survey represent the distribution of the three elements of interest over the area. The presence of outcrops, vegetation cover, soil moisture, and surface water. As a result, the measured concentrations are usually lower than the actual bedrock concentrations. The total air absorbed dose rate in nanograys per hour was produced from measured counts between 400 and 2810 keV.

Magnetic Data

The magnetic field was sampled 10 times per second using a split-beam cesium vapour magnetometer (sensitivity 0.005 nT) rigidly mounted to the aircraft. Differences in magnetic values at the intersections of control and traverse lines were analysed to obtain a mutually leveled set of flight-line magnetic data. A property of first vertical derivative maps is the coincidence of the zero-value contour with vertical contacts of magnetic units at high magnetic latitudes (Hood, 1965).

Vertical derivatives are available for free download through GEOSCAN (<http://geoscan.nrcan.gc.ca>). Corresponding digital profile and gridded data as well as similar data for adjacent airborne geophysical surveys are available from Natural Resources Canada's Geospatial Data Registry for Aeromagnetic data at <https://geospatial-data.canada.ca>. Digital products from this airborne survey are also available from the GSIL Geoscience Atlas at <https://geosatlas.gov.ca/default.htm>.

References

Hood, P.J., 1965. Gradient measurements in aeromagnetic surveys. *Geophysics*, 30, 891-902.
Broome, J., Carson, J.M., Grant, J.A., and Ford, K.L., 1987. A modified ternary radioelement mapping technique and its application to the south coast of Newfoundland. Paper 87-14, Geological Survey of Canada, Ottawa, Ontario, Canada.
International Atomic Energy Agency, 1991. Airborne gamma ray spectrometry surveying. Technical Reports Series 323, IAEA, Vienna.
International Atomic Energy Agency, 2003. Guidelines for radioelement mapping using gamma ray spectrometry data. Technical Reports Series 363, IAEA, Vienna.

OPEN FILE MAP INDEX

- OF9022: Residual Total Magnetic Field
- OF9023: First Vertical Derivative of the Magnetic Field
- OF9024: Natural Air Absorbed Dose Rate
- OF9025: Potassium
- OF9026: Uranium
- OF9027: Thorium
- OF9028: Uranium / Thorium
- OF9029: Uranium / Potassium
- OF9030: Thorium / Potassium
- OF9031: Ternary Radioelement Image

PLANIMETRIC SYMBOLS

- Project Limit
- Drainage
- Topographic Contour ...
- Flight Path L12370>

GSC open file numbers in blue

NTS map sheet numbers in black

