


APPARENT CONDUCTIVITY - LATE CHANNEL 30 (8.272 ms)

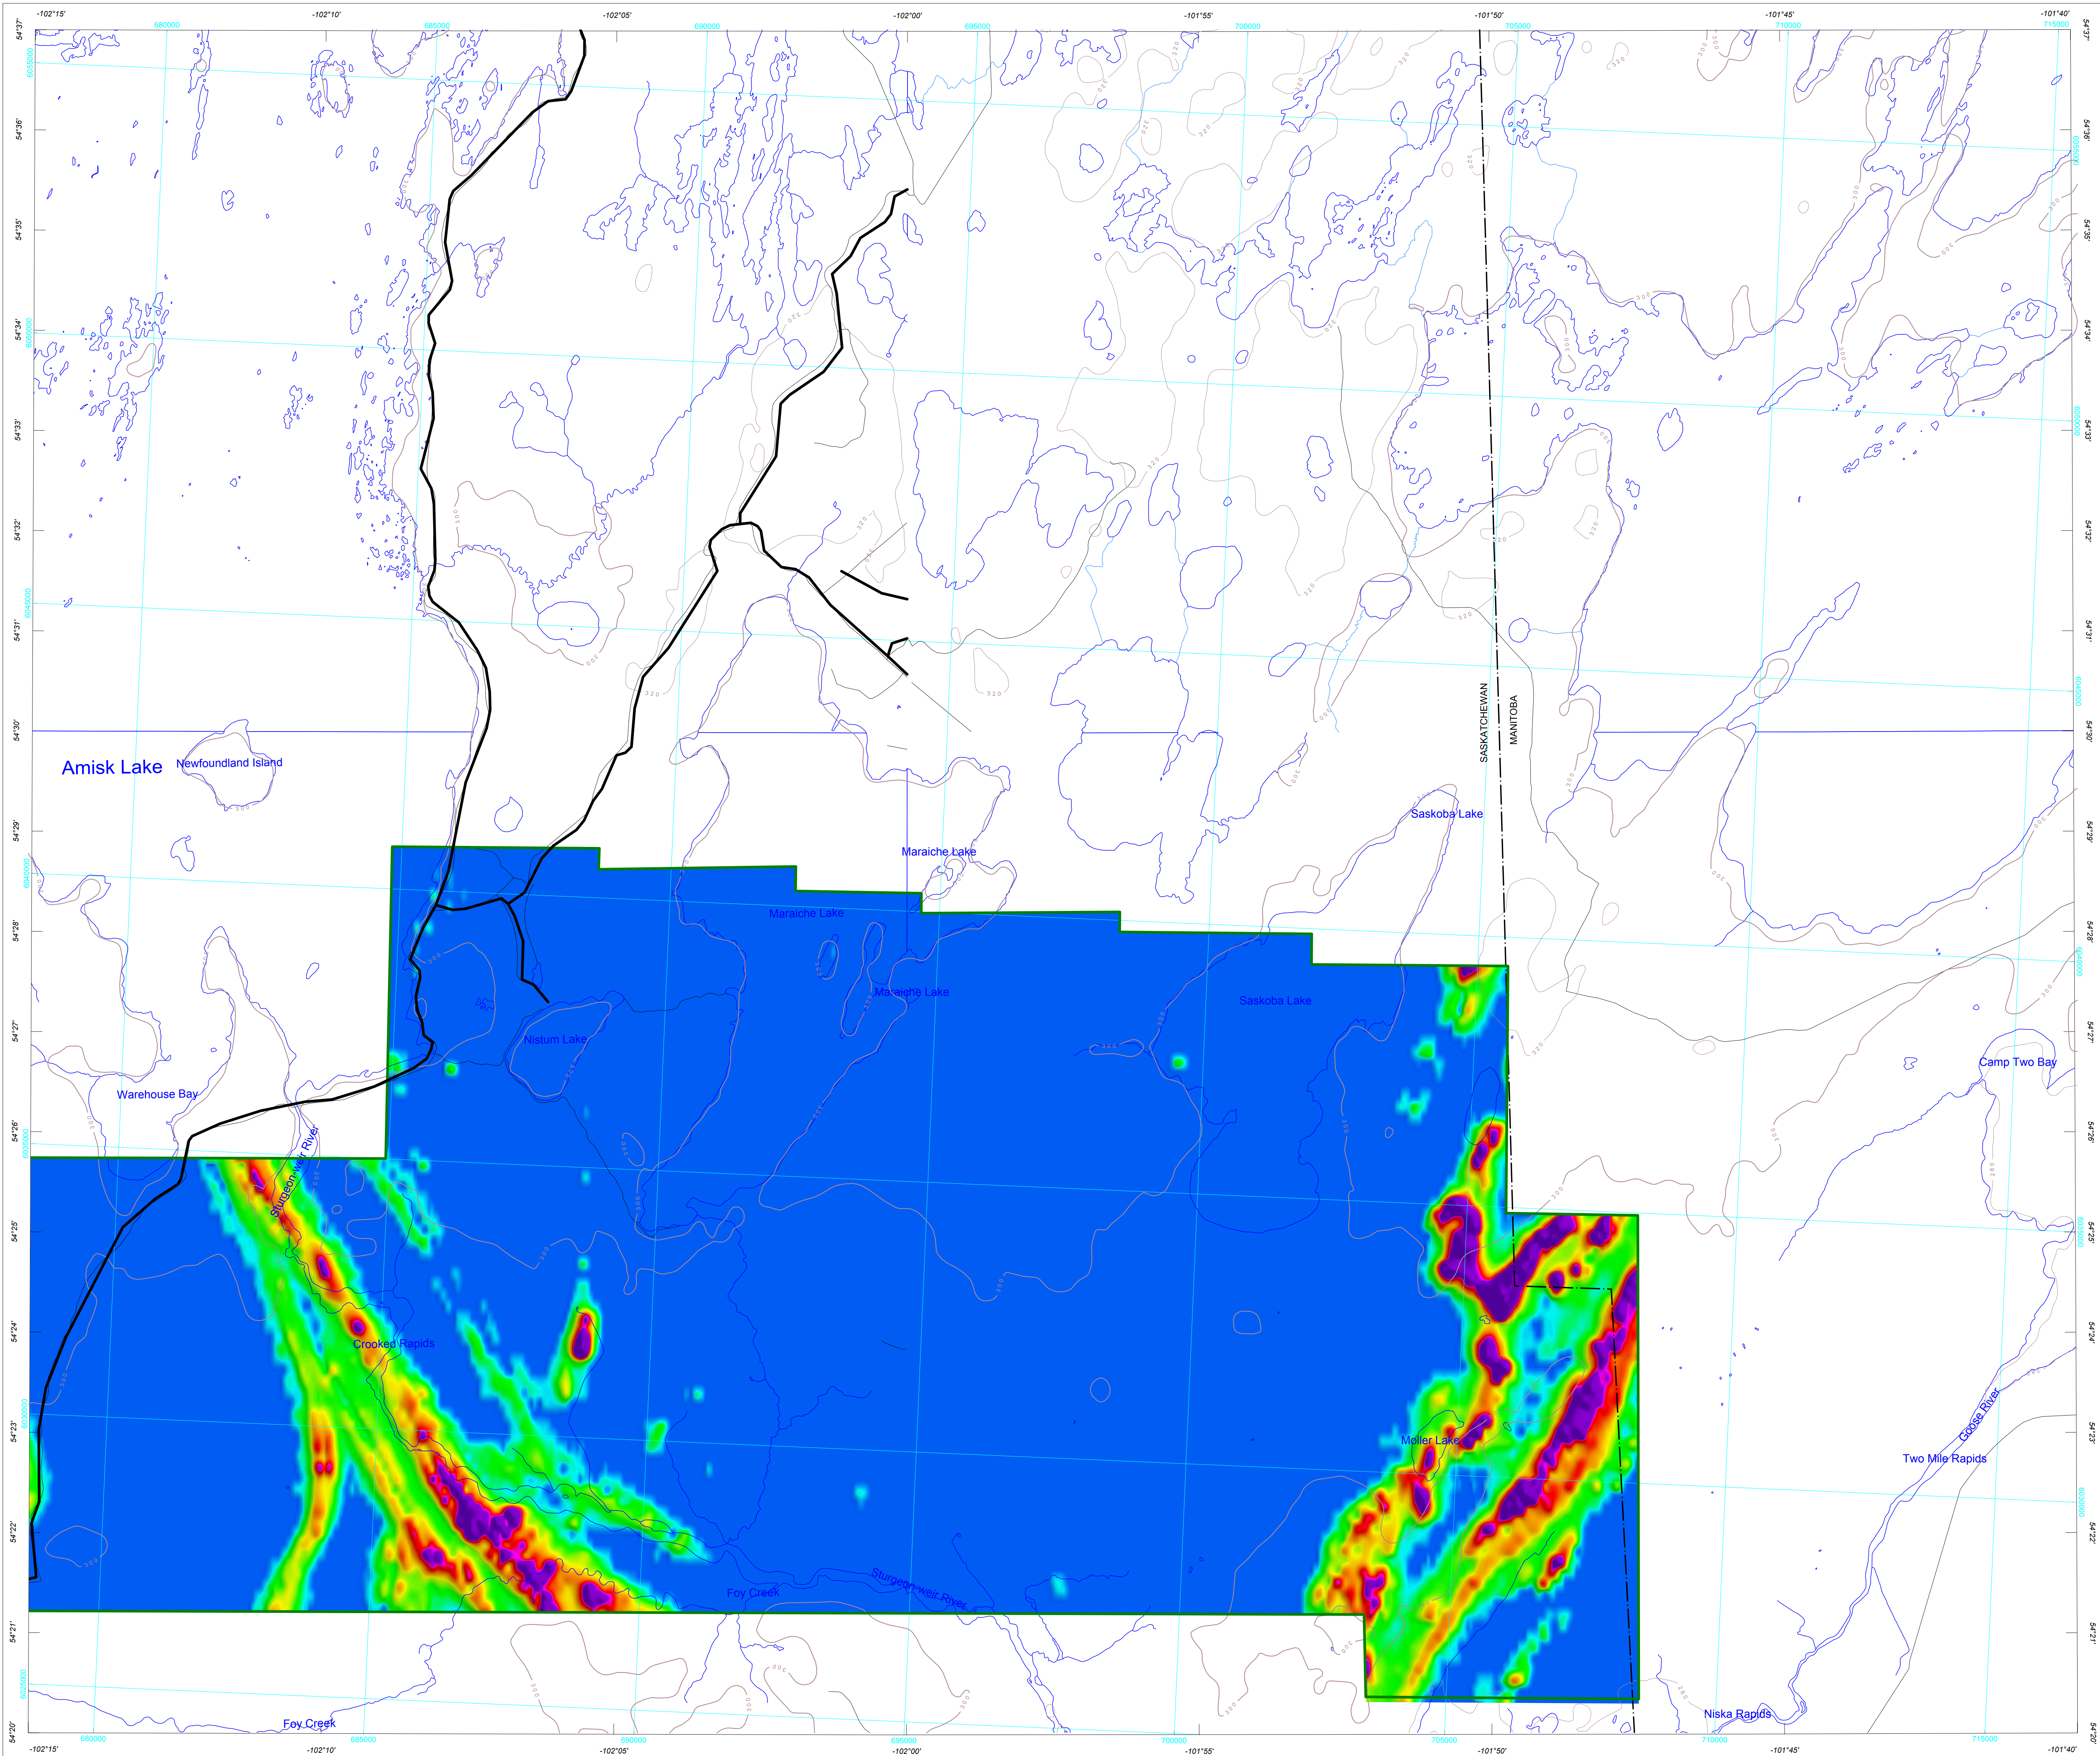

Technical Information

This map was compiled from data acquired during an airborne electromagnetic survey carried out by CGG Canada Inc. utilizing CGG's HELITEM 35C Time-Domain Electromagnetic (TDEM) system. The system was mounted on a Eurocopter AS350 B3 helicopter (registration C-GFUG) and the survey was carried out between March 30 and June 13, 2018. The helicopter flight altitude was maintained at an average ground clearance of 80 m with an average speed of 90 km/h. Aircraft navigation used a 14-channel NovAtel dual frequency GPS system. Post-flight differential corrections were applied to finalize the flight path position. A vertically mounted video camera was used to record images of the ground. The radar height was recorded ten times per second using a Honeywell altimeter and the barometric altitude was recorded five times per second using a Motorola precision pressure transducer. The magnetic data were recorded 10 times per second using a Scripps CS-3-A cesium magnetometer.

Electromagnetic System Specifications:

Base frequency	30 Hz
Waveform	Half sinusoid
Transmitter pulse width	8 ms
Transmitter area	962 m ²
Transmitter off-time	8.9 ms
Transmitter loop diameter	35 m
Transmitter current	215 A
Dipole moment (approximately)	827 000 Am ² (4 turns)
Windowed data sampling rate	10 Hz
Receiver	3-component induction coil (Z, X, Y)
Measured response	Voltage (dB/dT)
Digital recording	2 X 17.530 channels
1 st off-time Z channel	Channel 6 at +8 ms after pulse turn off
Tx-Rx configuration	In-loop concentric

Apparent Conductivity

The apparent conductivity values (mS/m) were derived from the electromagnetic decays using a selected early channel 5 (0.118 ms), middle channel 16 (0.802 ms) and late channel 30 (8.272 ms) of the off-time signal. The nomogram indicates the correspondence between the value of dB/dT (nT/s) and halfspace conductivity. Forward thin plate modeling is used to estimate the depth to the top of target (m) for the HELITEM 35C TDEM system.

Electromagnetic Decay Constant

Decay constant (Tau) values are obtained by fitting the data from selected early Z channels 6 to 10 (0.130 ms to 0.309 ms), middle channels 15 to 19 (0.618 ms to 1.440 ms) and late channels 26 to 30 (3.805 ms to 8.860 ms) of the off-time signal to a single exponential. In semi-log space, the slope of this function will reflect the exponential decay rate of the transient field and, therefore, the strength of the conductivity. A slow rate of decay, reflecting a high conductivity, will be represented by a high decay constant value.

Magnetics

The magnetic field was sampled 10 times per second using a cesium vapour magnetometer (sensitivity = 0.001 nT) mounted on the EM transmitter loop. Differences in magnetic values at the intersections of control and traverse lines were analysed to obtain a mutually levelled set of flight-line magnetic data. The levelled values were then interpolated to a 50 m grid. The International Geomagnetic Reference Field (IGRF) defined at a mean GPS altitude (378 m) for a constant mid-survey date (May 6, 2018) was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetizations within Earth's crust.

The first vertical derivative of the magnetic field is the rate of change of the magnetic field in the vertical direction. Computation of the first vertical derivative removes long-wavelength features of the magnetic field and significantly improves the resolution of closely spaced and superposed anomalies. A property of first vertical derivative maps is the coincidence of the zero-value contour with vertical contours at high magnetic latitudes (Hood, 1965). The first vertical derivative of the magnetic field was calculated using the fast Fourier transform on the gridded total magnetic field with a grid cell size of 50 m.

Digital versions of this map are available for free download through GEOSCAN (<http://geoscan.nrcan.gc.ca/>). Corresponding digital profile and gridded data as well as similar data for adjacent airborne geophysical surveys can be downloaded, at no charge, from Natural Resources Canada's Geoscience Data Repository for Geophysical Data at http://gdr.agr.nrcan.gc.ca/index_e.html. The same products are also available, for a fee, from the Geophysical Data Centre, Geological Survey of Canada, 601 Booth Street, Ottawa, Ontario K1A 0E8. Telephone: 613-995-5326, email: info@geoscan.gc.ca.

Acknowledgments


The authors thank the CGG Canada Inc. team, Brett Robinson, Imrie Russell, Adam Smiarowski, Elizabeth Bowslaugh and Mihai Szentesy for their cooperation. The authors thank Jim Craven and Mark Pilkington for helpful comments and suggestions to improve the maps.

Reference


Hood, P.J., 1965. Gradient measurements in aeromagnetic surveying; Geophysics, v. 30, p. 891-902.

Sheet 1: Time Decay Constant (Tau-Z) - Early Channels (6 to 10)
Sheet 2: Time Decay Constant (Tau-Z) - Mid Channels (15 to 19)
Sheet 3: Time Decay Constant (Tau-Z) - Late Channels (26 to 30)
Sheet 4: Apparent Conductivity - Early Channel 6 (0.118 ms)
Sheet 5: Apparent Conductivity - Mid Channel 16 (0.802 ms)
Sheet 6: Apparent Conductivity - Late Channel 30 (8.272 ms)
Sheet 7: Residual Total Magnetic Field
Sheet 8: First Vertical Derivative of the Magnetic Field
Sheet 9: Integration

Authors: O. Boulanger, F. Kiss, M. Coyle and O. Mahmoodi
Data acquisition and data compilation by CGG Canada Limited, Toronto, Ontario.
Contact, project management and map production by the Geological Survey of Canada, Ottawa, Ontario.
Permanent link: <https://doi.org/10.4095/308432>

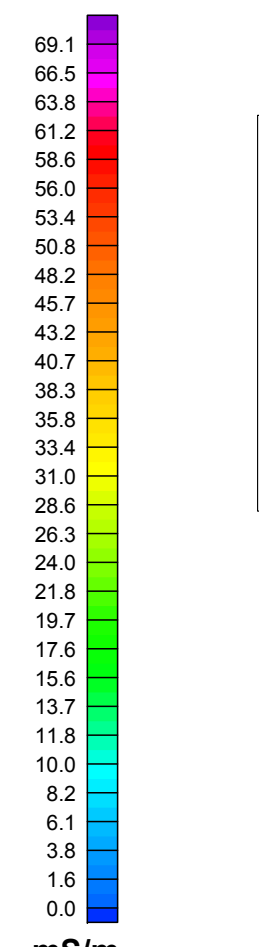

APPARENT CONDUCTIVITY - LATE CHANNEL 30 (8.272 ms)

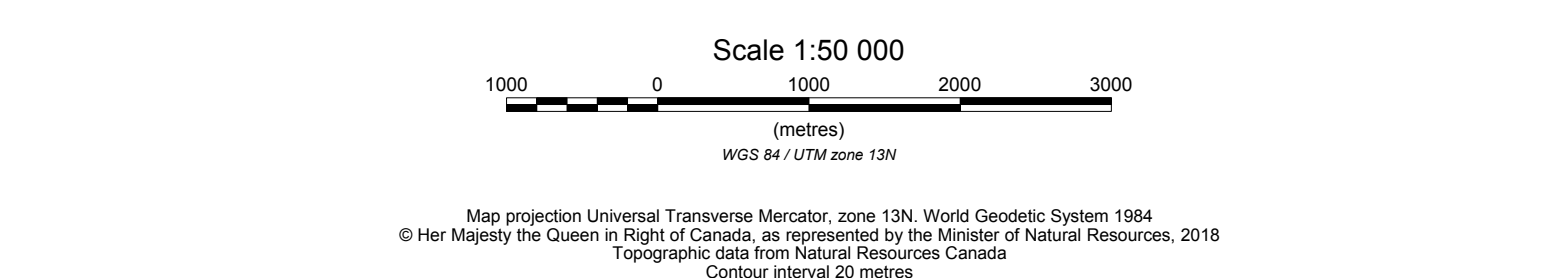

OPEN FILE / DOSSIER PUBLIC
8443
GEOLOGICAL SURVEY OF CANADA
COMMISSION GÉOLOGIQUE DU CANADA
2018
Sheet 6 of 9 / Feuille 6 de 9

OPEN FILE REPORT
RAPPORT DE DOSSIER PUBLIC
2018-2
SASKATCHEWAN GEOLOGICAL SURVEY
COMMISSION GÉOLOGIQUE DE LA
SASKATCHEWAN
2018
Sheet 6 of 9 / Feuille 6 de 9