

Technical Information

This map was compiled from data acquired during an airborne electromagnetic (EM) survey carried out by Geotech Canada Inc. utilizing Geotech's VTEM Max Time-Domain Electromagnetic (TDEM) system. The system was mounted on a Eurocopter AS350 B3 helicopter (registration C-GLHX) and the survey was carried out between December 1, 2022 and March 13, 2023. The helicopter flight altitude was maintained at an average ground clearance of 94.6 m, with an average speed of 50 km/h. Aircraft navigation used a 4-channel NovAtel dual frequency GPS system. Post-flight differential corrections were applied to finalize the flight path position. A vertically mounted video camera was used to record images of the ground. The radar height was recorded in real time using a TR53000 altimeter. The magnetic data were recorded 10 times per second using a Geometrics G-823A cesium magnetometer installed in a 10 m x 10 m box below the helicopter.

Electromagnetics

The TDEM system operated at a base frequency of 30 Hz and transmits a 7.5 ms half square wave pulse from a 300 turn horizontal loop mounted approximately 40 m below and 8 m behind the helicopter. This configuration generates a peak dipole moment of 733 200 Am². The receiver consists of a vertical magnetic field coil mounted on a 10 m x 10 m platform and a horizontal magnetic field coil mounted on a 10 m x 10 m platform. The receiver is oriented with the transmitter using a three axis (X, Y, and Z) electromagnetic receiver consistent with the transmitter. The magnetic field data were recorded in a continuous stream for each of the three components. The EM receiver directly measures the change in the magnetic field with respect to time (dB/dt) from which the secondary magnetic field (B) is numerically integrated. High-altitude background sections from the start and end of each flight allowed a first-order removal of system drift.

Apparent Conductivity

The apparent conductivity values (mS/m) were derived from the electromagnetic decays using selected early channels 4 to 14 (0.021 - 0.096 ms), middle channels 15 to 30 (0.110 - 0.880 ms) and late channels 31 to 46 (1.010 - 8.083 ms) of the off-time signal. In semi-log space, the slope of this function will reflect the exponential decay rate of the transient field and, therefore, the strength of the conductivity. A slow rate of decay, reflecting a high conductivity, will be represented by a high decay constant value.

Electromagnetic Decay Constant

Decay constant (tau) values were obtained by fitting the data from selected early Z channels 4 to 14 (0.021 - 0.096 ms), middle channels 15 to 30 (0.110 - 0.880 ms) and late channels 31 to 46 (1.010 - 8.083 ms) of the off-time signal to a single exponential. In semi-log space, the slope of this function will reflect the exponential decay rate of the transient field and, therefore, the strength of the conductivity. A slow rate of decay, reflecting a high conductivity, will be represented by a high decay constant value.

Magnetics

The magnetic field was sampled 10 times per second using a cesium vapour magnetometer (consistency ± 0.01 nT). Differences in magnetic values at the intersections of control and traverse lines were analysed to obtain a mutually levelled set of flight-line magnetic data. The levelled values were then interpolated to a 50 m grid. The International Geomagnetic Reference Field (IGRF) defined at a mean GPS altitude (530 m) for a constant mid-survey date (January 20, 2023) was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetizations within Earth's crust.

The first vertical derivative of the magnetic field is the rate of change of the magnetic field in the vertical direction. Computation of the first vertical derivative removes long-wavelength features of the magnetic field and significantly improves the resolution of closely spaced and superposed anomalies. A property of first vertical derivative maps is the coincidence of the zero-value contour with magnetic contacts at high magnetic latitudes (Heid, 1965). The first vertical derivative of the magnetic field reduced to the pole was calculated using the fast Fourier transform with a grid cell size of 50 m.

Availability



This map is available for free download through GEOSCAN (<https://geoscan.nrcan.gc.ca/>). Corresponding digital profile and gridded data as well as similar data for adjacent airborne geophysical surveys can be downloaded, at no charge, from Natural Resources Canada's Geoscience Data Repository for Geophysical Data at <https://geophysical-data.canada.ca/>. For more information, please contact the Geophysical Data Centre, Geological Survey of Canada, 601 Booth Street, Ottawa, Ontario K1A 0G8. Email: info@geoscan.nrcan.gc.ca

Acknowledgments

The authors thank the Geotech Canada Inc. team, David Hitz, Adrian Sarmasag, Adam Schubert, Tai-Chyi Sheu, Maria Onda and Moyse Lenoir for their contributions. The authors thank Jim Carver and Mark Pilantow for helpful comments and suggestions to improve the maps. We thank Douglas Oneschuk for his cartographic design expertise.

References

Heid, P., 1965. Gradient measurements in aeromagnetic surveying. *Geophysics*, v. 30, p. 891-892.
 Mili, M.A., 1995. Short Note: A simple method of transient electromagnetic data analysis. *Geophysics*, v. 63, p. 405-410.
 Michel, J.D., 1980. Applications of Transient Electromagnetic Techniques. Technical Note TN-7, p. 5. Science Limited, Mississauga, Ontario.

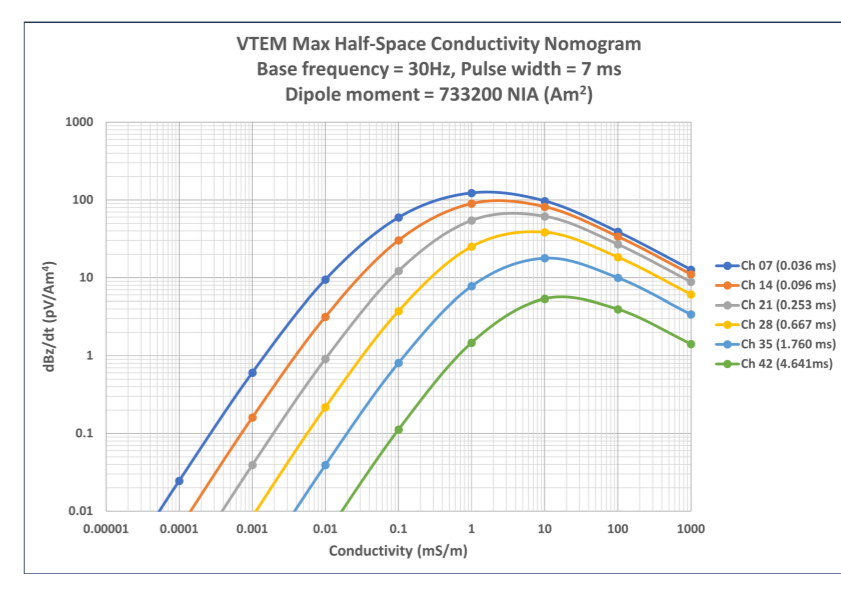
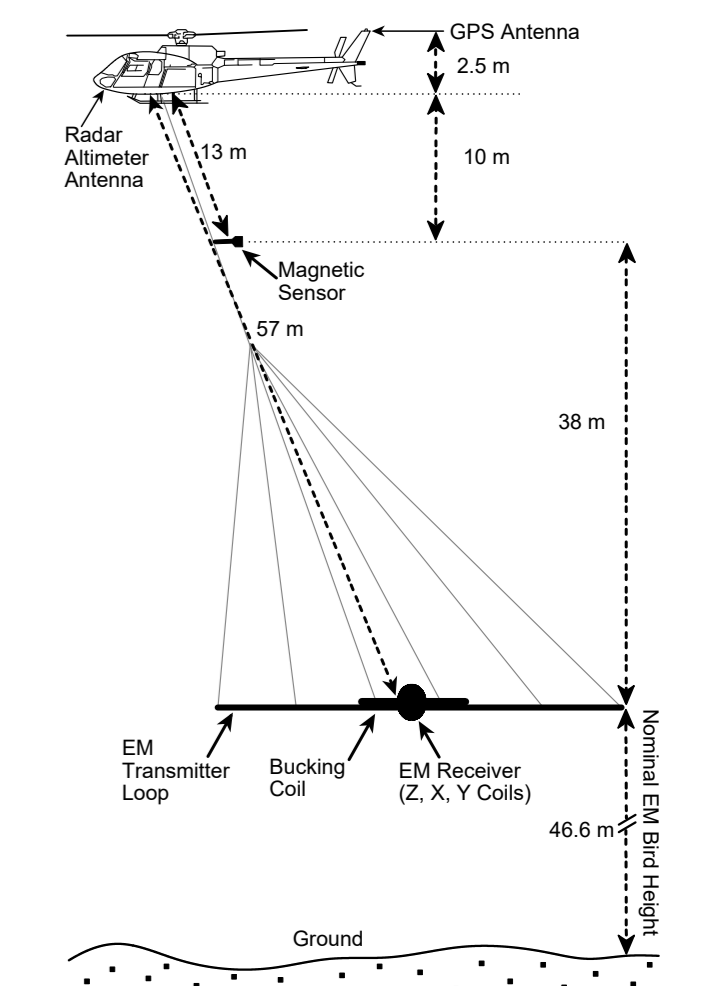


MAP SHEET SUMMARY

Sheet 1: Time Decay Constant (Tau-Z) - Early Channels 4 to 14 (0.021 - 0.096 ms)
 Sheet 2: Time Decay Constant (Tau-Z) - Mid Channels 15 to 30 (0.110 - 0.880 ms)
 Sheet 3: Time Decay Constant (Tau-Z) - Late Channels 31 to 46 (1.010 - 8.083 ms)
 Sheet 4: Apparent Conductivity - Early Channels 4 to 14 (0.021 - 0.096 ms)
 Sheet 5: Apparent Conductivity - Mid Channels 15 to 30 (0.110 - 0.880 ms)
 Sheet 6: Apparent Conductivity - Late Channels 31 to 46 (1.010 - 8.083 ms)
 Sheet 7: Residual Total Magnetic Field
 Sheet 8: First Vertical Derivative of the Magnetic Field
 Sheet 9: Interpretation



Authors: O. Boulanger, P. Vo, and F. Kiss
 Data acquisition and data compilation by Geotech Canada Inc., Aurora, Ontario
 Contract and project management by the Geological Survey of Canada, Ottawa, Ontario
 Digital cartography by D. Oneschuk, Geological Survey of Canada
 Permanent link: <https://doi.org/10.4095/332167>

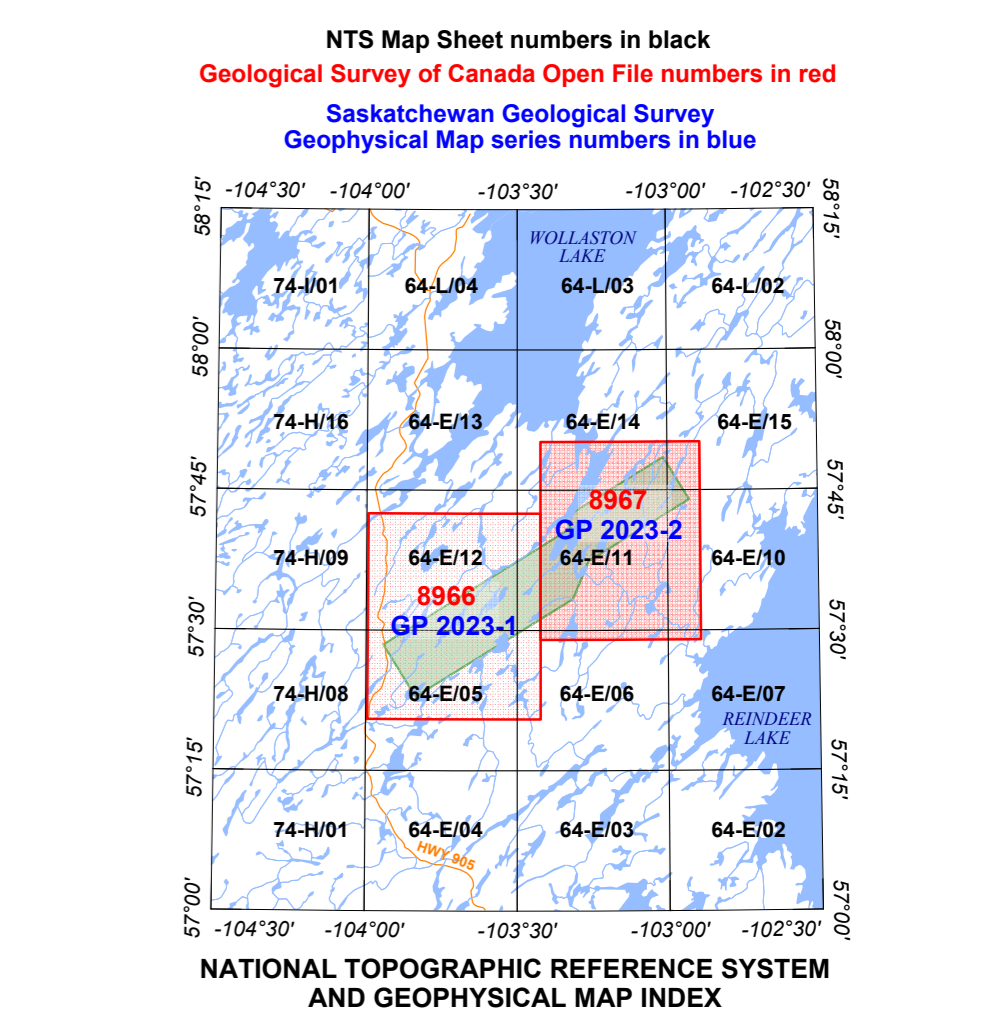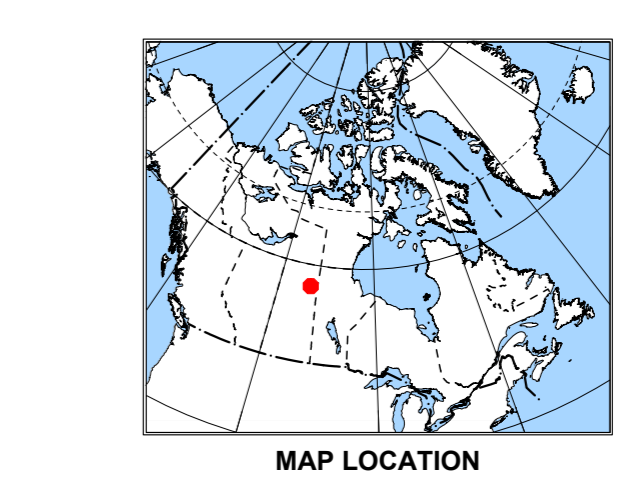

GEOLOGICAL SURVEY OF CANADA OPEN FILE 8967
 SASKATCHEWAN GEOLOGICAL SURVEY GEOPHYSICAL MAP GP 2023-2
ELECTROMAGNETIC SURVEY OF THE EASTERN WOLLASTON AREA
 SASKATCHEWAN
 Parts of NTS 64-E/10, 11, 14 and 15
TIME DECAY CONSTANT (TAU-Z) - EARLY CHANNELS 4 to 14 (0.021 - 0.096 ms)
 Scale 1:50 000
 (metres)
 Universal Transverse Mercator Projection
 North American Datum (NAD83) 1983
 UTM zone 13N
 © His Majesty the King in Right of Canada, as represented by the Minister of Natural Resources, 2023
 Base map at the scale of 1:50 000 from Natural Resources Canada, with modifications
 Contour interval 20 metres. Elevations in metres above mean sea level

<p>OPEN FILE / DOSSIER PUBLIC</p> <p>8967</p> <p>GEOLOGICAL SURVEY OF CANADA COMMISSION GEOLOGIQUE DU CANADA 2023</p> <p>Sheet 1 of 9 / Feuille 1 de 9</p>	<p>Publications in this series have not been edited; they are released as submitted by the author.</p> <p>Les publications de cette série ne sont pas révisées; elles sont publiées telles que soumises par l'auteur.</p>	<p>GEOPHYSICAL MAP CARTE GÉOPHYSIQUE</p> <p>GP 2023-2</p> <p>SASKATCHEWAN GEOLOGICAL SURVEY COMMISSION GÉOLOGIQUE DE LA SASKATCHEWAN 2023</p> <p>Sheet 1 of 9 / Feuille 1 de 9</p>
--	---	--

Recommended citation
 Boulanger, O., Vo, P., and Kiss, F., 2023. Electromagnetic Survey of the Eastern Wollaston Area, Saskatchewan, Parts of NTS 64-E/10, 11, 14 and 15; Geological Survey of Canada, Open File 8967; Saskatchewan Geological Survey Geophysical Map GP 2023-2, Scale 1:50 000. <https://doi.org/10.4095/332167>