




TIME DECAY CONSTANT (TAU Z) - EARLY CHANNELS 4 to 14 (0.021 - 0.096 ms)

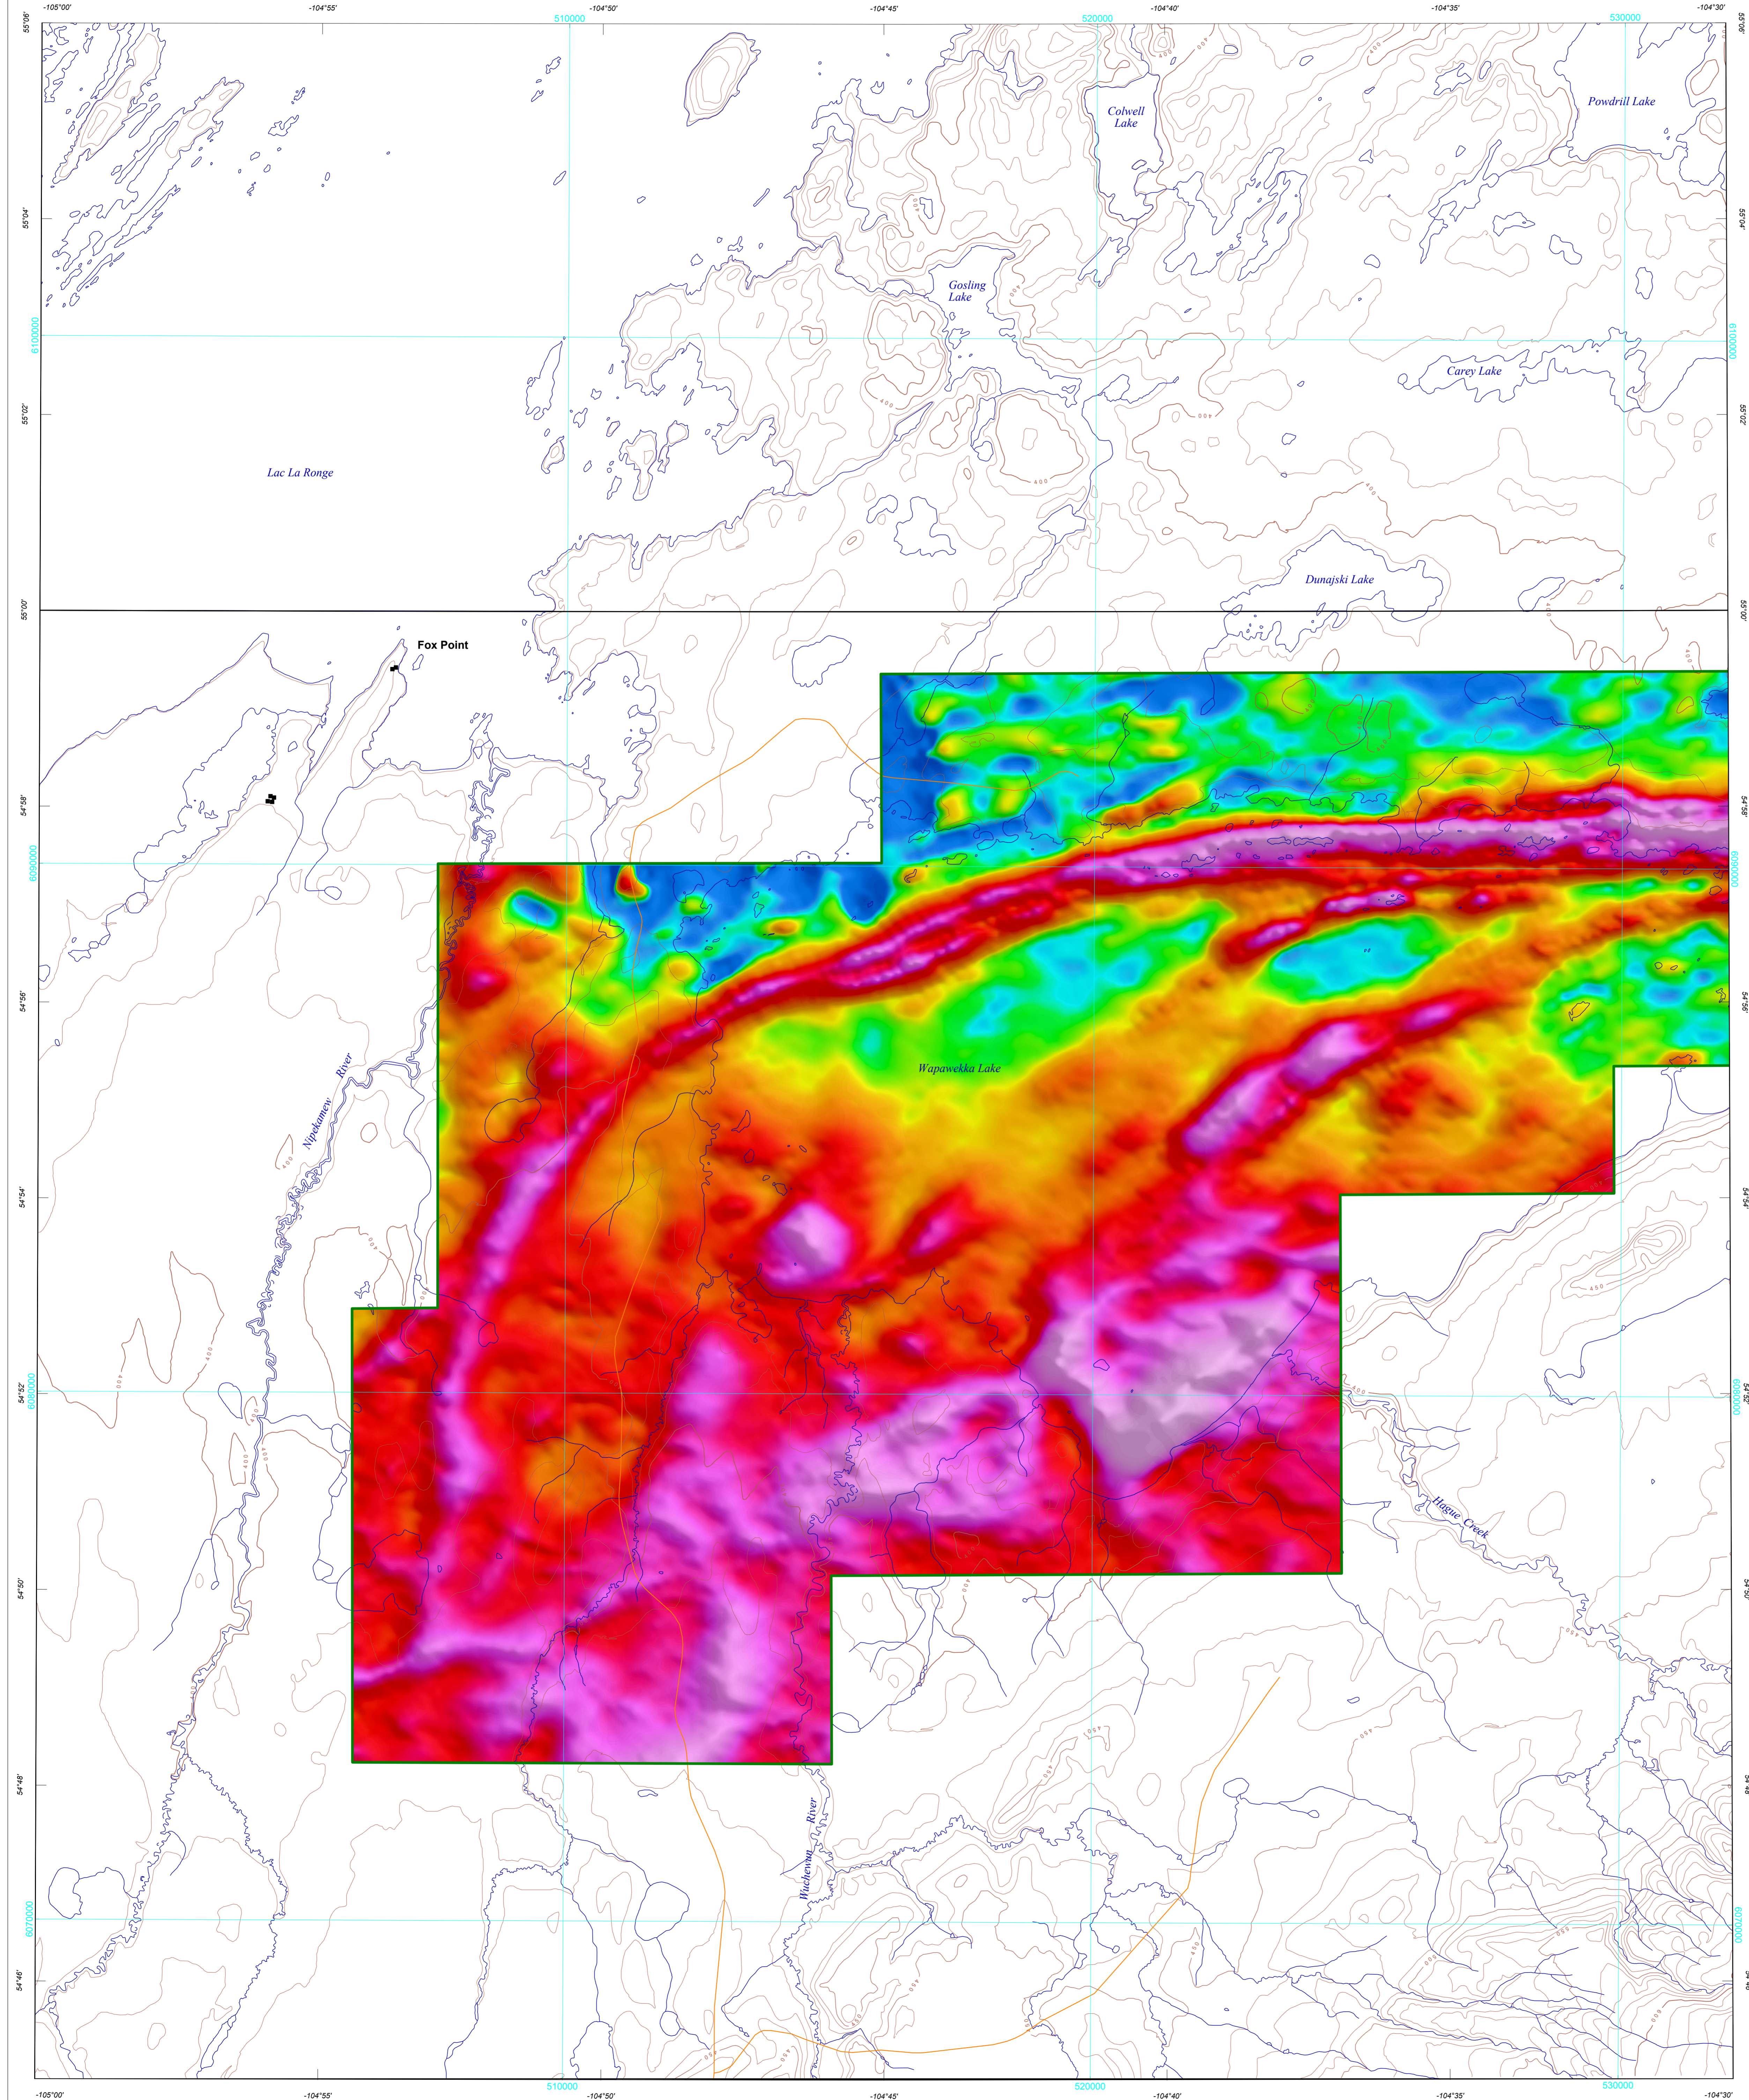

Technical Information
This map was compiled from data acquired during an airborne electromagnetic/magnetic survey carried out by Geotech Canada Inc. utilizing Geoscan's VTEM Max Time-Domain Electromagnetic (TDEM) system. The systems were mounted on two Eurocopter AS350 B3 helicopters (registration C-TQO and C-FZLN) and the survey was carried out between December 19, 2019 and March 10, 2020. The helicopter flight altitude was maintained at an average ground clearance of 48 m, with an average speed of 180 km/h. Aircraft navigation used a 14-channel NovAtel dual frequency GPS system. Post-flight differential corrections were applied to finalize the flight path position. A vertically mounted voice camera was used to record images of the ground. The solar height was recorded ten times per second using a TRS300 altimeter. The magnetic data were recorded 10 times per second using a Geometrics G-822A cesium magnetometer installed in a basket below the helicopter.

Electromagnetics
The TDEM system operated at a base frequency of 30 Hz transmits a 7.0 m half square signal from a four-turn 940 m² horizontal loop mounted approximately 48 m above and behind the helicopter. This configuration generates a peak dipole moment of 721 920 Am². The response of conductors in the subsurface was recorded at 150 Hz over the entire survey using a three-axis (X, Y and Z) electromagnetic receiver coincident with the transmitter loop (in-loop Transmitter Receiver). The EM system recorded data in a continuous stream for each of the three components. The EM receiver directly measures the change in the magnetic field with respect to time (dB/dt) from which the secondary magnetic field (B) is numerically integrated. High-altitude background sections flown at the start and end of each flight allowed a first-order removal of system drift.

Apparent Conductivity
The apparent conductivity values (mS/m) were derived from the electromagnetic decay using selected early channels 4 to 14 (0.021 - 0.096 ms), middle channels 15 to 30 (0.110 - 0.880 ms) and late channels 31 to 46 (1.010 - 8.083 ms) of the off-time signal. The nomogram indicates the correspondence between the value of dB/dt (nT/s) and halfspace conductivity. Forward thin plate modeling is used to estimate the depth to the top of target (m) for the VTEM[®] MAX TDEM system.

Electromagnetic Decay Constant
Decay constant (tau) values were obtained by fitting the data from selected early Z channels 4 to 14 (0.021 - 0.096 ms), middle channels 15 to 30 (0.110 - 0.880 ms) and late channels 31 to 46 (1.010 - 8.083 ms) of the off-time signal to a single exponential. In semi-log space, the slope of this function will reflect the exponential decay rate of the transient field and, therefore, the strength of the conductivity. A slow rate of decay, reflecting a high conductivity, will be represented by a high decay constant value.

Magnetics
The magnetic field was sampled 10 times per second using a cesium vapour magnetometer (sensitivity = 0.001 nT) mounted on the EM transmitter loop. Differences in magnetic values at the intersections of control and traverse lines were analysed to obtain a mutually leveled set of flight-line magnetic data. The leveled values were then interpolated to a 50 m grid. The International Geomagnetic Reference Field (IGRF) defined at a mean GPS altitude (472 m) for a constant mid-survey date (January 15, 2020) was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetizations within Earth's crust.

The first vertical derivative of the magnetic field is the rate of change of the magnetic field in the vertical direction. Computation of the first vertical derivative removes long-wavelength features of the magnetic field and significantly improves the resolution of closely spaced and superposed anomalies. A property of first vertical derivative maps is the coincidence of the zero-value contour with vertical geological contacts at high magnetic latitudes (Hood, 1965). The first vertical derivative of the magnetic field was calculated using the fast Fourier transform on the gridded total magnetic field with a grid cell size of 50 m.

Availability
This map is available for free download through GEOSCAN (<http://geoscan.mcg.ca/>). Corresponding digital profile and gridded data as well as similar data for adjacent airborne geophysical surveys can be downloaded, at no charge, from Natural Resources Canada's Geoscience Data Repository for Geophysical Data at <http://gdr.agr.nrcan.gc.ca/index.cfm>. The same products are also available, for a fee, from the Geophysical Data Centre, Geological Survey of Canada, 601 Booth Street, Ottawa, Ontario K1A 0E8. Telephone: 613-993-5325; email: info@gdr.nrcan.gc.ca.

Acknowledgments
The authors thank the Geotech Canada Inc. team: Sharna Lee, Heidi, Dmitry Danchenko, Zhao Han, Emily, David and David Hitz. The authors thank Jim Covert and Mark Pilkington for helpful comments and suggestions to improve the maps.



Reference
Hood, P.J., 1965. Gradient measurements in aeromagnetic surveying. *Geophysics*, v. 30, p. 891-902.

Survey Area Parameters:


Traverse line azimuth	N10°E
Traverse line spacing	200 m
Traverse line width	1500 m
Line spacing	1500 m
Line width	1500 m
Altitude average clearance	98 m
EM transmitter nominal clearance	50 m
Magnetometer sensor nominal clearance	48 m
EM receiver nominal clearance	50 m

Electromagnetic System Specifications:


Base frequency	30 Hz
Waveform	Polygonal
Transmitter pulse width	7 ms
Transmitter area	940 m ²
Transmitter offset	8.7 ms
Transmitter tow diameter	34.8 m
Transmitter peak current	192 A
Dipole moment (peak)	721 920 Am ² (4 turns)
Workload data sampling rate	10 Hz
Receiver	3-component induction coil (Z, X, Y Coils)
Measured response	Voltage (dB/dt)
Digital recording	2 x 46 channels
1 st off-time Z channel	Channel 4 at ~0.021 ms after pulse turn off
Tr/Rx configuration	In-loop co-located

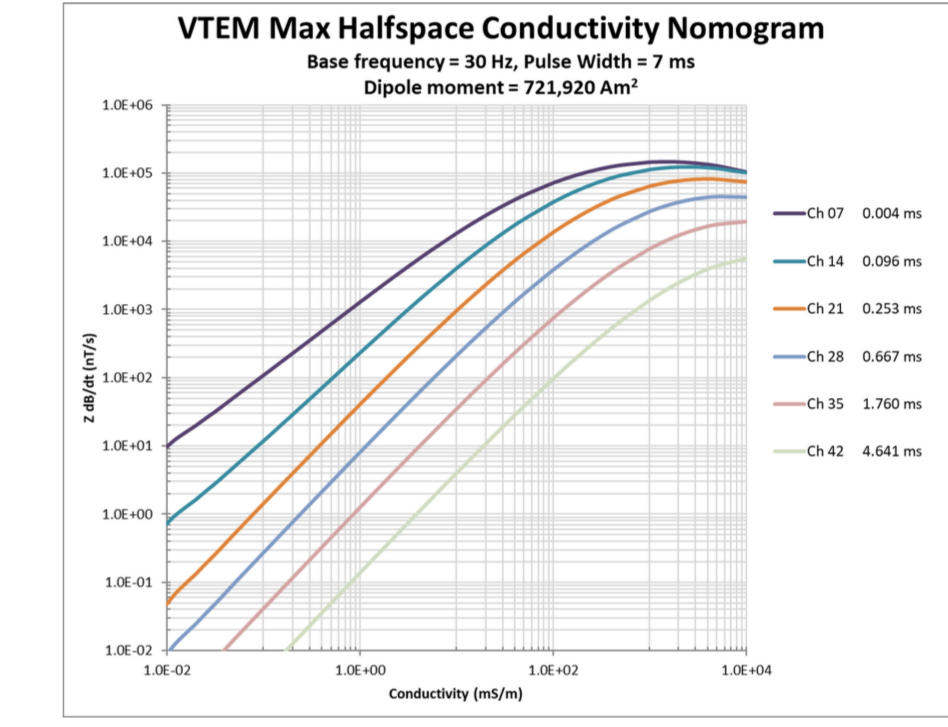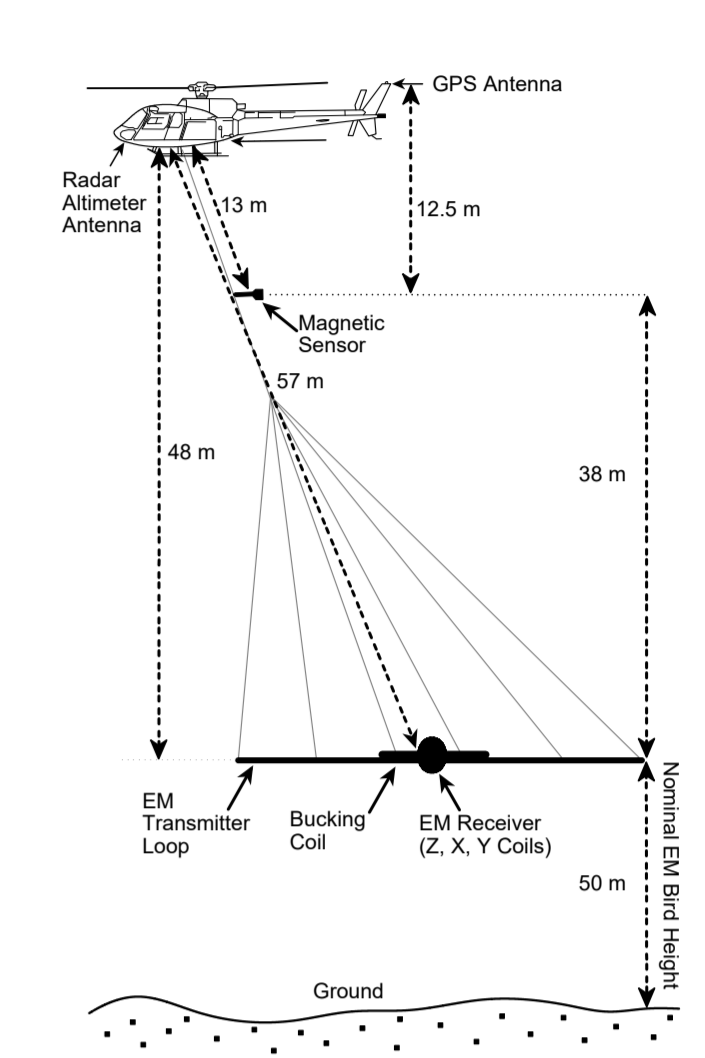

MAP SHEET SUMMARY
Sheet 1: Time Decay Constant (Tau-Z) - Early Channels 4 to 14 (0.021 - 0.096 ms)
Sheet 2: Time Decay Constant (Tau-Z) - Mid Channels 15 to 30 (0.110 - 0.880 ms)
Sheet 3: Time Decay Constant (Tau-Z) - Late Channels 31 to 46 (1.010 - 8.083 ms)
Sheet 4: Apparent Conductivity - Early Channels 4 to 14 (0.021 - 0.096 ms)
Sheet 5: Apparent Conductivity - Mid Channels 15 to 30 (0.110 - 0.880 ms)
Sheet 6: Apparent Conductivity - Late Channels 31 to 46 (1.010 - 8.083 ms)
Sheet 7: Residual Total Magnetic Field
Sheet 8: First Vertical Derivative of the Magnetic Field
Sheet 9: Interpretation

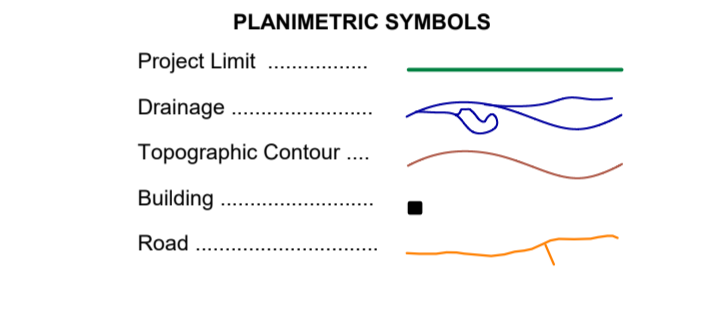

Authors: O. Boulanger, F. Kiss, R. Fortin and O. Mahmoodi
Data acquisition and data compilation by Geotech Limited, Aurora, Ontario
Contract and project management by the Geological Survey of Canada, Ottawa, Ontario
Digital cartography by D. Oneschuk, Geological Survey of Canada
Permanent link: <https://doi.org/10.4095/526708>

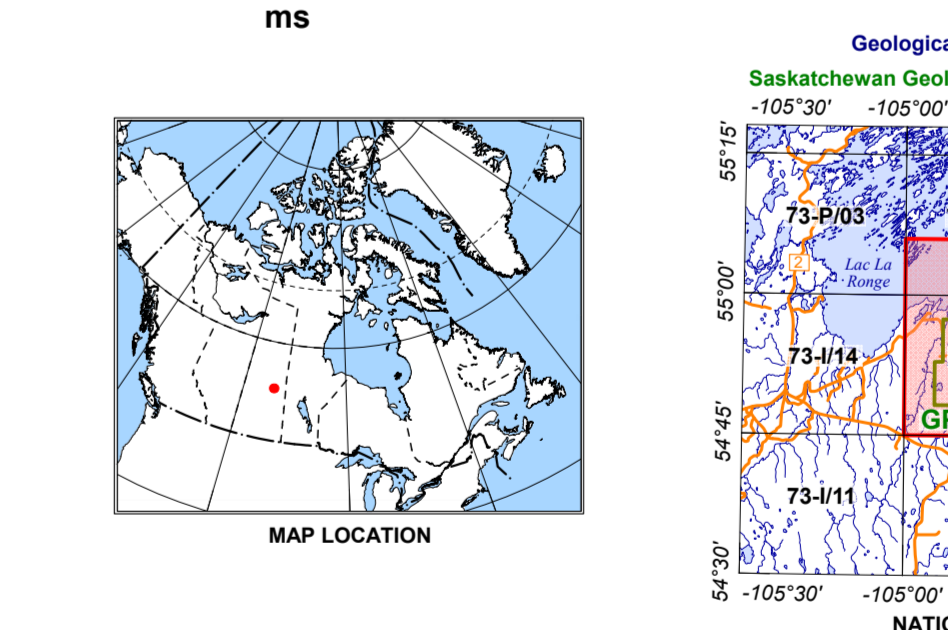

GEOLOGICAL SURVEY OF CANADA OPEN FILE 8671
SASKATCHEWAN GEOLOGICAL SURVEY GEOPHYSICAL MAP GP 2020-1
ELECTROMAGNETIC SURVEY OF THE SOUTHERN GLENNE AREA
SASKATCHEWAN
Part of NTS 73-I/15

TIME DECAY CONSTANT (TAU Z) - EARLY CHANNELS 4 to 14 (0.021 - 0.096 ms)
Scale 1:50 000

© Her Majesty the Queen in Right of Canada, as represented by the Minister of Natural Resources, 2020
Base map at the scale of 1:50 000 from Natural Resources Canada, with modifications
Elevations in metres above sea level

<p>OPEN FILE / DOSSIER PUBLIC 8671 GEOLOGICAL SURVEY OF CANADA COMMISSION GÉOLOGIQUE DU CANADA 2020</p> <p>Sheet 1 of 9 / Feuille 1 de 9</p>	<p>Publications in this series have not been redacted; they are released as submitted by the author. Les publications de cette série ne sont pas filtrées; elles sont publiées telles que soumises par l'auteur.</p>	<p>GEOPHYSICAL MAP CARTE GÉOPHYSIQUE GP 2020-1 SASKATCHEWAN GEOLOGICAL SURVEY COMMISSION GÉOLOGIQUE DE LA SASKATCHEWAN 2020</p> <p>Sheet 1 of 9 / Feuille 1 de 9</p>
--	--	---